



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No. 15-191-22592-00-00	Company McCoy Petroleum Corporation	Location 250' S of NE NW SE 2060' FSL / 1650' FEL	Other Services CNL / CDL DIL
	Well Erskine 'A' #4-32		
	Field Erskine North		
	County Sumner	State Kansas	
	Sec: 32	Twp: 31S	Rge: 3W
Permanent Datum Log Measured From Drilling Measured From	Ground Level Kelly Bushing Kelly Bushing	Elevation 1261 9 Ft. Above Perm. Datum	K.B. 1270 D.F. G.L. 1261

Date	4/6/2011
Run Number	Two
Depth Driller	4010
Depth Logger	4013
Bottom Logged Interval	4012
Top Log Interval	1500
Casing Driller	8.625 @ 266
Casing Logger	264
Bit Size	7.875
Type Fluid in Hole	Chemical
Salinity, ppm CL	5000
Density / Viscosity	9.2 44
pH / Fluid Loss	9.0 10.8
Source of Sample	Flowline
Rm @ Meas. Temp	0.90 @ 75
Rmf @ Meas. Temp	0.68 @ 75
Rmc @ Meas. Temp	1.22 @ 75
Source of Rmf / Rmc	Charts
Rm @ BHT	0.62 @ 116
Operating Rig Time	4 Hours
Max Rec. Temp. F	116
Equipment Number	15
Location	Hays
Recorded By	R. Barnhart
Witnessed By	Robert Hendrix

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments



Thank you for using Log-Tech, Inc.
(785) 625-3858


Conway Springs, KS:
5S, 2W, 3/4S, 1/4E, N into

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

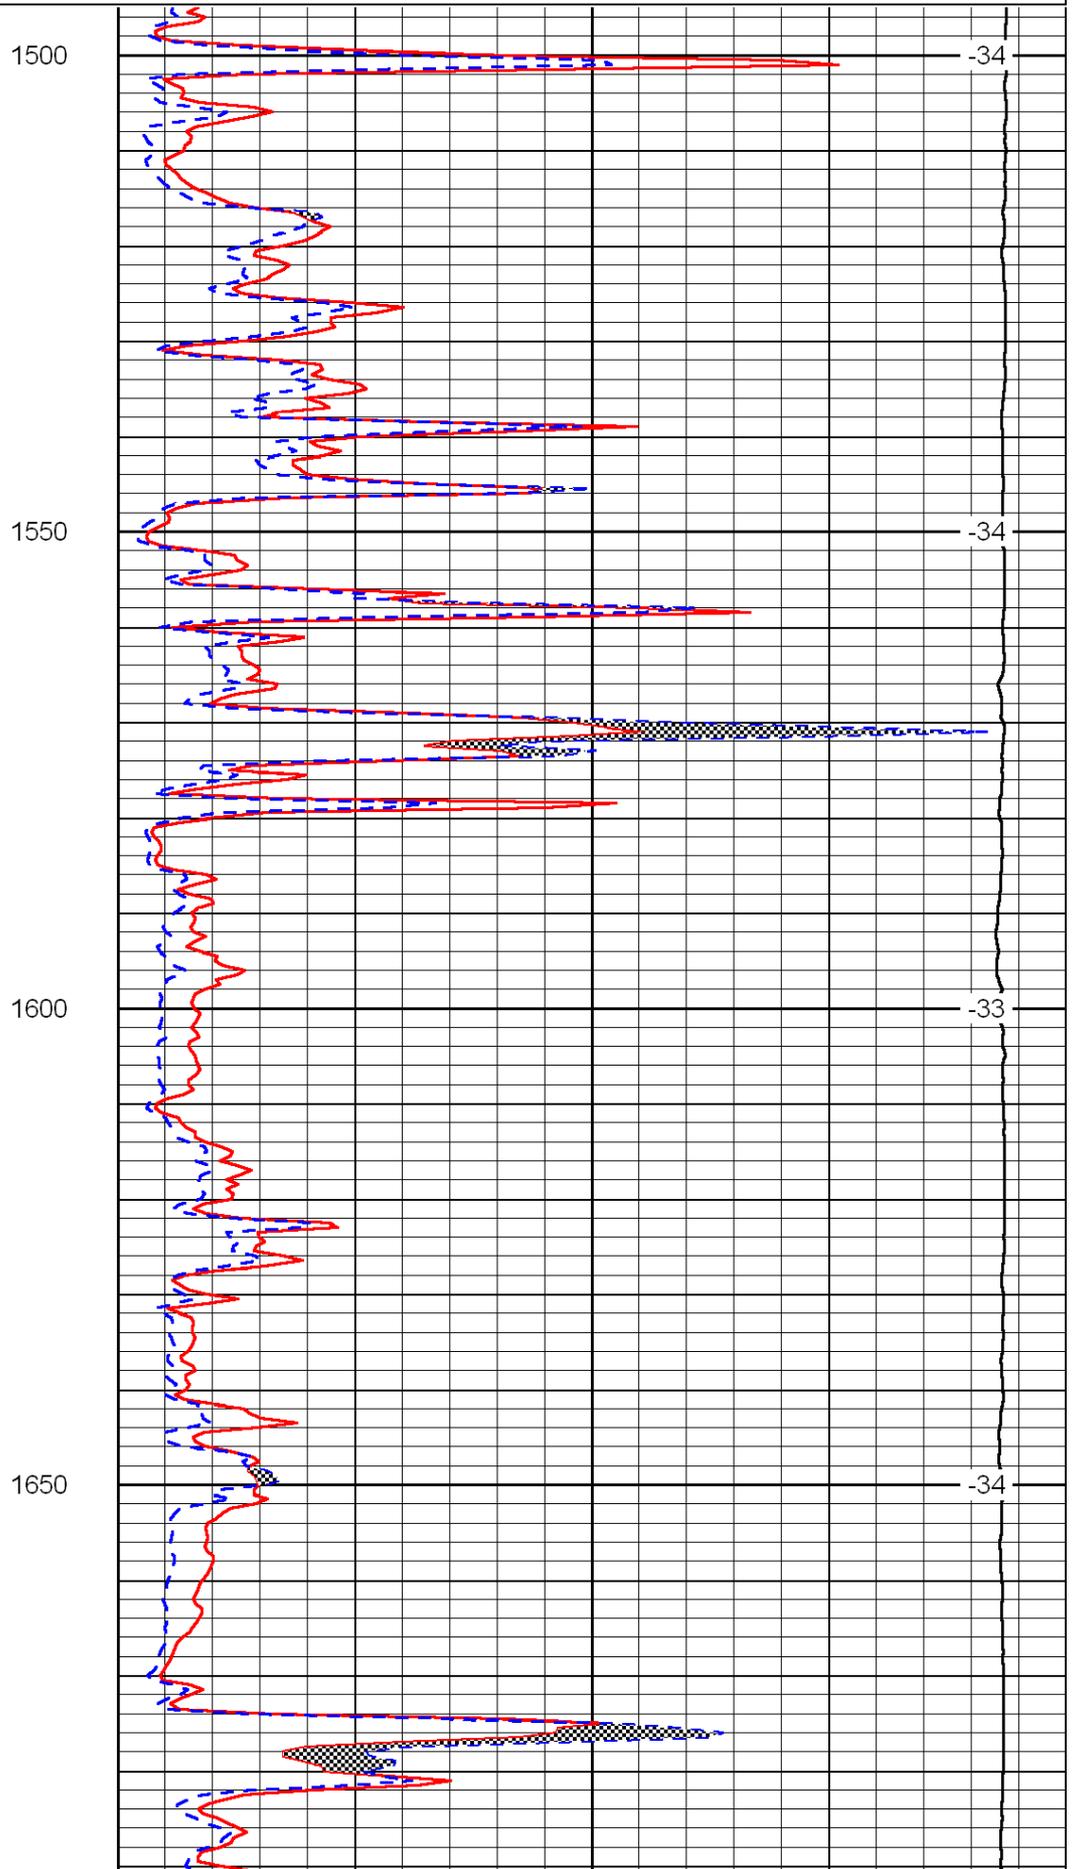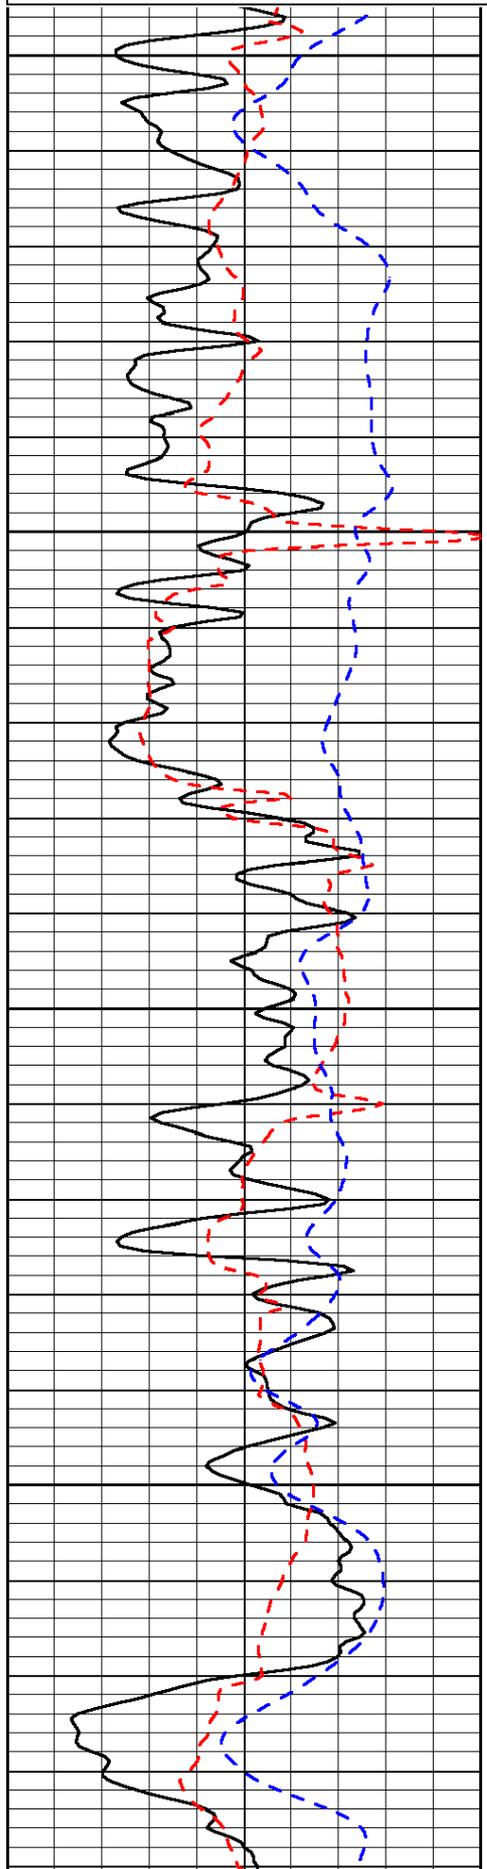

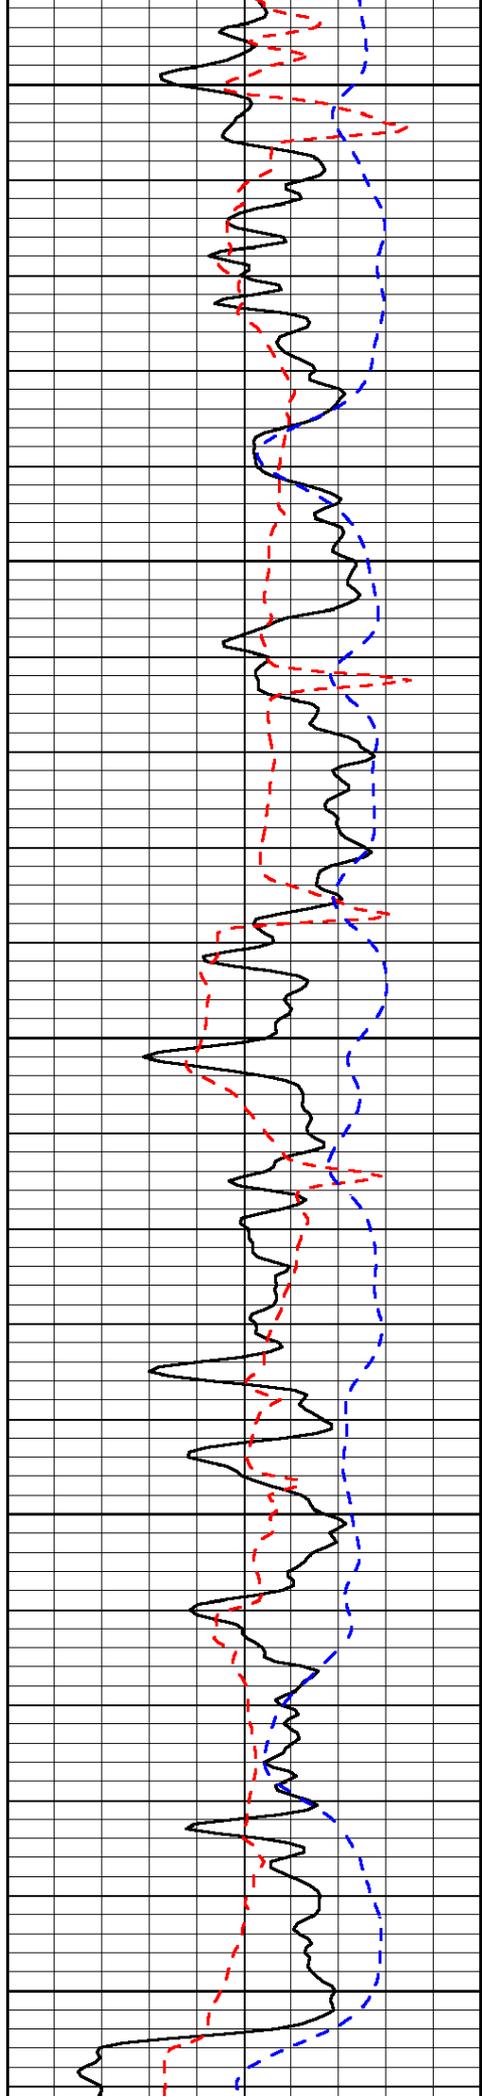


1700

1750

1800

1850

1900

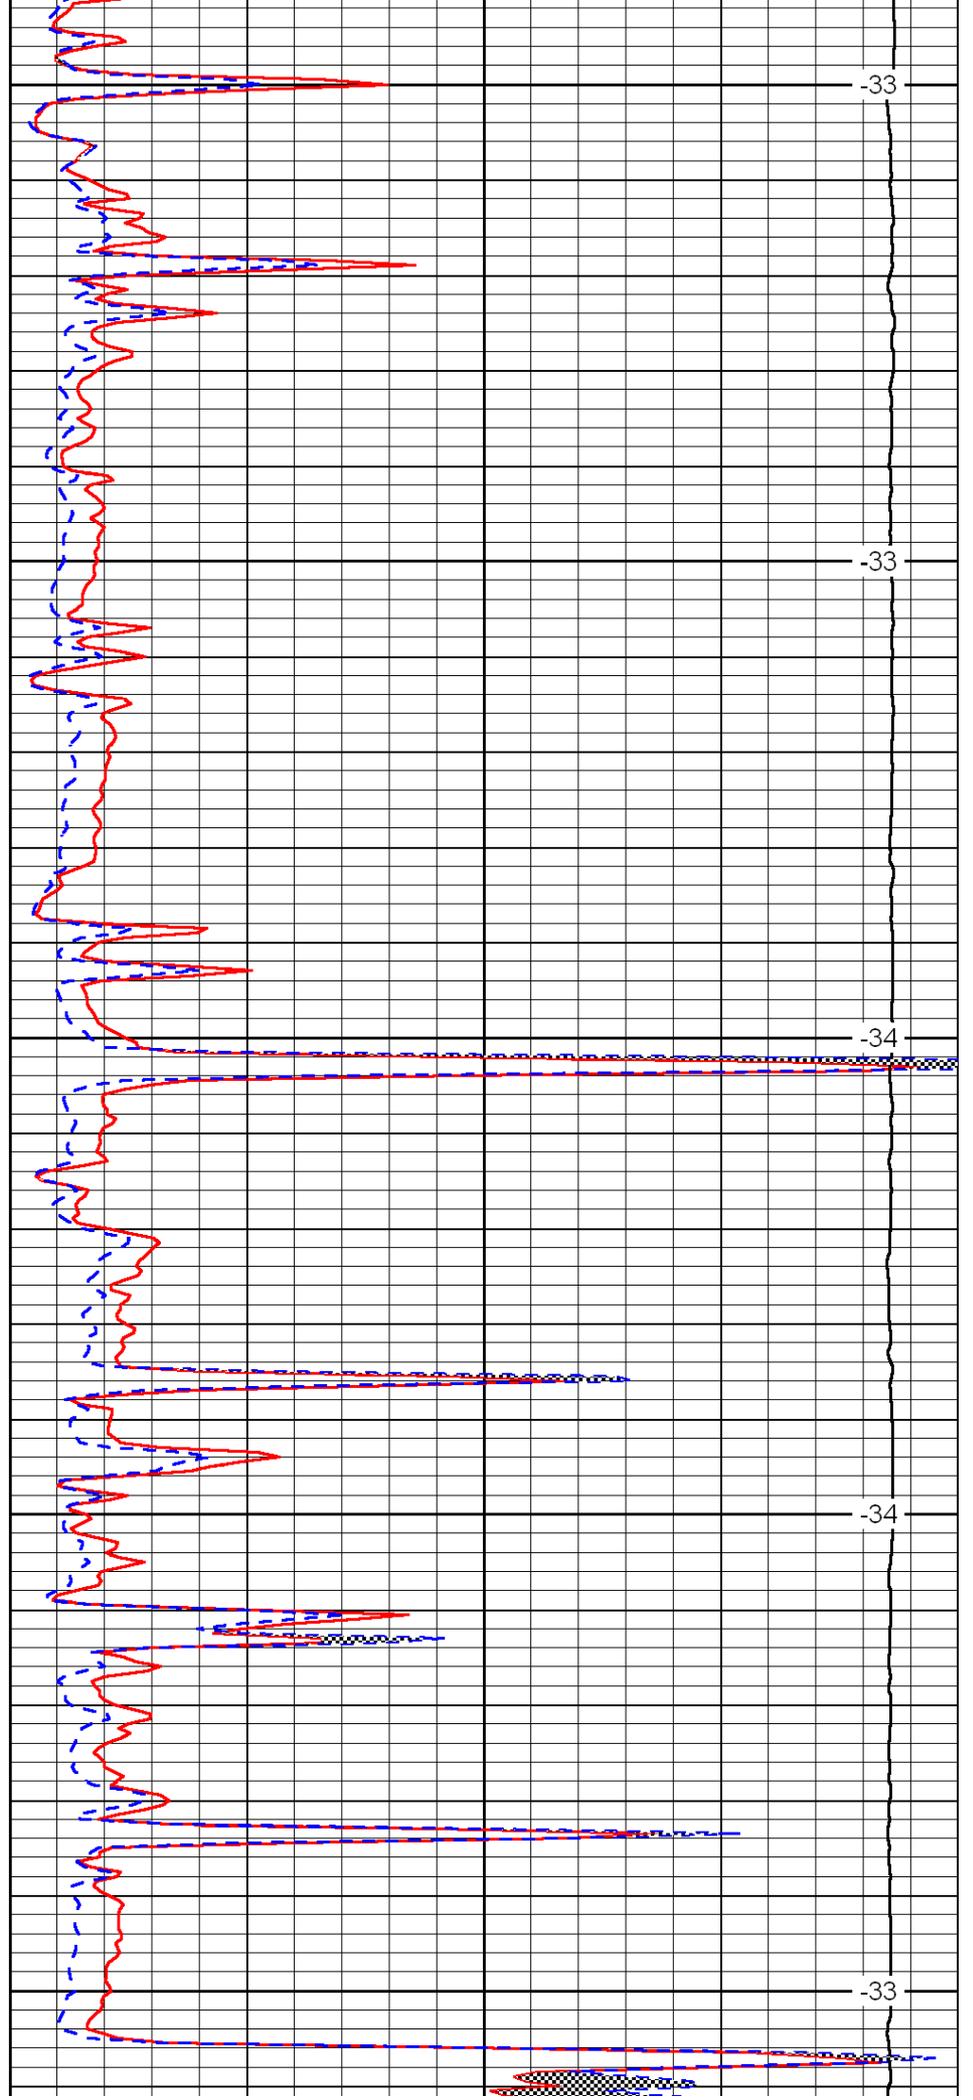


-33

-33

-34

-34

-33

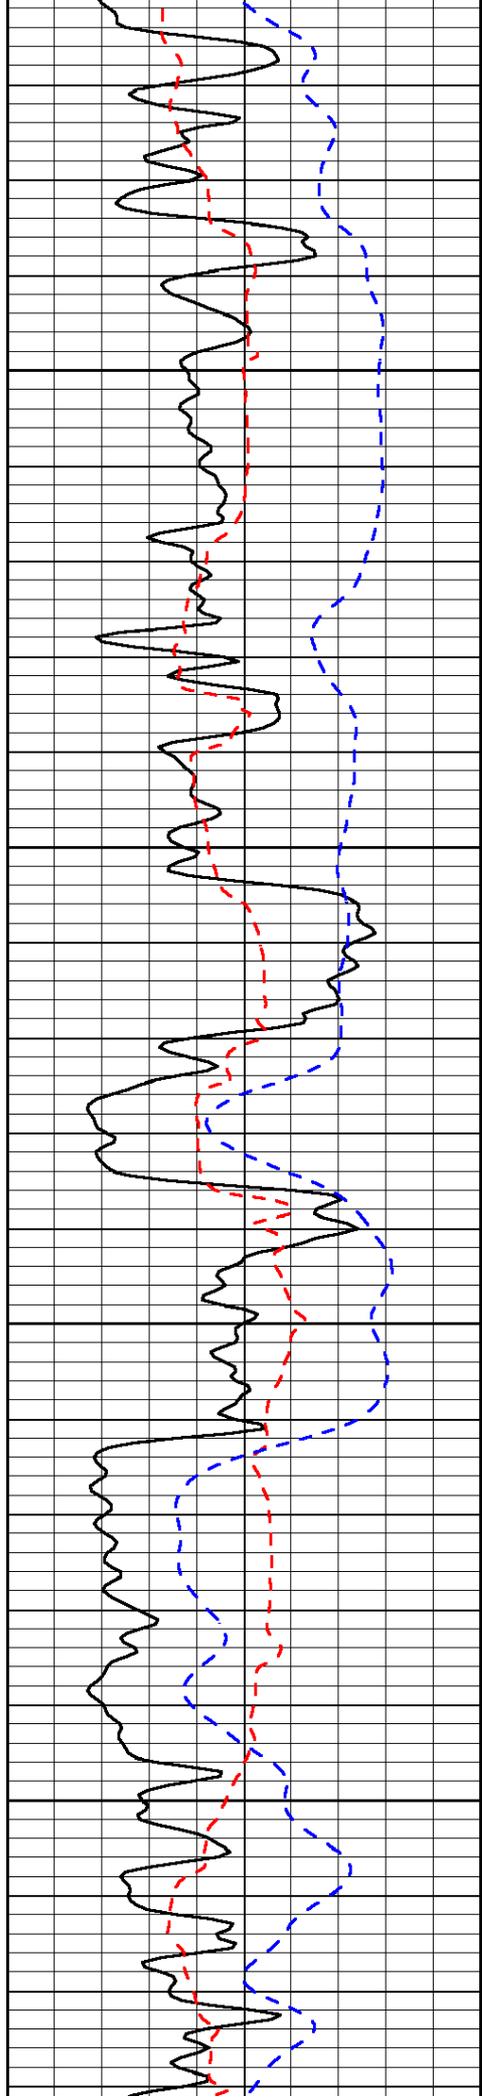


1950

2000

2050

2100


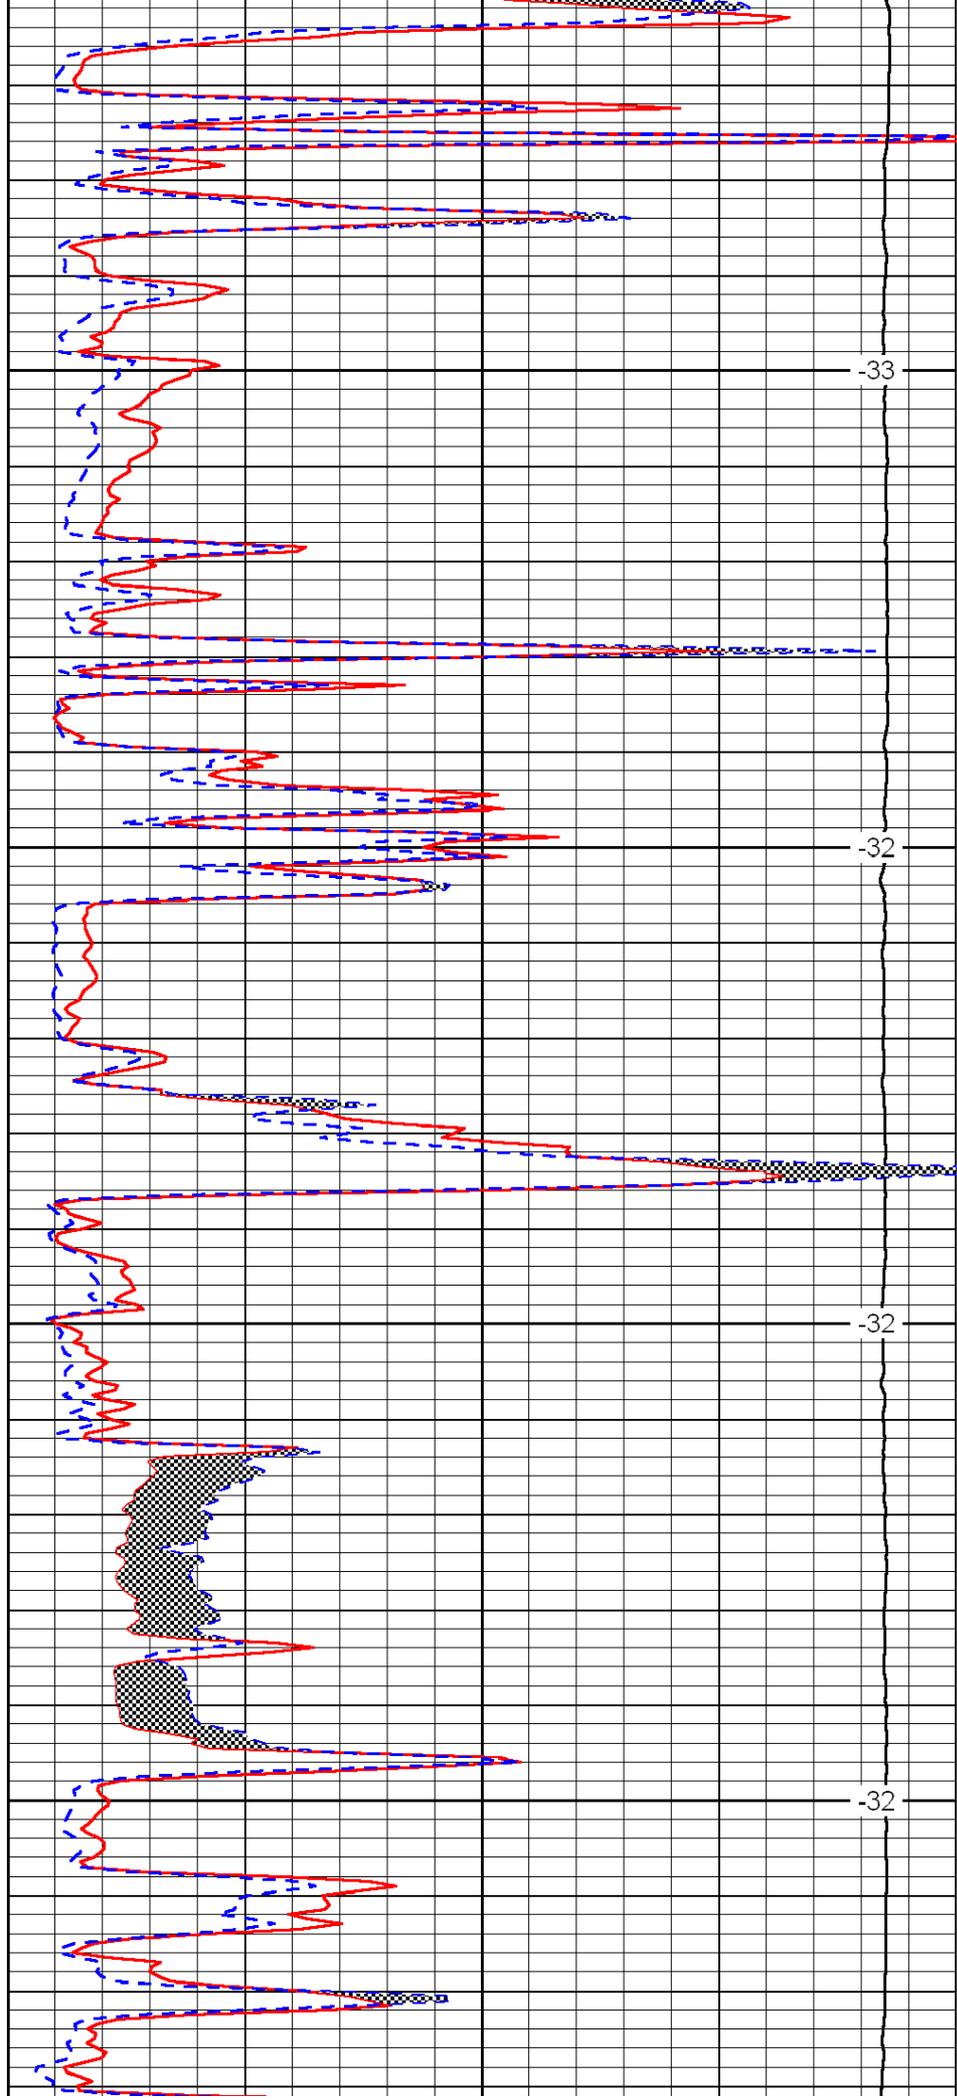




-33


-32

-32

-32

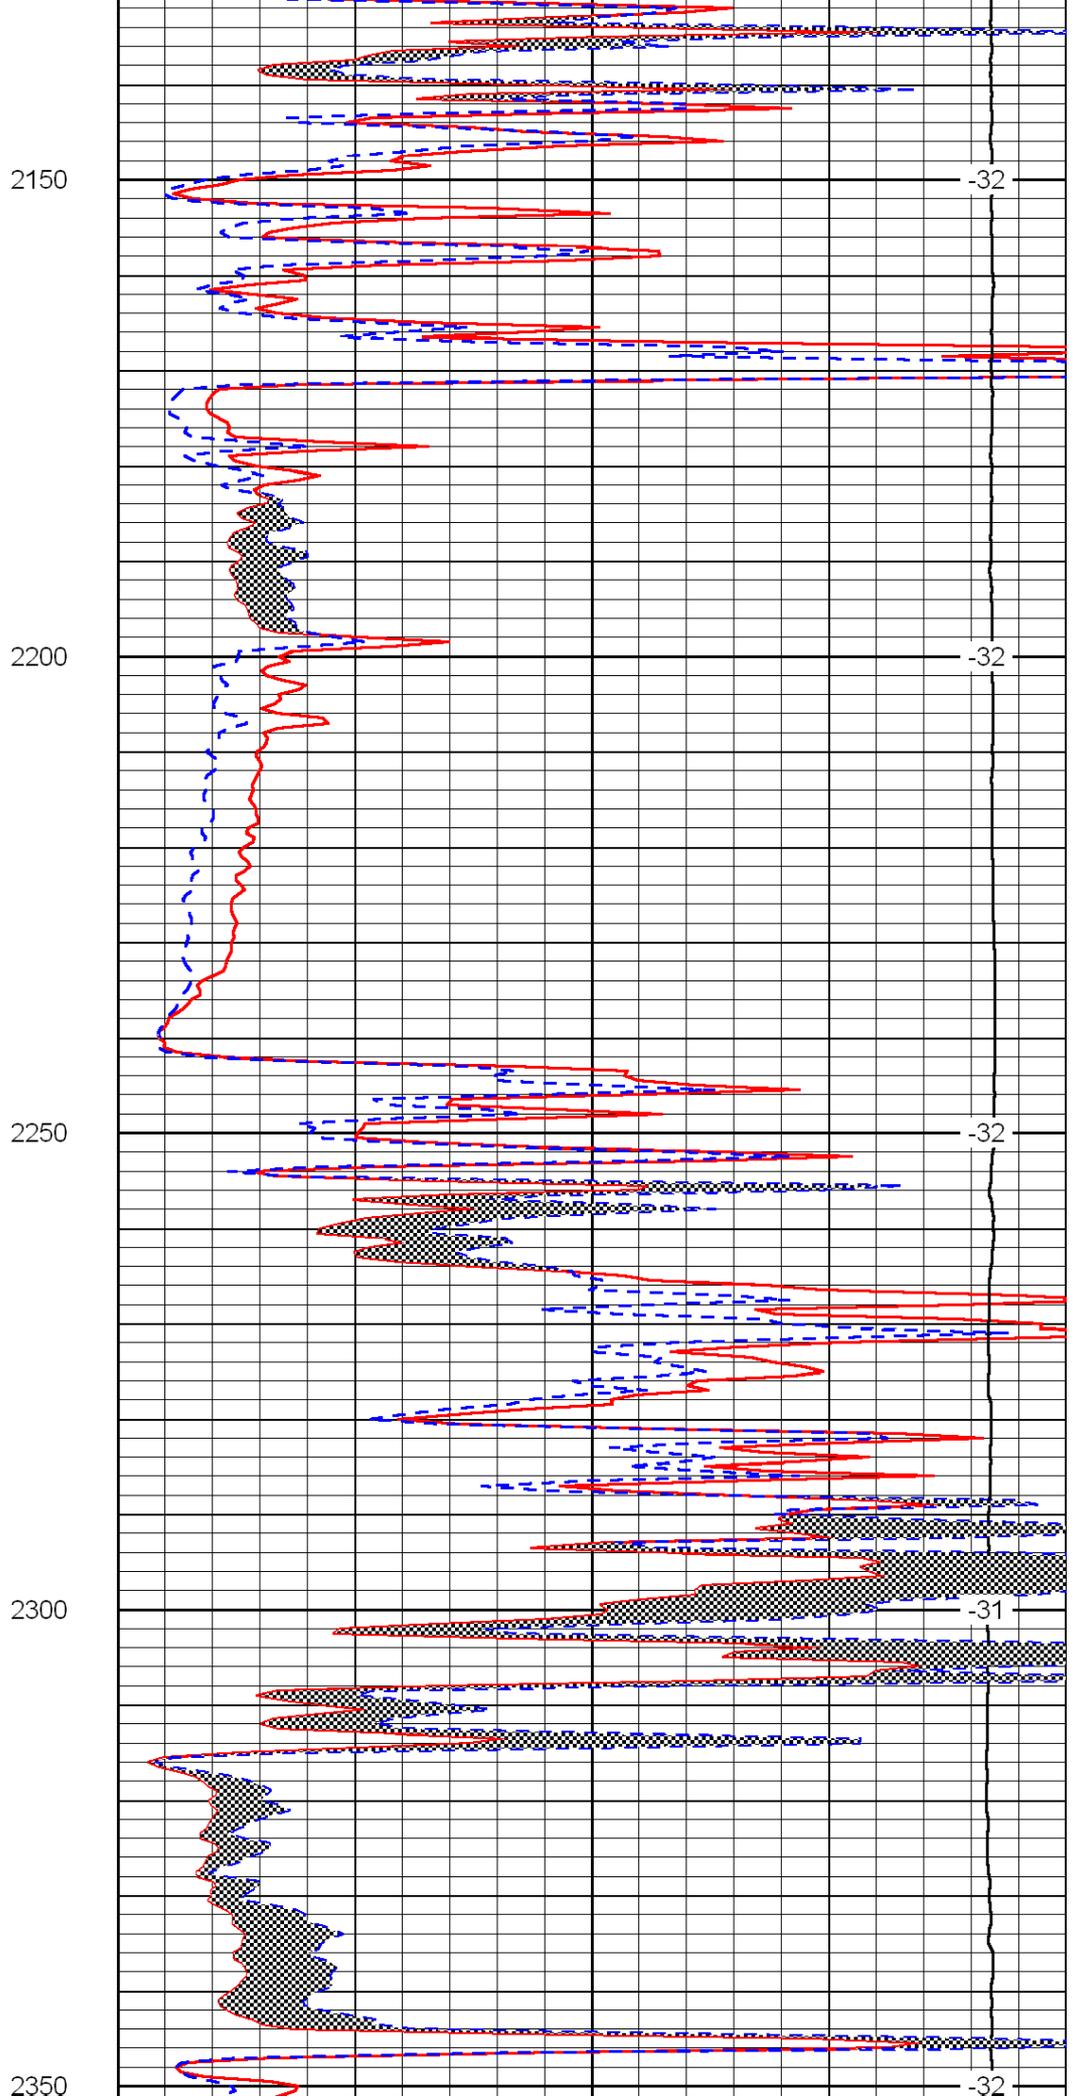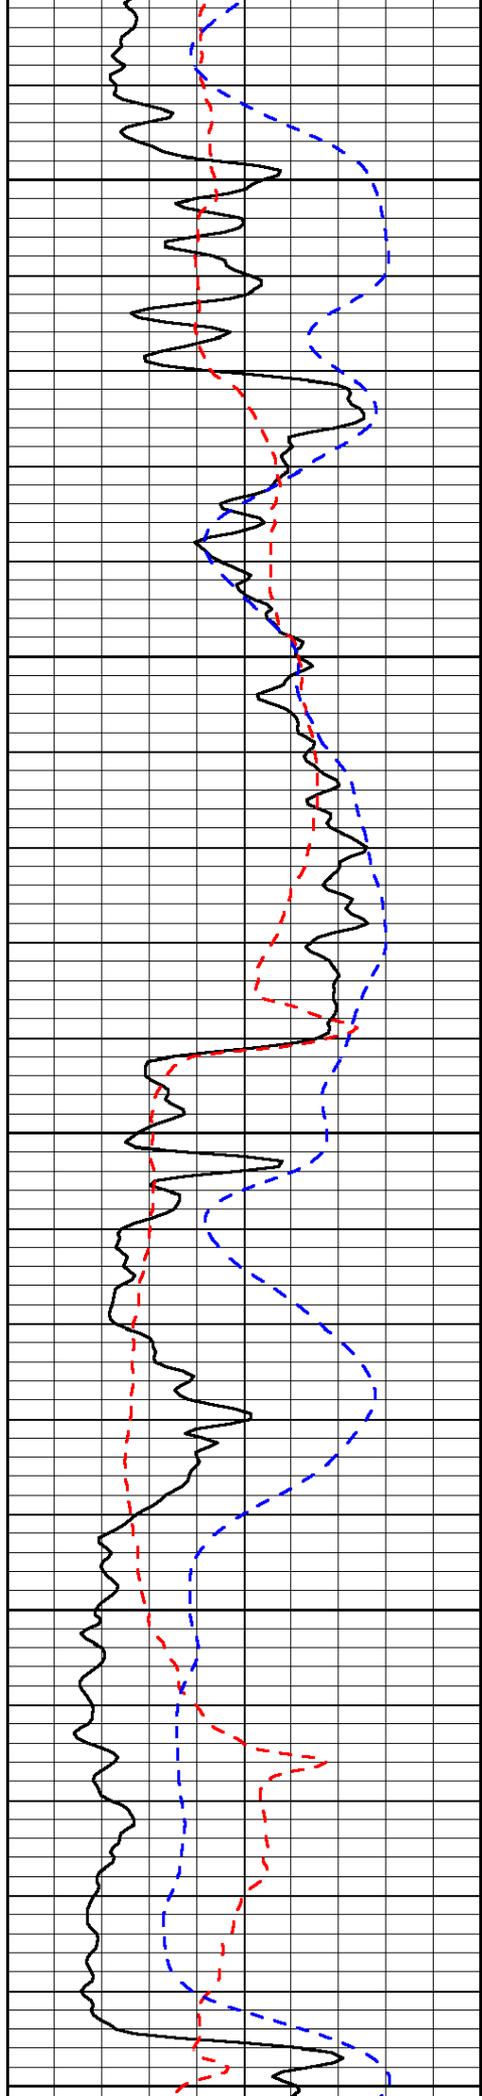

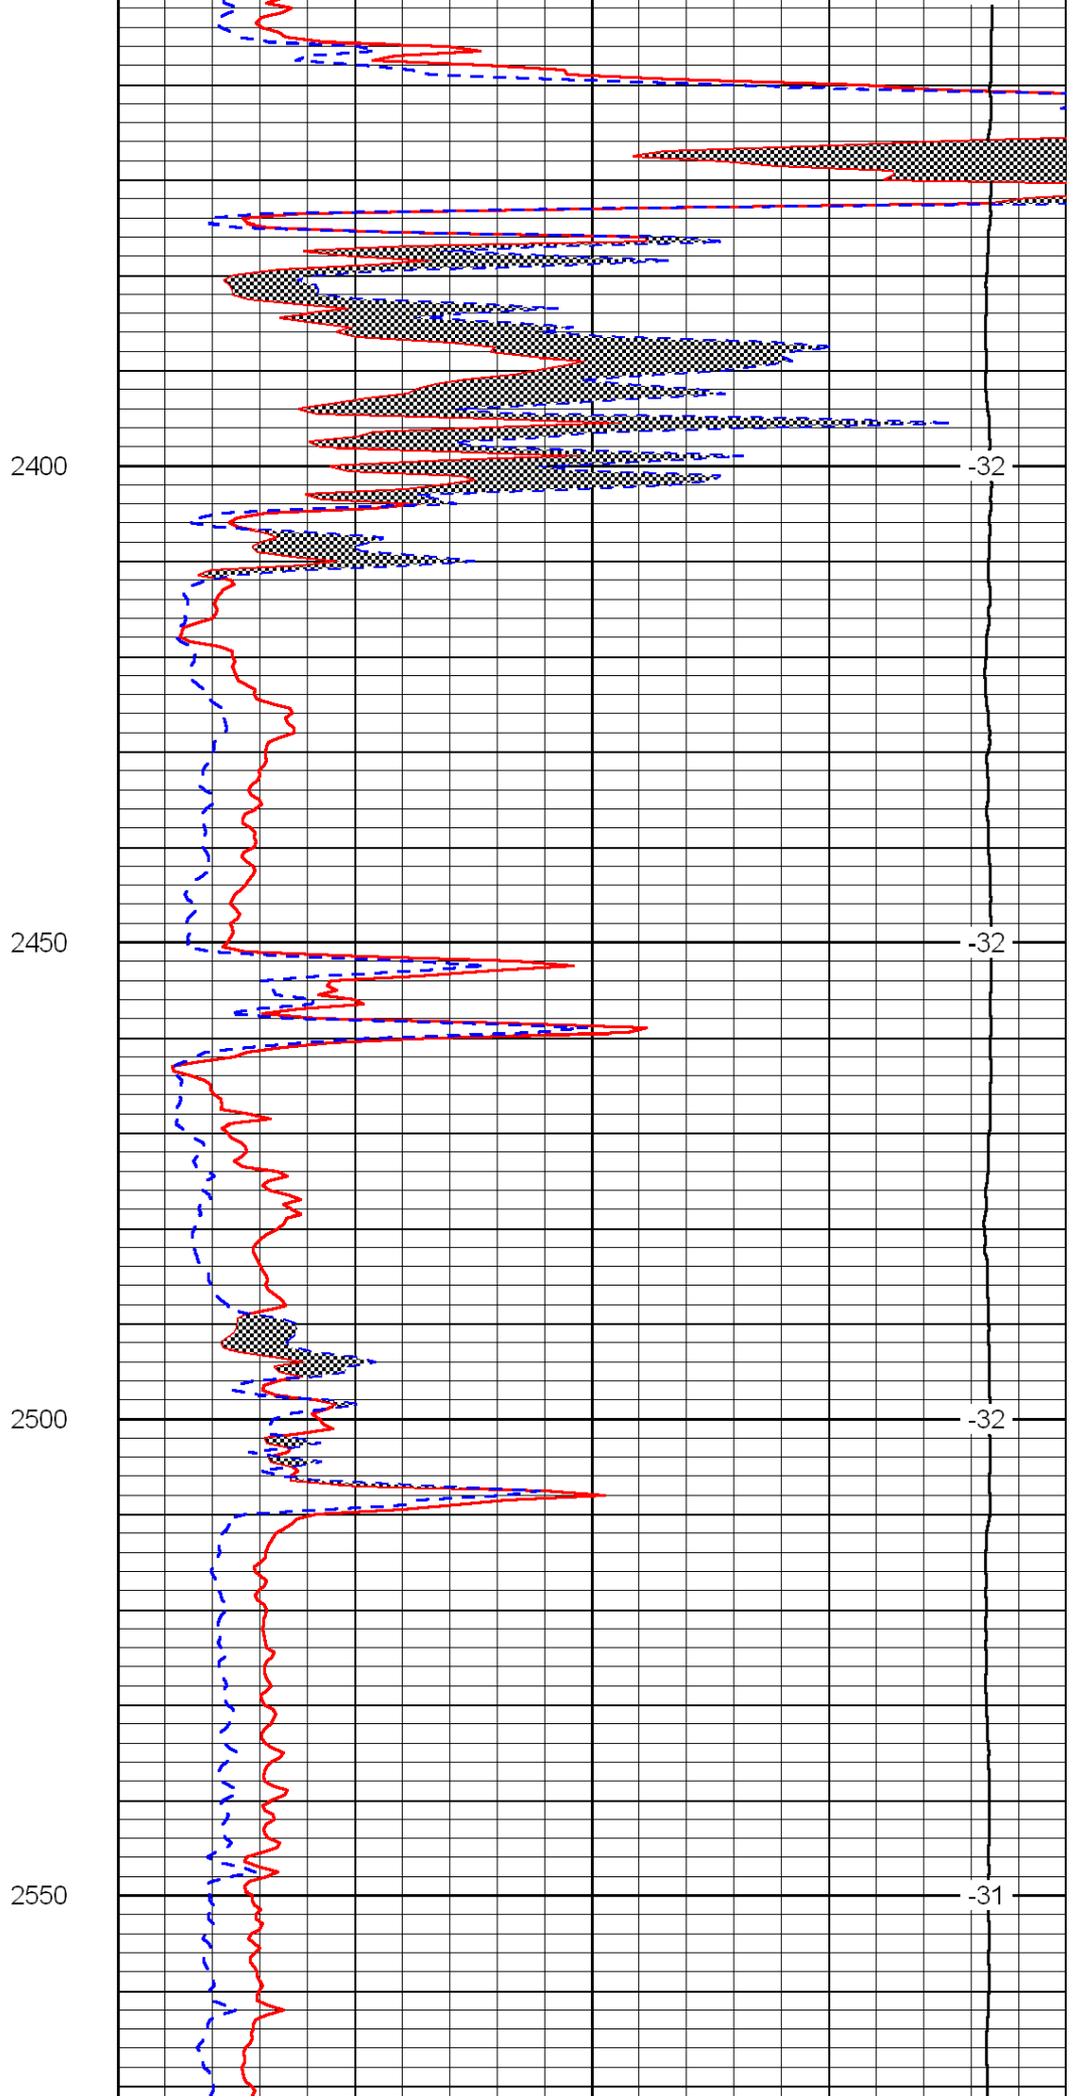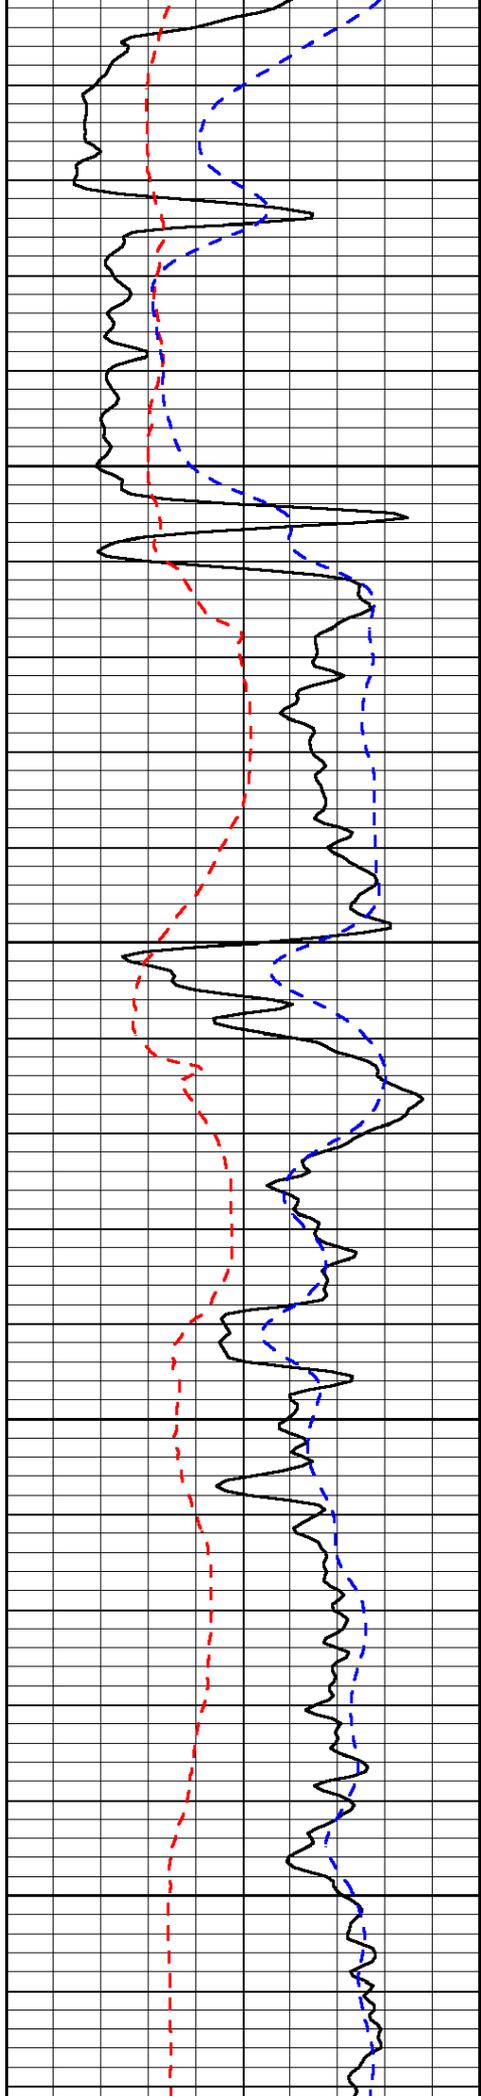

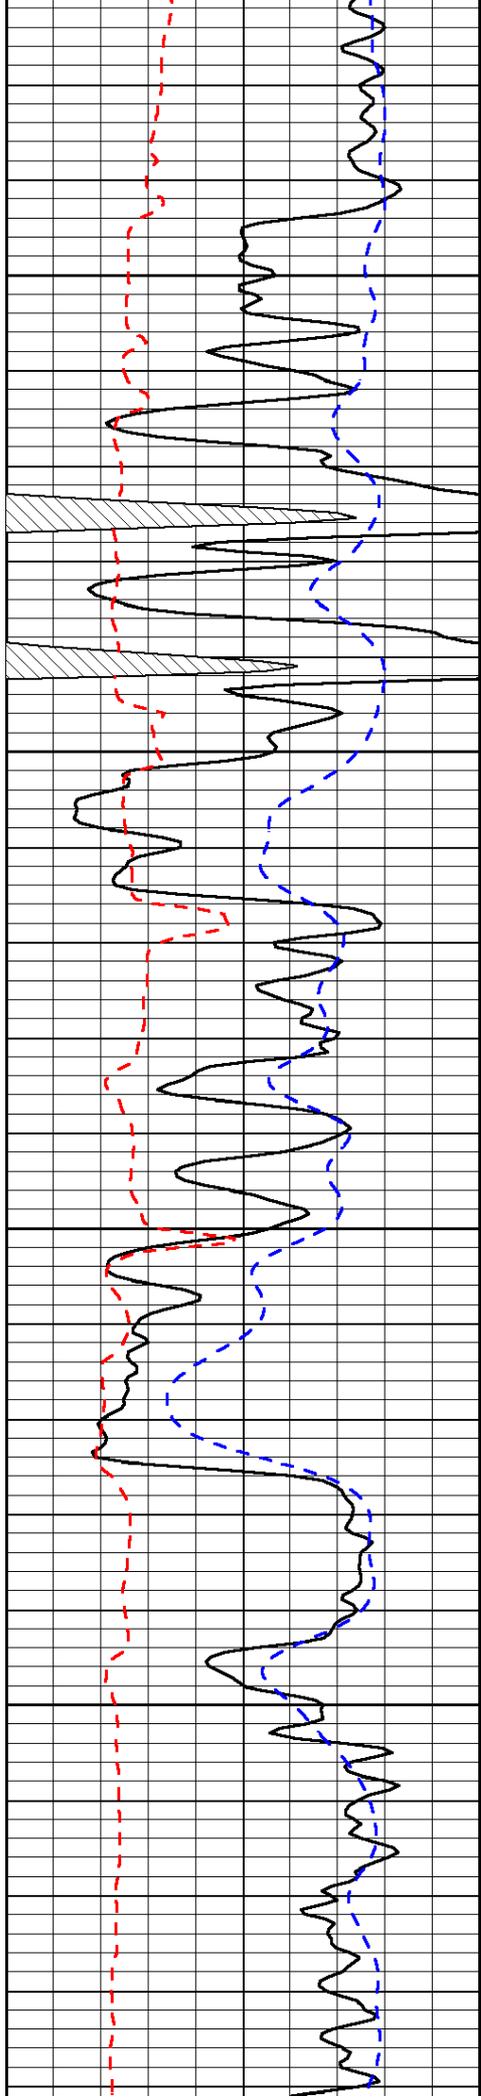


2600

2650

2700

2750

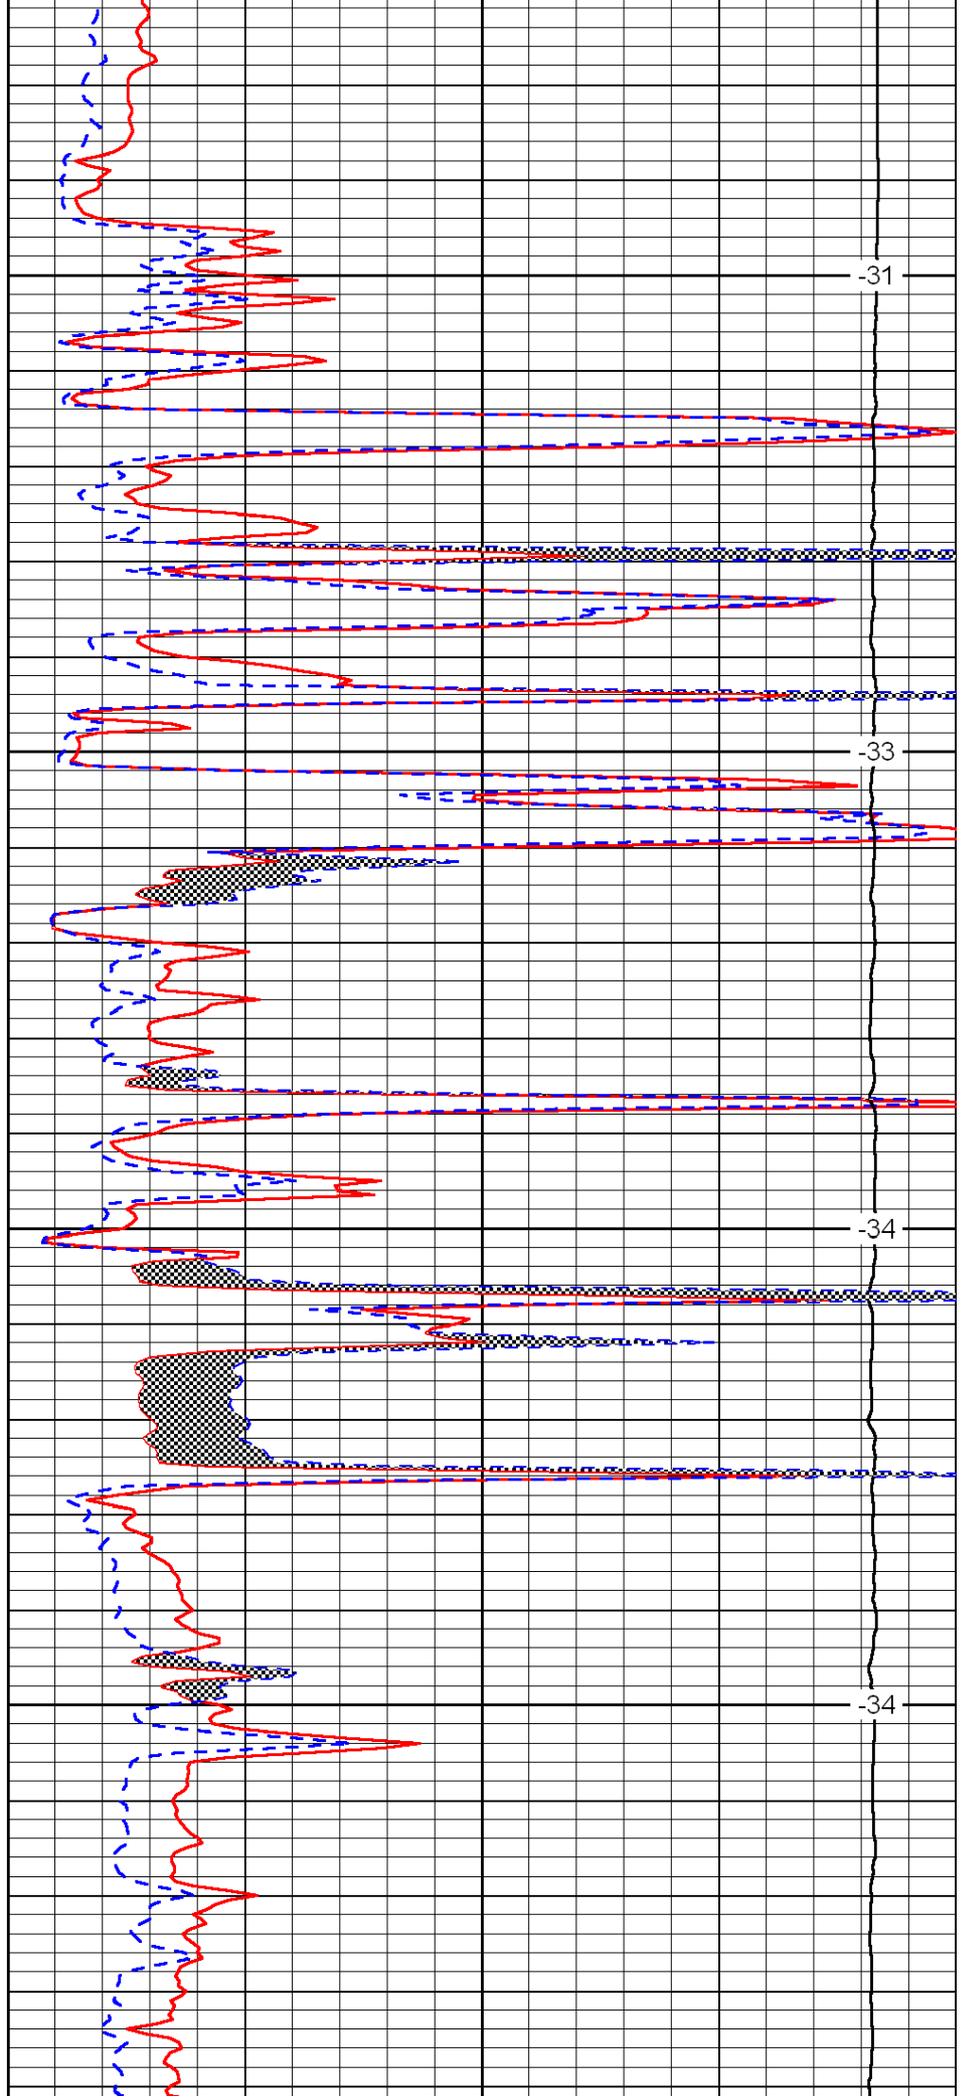


-31

-33

-34

-34

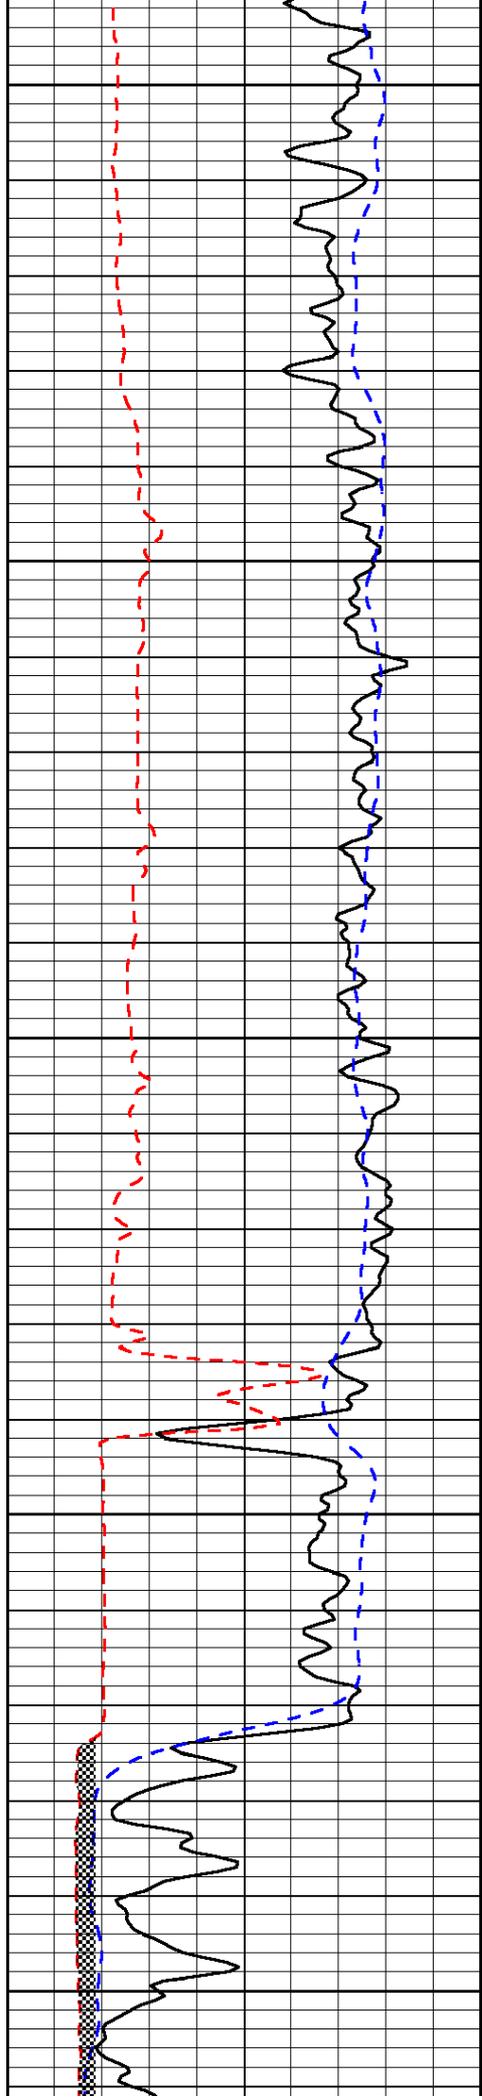


2800

2850

2900

2950

3000

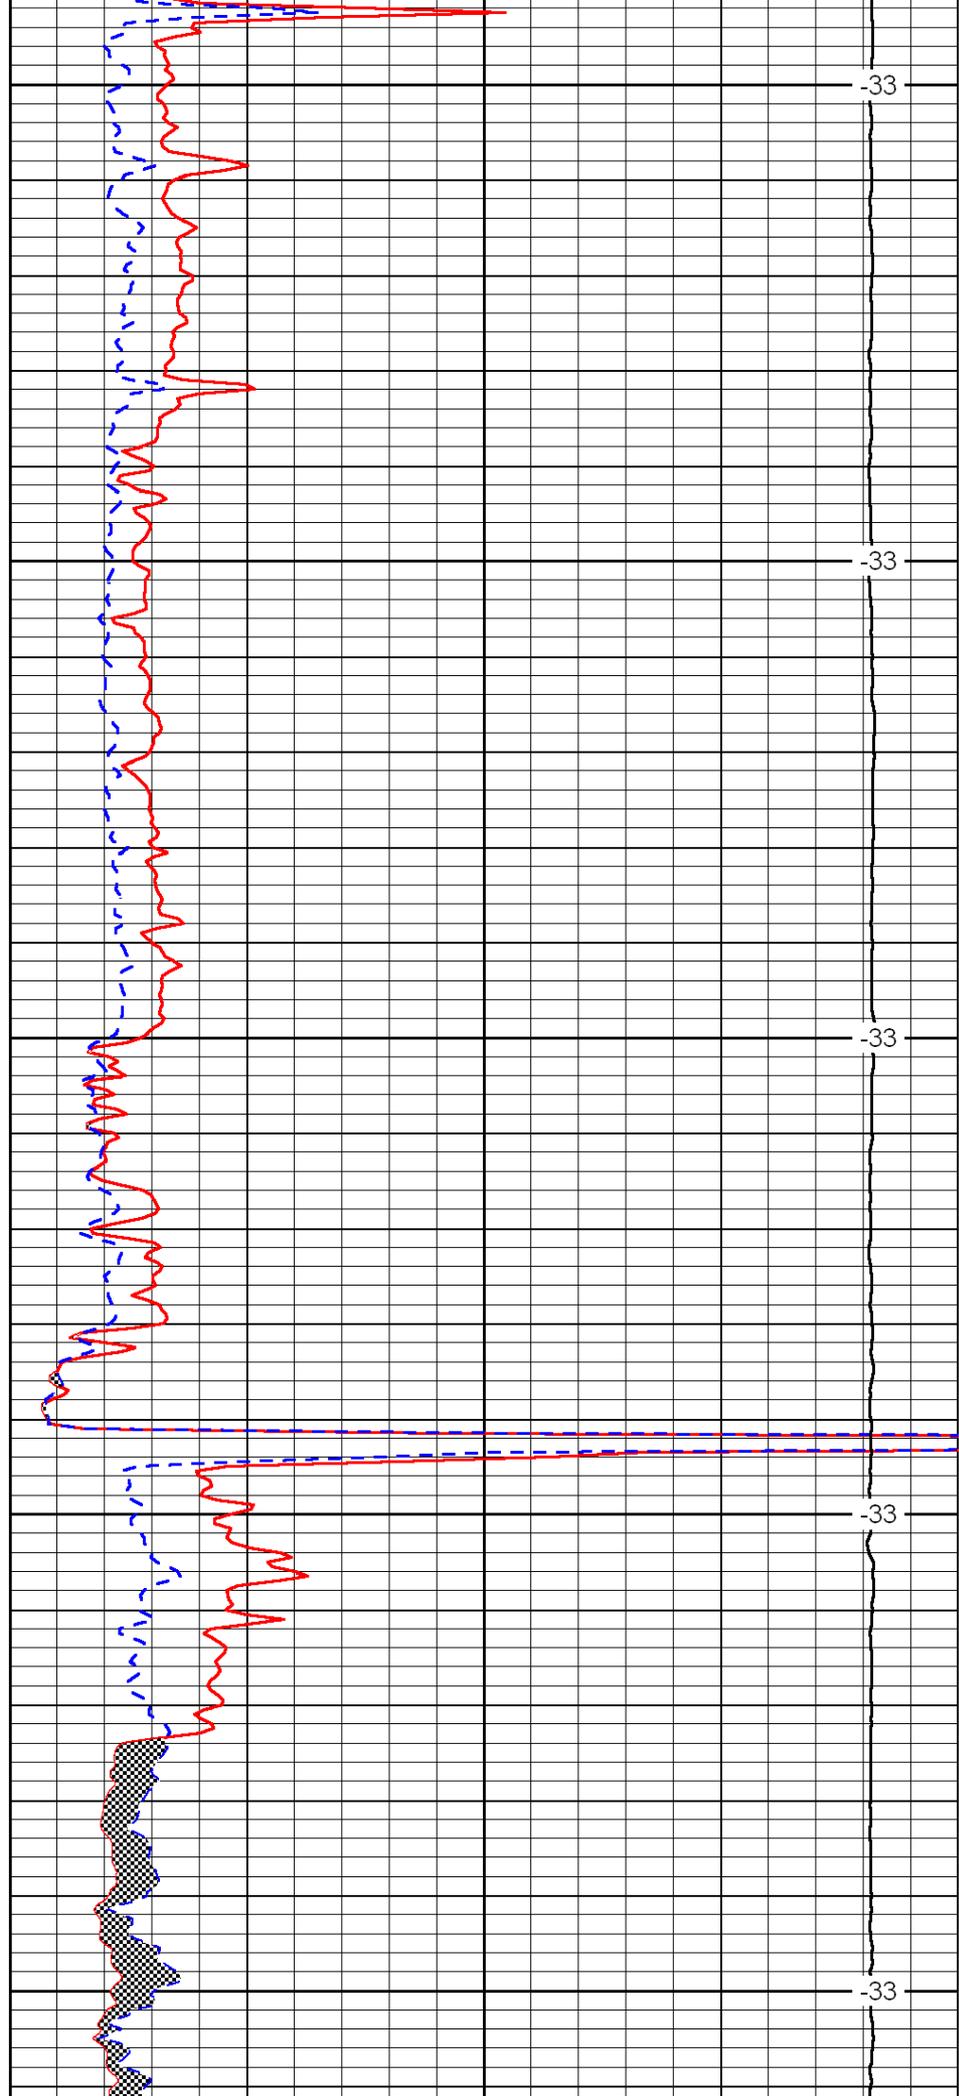


-33

-33

-33

-33

-33

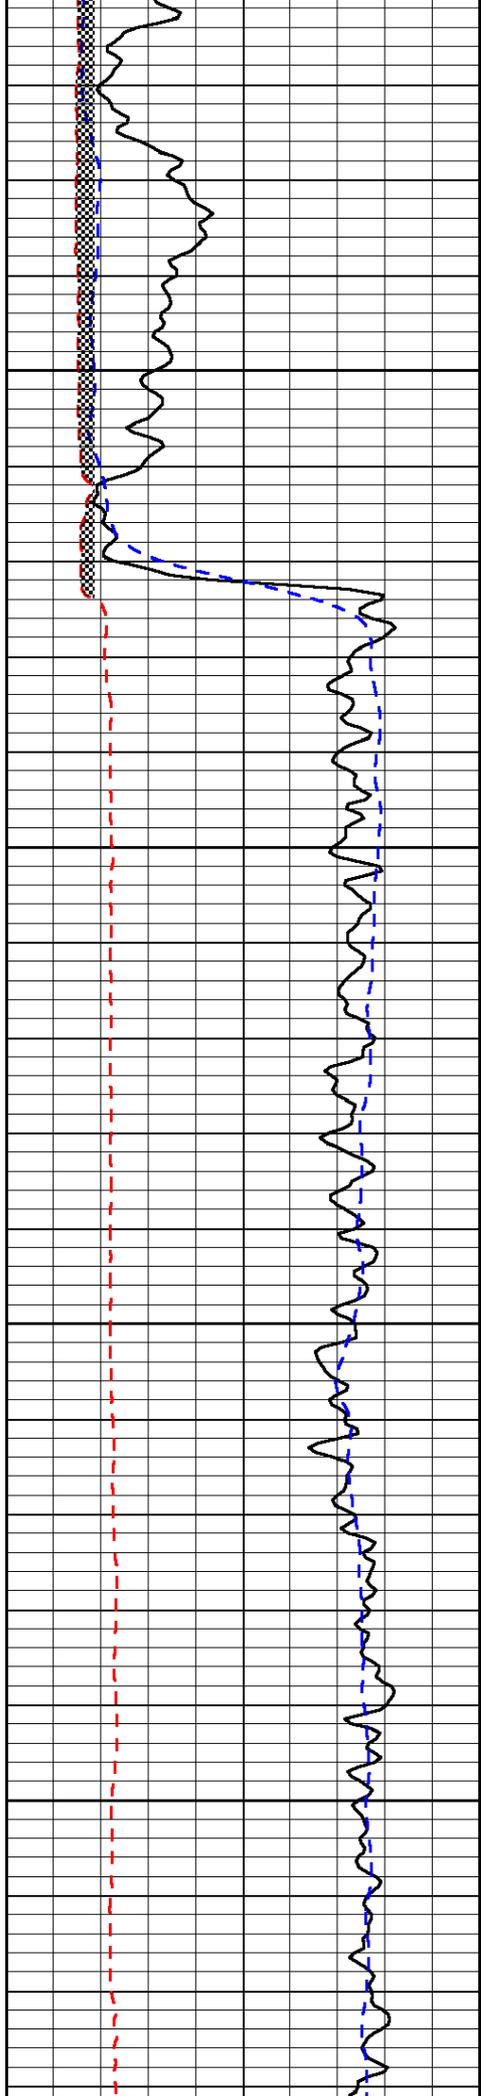


3050

3100

3150

3200


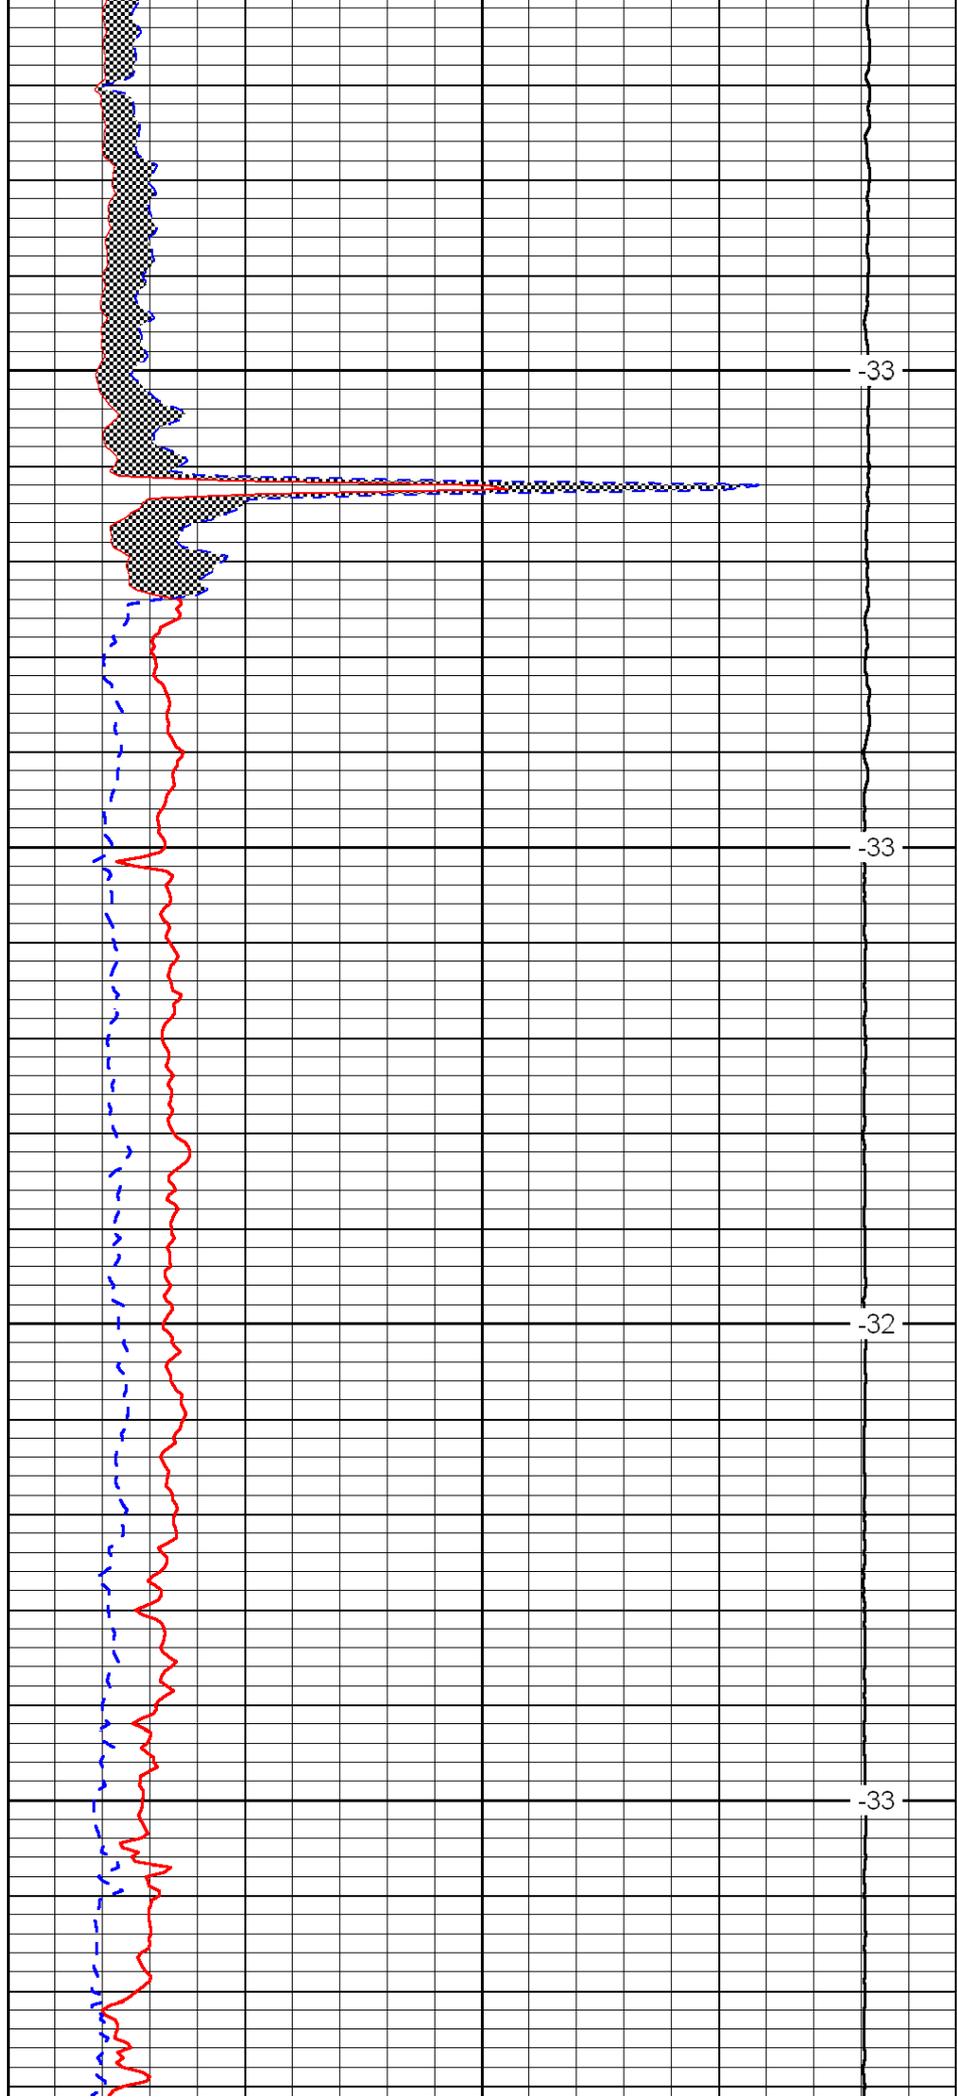



-33

-33

-32

-33

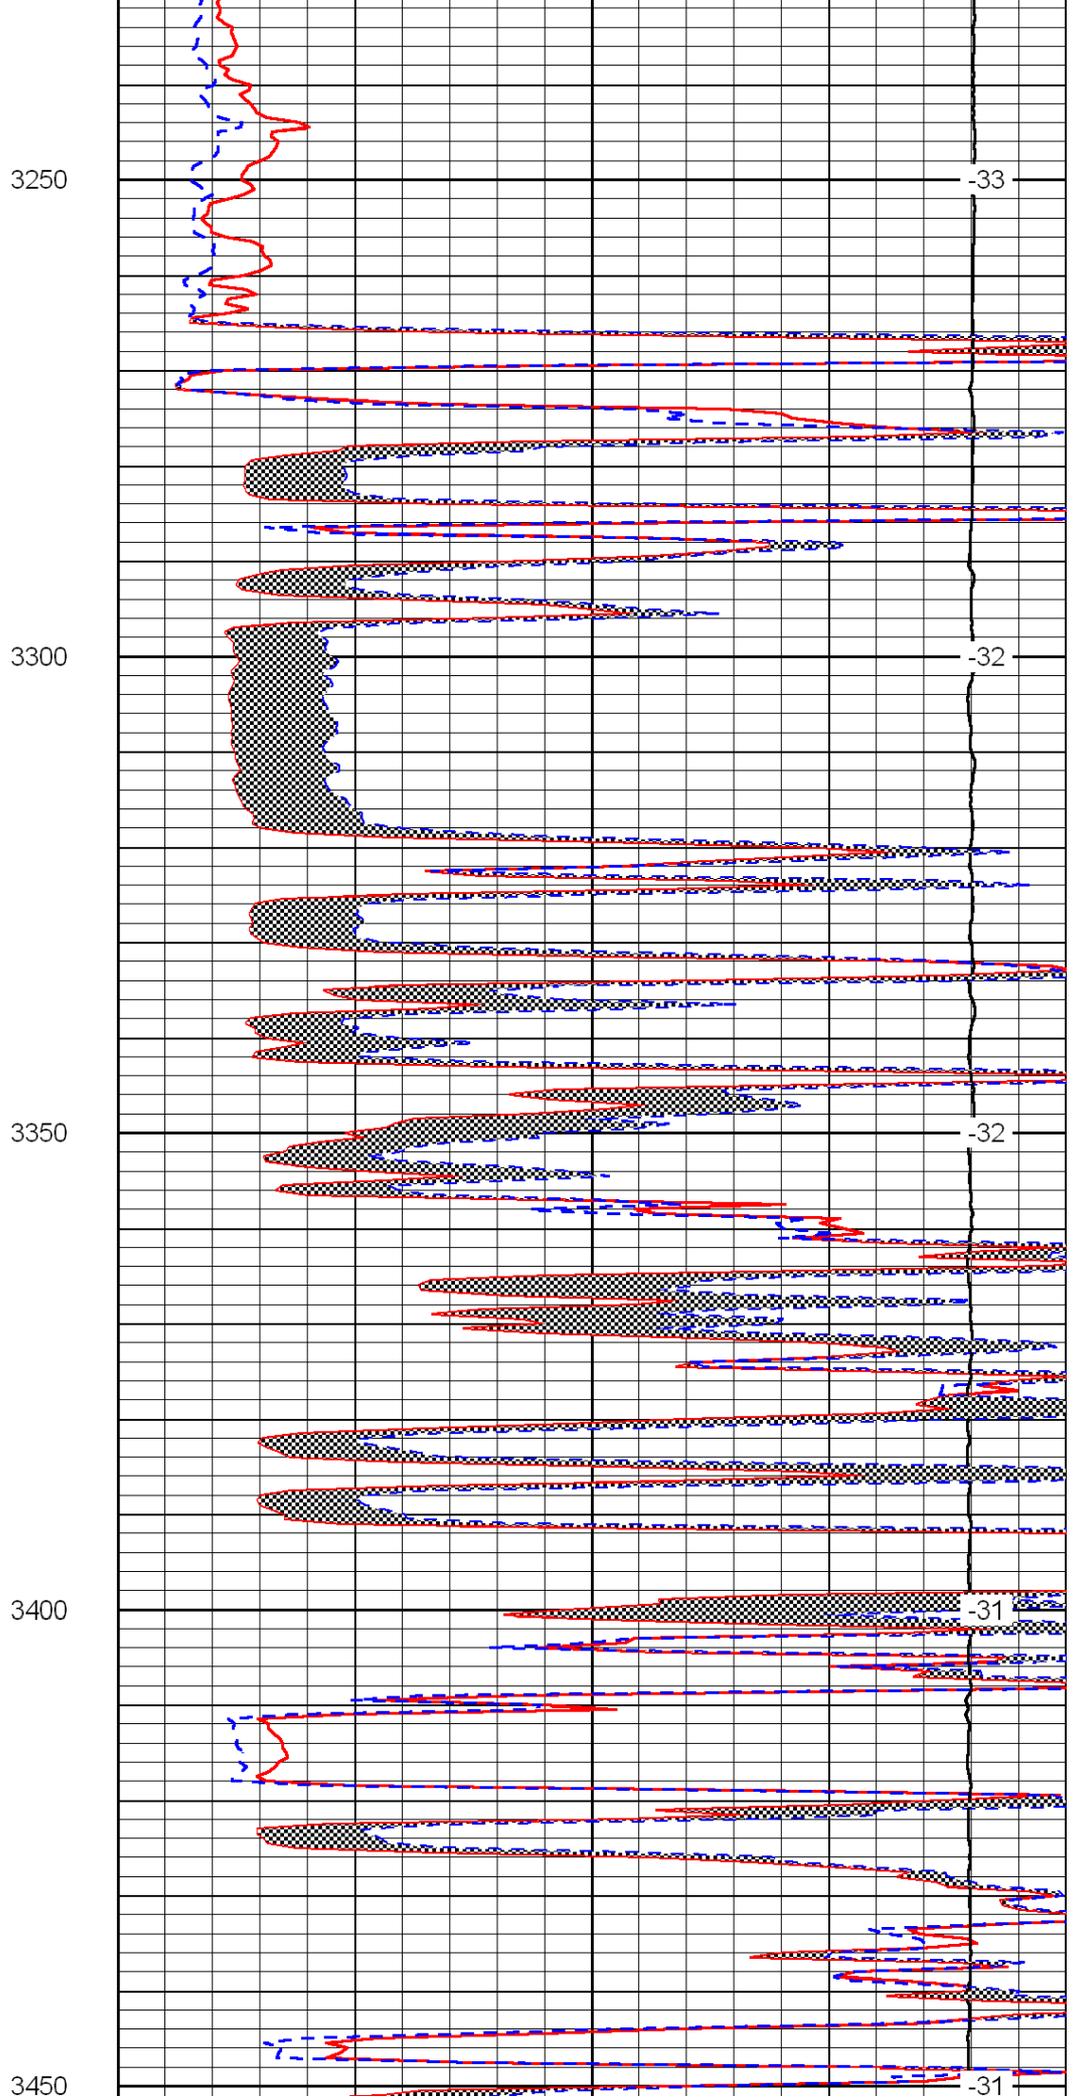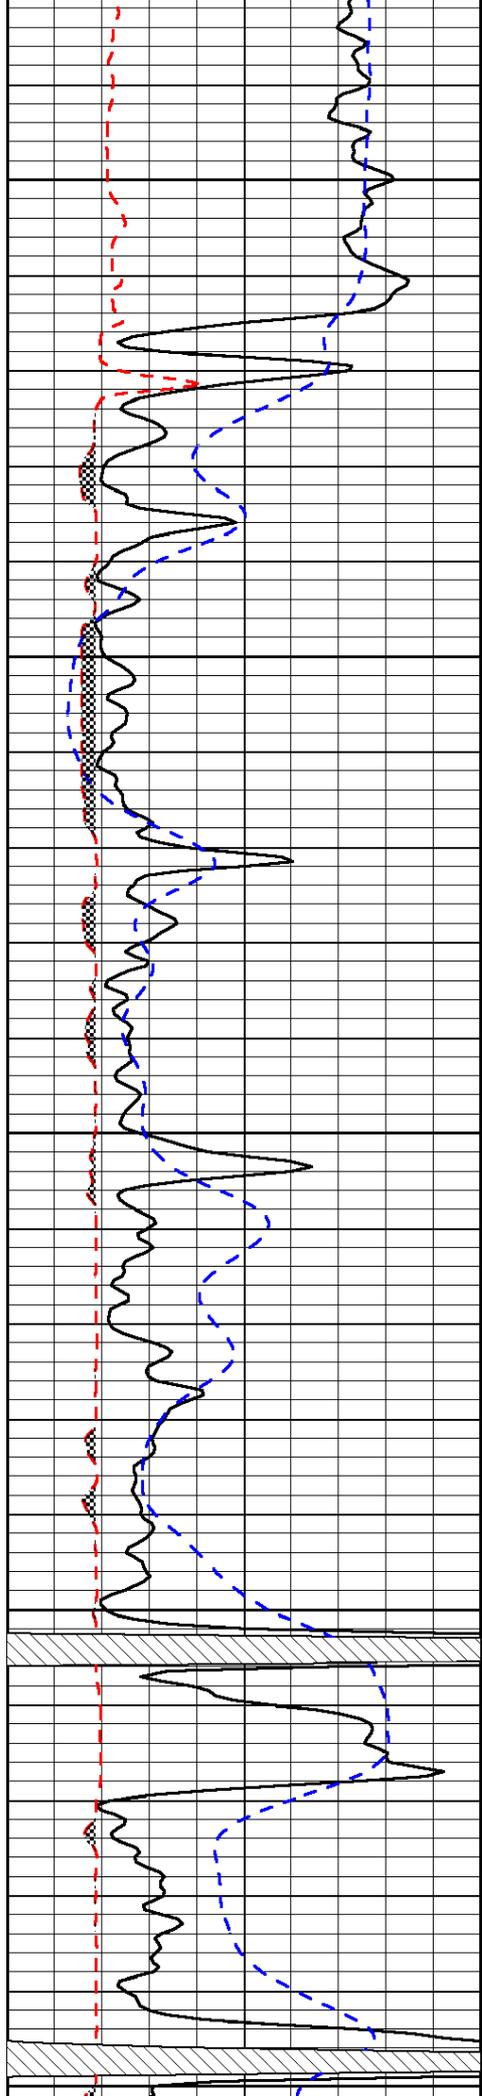

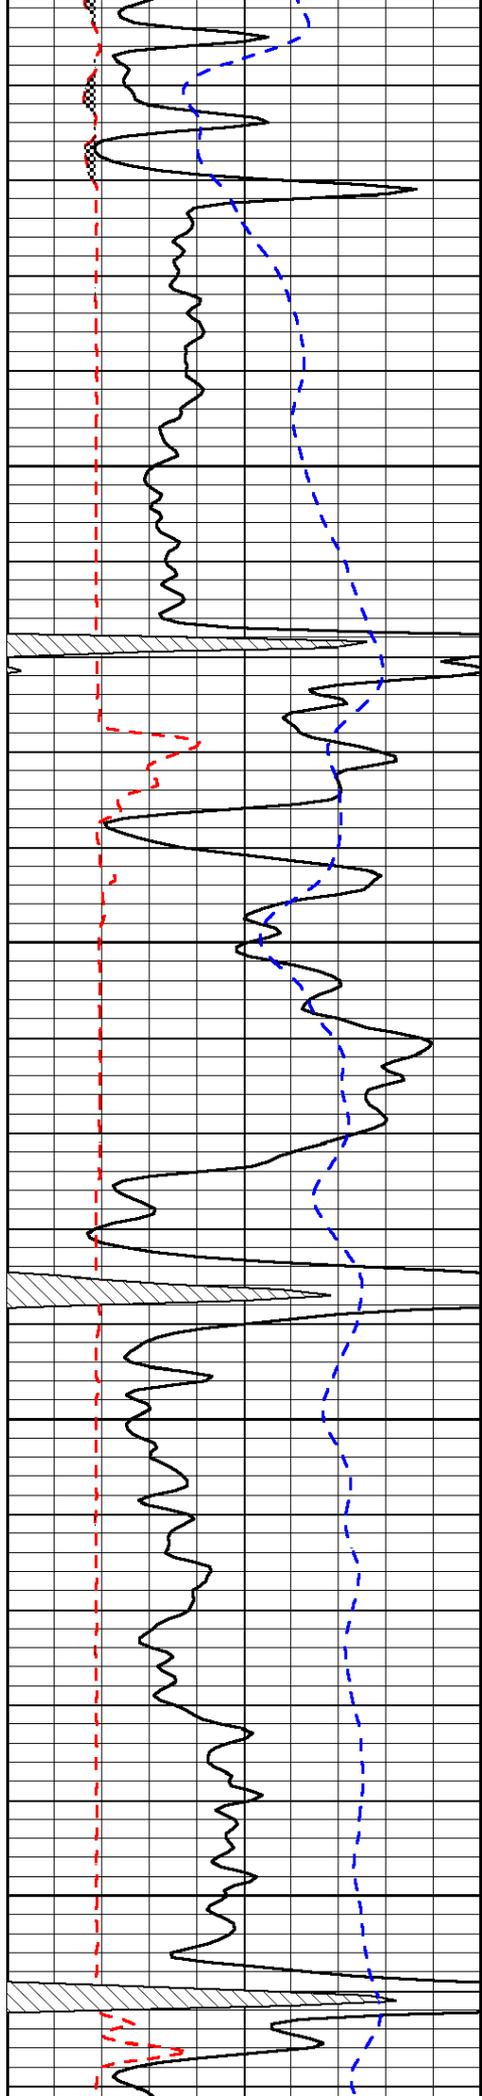


3500

3550

3600

3650

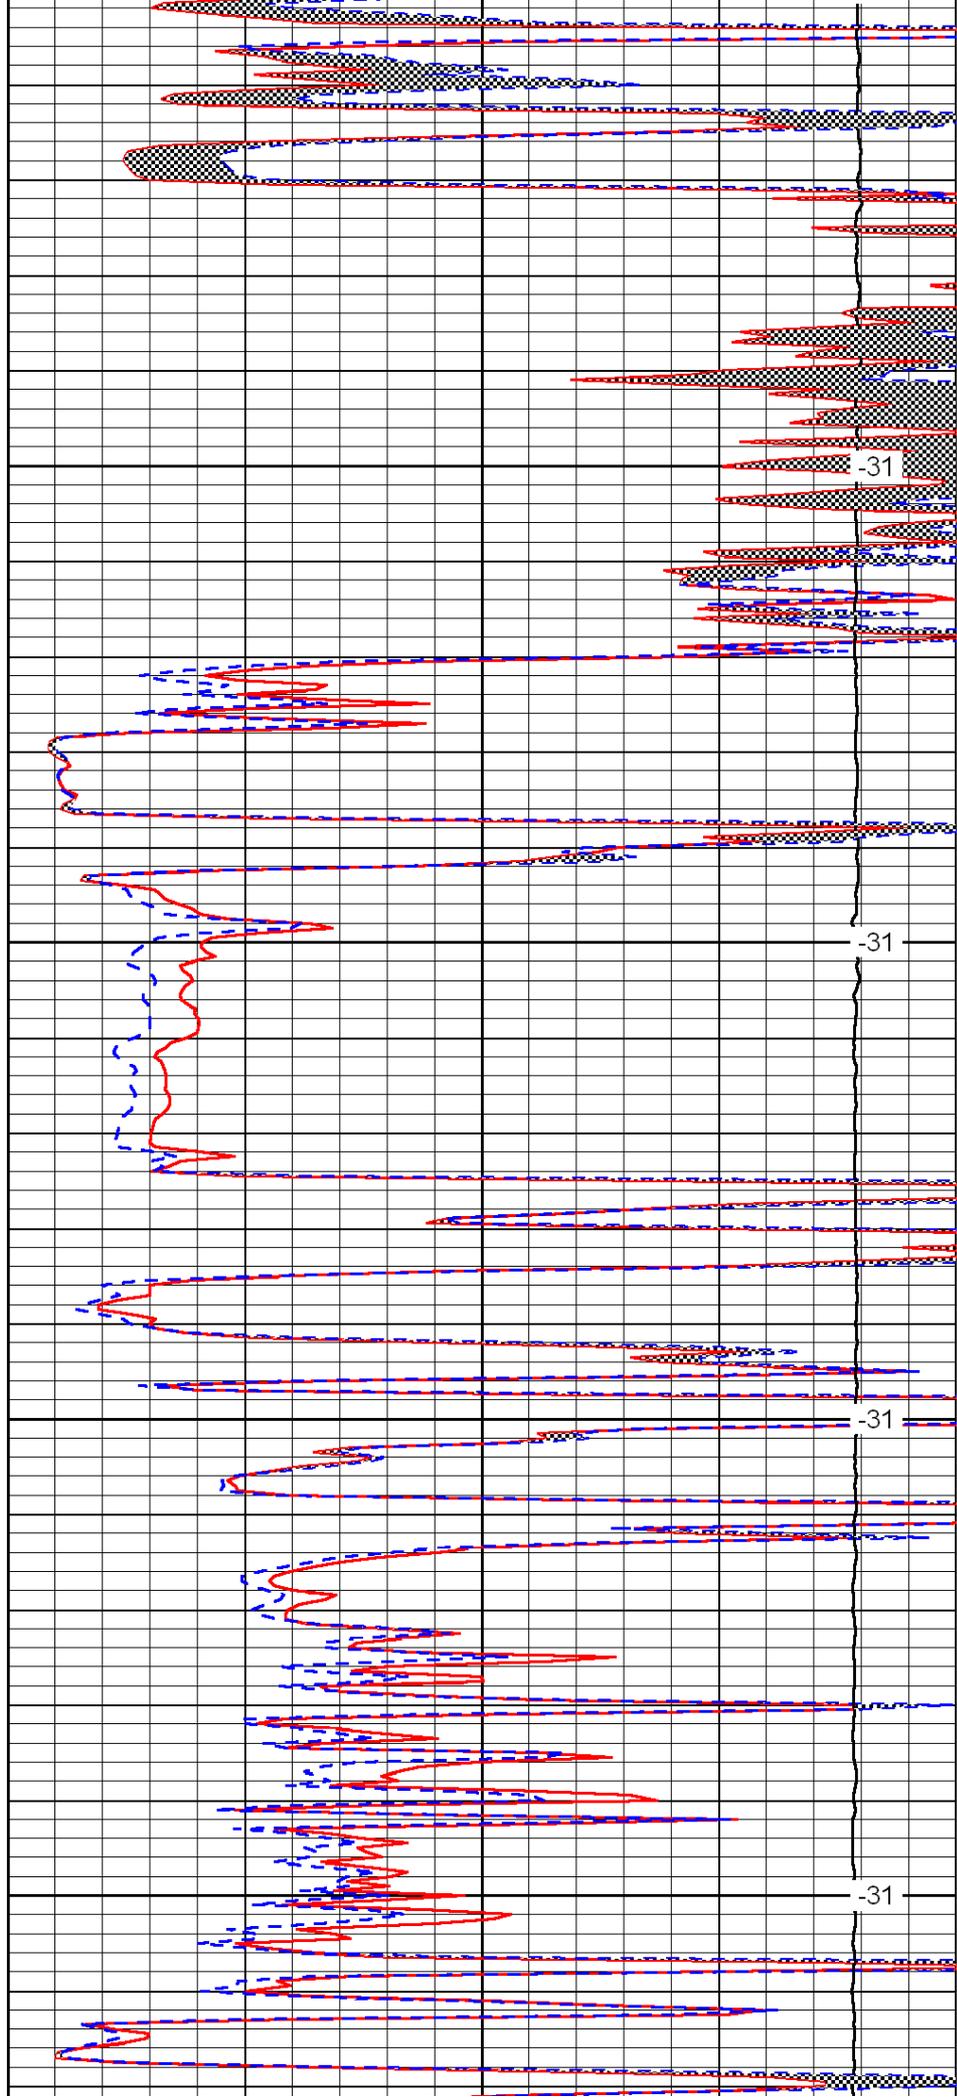


-31

-31

-31

-31

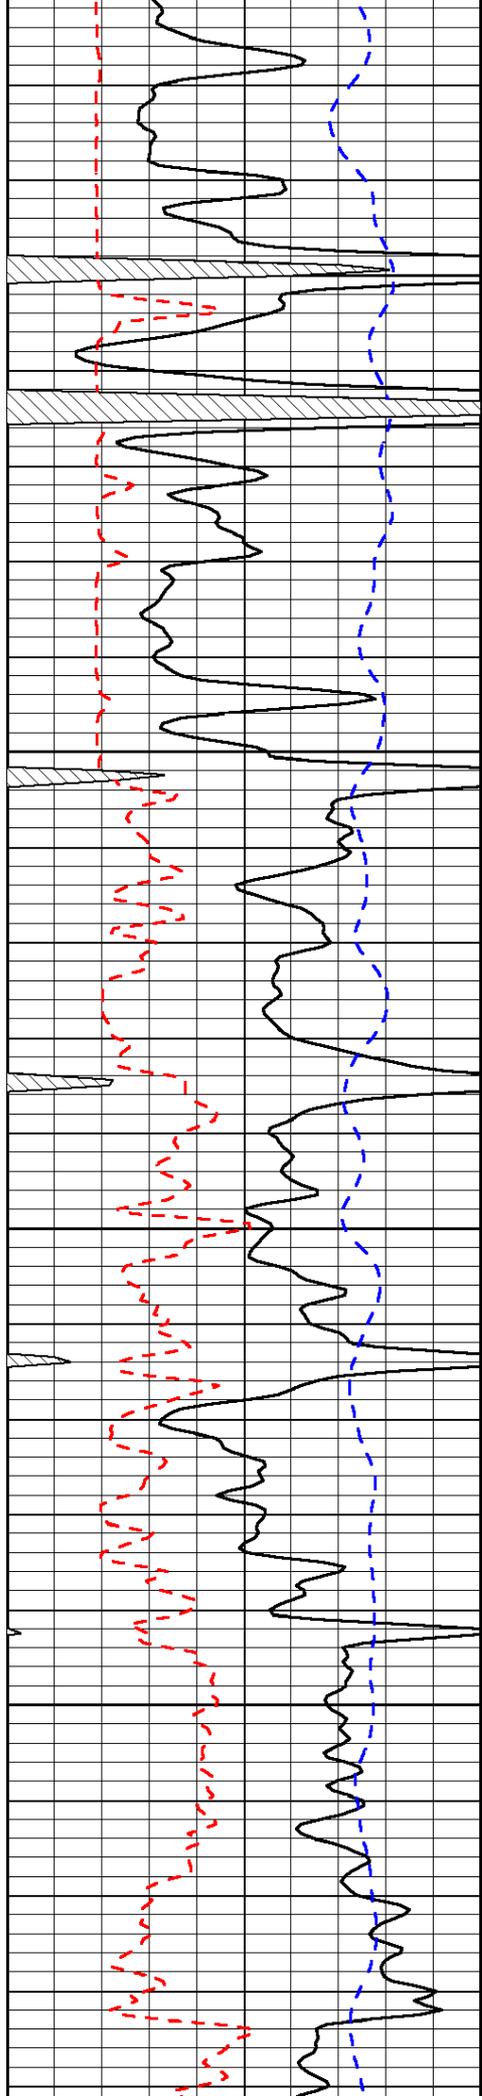


3700

3750

3800

3850

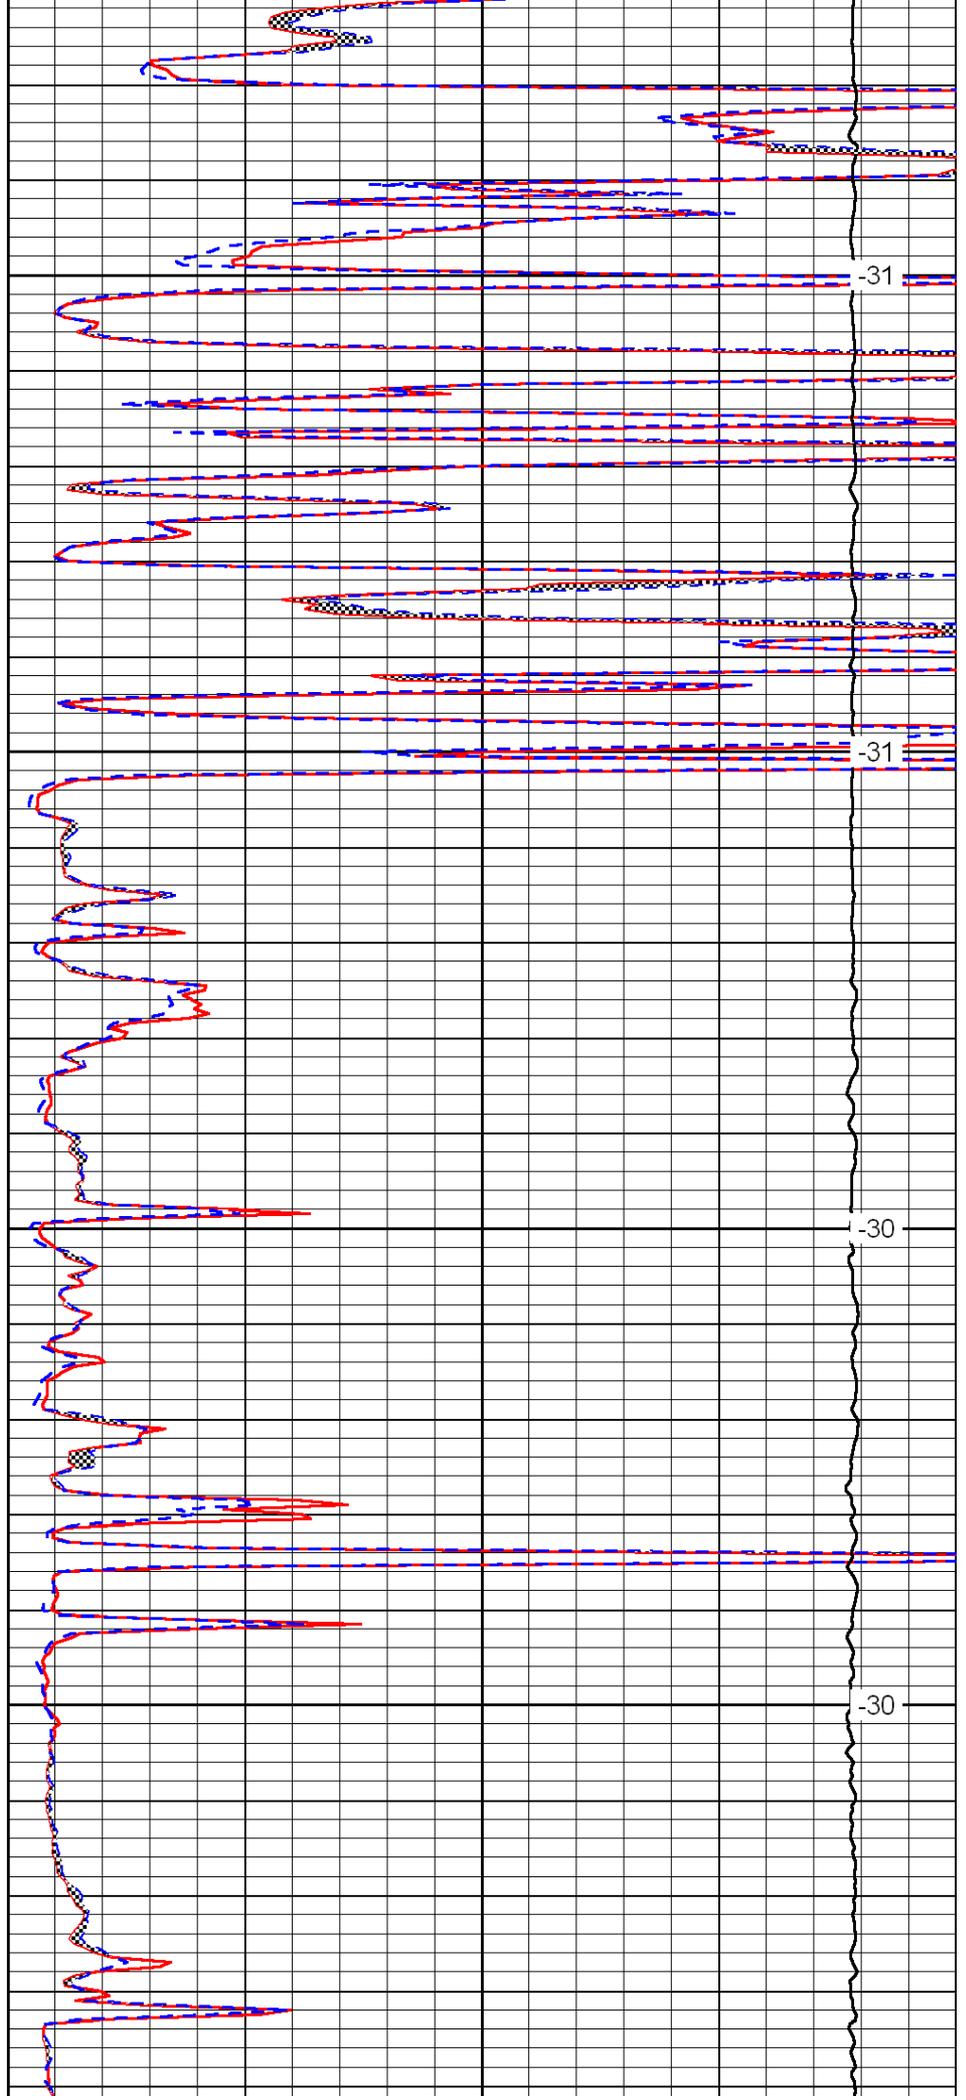


-31


-31

-30

-30

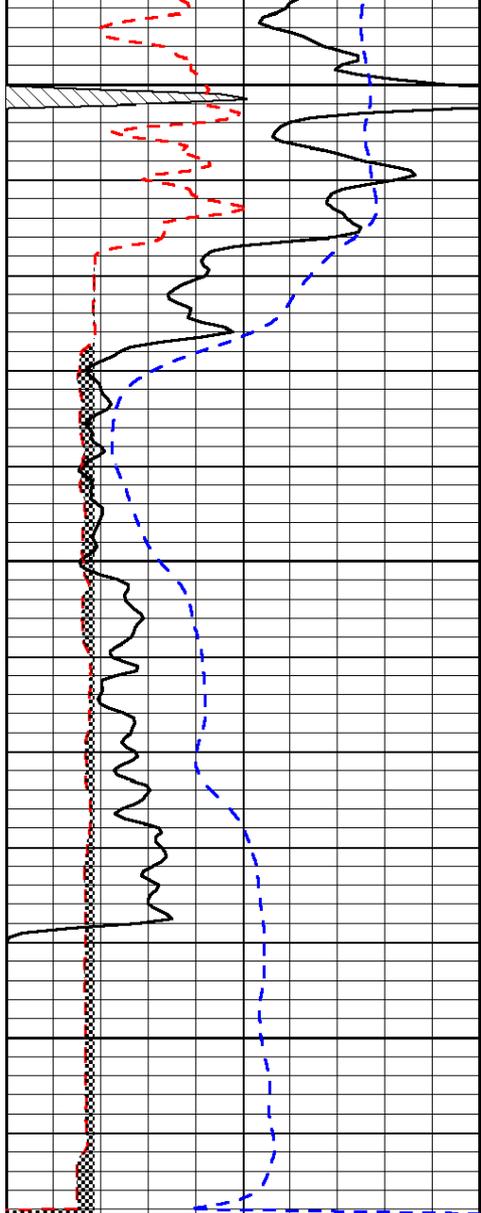

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

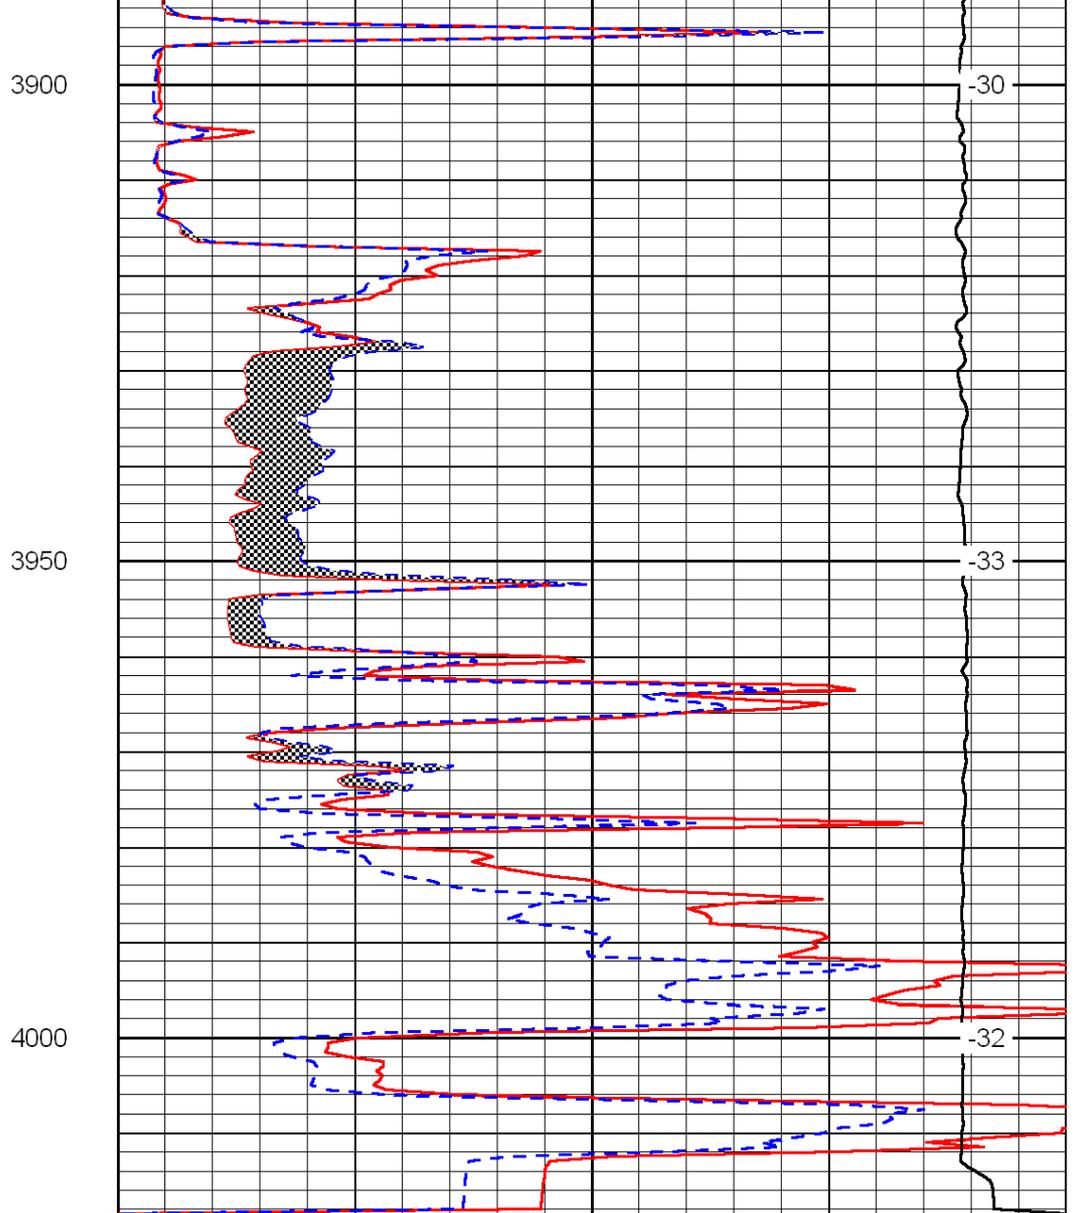

0	Micro Inverse 1 X 1	40
0	Micro Normal 2''	40
15000	Line Weight	0

LSPD