

HALIBURTON

MICROLOG

COMPANY		PHOENIX PETRO CORP			
WELL		BERRYMAN RU 6-4			
FIELD		RICHFIELD			
COUNTY		MORTON			
STATE		KANSAS			
Permanent Datum Log measured from Drilling measured from		GROUND LEVEL KELLY BUSHING KELLY BUSHING		Elev. 3405.0 ft 11.0 ft above perm. Datum Elev.: K.B. 3416.0 ft D.F. 3415.0 ft G.L. 3404.0 ft	
Date	16-Jul-11	Sect. 34 Twp. 32S Rge. 41W		Other Services: DSNT / SDLT ACRT	
Run No.	ONE				
Depth - Driller	5157.00 ft				
Depth - Logger	5156.0 ft				
Bottom - Logged Interval	5134.0 ft				
Top - Logged Interval	2000.0 ft				
Casing - Driller	8.625 in @ 1521.0 ft			@	
Casing - Logger	1519.0 ft				
Bit Size	8.785 in			@	
Type Fluid in Hole	WATER BASED MUD				
Density	9.2 ppq	52.00	s/qt		
PH	9.50 pH	9.5	cpm		
Source of Sample	FLOWLINE				
Rm @ Meas. Temperature	1.170 ohmm @ 89.00 degF			@	
Rmf @ Meas. Temperature	1.06 ohmm @ 87.00 degF			@	
Rmc @ Meas. Temperature	1.330 ohmm @ 87.00 degF			@	
Source Rmf	MEASURED	MEASURED			
Rm @ BHT	0.92 ohmm @ 132.0 degF			@	
Time Since Circulation	3.4 hr				
Time on Bottom	16-Jul-11 09:36				
Max. Rec. Temperature	132.0 degF @ 5156.0 ft			@	
Equipment	10546866	LIBERAL			
Recorded By	C. HAVERKAMP				
Witnessed By	C. WILLIAMS	T. FULLER			

Fold here

Service Ticket No.: 8322975				API Serial No.: 15-129-21931				PGM Version: WL INSITE R3.2.0 (Build 7)			
CHANGE IN MUD TYPE OR ADDITIONAL SAMPLE						RESISTIVITY SCALE CHANGES					
Date	Sample No.					Type Log	Depth	Scale Up Hole	Scale Down Hole		
Depth-Driller											
Type Fluid in Hole											
Density	Viscosity										
Ph	Fluid Loss										
Source of Sample						RESISTIVITY EQUIPMENT DATA					
Rm @ Meas. Temp		@		@		Run No.	Tool Type & No.	Pad Type	Tool Pos.	Other	
Rmf @ Meas. Temp.		@		@		ONE	MICRO	RUBBER	ADJ.	N/A	
Rmc @ Meas. Temp.		@		@							
Source Rmf	Rmc										
Rm @ BHT		@		@							
Rmf @ BHT		@		@							
Rmc @ BHT		@		@							
EQUIPMENT DATA											
GAMMA			ACOUSTIC			DENSITY			NEUTRON		
Run No.	ONE		Run No.			Run No.			Run No.		
Serial No.	11048627		Serial No.			Serial No.			Serial No.		
Model No.	GTET		Model No.			Model No.			Model No.		
Diameter	3.625"		No. of Cent.			Diameter			Diameter		
Detector Model No.	T-102		Spacing			Log Type			Log Type		
Type	SCINT					Source Type			Source Type		
Length	8"		LSA [Y/N]			Serial No.			Serial No.		
Distance to Source	10'		FWDA [Y/N]			Strength			Strength		
LOGGING DATA											

GENERAL			GAMMA		ACOUSTIC		DENSITY		NEUTRON					
Run	Depth		Speed	Scale		Scale		Matrix	Scale		Matrix	Scale		Matrix
No.	From	To	ft/min	L	R	L	R		L	R		L	R	
ONE	5156'	2000'	REC	0	150									
DIRECTIONAL INFORMATION														
Maximum Deviation @								KOP @						
Remarks: SP-GTET-DSNT-SDLT-ACRT RAN IN COMBINATION.														
ANNULAR HOLE VOLUME CALCULATED FOR 5.5 INCH CASING.														
CHLORIDES REPORTED AT 2500 MG/L.														
LCM REPORTED AT 6 LB/BBL.														
YOUR CREW: K. KING, V. JAIME														
THANK YOU FOR CHOOSING HALLIBURTON ENERGY SERVICES. LIBERAL, KS 620-624-8123														
HALLIBURTON DOES NOT GUARANTEE THE ACCURACY OF ANY INTERPRETATION OF THE LOG DATA, CONVERSION OF LOG DATA TO PHYSICAL ROCK PARAMETERS OR RECOMMENDATIONS WHICH MAY BE GIVEN BY HALLIBURTON PERSONNEL OR WHICH APPEAR ON THE LOG OR IN ANY OTHER FORM. ANY USER OF SUCH DATA, INTERPRETATIONS, CONVERSIONS, OR RECOMMENDATIONS AGREES THAT HALLIBURTON IS NOT RESPONSIBLE EXCEPT WHERE DUE TO GROSS NEGLIGENCE OR WILLFUL MISCONDUCT, FOR ANY LOSS, DAMAGES, OR EXPENSES RESULTING FROM THE USE THEREOF.														
HALLIBURTON														

HALLIBURTON


Plot Time: 16-Jul-11 11:12:42


Plot Range: 1996 ft to 5161.17 ft

Data: BERRYMAN_RU_6_4\Well Based\DETAIL\

Plot File: \\-LOCAL-BERRYMAN_RU_6_4\0001 SP-GTET-DSN-SDL-ACRT-CH\MICRO\Microlog_IQ_5_main_lib


5 INCH MAIN LOG

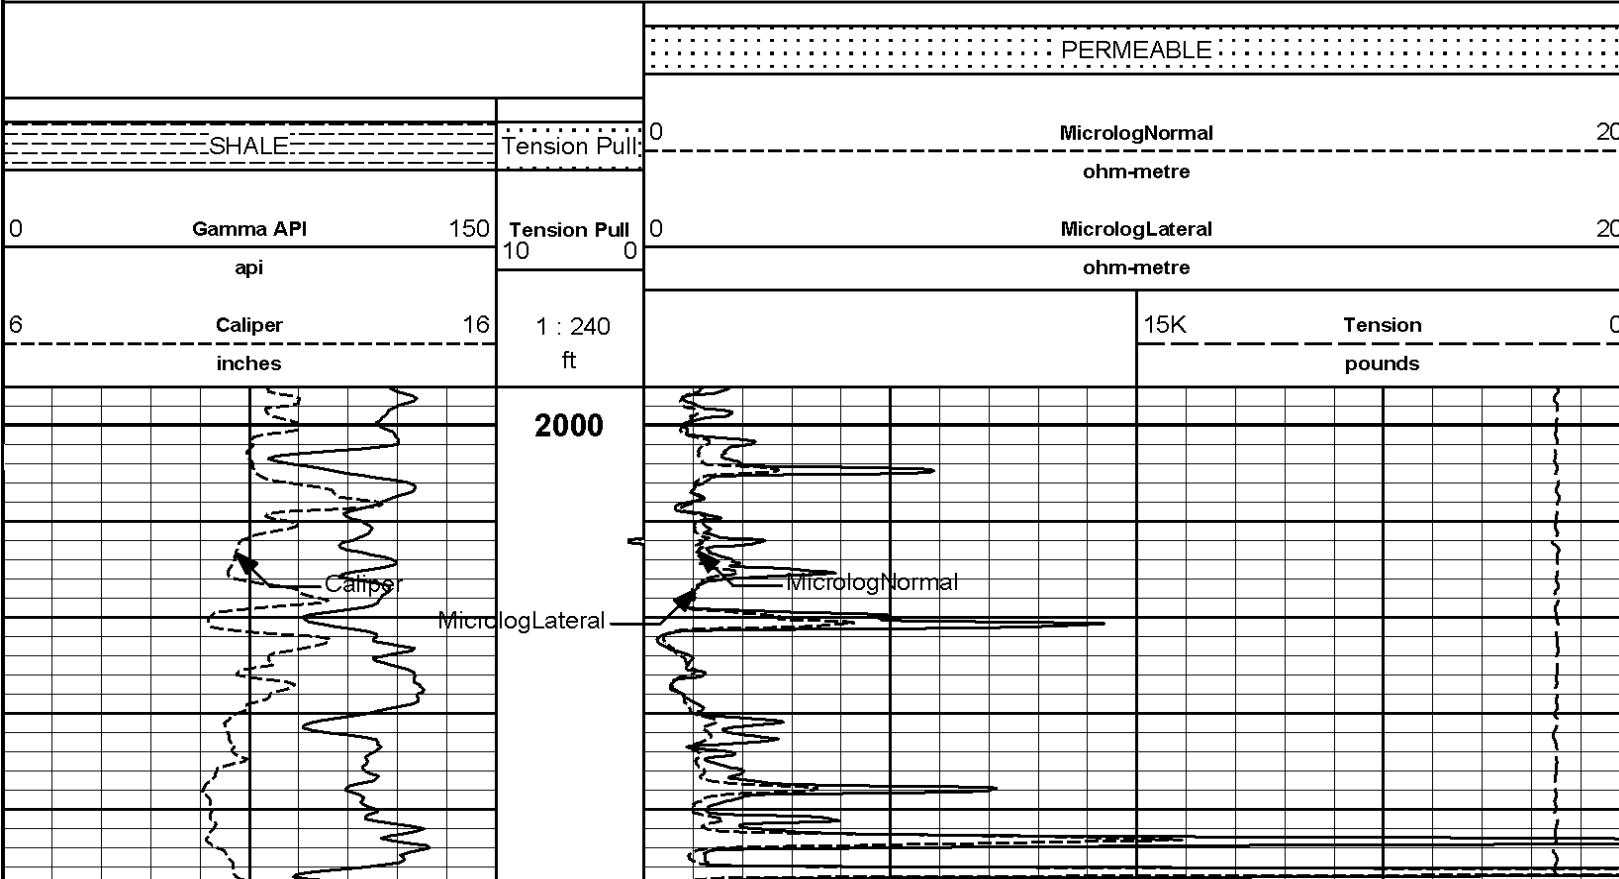

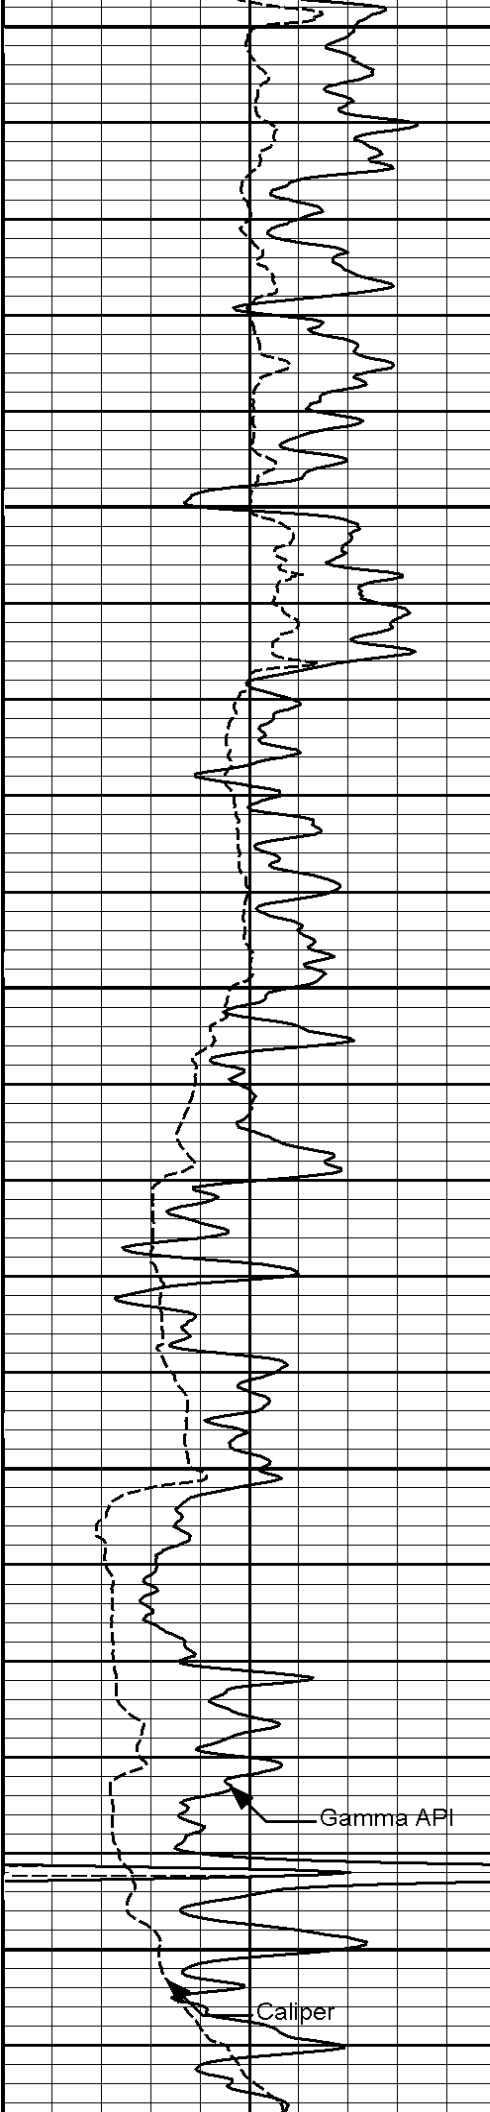

2100

2200

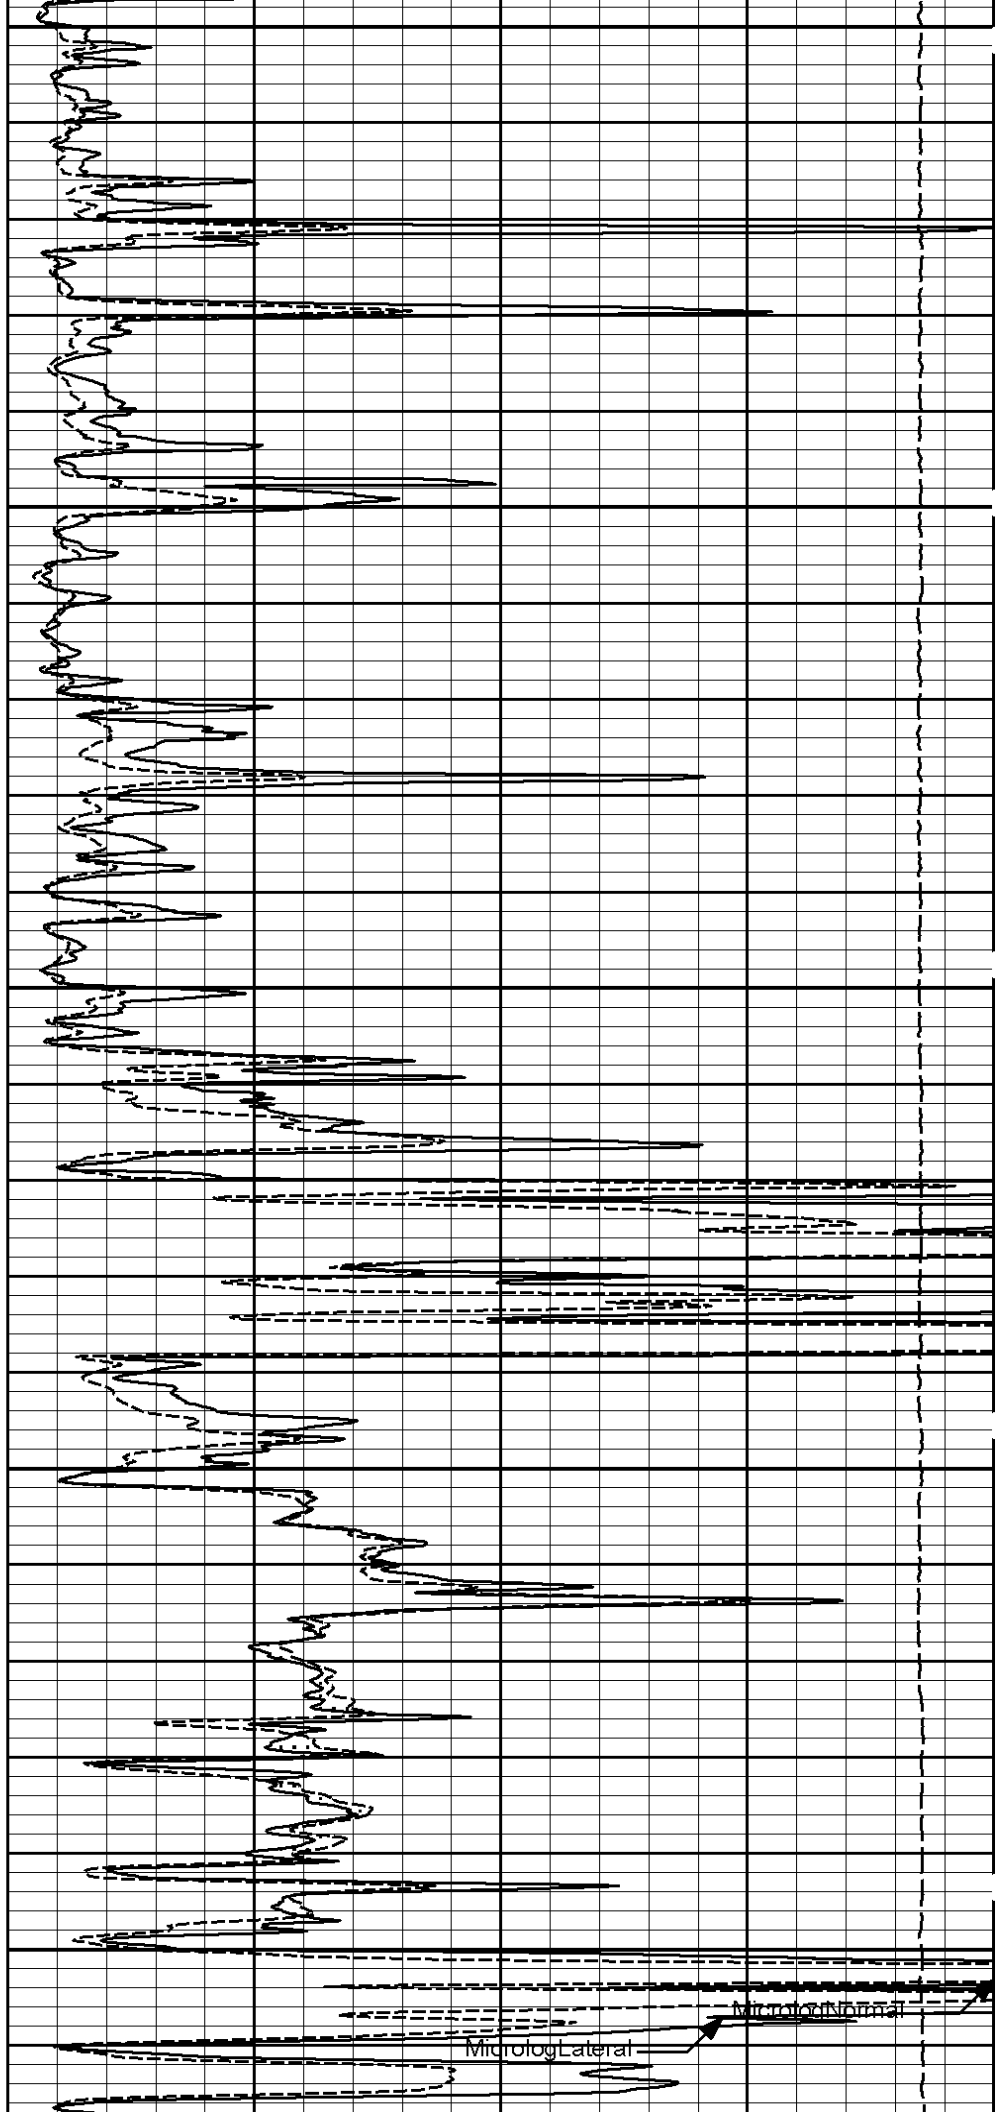


Gamma API

Caliper

Microlog Lateral


Microlog Normal

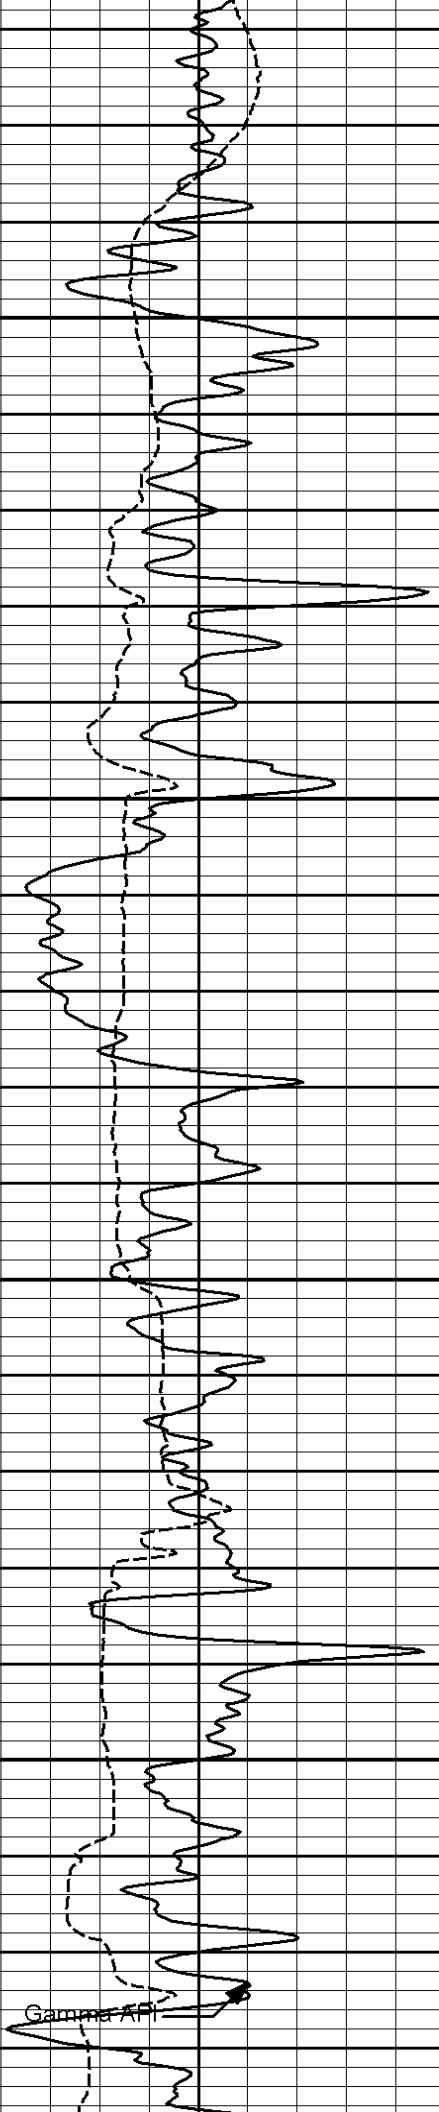


2300

2400

Gamma API

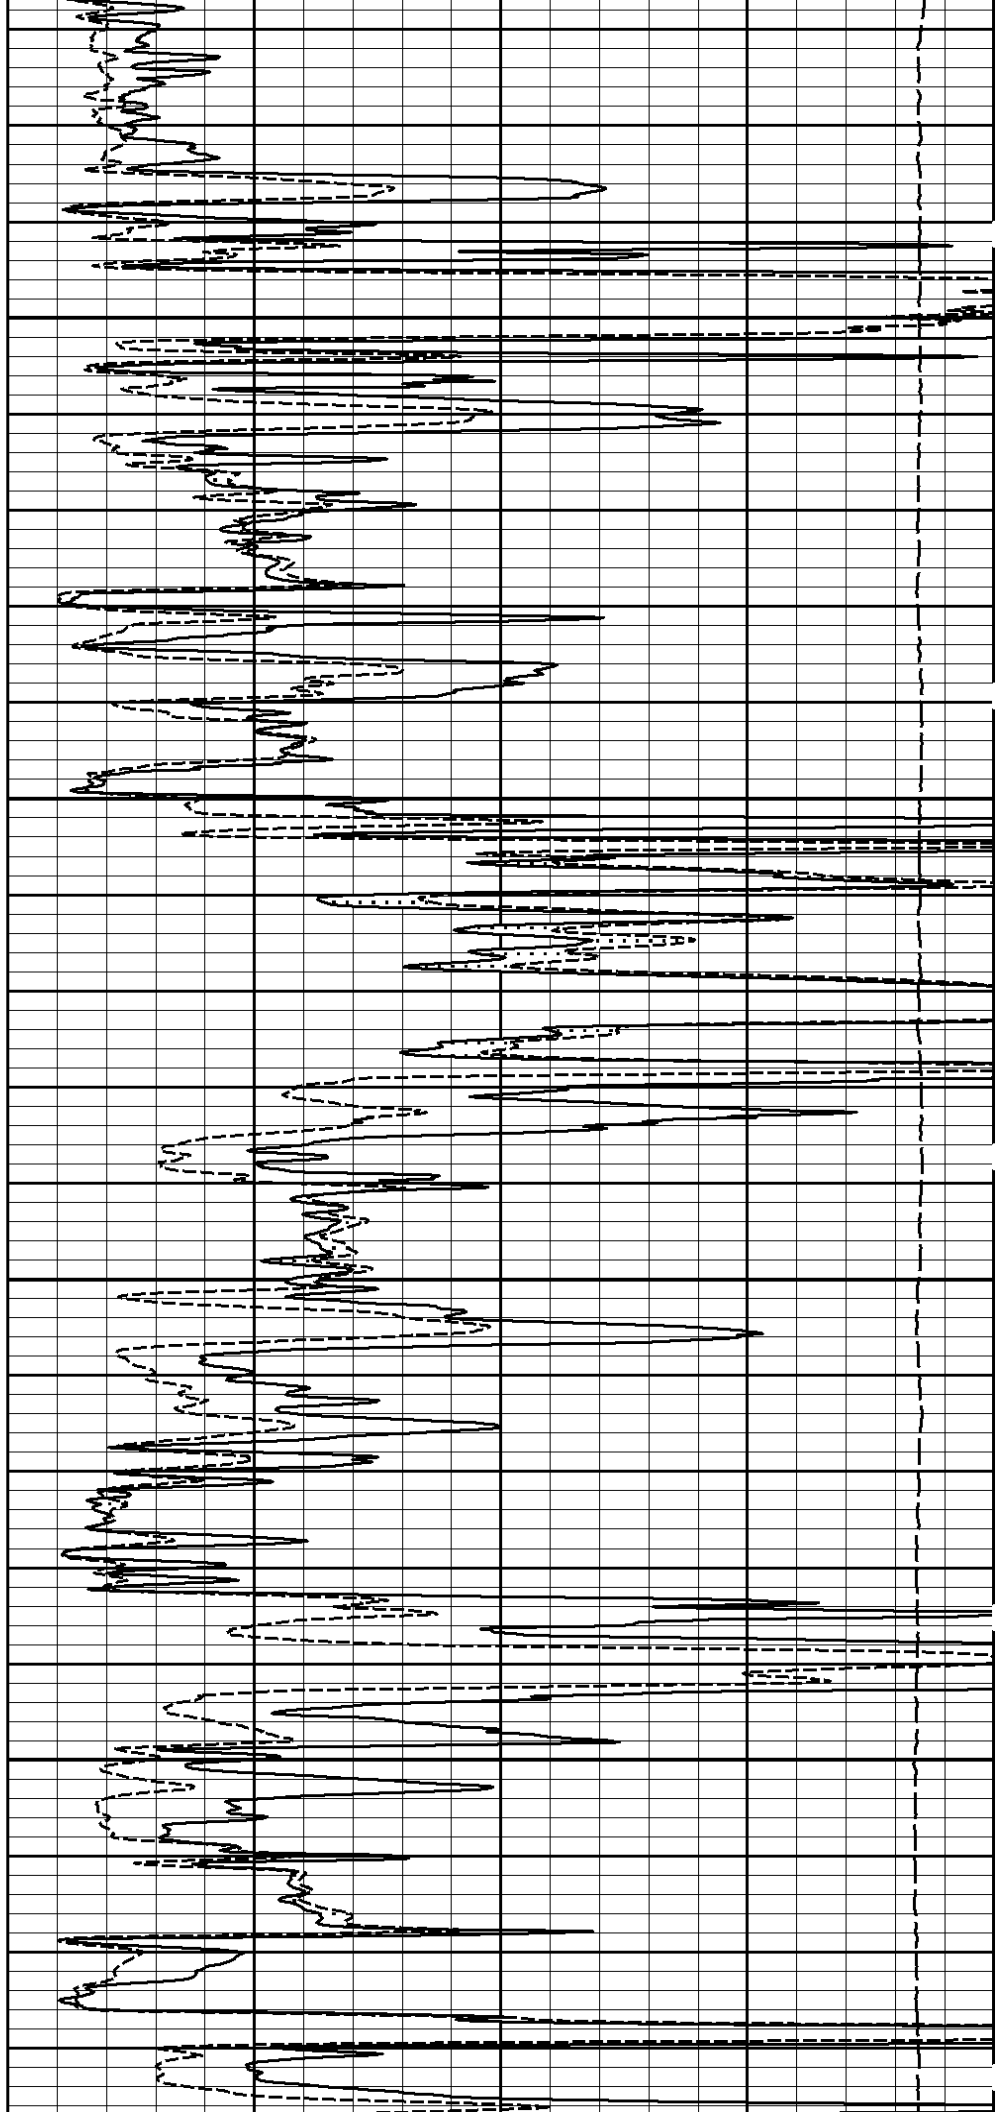


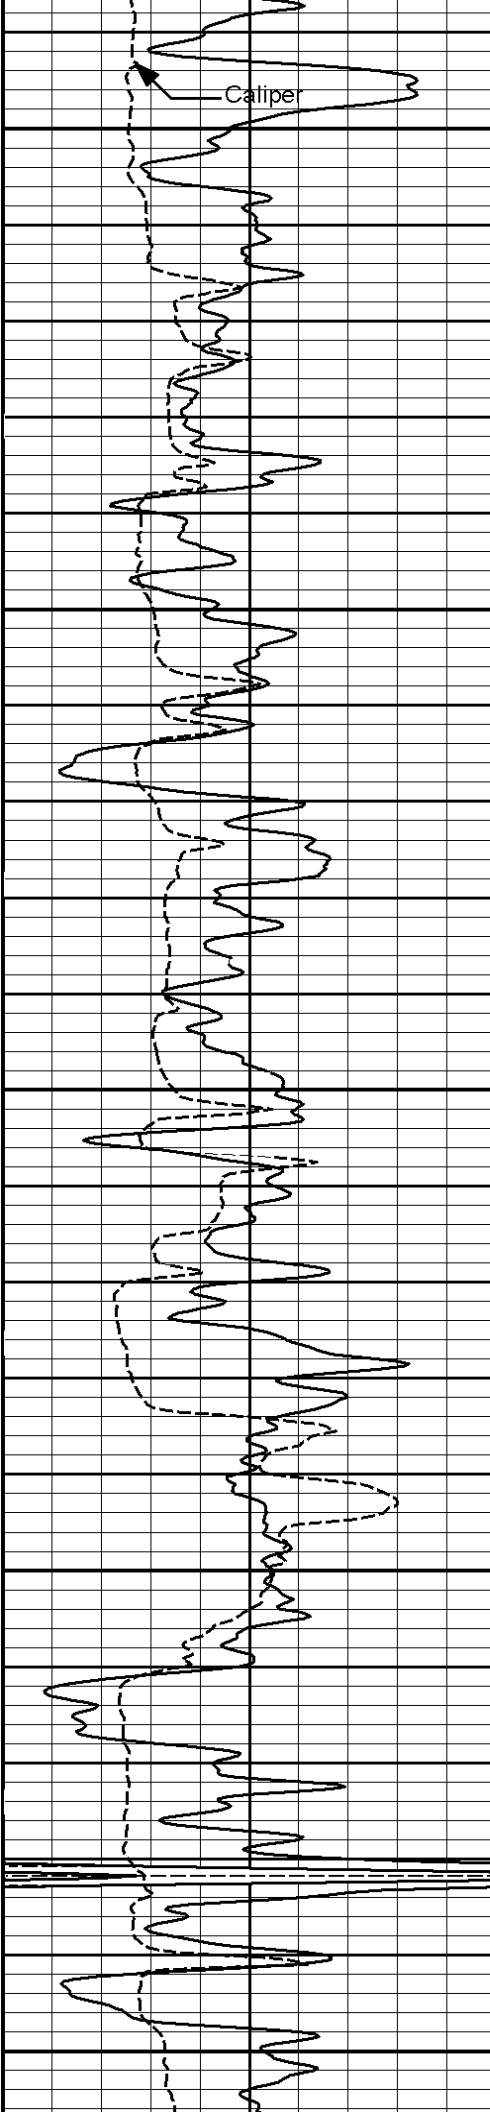


2500

2600


2700

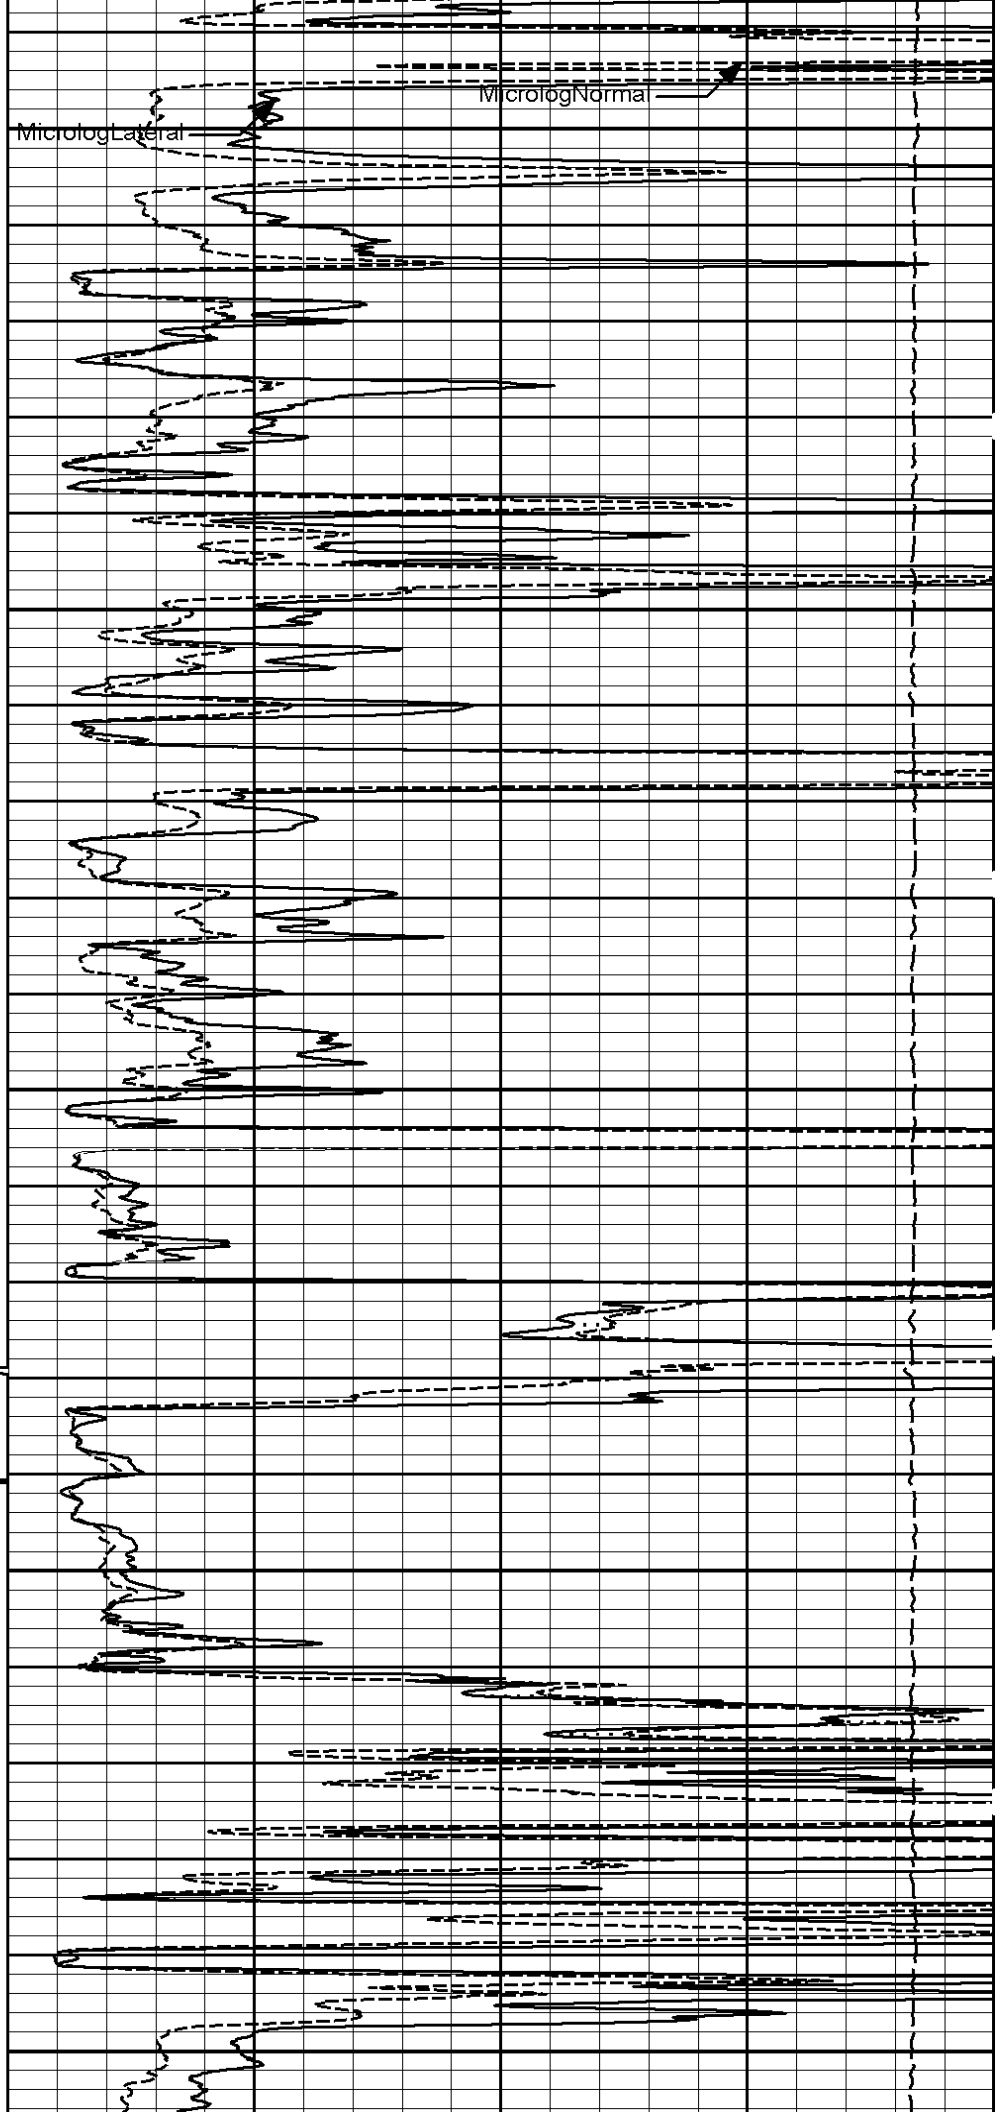


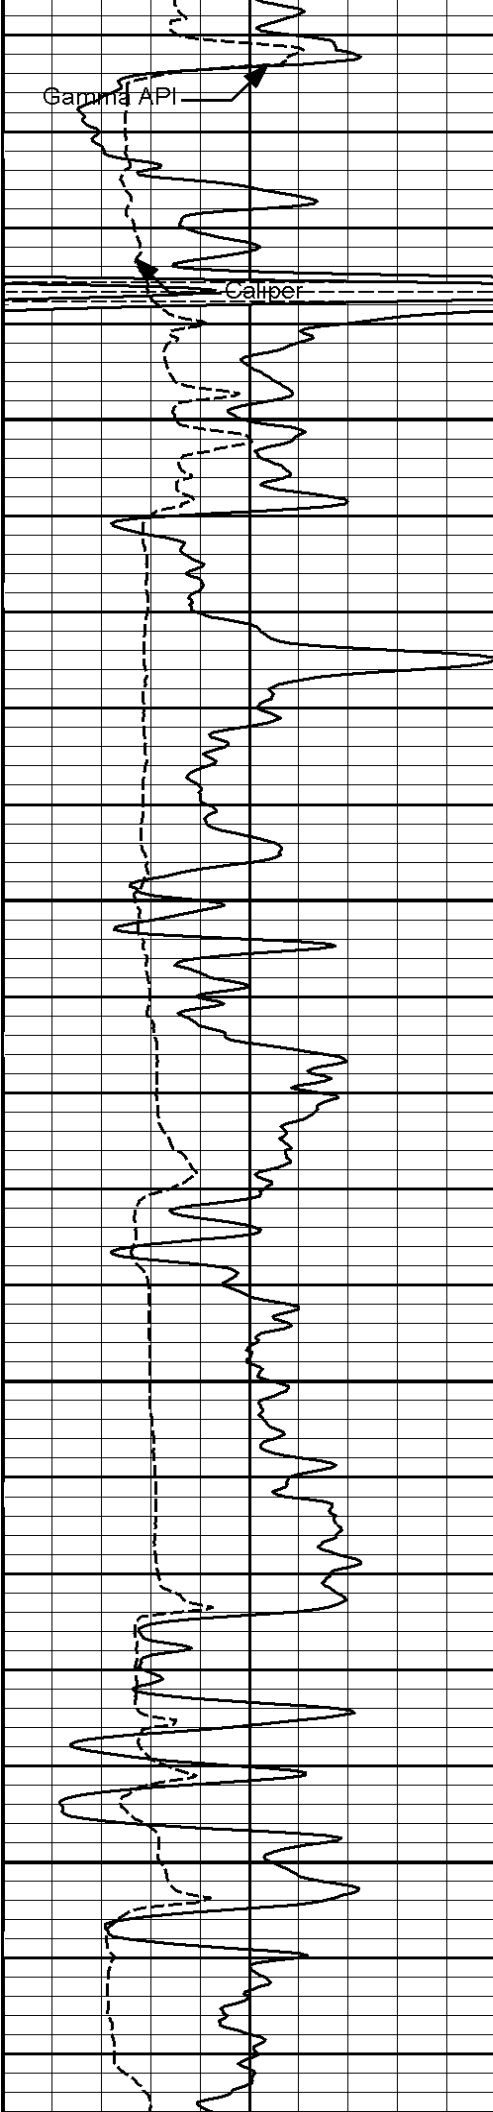

2800


2900

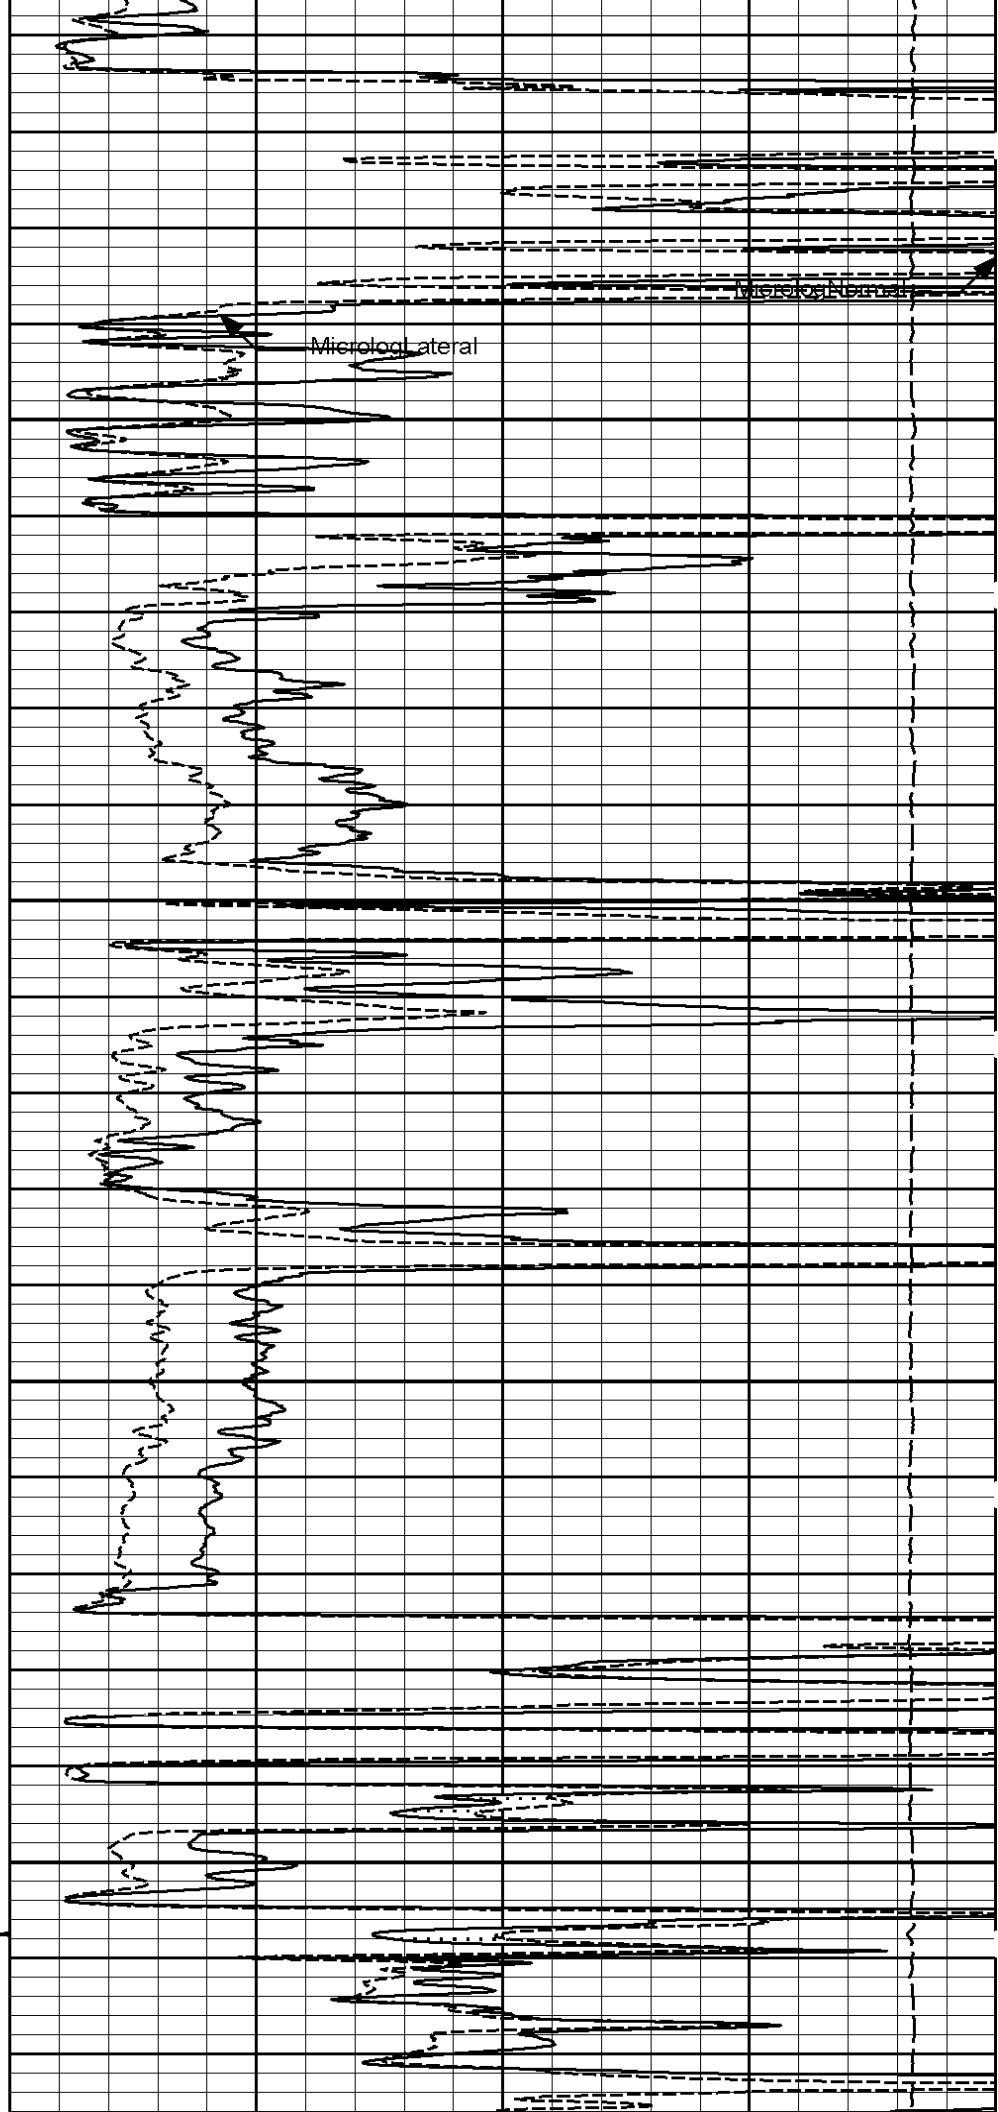


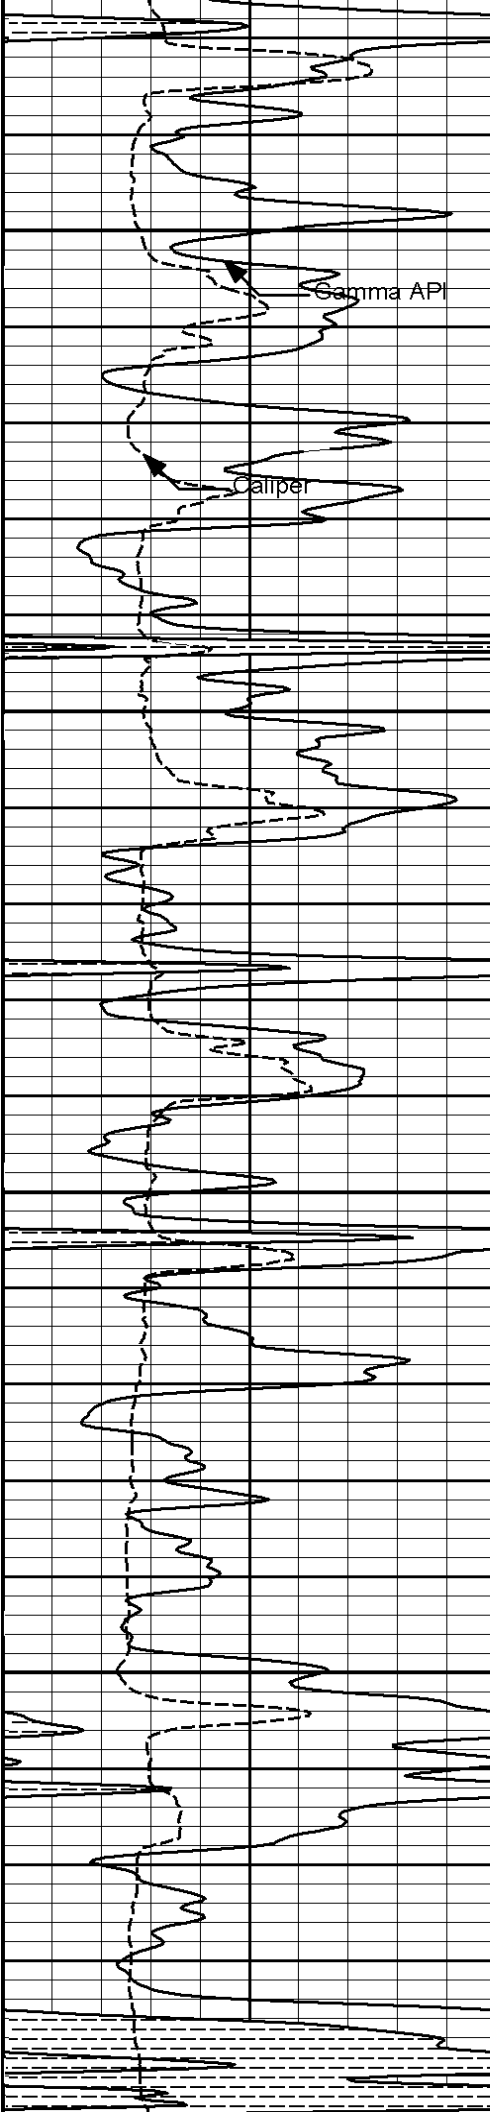

3000


3100

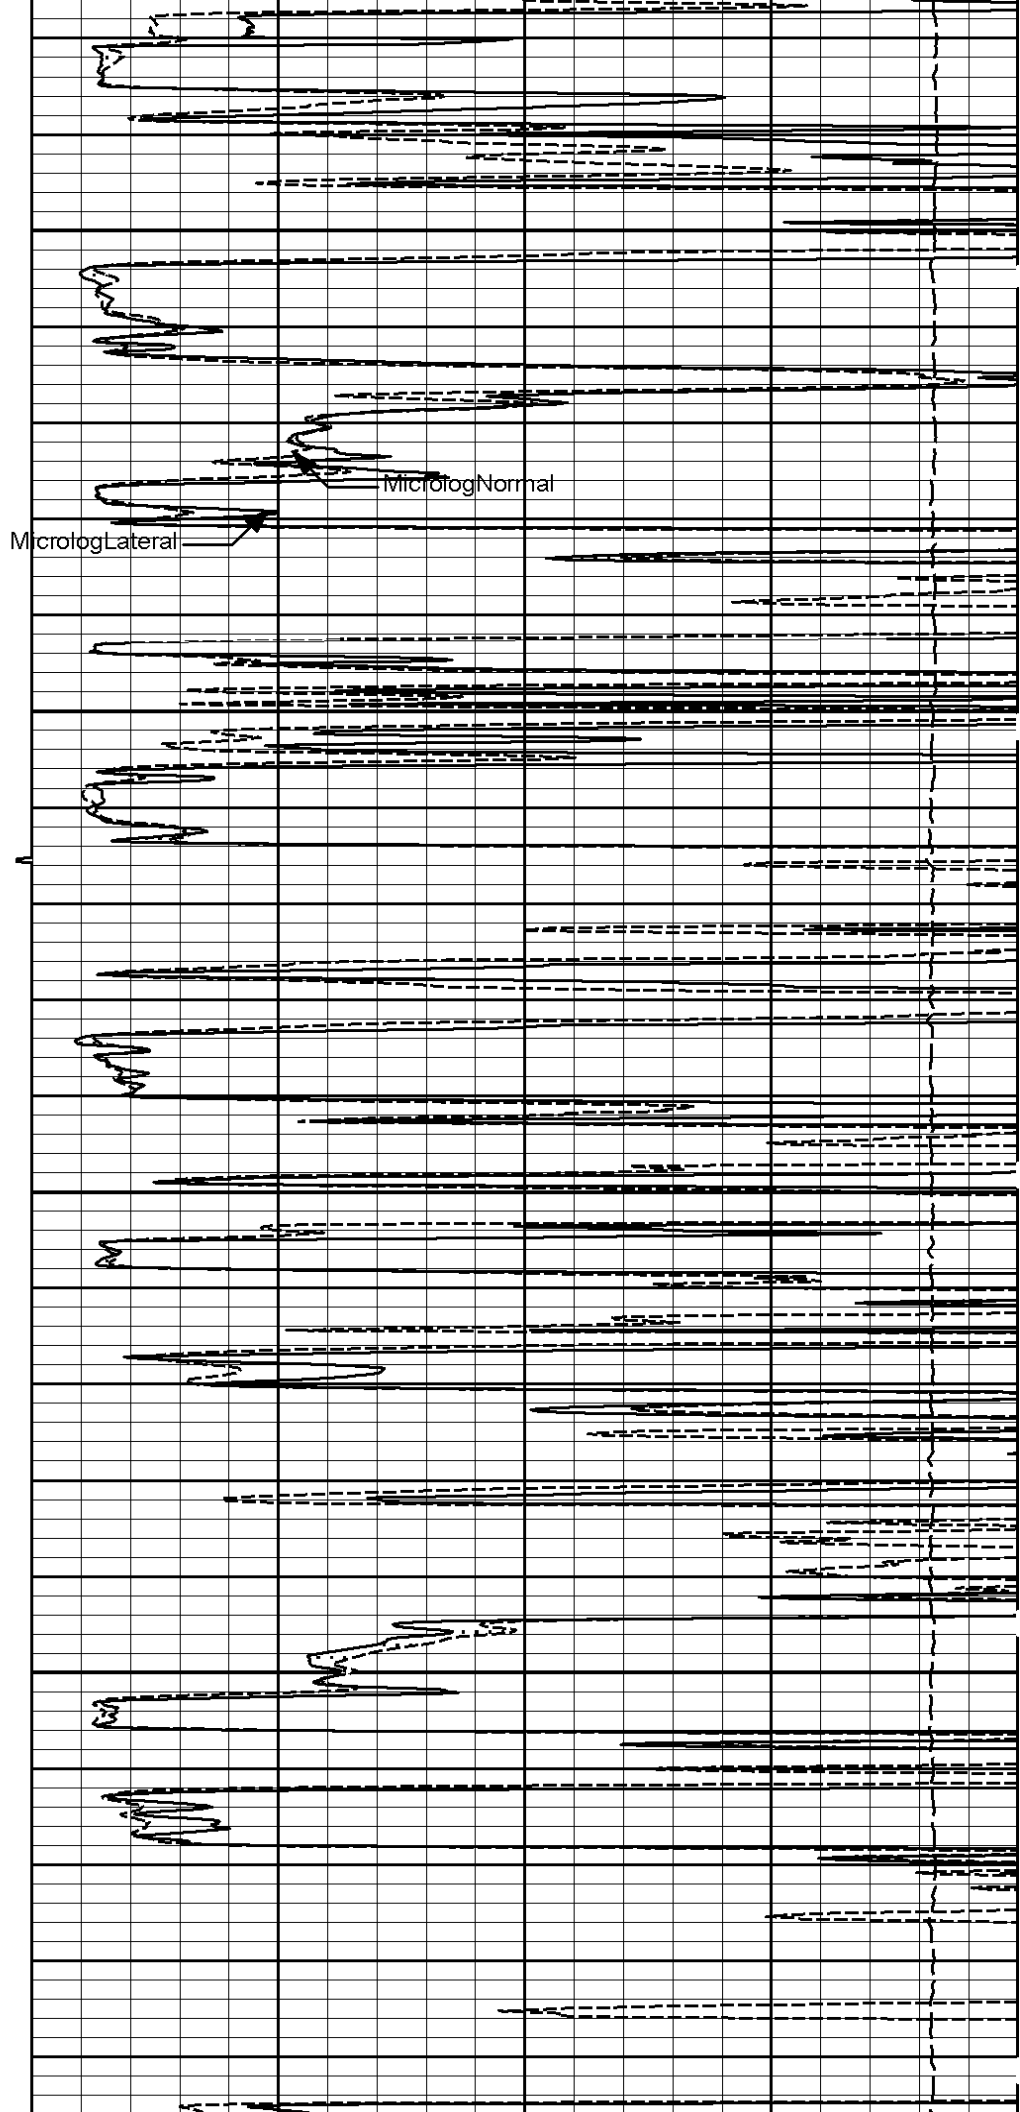


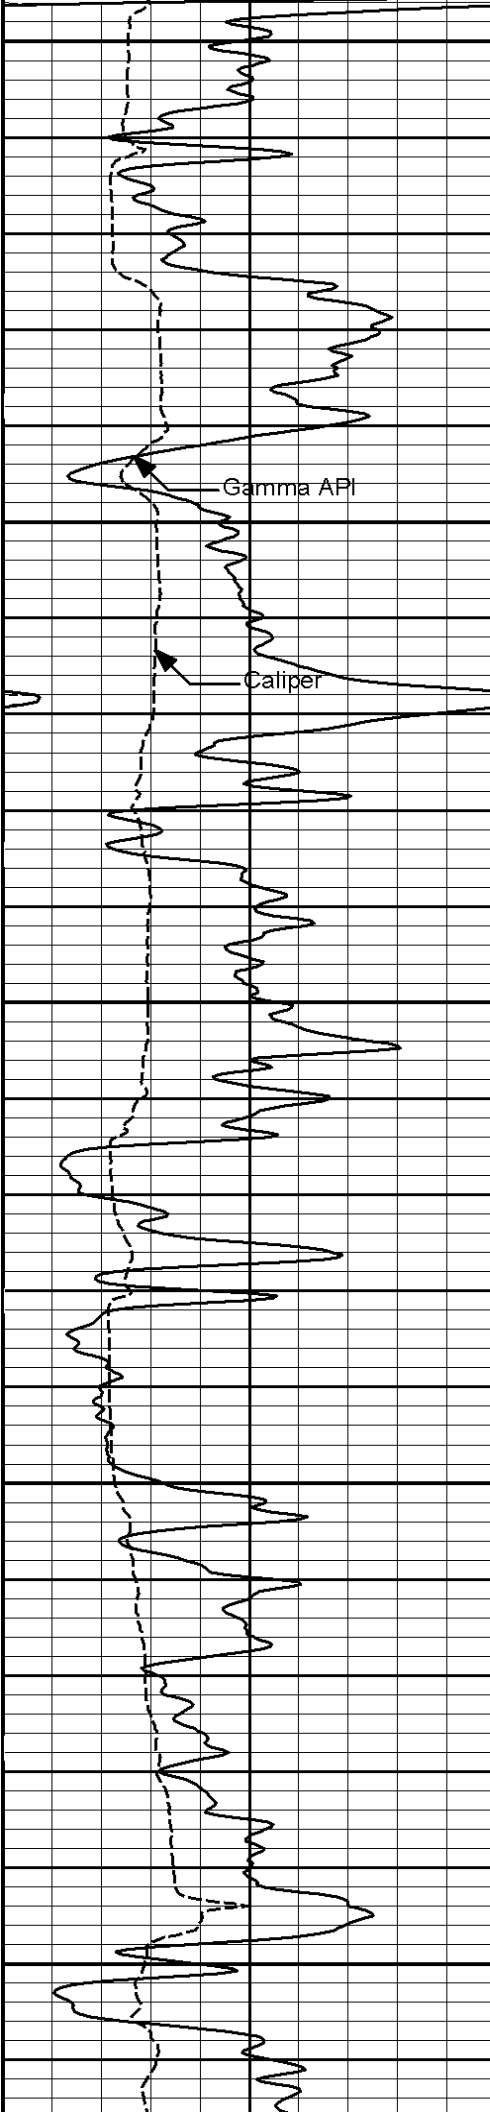

3200


3300

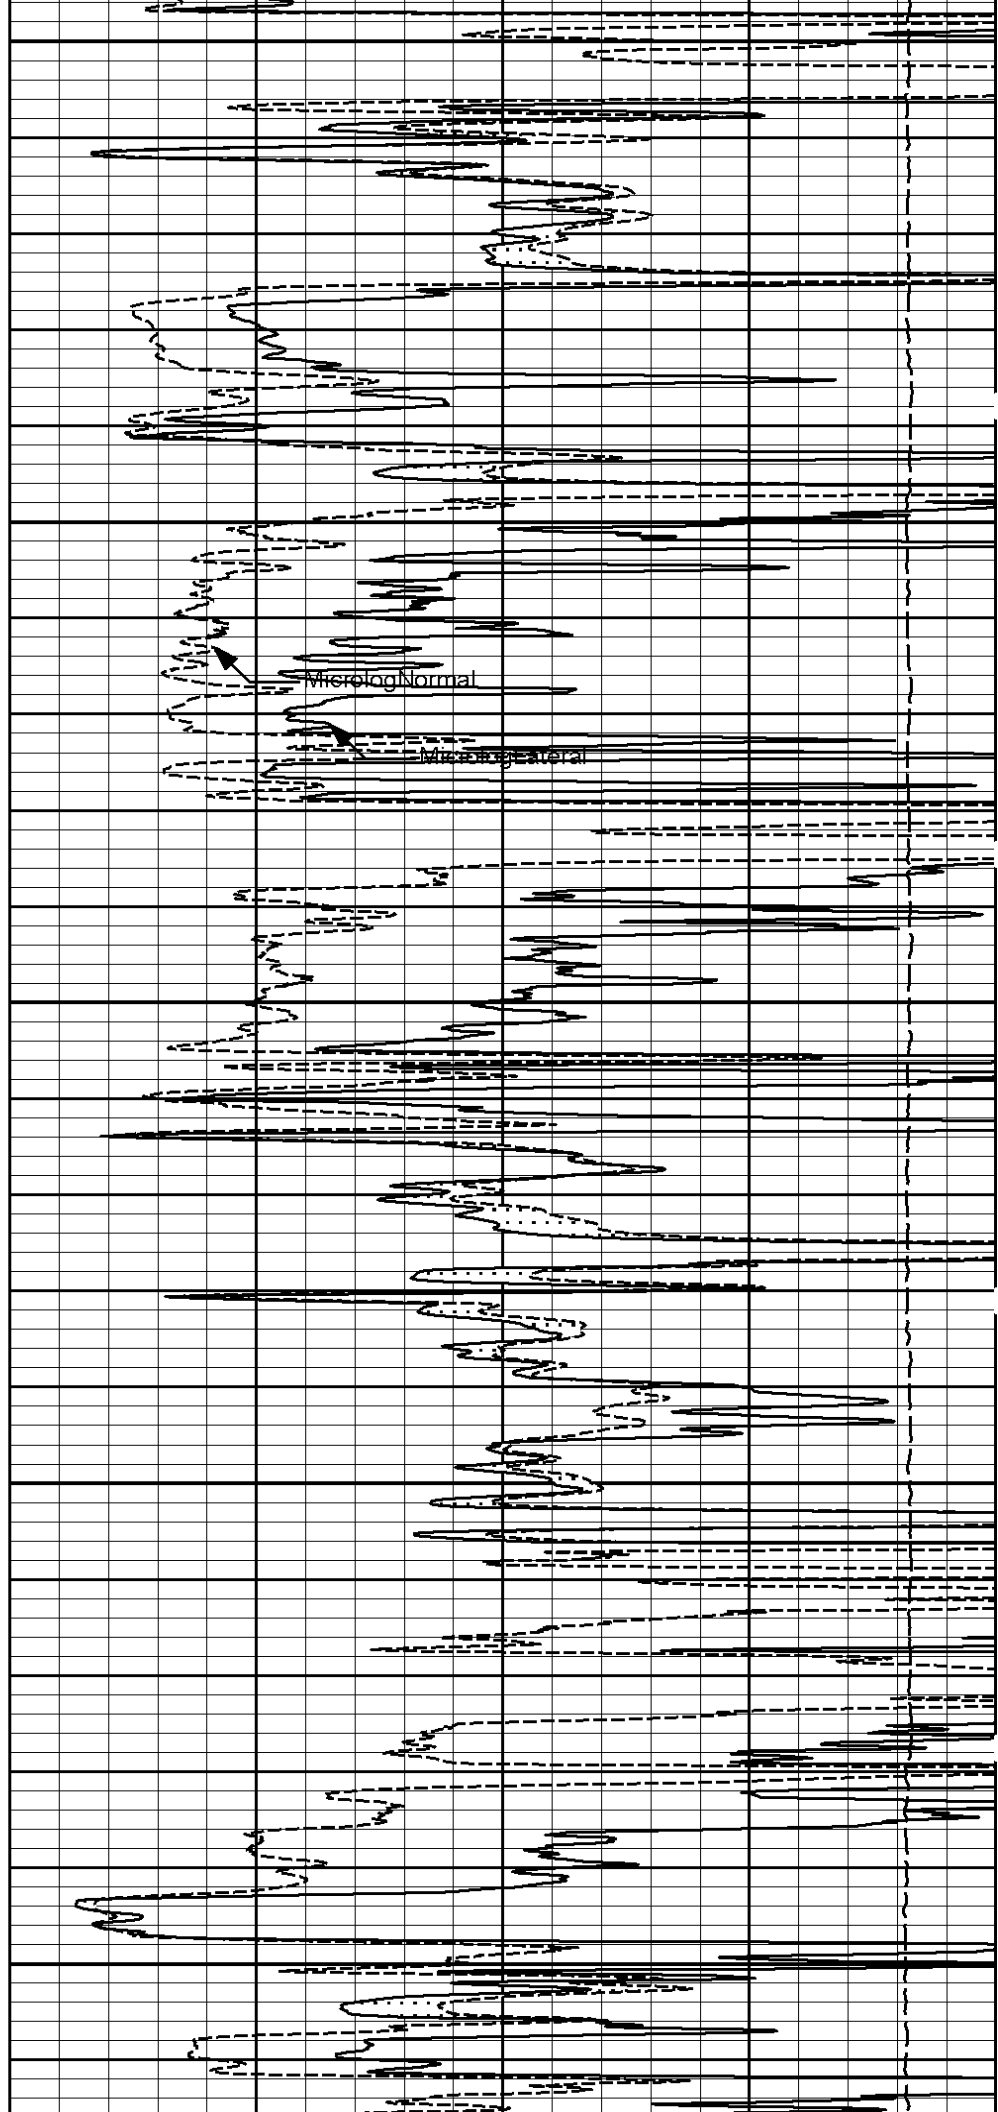

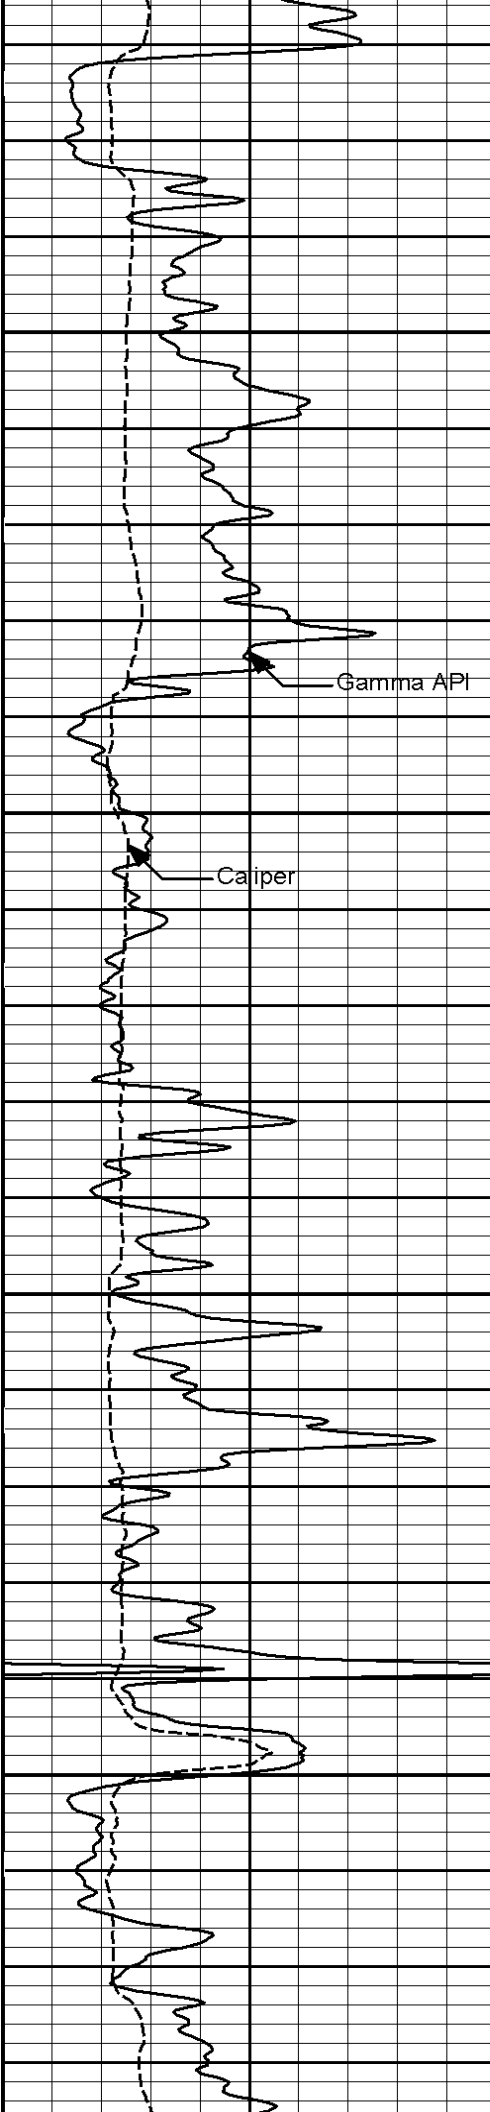


3400

3500

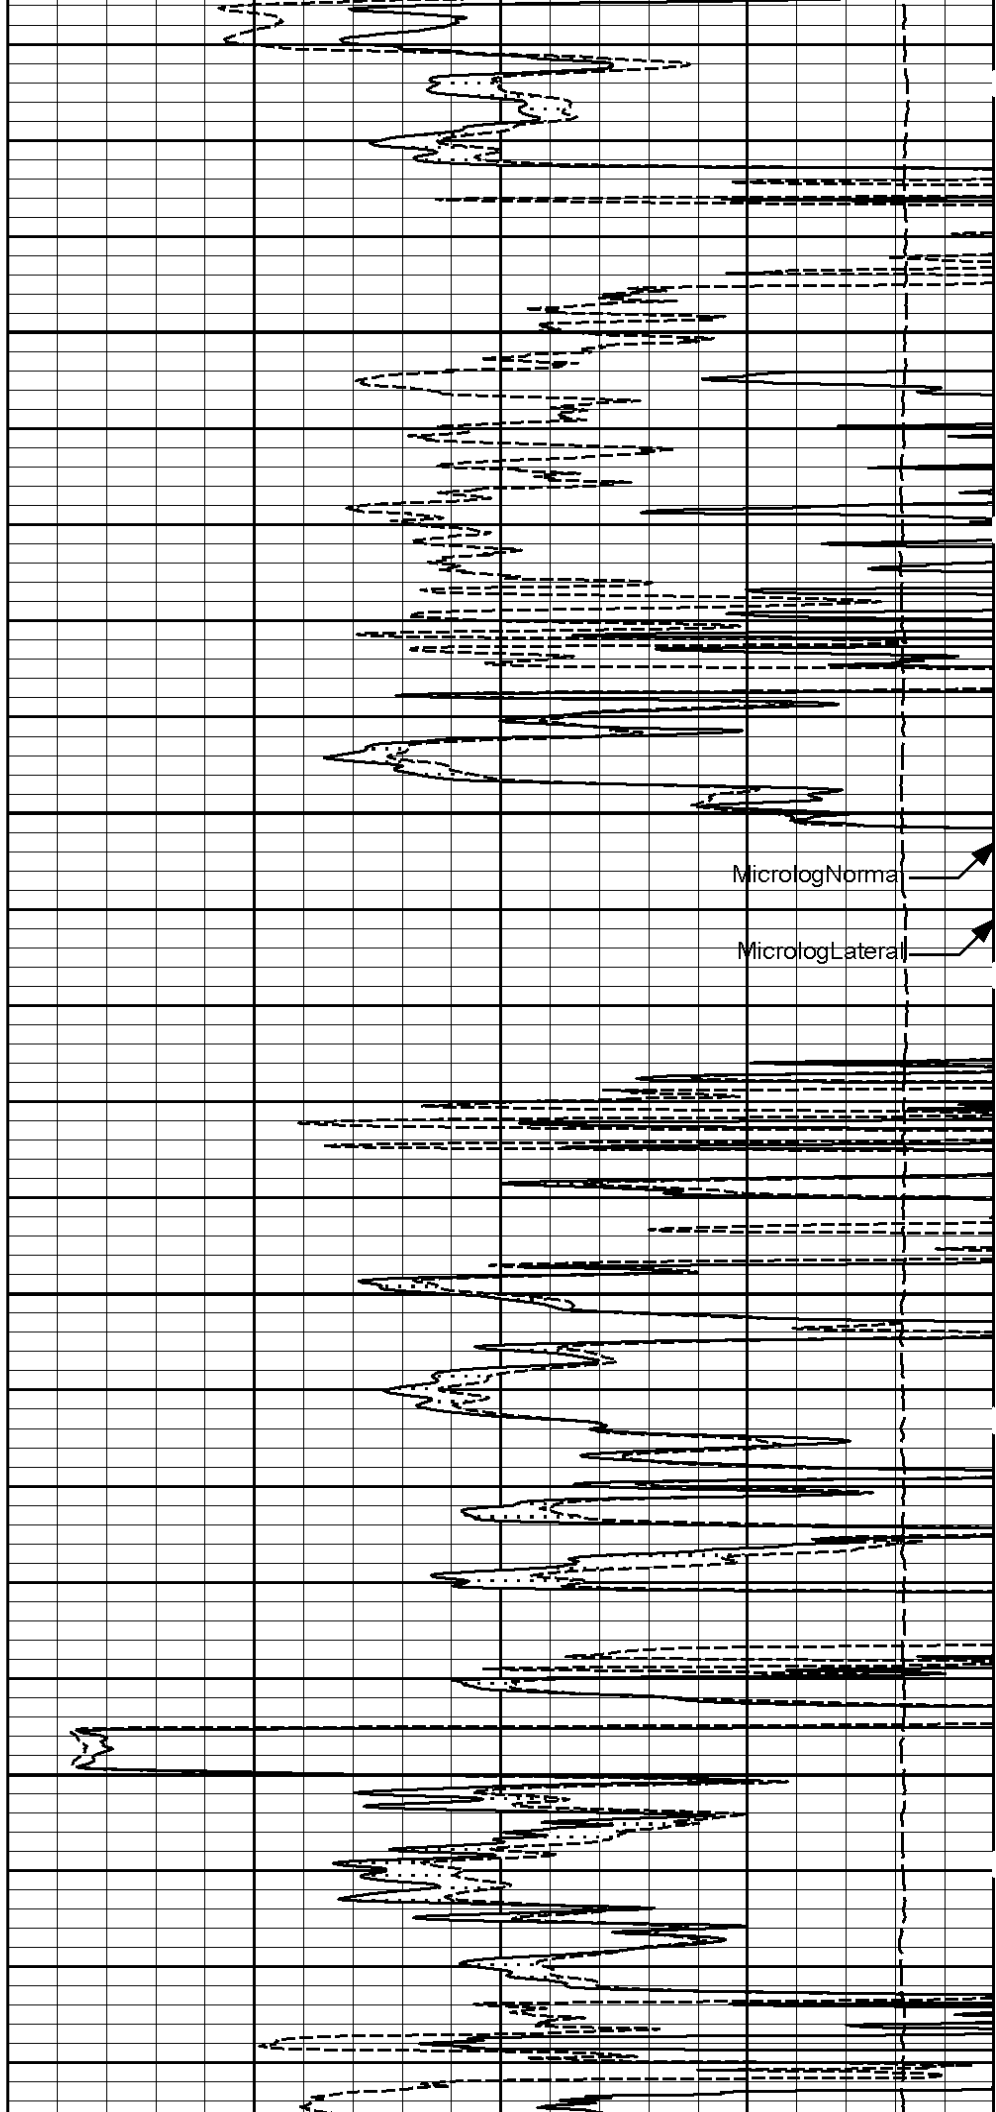

MicrologNormal


MicrologLateral

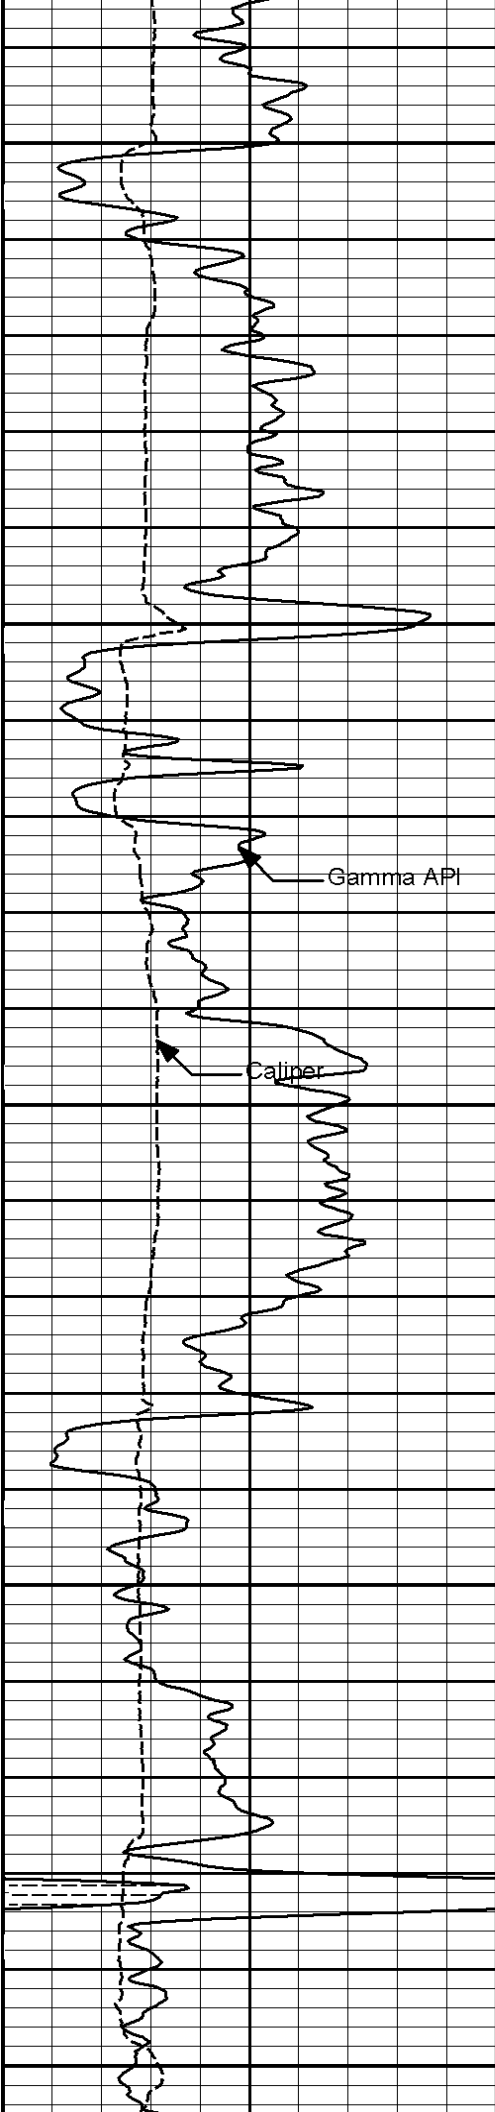


3600

3700


3800

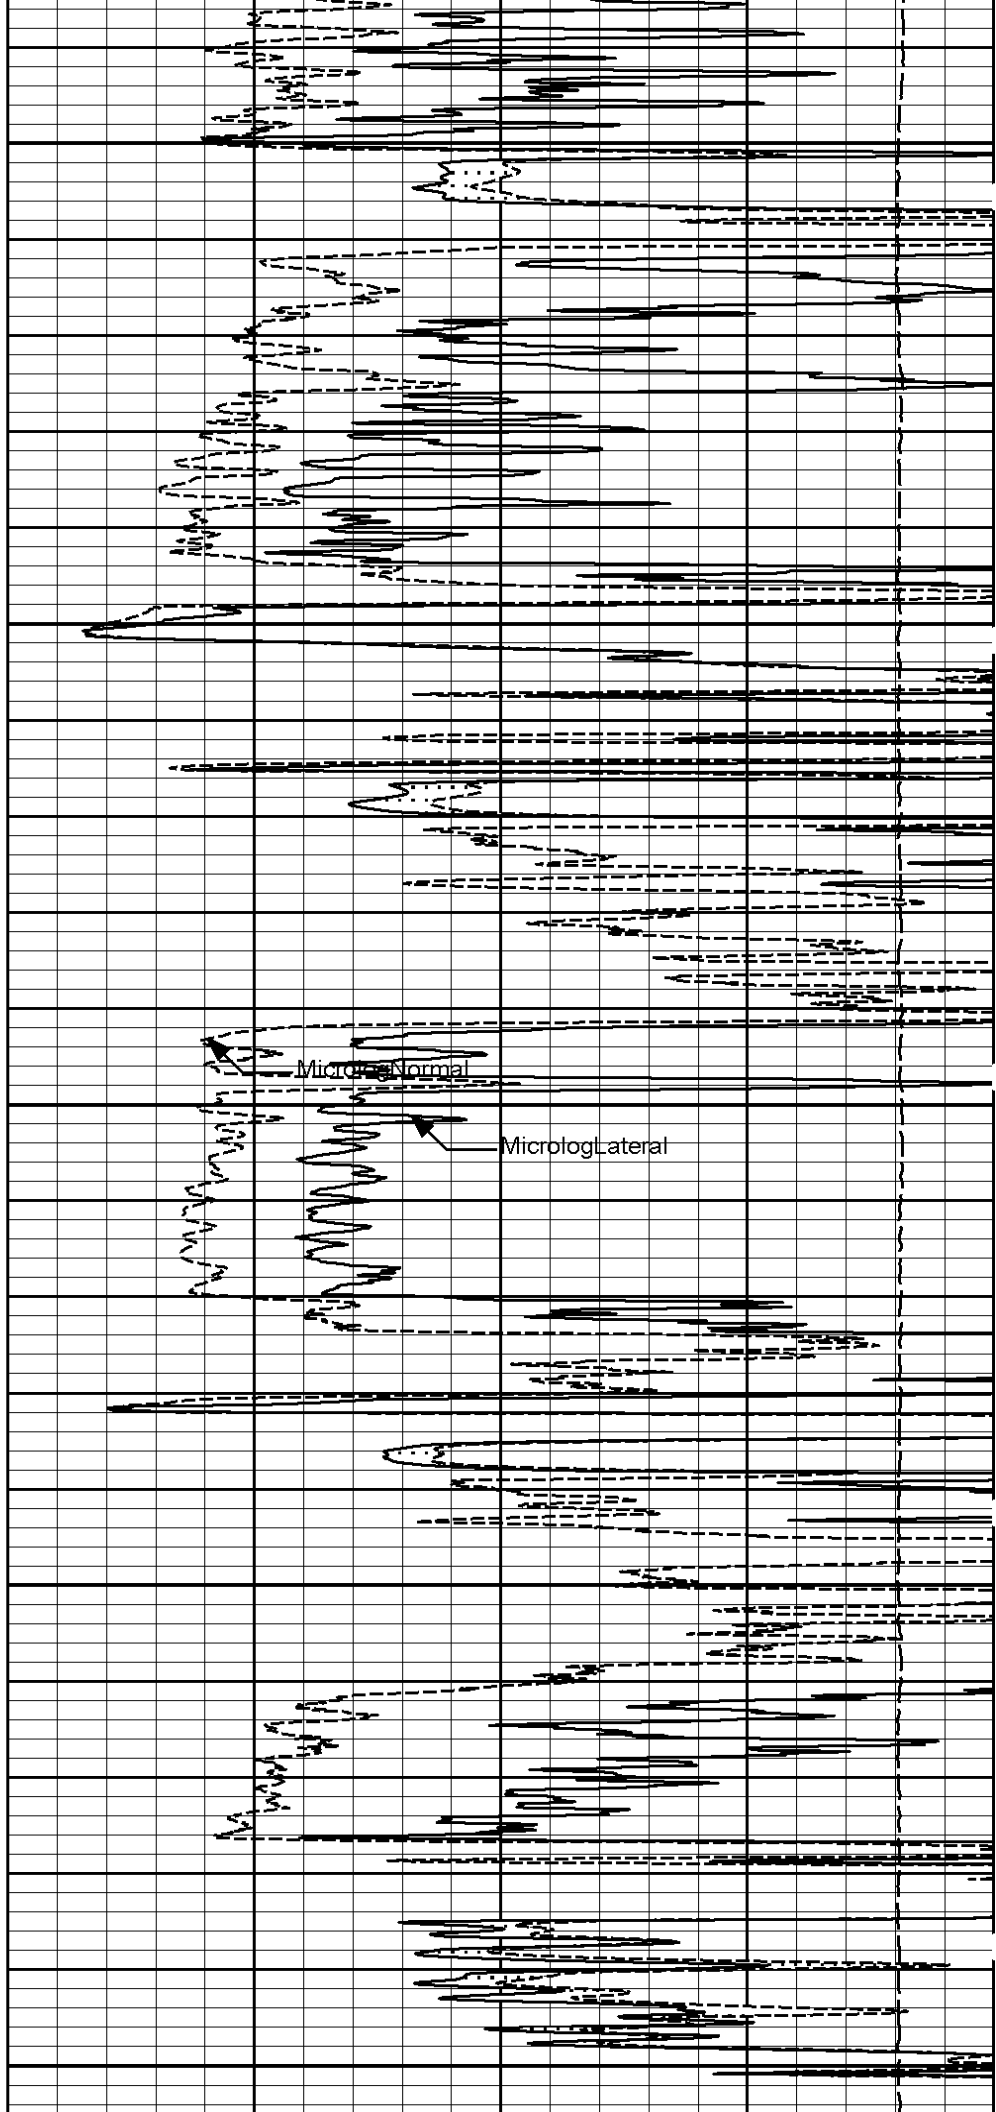


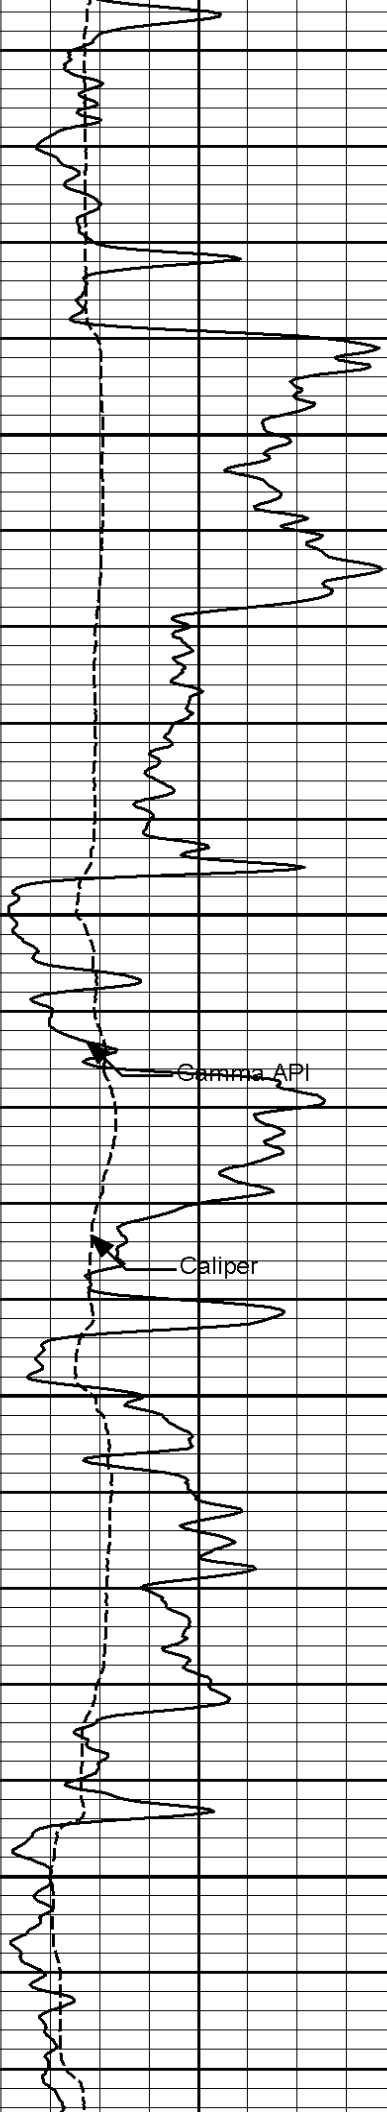

3900


4000

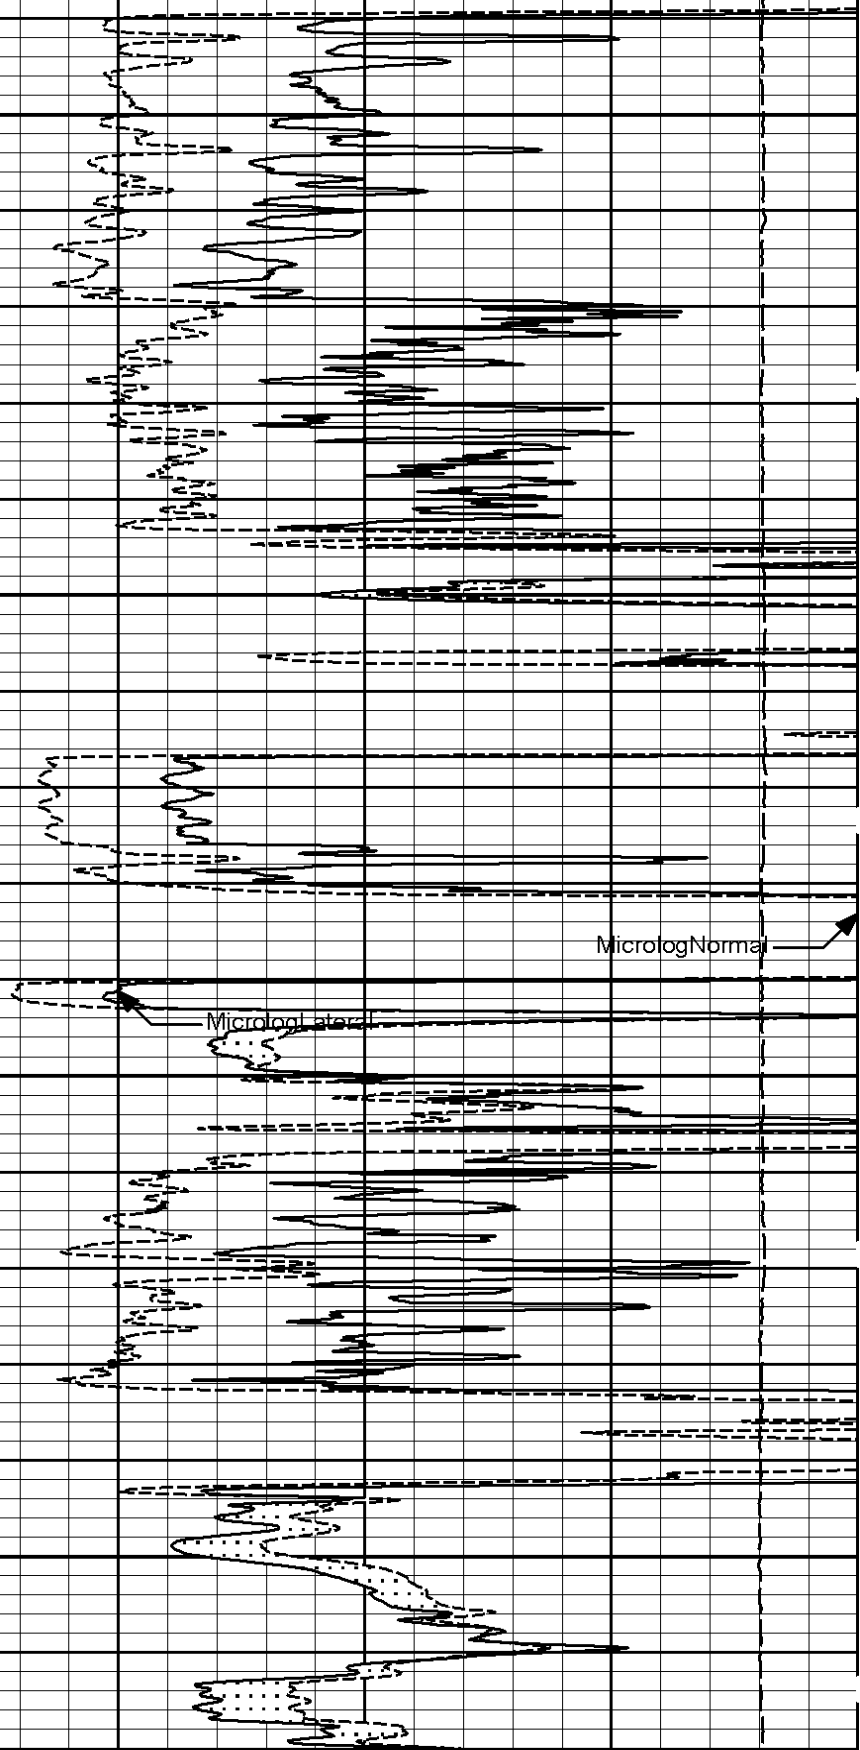

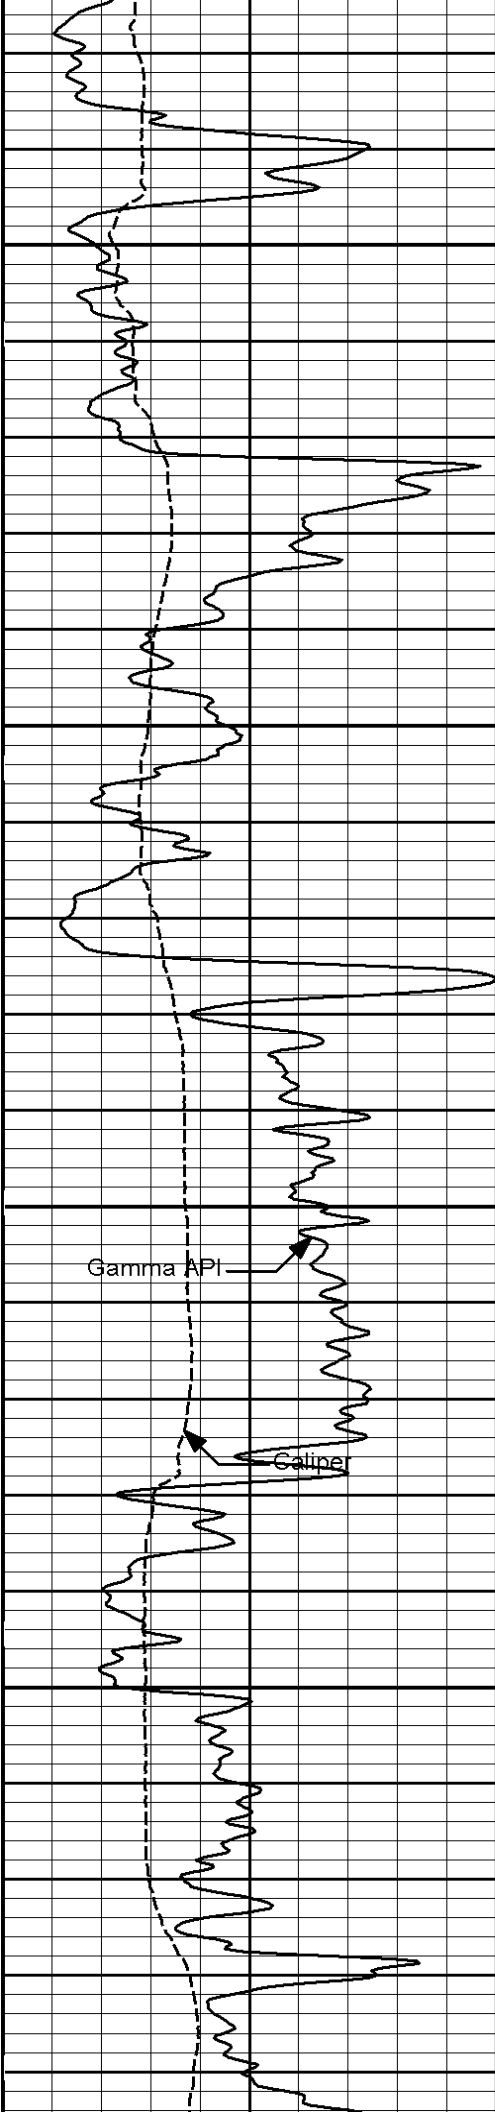

4100

4200

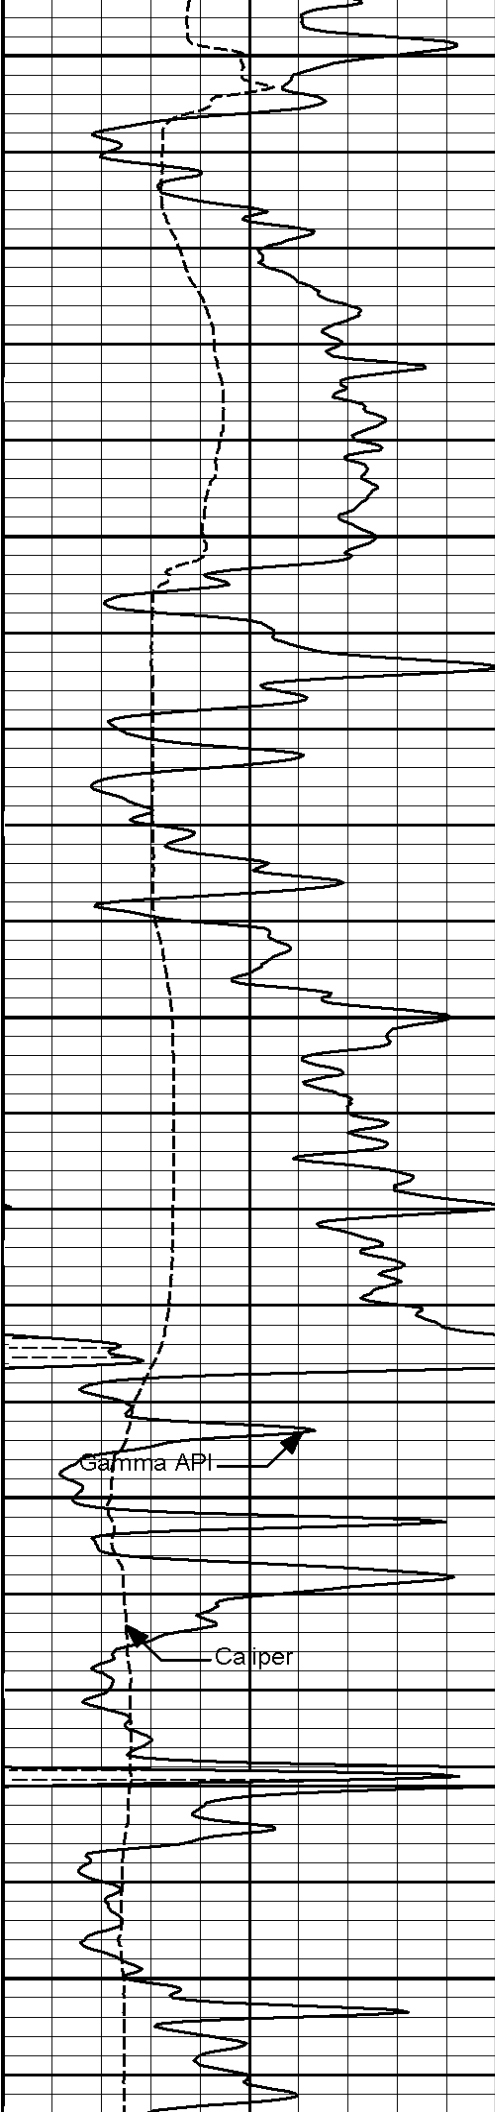


4300

4400


Gamma API

Caliper

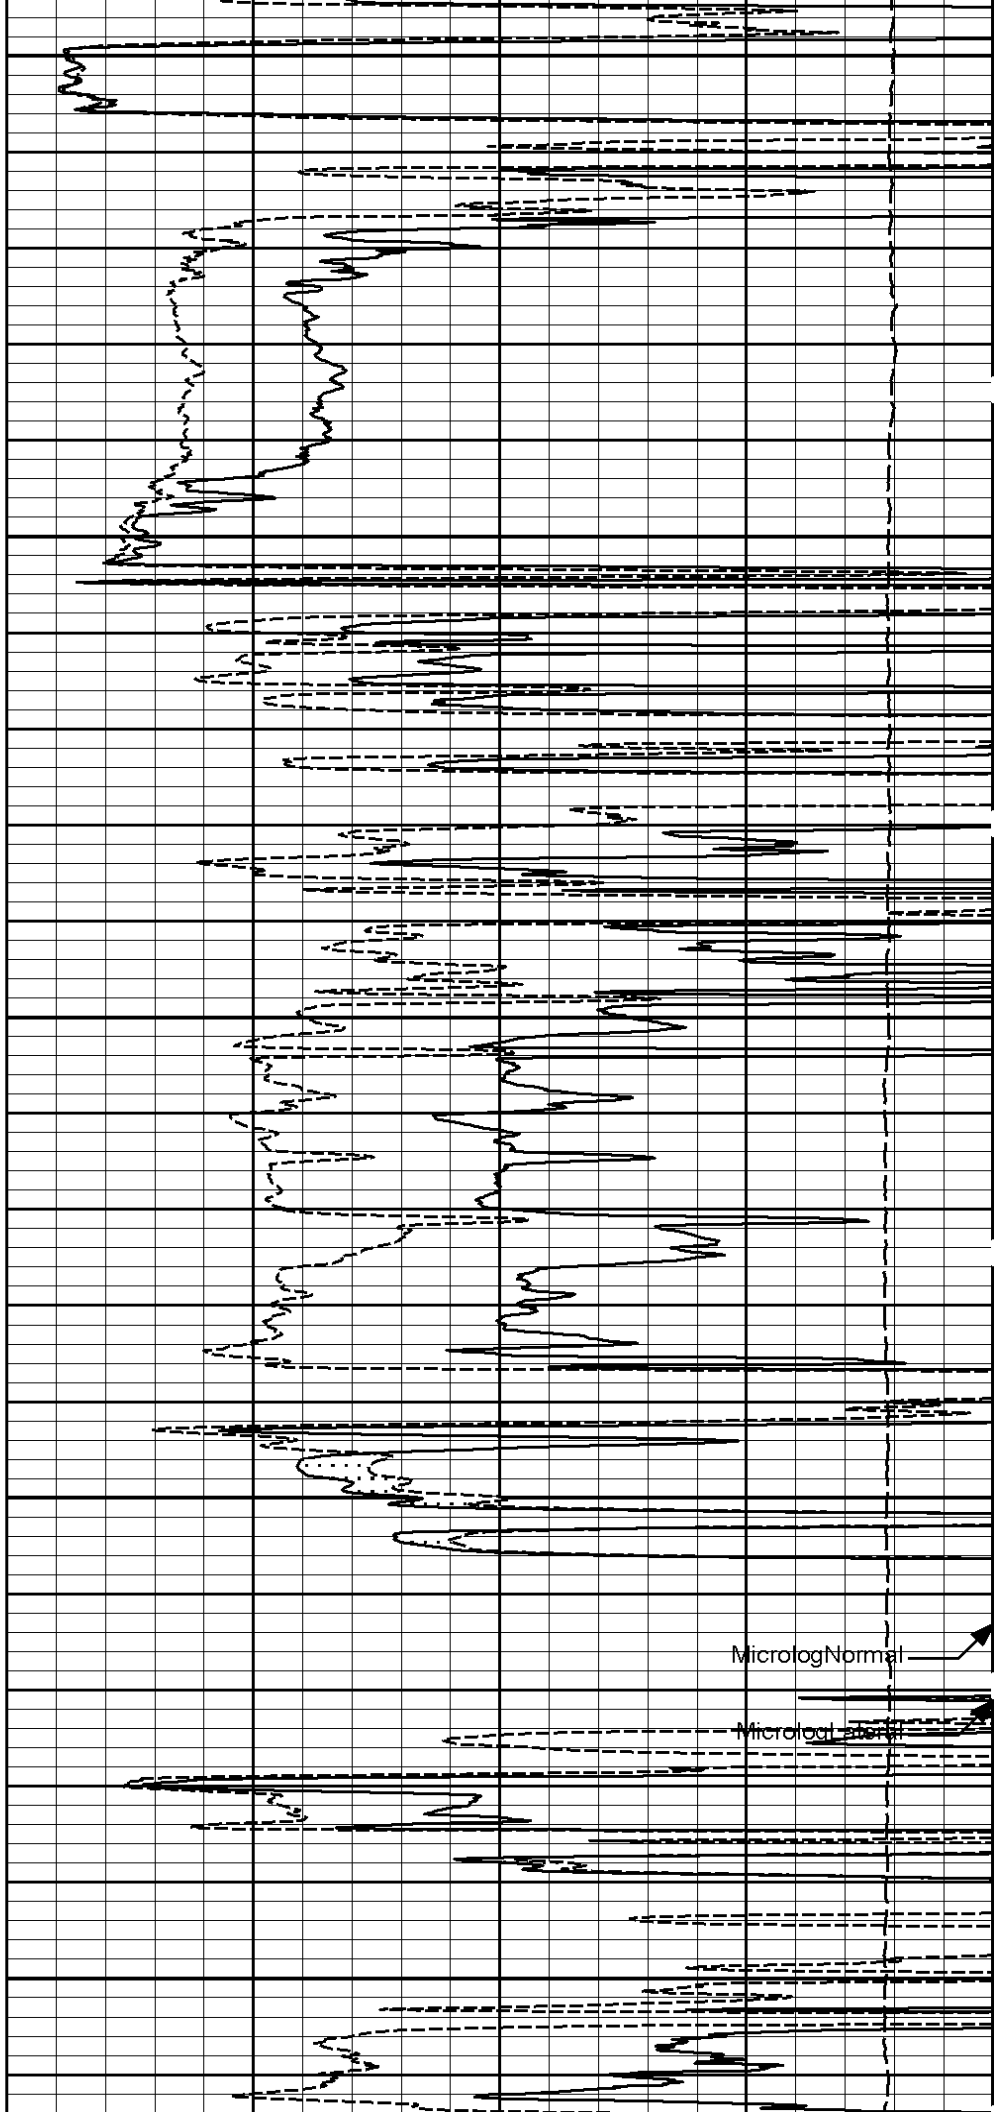

MicrologNormal

MicrologAPI

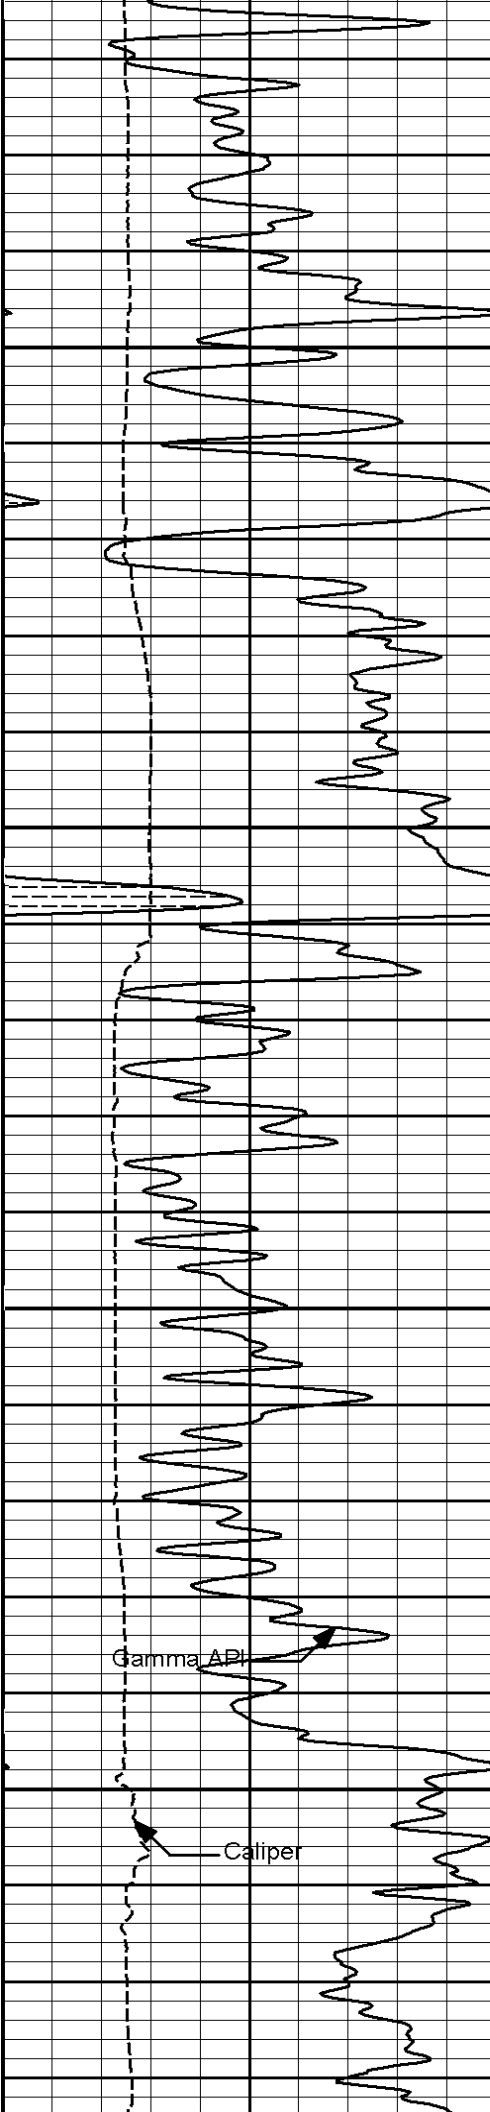


4500

4600


Gamma API

Caliper

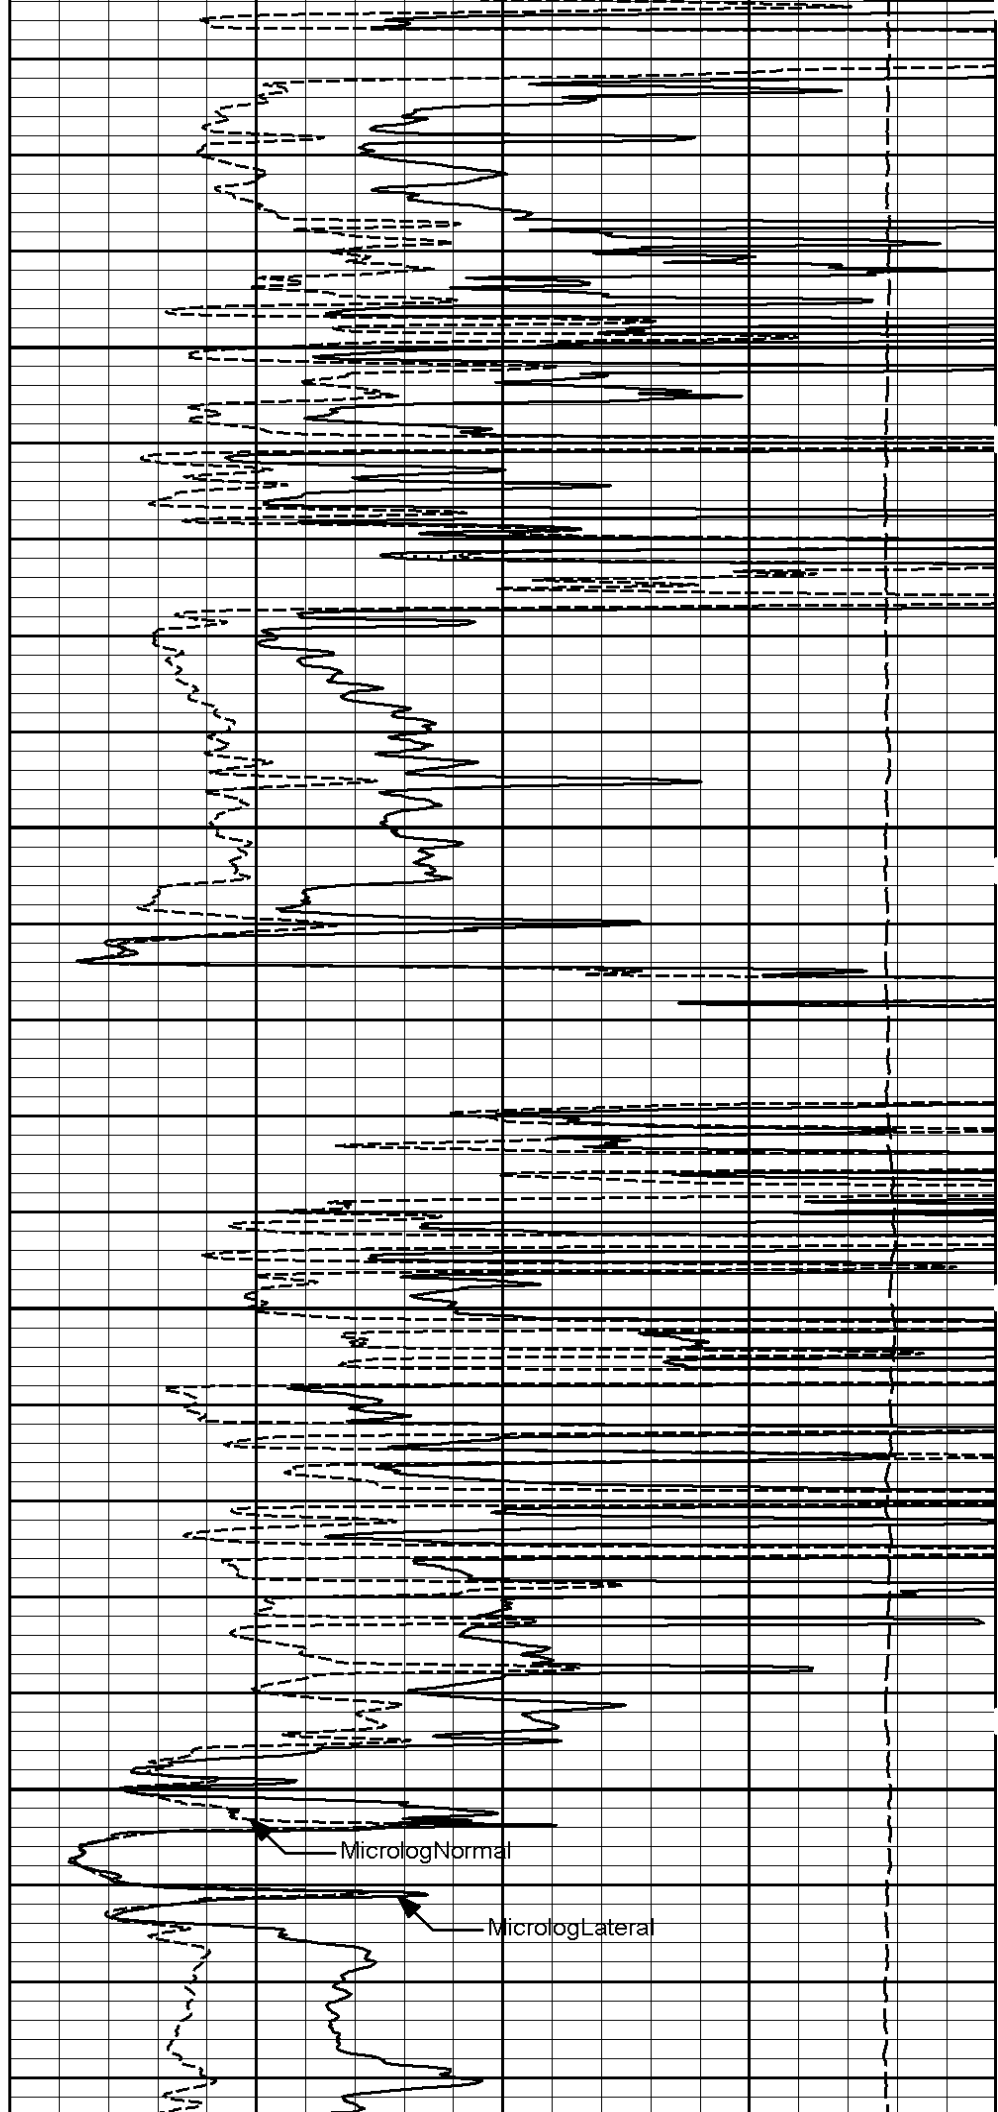

MicrologNormal


MicrologLateral

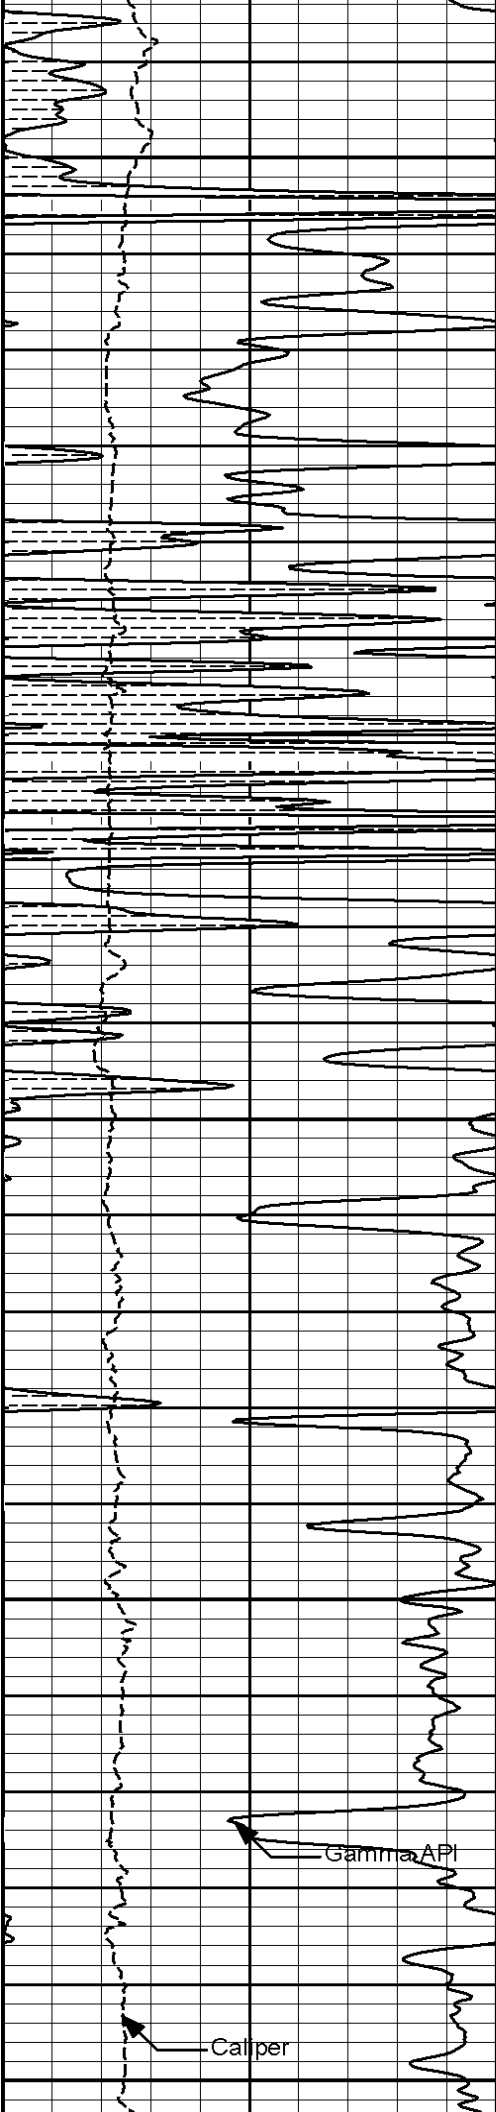


4700

4800

4900

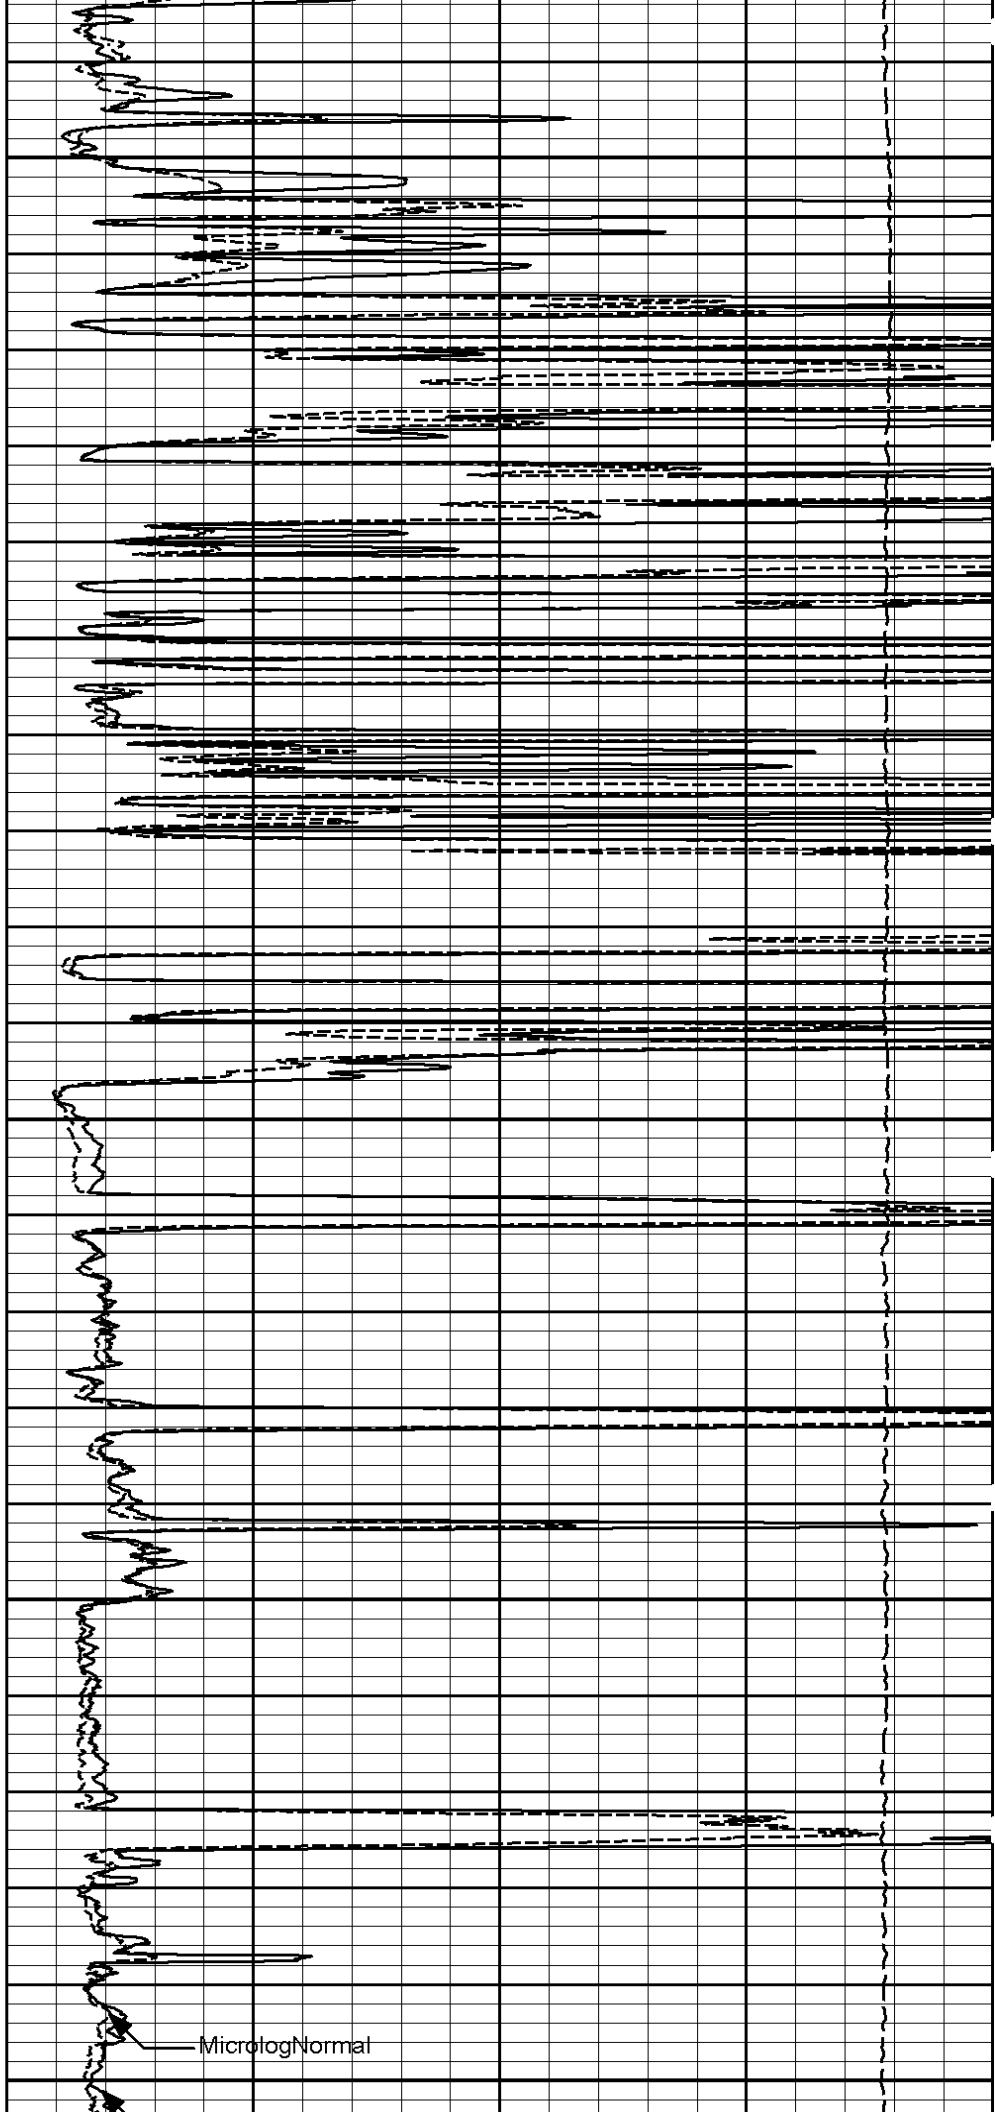


MicrologNormal

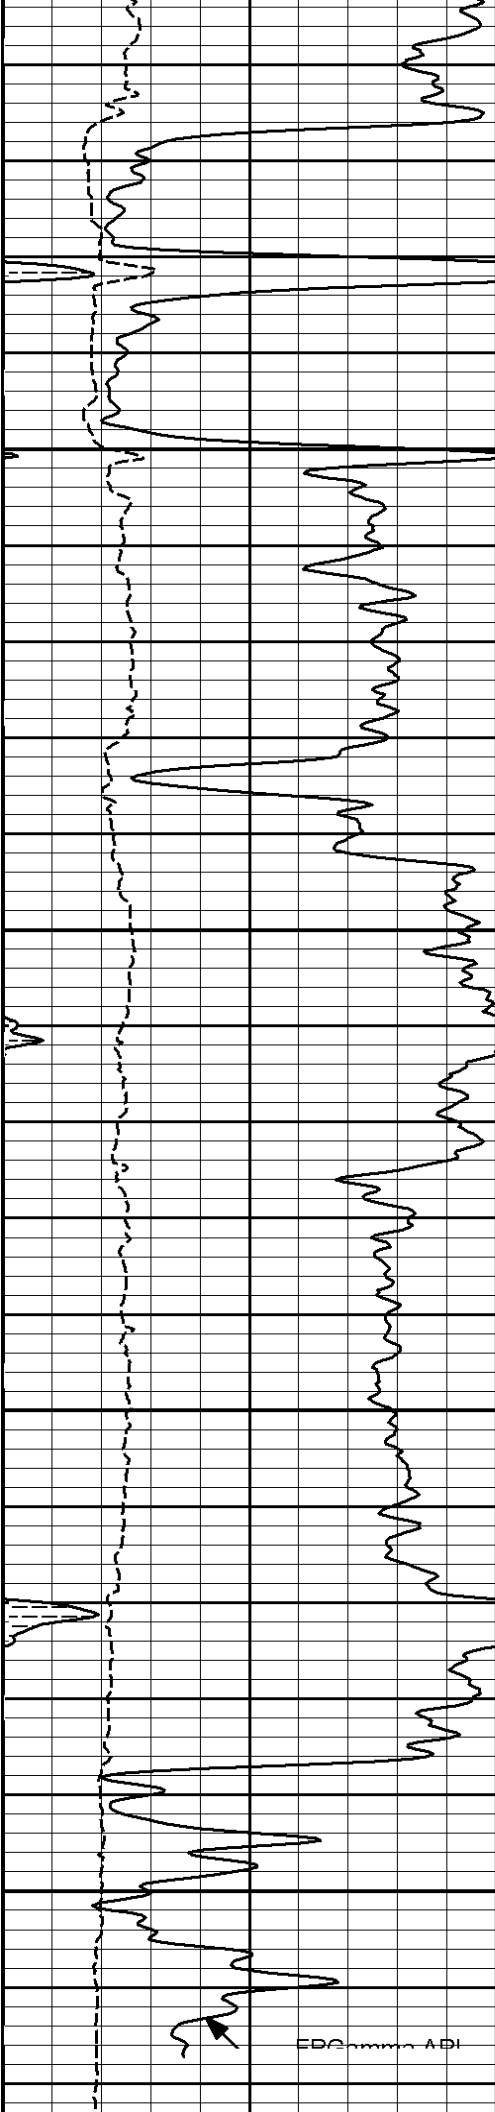


5000

5100

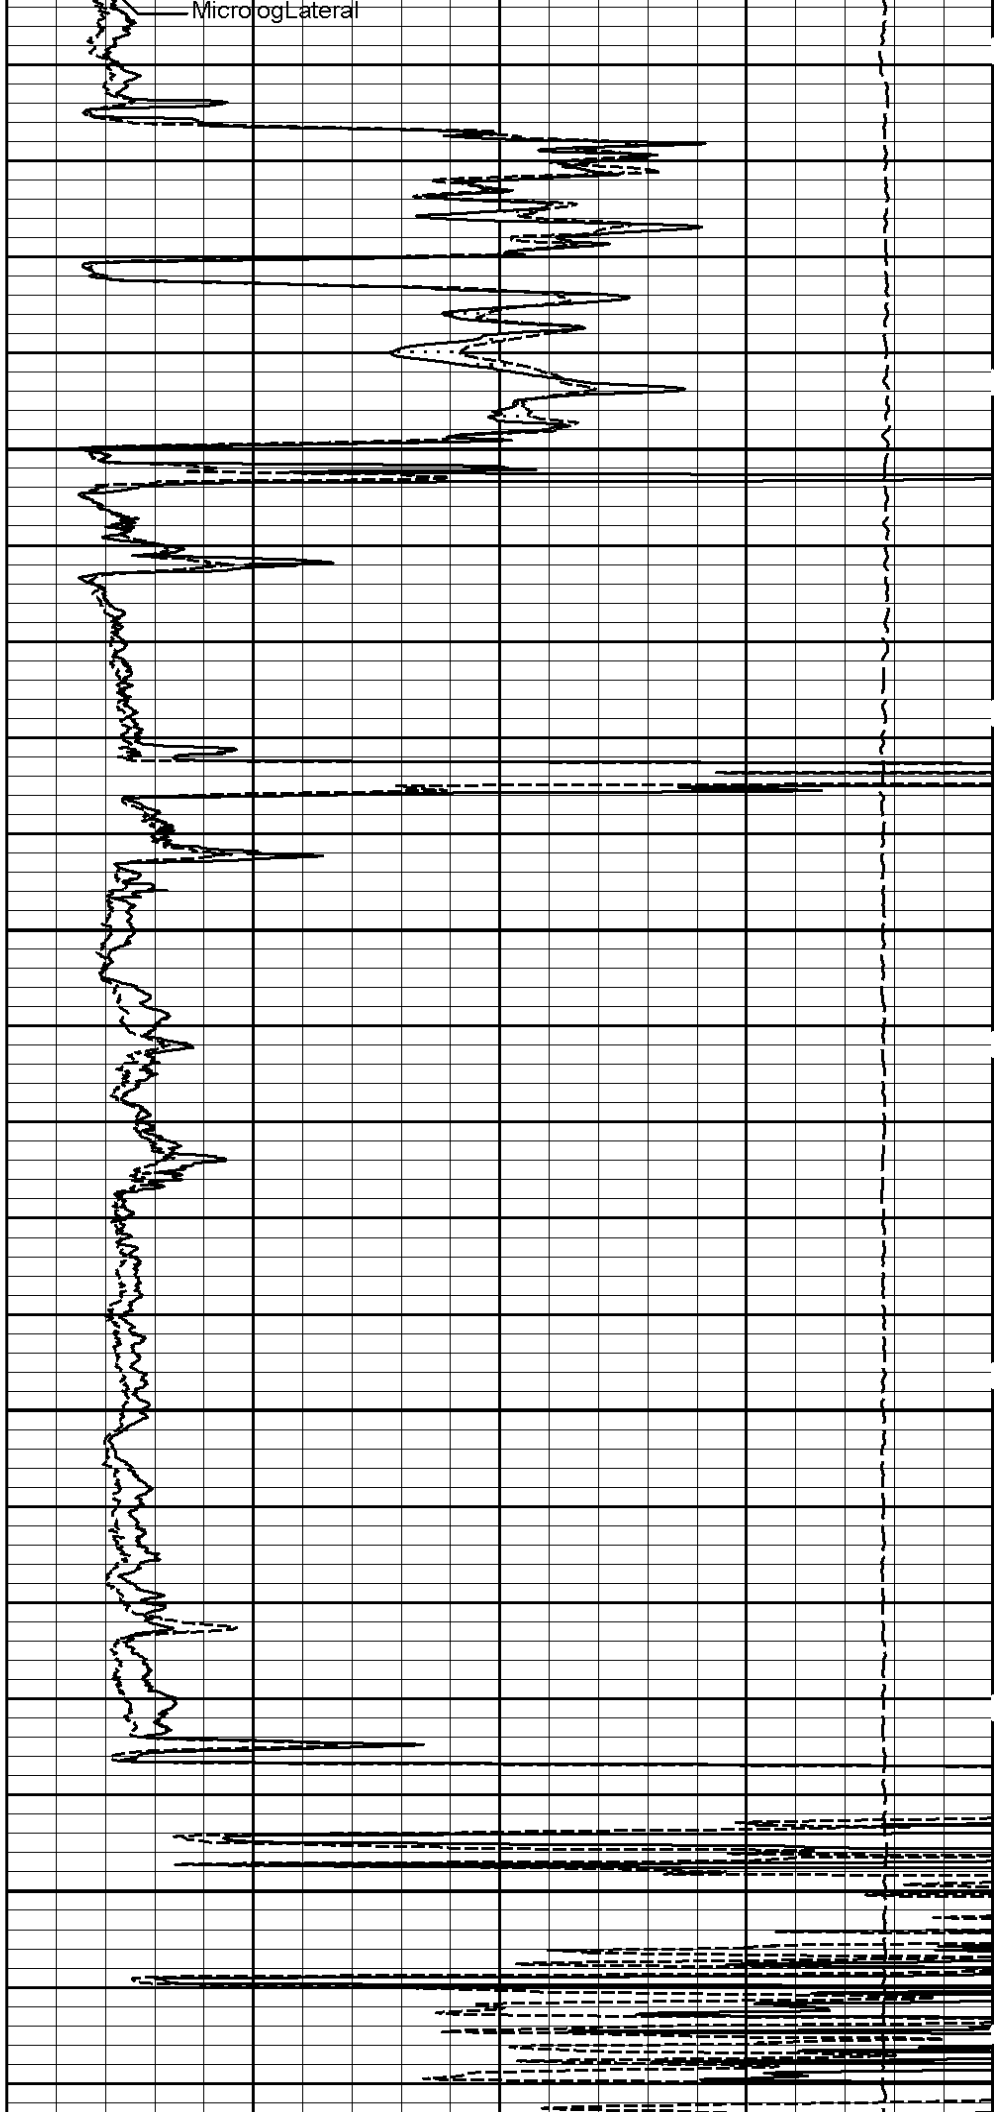

MicrologLateral

EDC-mm-A-DI

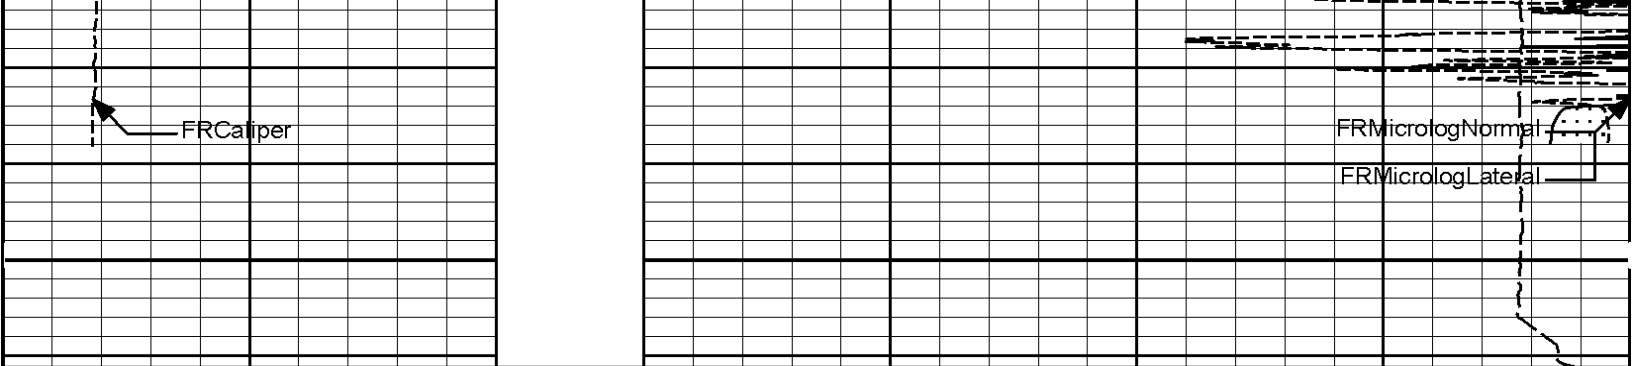

6	Caliper	16	1 : 240	15K	Tension	0
	inches		ft		pounds	
0	Gamma API	150	Tension Pull	0	MicrologLateral	20
	api		10 0		ohm-metre	
	SHALE		Tension Pull	0	MicrologNormal	20
					ohm-metre	
					PERMEABLE	

HALLIBURTON


Plot Time: 16-Jul-11 11:13:03
Plot Range: 1996 ft to 5161.17 ft
Data: BERRYMAN_RU_6_4\Well Based\DETAIL\
Plot File: \\-LOCAL-\BERRYMAN_RU_6_4\0001 SP-GTET-DSN-SDL-ACRT-CH\MICRO\Microlog_IQ_5_main_lib


5 INCH MAIN LOG

HALLIBURTON

Plot Time: 16-Jul-11 11:13:04
Plot Range: 4796 ft to 5160.25 ft
Data: BERRYMAN_RU_6_4\Well Based\REPEAT\
Plot File: \\-LOCAL-\BERRYMAN_RU_6_4\0001 SP-GTET-DSN-SDL-ACRT-CH\MICRO\Microlog_IQ_5_rep_lib


REPEAT SECTION

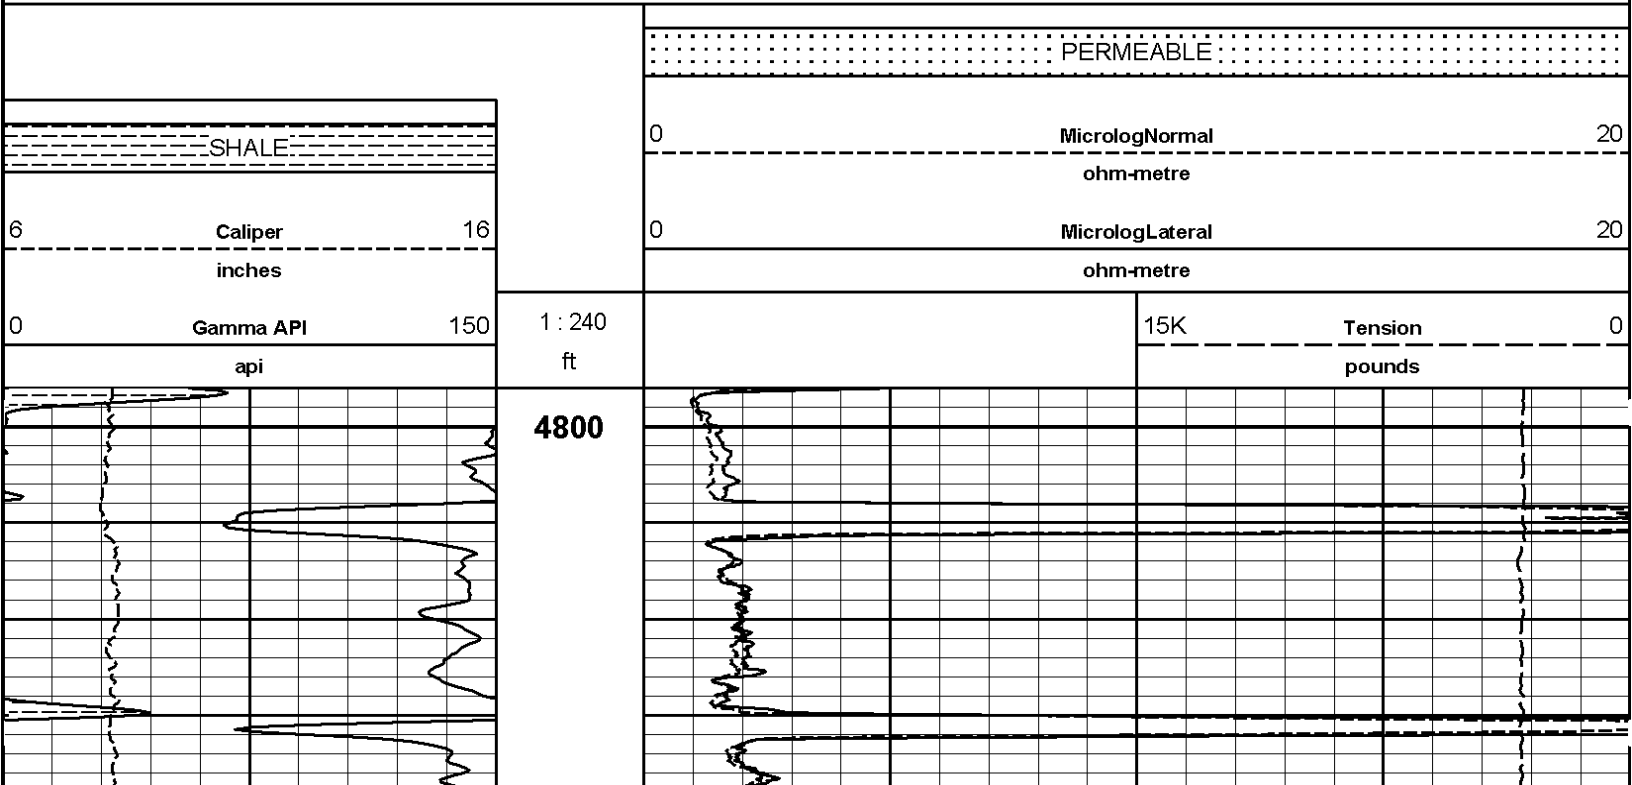


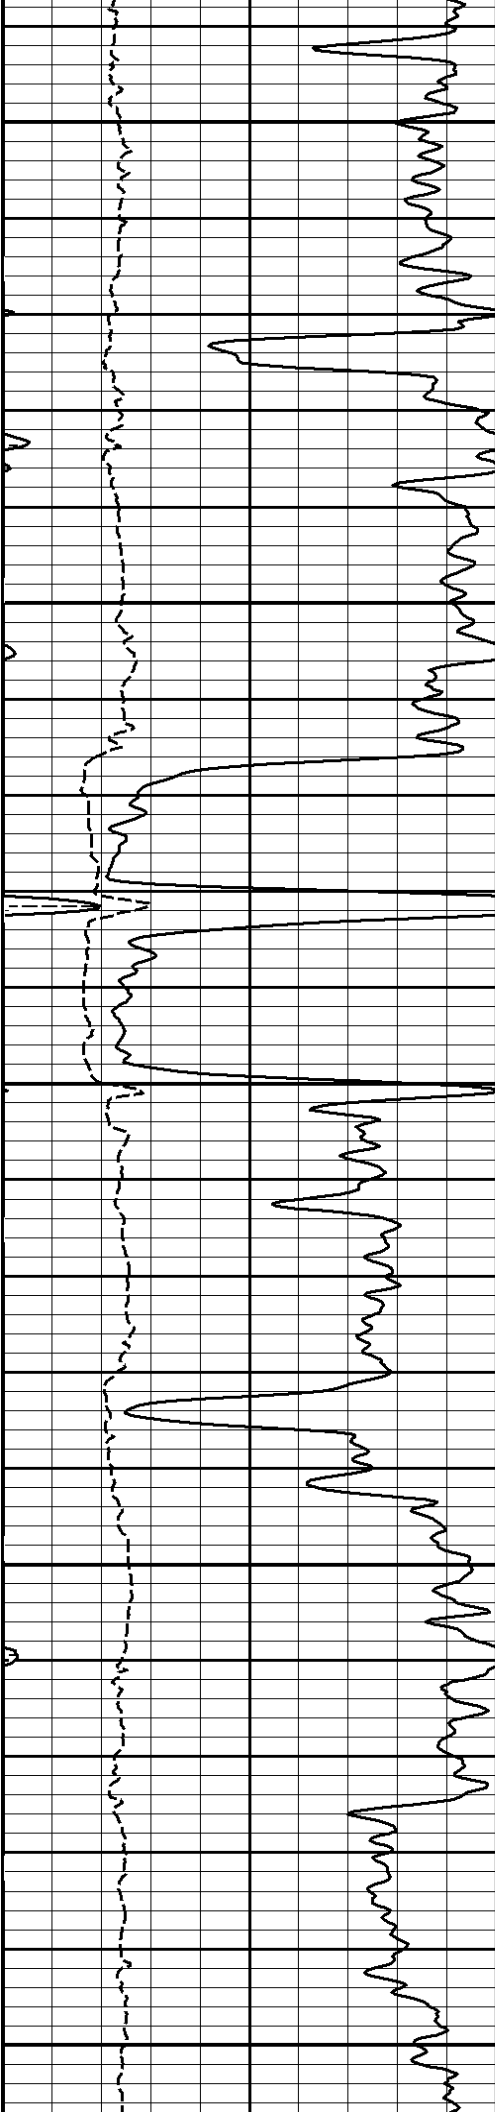

4900

5000

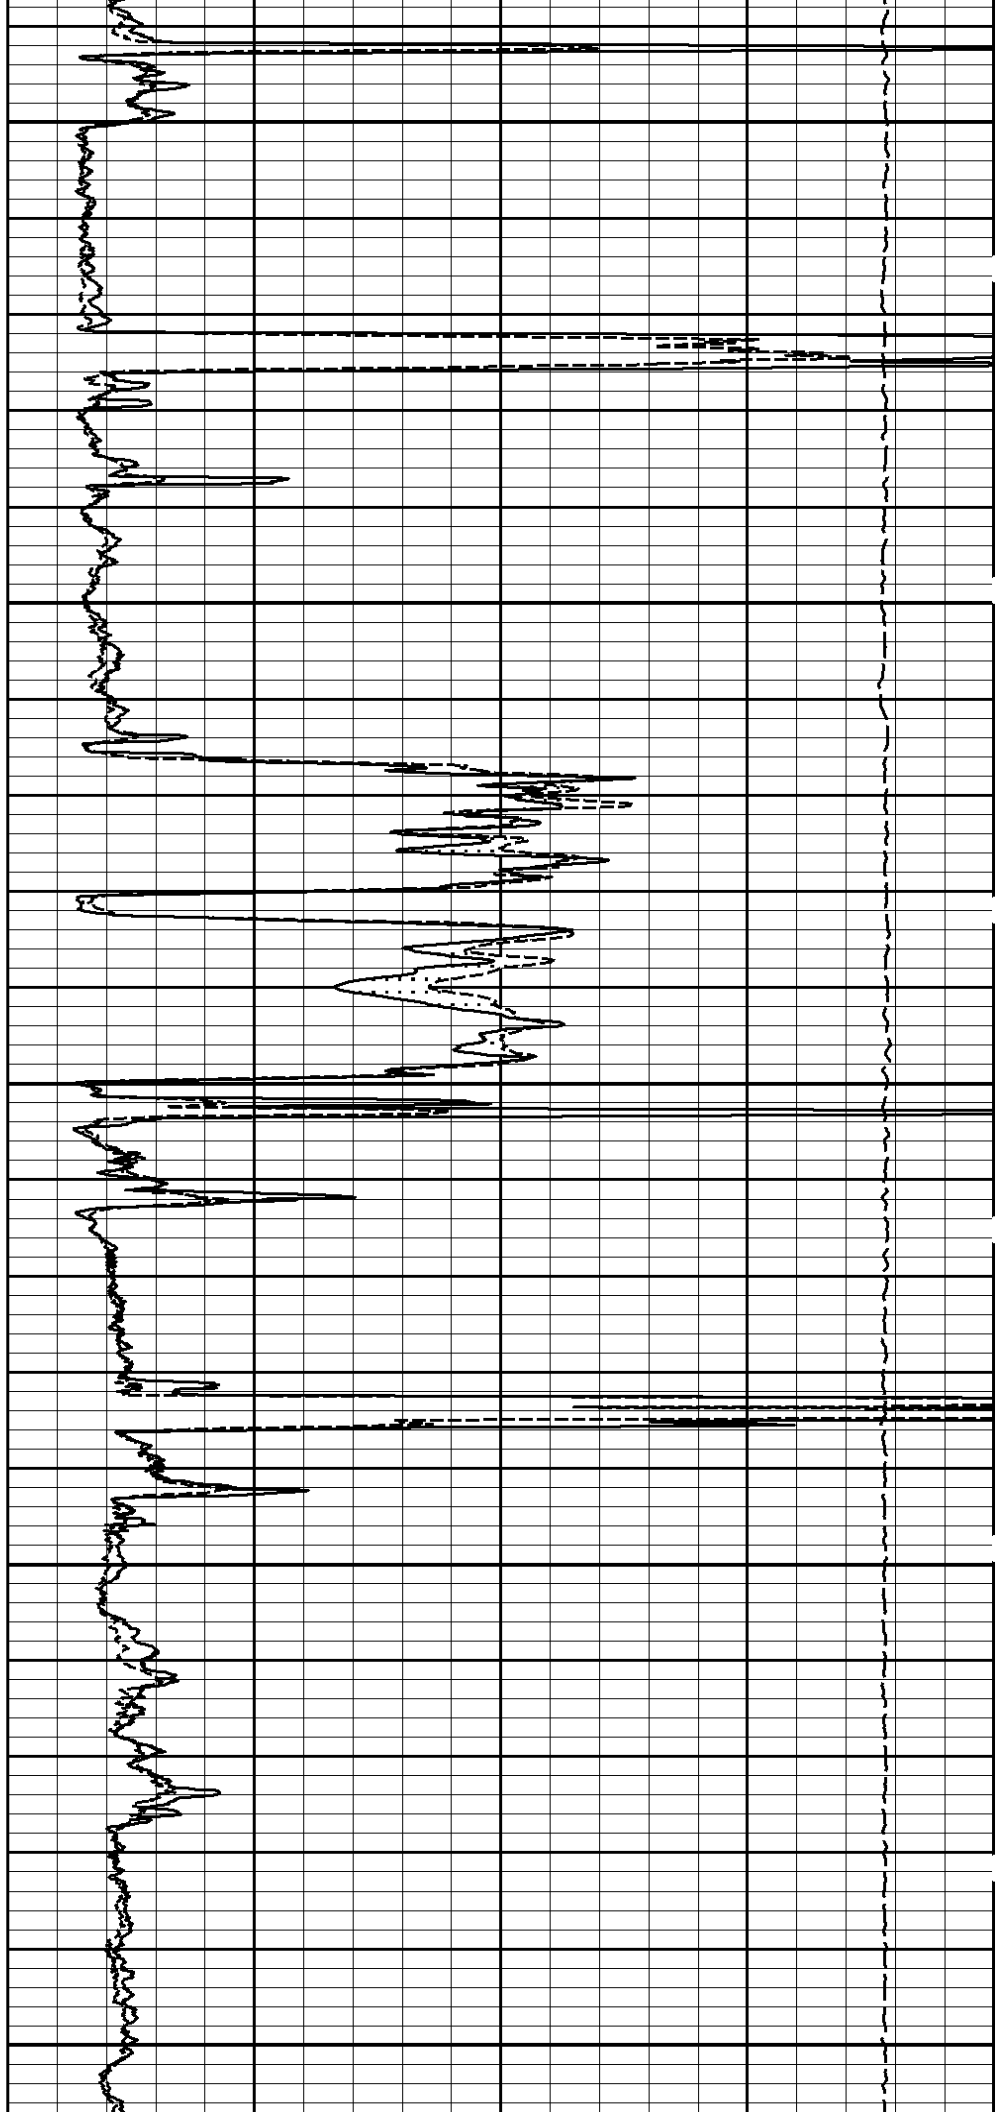

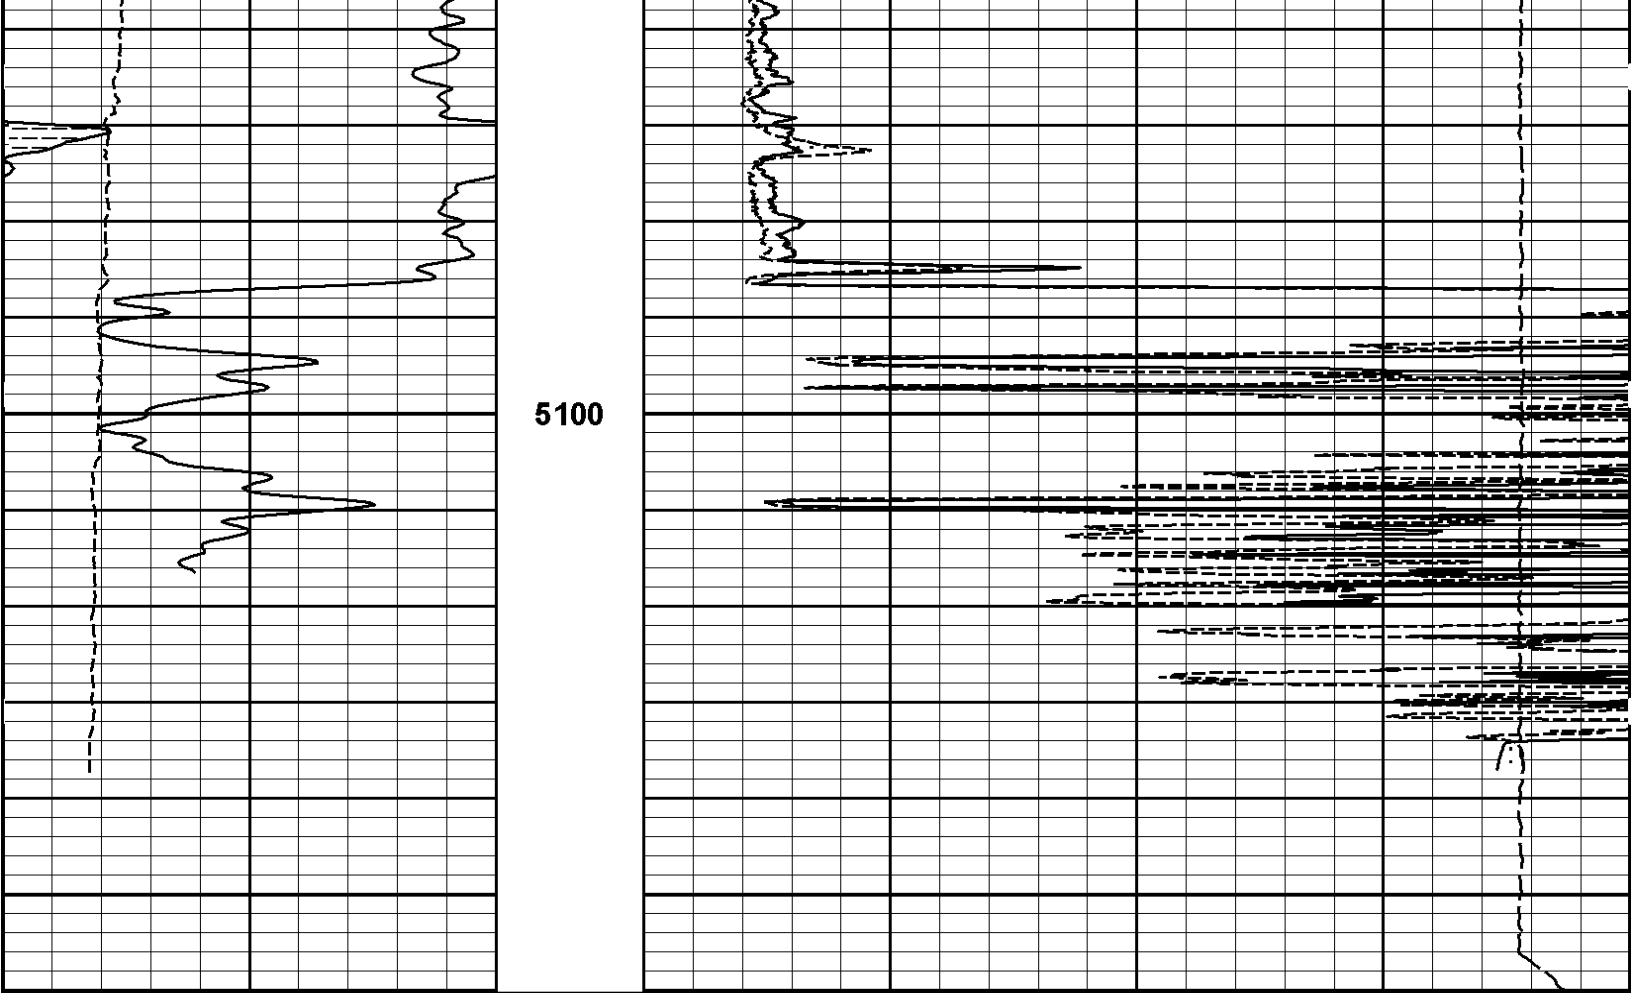

5100

0	Gamma API	150	1 : 240		15K	Tension	0
	api		ft			pounds	
6	Caliper	16		0	MicrologLateral		20
	inches				ohm-metre		
	SHALE			0	MicrologNormal		20
					ohm-metre		
					PERMEABLE		

HALLIBURTON

Plot Time: 16-Jul-11 11:13:06
Plot Range: 4796 ft to 5160.25 ft
Data: BERRYMAN_RU_6_4\Well Based\REPEAT\
Plot File: \\-LOCAL-BERRYMAN_RU_6_4\0001 SP-GTET-DSN-SDL-ACRT-CH\MICRO\Microlog_IQ_5_rep_lib

REPEAT SECTION

HALLIBURTON

TOOL STRING DIAGRAM REPORT

Description	Overbody Description	O.D.	Diagram	Sensors @ Delays	Length	Accumulated Length
CH_HOS-CH_696 37.50 lbs		Ø 2.750 in →		← Temperature @ 55.54 ft	3.03 ft	56.57 ft
XOHD-TRK696 20.00 lbs		Ø 2.750 in → Ø 3.625 in →			0.95 ft	53.54 ft

SP Sub-PROT01
60.00 lbs

Ø 3.625 in →

← SP @ 50.81 ft

3.74 ft

52.59 ft

GTET-11048627
165.00 lbs

Ø 3.625 in →

← GammaRay @ 42.79 ft

8.52 ft

48.85 ft

DSNT-11055304
174.00 lbs

DSN Decentralizer-
10755066
6.60 lbs

Ø 3.625 in* →

Ø 3.625 in →

← DSN Far @ 33.39 ft
← DSN Near @ 32.64 ft

9.69 ft

40.33 ft

30.64 ft

SDLT-I04_P84
360.00 lbs

Ø 4.500 in →

Ø 4.750 in →

SDL Microlog @ 22.83 ft
SDL Caliper @ 22.65 ft
SDL @ 22.64 ft

10.81 ft

19.83 ft

ACRt-I962_S909
250.00 lbs

Ø 3.625 in →

← Mud Resistivity @ 13.44 ft

← ACRt @ 9.46 ft

19.25 ft

Cabbage Head-
TRK696
5.00 lbs

Ø 3.625 in →
Ø 6.000 in →

0.58 ft

0.58 ft

0.00 ft

Mnemonic	Tool Name	Serial Number	Weight (lbs)	Length (ft)	Accumulated Length (ft)	Max.Log. Speed (fpm)
CH_HOS	Hostile Cable Head with Load Cell	CH_696	37.50	3.03	53.54	300.00
XOHD	Hostile to Dits Cross Over	TRK696	20.00	0.95	52.59	300.00
SP	SP Sub	PROT01	60.00	3.74	48.85	300.00
GTET	Gamma Telemetry Tool	11048627	165.00	8.52	40.33	60.00
DSNT	Dual Spaced Neutron	11055304	174.00	9.69	30.64	60.00
DCNT	DSN Decentralizer	10755066	6.60	5.13	33.97	300.00
SDLT	Spectral Density Tool	I04_P84	360.00	10.81	19.83	60.00
ACRt	Array Compensated True Resistivity	I962_S909	250.00	19.25	0.58	300.00
CBHD	Cabbage Head	TRK696	5.00	0.58	0.00	300.00
Total			1,078.10	56.57		
						* Not included in Total Length and Length Accumulation.
Data: BERRYMAN_RU_6_4\0001 SP-GTET-DSN-SDL-ACRT-CH\IDLE					Date: 16-Jul-11 08:51:42	

COMPANY	PHOENIX PETRO CORP		
WELL	BERRYMAN RU 6-4		
FIELD	RICHFIELD		
COUNTY	MORTON	STATE	KANSAS
HALLIBURTON		MICROLOG	

HALLIBURTON
PARAMETERS REPORT

Depth (ft)	Tool Name	Mnemonic	Description	Value	Units
TOP					
	SHARED	BS	Bit Size	7.875	in
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No	
	SHARED	MDBS	Mud Base	Water	
	SHARED	MDWT	Borehole Fluid Weight	9.200	ppg
	SHARED	WAGT	Weighting Agent	Natural	
	SHARED	BSAL	Borehole salinity	2500.00	ppm
	SHARED	FSAL	Formation Salinity NaCl	0.00	ppm
	SHARED	KPCT	Percent K in Mud by Weight?	0.00	%
	SHARED	RMUD	Mud Resistivity	1.170	ohmm
	SHARED	TRM	Temperature of Mud	89.0	degF
	SHARED	CSD	Logging Interval is Cased?	No	
	SHARED	ICOD	AHV Casing OD	5.500	in
	SHARED	ST	Surface Temperature	75.0	degF
	SHARED	TD	Total Well Depth	5157.00	ft
	SHARED	BHT	Bottom Hole Temperature	125.0	degF
	SHARED	SVTM	Navigation and Survey Master Tool	NONE	
	SHARED	AZTM	High Res Z Accelerometer Master Tool	GTET	
	SHARED	TEMM	Temperature Master Tool	NONE	
	SHARED	BHSM	Borehole Size Master Tool	NONE	
	GTET	GROK	Process Gamma Ray?	Yes	
	GTET	GRSQ	Gamma Tool Standoff	0.000	in

GTET	GEOK	Process Gamma Ray EVR?	No	
GTET	TPOS	Tool Position	Centered	
DSNT	DNOK	Process DSN?	Yes	
DSNT	DEOK	Process DSN EVR?	No	
DSNT	NLIT	Neutron Lithology	Limestone	
DSNT	DNOS	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.250	in
DSNT	DNTP	Temperature Correction Type	None	
DSNT	DPRS	DSN Pressure Correction Type	None	
DSNT	SHCO	View More Correction Options	No	
DSNT	UTVD	Use TVD for Gradient Corrections?	No	
DSNT	LHWT	Logging Horizontal Water Tank?	No	
SDLT	DNOK	Process Density?	Yes	
SDLT	DNOK	Process Density EVR?	No	
SDLT	CB	Logging Calibration Blocks?	No	
SDLT	SPVT	SDLT Pad Temperature Valid?	Yes	
SDLT	DTWN	Disable temperature warning	No	
SDLT	DMA	Formation Density Matrix	2.710	g/cc
SDLT	DFL	Formation Density Fluid	1.000	g/cc
SDLT	CLOK	Process Caliper Outputs?	Yes	
SDLT	MLOK	Process MicroLog Outputs?	Yes	
ACRt	RTOK	Process ACRt?	Yes	
ACRt	MNSO	Minimum Tool Standoff	1.50	in
ACRt	TCS1	Temperature Correction Source	FP Lwr & FP Up	
ACRt	TPOS	Tool Position	Free Hanging	
ACRt	RMOP	Rmud Source	Mud Cell	
ACRt	RMIN	Minimum Resistivity for MAP	0.20	ohmm
ACRt	RMIN	Maximum Resistivity for MAP	200.00	ohmm
ACRt	THQY	Threshold Quality	0.50	
BOTTOM				
Data: BERRYMAN_RU_6_4\0001 SP-GTET-DSN-SDL-ACRT-CH\IDLE			Date: 16-Jul-11 08:54:52	

HALLIBURTON

INPUTS, DELAYS AND FILTERS TABLE

Mnemonic	Input Description	Delay (ft)	Filter Type	Filter Length (ft)
Depth Panel				
TENS	Tension	0.00	NO	
CH_HOS				
DHTN	DownholeTension	0.00	BLK	0.000
SP Sub				
PLTC	Plot Control Mask	50.81	NO	
SP	Spontaneous Potential	50.81	BLK	1.250
SPR	Raw Spontaneous Potential	50.81	NO	
SPO	Spontaneous Potential Offset	50.81	NO	
GTET				
TPUL	Tension Pull	42.79	NO	
GR	Natural Gamma Ray API	42.79	TRI	1.750
GRU	Unfiltered Natural Gamma Ray API	42.79	NO	
EGR	Natural Gamma Ray API with Enhanced Vertical Resolution	42.79	W	1.416 , 0.750
ACCZ	Accelerometer Z	0.00	BLK	0.083
ACCX	Accelerometer X	0.00	BLK	0.083
ACCY	Accelerometer Y	0.00	BLK	0.083

DEVI	Inclination		0.00	NO	
DSNT					
TPUL	Tension Pull		32.54	NO	
RNDS	Near Detector Telemetry Counts		32.64	BLK	1.417
RFDS	Far Detector Telemetry Counts		33.39	TRI	0.583
DNTT	DSN Tool Temperature		32.64	NO	
DSNS	DSN Tool Status		32.54	NO	
ERND	Near Detector Telemetry Counts EVR		32.64	BLK	0.000
ERFD	Far Detector Telemetry Counts EVR		33.39	BLK	0.000
ENTM	DSN Tool Temperature EVR		32.64	NO	
SDLT					
TPUL	Tension Pull		22.64	NO	
NAB	Near Above		22.46	BLK	0.920
NHI	Near Cesium High		22.46	BLK	0.920
NLO	Near Cesium Low		22.46	BLK	0.920
NVA	Near Valley		22.46	BLK	0.920
NBA	Near Barite		22.46	BLK	0.920
NDE	Near Density		22.46	BLK	0.920
NPK	Near Peak		22.46	BLK	0.920
NLI	Near Lithology		22.46	BLK	0.920
NBAU	Near Barite Unfiltered		22.46	BLK	0.250
NLIU	Near Lithology Unfiltered		22.46	BLK	0.250
FAB	Far Above		22.81	BLK	0.250
FHI	Far Cesium High		22.81	BLK	0.250
FLO	Far Cesium Low		22.81	BLK	0.250
FVA	Far Valley		22.81	BLK	0.250
FBA	Far Barite		22.81	BLK	0.250
FDE	Far Density		22.81	BLK	0.250
FPK	Far Peak		22.81	BLK	0.250
FLI	Far Lithology		22.81	BLK	0.250
PTMP	Pad Temperature		22.65	BLK	0.920
NHV	Near Detector High Voltage		19.83	NO	
FHV	Far Detector High Voltage		19.83	NO	
ITMP	Instrument Temperature		19.83	NO	
DDHV	Detector High Voltage		19.83	NO	
TPUL	Tension Pull		22.65	NO	
PCAL	Pad Caliper		22.65	TRI	0.250
ACAL	Arm Caliper		22.65	TRI	0.250
TPUL	Tension Pull		22.83	NO	
MINV	Microlog Lateral		22.83	BLK	0.750
MNOR	Microlog Normal		22.83	BLK	0.750
ACRt					
TPUL	Tension Pull		2.97	NO	
F1R1	ACRT 12KHz - 80in R value		9.22	BLK	0.000
F1X1	ACRT 12KHz - 80in X value		9.22	BLK	0.000
F1R2	ACRT 12KHz - 50in R value		6.72	BLK	0.000
F1X2	ACRT 12KHz - 50in X value		6.72	BLK	0.000
F1R3	ACRT 12KHz - 29in R value		5.22	BLK	0.000
F1X3	ACRT 12KHz - 29in X value		5.22	BLK	0.000
F1R4	ACRT 12KHz - 17in R value		4.22	BLK	0.000
F1X4	ACRT 12KHz - 17in X value		4.22	BLK	0.000
F1R5	ACRT 12KHz - 10in R value		3.72	BLK	0.000
F1X5	ACRT 12KHz - 10in X value		3.72	BLK	0.000
F1R6	ACRT 12KHz - 6in R value		2.47	BLK	0.000
F1X6	ACRT 12KHz - 6in X value		2.47	BLK	0.000

F1R6	ACRT 12KHz - 6in R value	3.47	BLK	0.000
F1X6	ACRT 12KHz - 6in X value	3.47	BLK	0.000
F2R1	ACRT 36KHz - 80in R value	9.22	BLK	0.000
F2X1	ACRT 36KHz - 80in X value	9.22	BLK	0.000
F2R2	ACRT 36KHz - 50in R value	6.72	BLK	0.000
F2X2	ACRT 36KHz - 50in X value	6.72	BLK	0.000
F2R3	ACRT 36KHz - 29in R value	5.22	BLK	0.000
F2X3	ACRT 36KHz - 29in X value	5.22	BLK	0.000
F2R4	ACRT 36KHz - 17in R value	4.22	BLK	0.000
F2X4	ACRT 36KHz - 17in X value	4.22	BLK	0.000
F2R5	ACRT 36KHz - 10in R value	3.72	BLK	0.000
F2X5	ACRT 36KHz - 10in X value	3.72	BLK	0.000
F2R6	ACRT 36KHz - 6in R value	3.47	BLK	0.000
F2X6	ACRT 36KHz - 6in X value	3.47	BLK	0.000
F3R1	ACRT 72KHz - 80in R value	9.22	BLK	0.000
F3X1	ACRT 72KHz - 80in X value	9.22	BLK	0.000
F3R2	ACRT 72KHz - 50in R value	6.72	BLK	0.000
F3X2	ACRT 72KHz - 50in X value	6.72	BLK	0.000
F3R3	ACRT 72KHz - 29in R value	5.22	BLK	0.000
F3X3	ACRT 72KHz - 29in X value	5.22	BLK	0.000
F3R4	ACRT 72KHz - 17in R value	4.22	BLK	0.000
F3X4	ACRT 72KHz - 17in X value	4.22	BLK	0.000
F3R5	ACRT 72KHz - 10in R value	3.72	BLK	0.000
F3X5	ACRT 72KHz - 10in X value	3.72	BLK	0.000
F3R6	ACRT 72KHz - 6in R value	3.47	BLK	0.000
F3X6	ACRT 72KHz - 6in X value	3.47	BLK	0.000
RMUD	Mud Resistivity	12.76	BLK	0.000
F1RT	Transmitter Reference 12 KHz Real Signal	2.97	BLK	0.000
F1XT	Transmitter Reference 12 KHz Imaginary Signal	2.97	BLK	0.000
F2RT	Transmitter Reference 36 KHz Real Signal	2.97	BLK	0.000
F2XT	Transmitter Reference 36 KHz Imaginary Signal	2.97	BLK	0.000
F3RT	Transmitter Reference 72 KHz Real Signal	2.97	BLK	0.000
F3XT	Transmitter Reference 72 KHz Imaginary Signal	2.97	BLK	0.000
TFPU	Upper Feedpipe Temperature Calculated	2.97	BLK	0.000
TFPL	Lower Feedpipe Temperature Calculated	2.97	BLK	0.000
ITMP	Instrument Temperature	2.97	BLK	0.000
TCVA	Temperature Correction Values Loop Off	2.97	NO	
TIDV	Instrument Temperature Derivative	2.97	NO	
TUDV	Upper Temperature Derivative	2.97	NO	
TLDV	Lower Temperature Derivative	2.97	NO	
TRBD	Receiver Board Temperature	2.97	NO	
Data: BERRYMAN_RU_6_4\0001 SP-GTET-DSN-SDL-ACRT-CHIDLE				Date: 16-Jul-11 08:52:36

HALLIBURTON

CALIBRATION REPORT

MICRO LOG SHOP CALIBRATION

Tool Name: SDLT - I04_P84

Reference Calibration Date: 04-Jul-11 10:28:03

Engineer: C. PARKER

Calibration Date: 06-Jul-11 11:21:50

Software Version: WL INSITE R3.2.0 (Build 7)

Calibration Version: 1

CALIBRATION COEFFICIENT SUMMARY

Measurement

Micro Log Normal

Micro Log Lateral

Measurement Coefficient Measurement Coefficient Measurement Coefficient

		Measured	Calibrated	Measured	Calibrated	Units
Tool Zero		-0.08	-0.07	-0.02	-0.02	ohmm
Calibration Point #1		-0.01	0.00	-0.00	0.00	ohmm
Calibration Point #2		19.85	20.00	18.36	20.00	ohmm
Internal Reference		19.96	20.11	20.29	22.09	ohmm
Measurement	Micro Log Normal Tool Value		Micro Log Lateral Tool Value		Units	
Tool Zero	-0.47		0.38		V	
Calibration Point #1	19.27		5.18		V	
Calibration Point #2	5326.21		6365.94		V	
Internal Reference	5356.49		7032.01		V	
MICRO LOG FIELD CHECK						
Tool Name: SDLT - I04_P84				Reference Calibration Date:		06-Jul-11 11:21:50
Engineer: J. BOSH				Calibration Date:		16-Jul-11 08:02:00
Software Version: WL INSITE R3.2.0 (Build 7)				Calibration Version:		1
Measurement	Micro Log Normal		Micro Log Lateral			
	Shop	Field	Shop	Field	Units	
Tool Zero	-0.07	-0.07	-0.02	-0.01	ohmm	
Internal Reference	20.11	20.09	22.09	22.07	ohmm	
Summary						
Signal	Shop	Field	Difference		Tolerance	
Microlog Normal	20.11	20.09	0.02		+/- 0.80	
Microlog Lateral	22.09	22.07	0.02		+/- 0.80	
MICRO LOG POST CHECK						
Tool Name: SDLT - I04_P84				Reference Calibration Date:		16-Jul-11 08:02:00
Engineer: C. HAVERKAMP				Calibration Date:		16-Jul-11 11:03:10
Software Version: WL INSITE R3.2.0 (Build 7)				Calibration Version:		1
Measurement	Micro Log Normal		Micro Log Lateral			
	Field	Post	Field	Post	Units	
Tool Zero	-0.07	-0.08	-0.01	-0.01	ohmm	
Internal Reference	20.09	20.21	22.07	22.21	ohmm	
Summary						
Signal	Field	Post	Difference		Tolerance	
Microlog Normal	20.09	20.21	0.12		+/- 0.80	
Microlog Lateral	22.07	22.21	0.14		+/- 0.80	
CALIBRATION SUMMARY						
Sensor	Shop	Field	Post	Difference	Tolerance	Units
SDLT-I04_P84						
MicroLog Normal	20.11	20.09	20.21	-0.12	+/-0.80	ohmm
MicroLog Lateral	22.09	22.07	22.21	-0.14	+/-0.80	ohmm
Data: BERRYMAN_RU_6_4\0001 SP-GTET-DSN-SDL-ACRT-CH\IDLE				Date: 16-Jul-11 11:03:14		