



BOREHOLE COMPENSATED
SONIC ARRAY
LOG

Service Ticket No.: 8105526				API Serial No.: 15-081-21933				PGM Version: VL INSITE R3.2.0 (Build 7)			
CHANGE IN MUD TYPE OR ADDITIONAL SAMPLE						RESISTIVITY SCALE CHANGES					
Date	Sample No.					Type Log	Depth	Scale Up Hole		Scale Down Hole	
Depth-Driller											
Type Fluid in Hole											
Density	Viscosity										
Ph	Fluid Loss										
Source of Sample						RESISTIVITY EQUIPMENT DATA					
Rm @ Meas. Temp		@		@		Run No.	Tool Type & No.	Pad Type	Tool Pos.		Other
Rmf @ Meas. Temp.		@		@							
Rmc @ Meas. Temp.		@		@							
Source Rmf	Rmc										
Rm @ BHT		@		@							
Rmf @ BHT		@		@							
Rmc @ BHT		@		@							
EQUIPMENT DATA											
GAMMA			ACOUSTIC			DENSITY			NEUTRON		
Run No.	ONE		Run No.	ONE		Run No.			Run No.		
Serial No.	11039640		Serial No.	10747684		Serial No.			Serial No.		
Model No.	GTET		Model No.	BSAT		Model No.			Model No.		
Diameter	3.625		No. of Cent.	2		Diameter			Diameter		
Detector Model No.	T-102		Spacing	.5'		Log Type			Log Type		
Type	SCINT					Source Type			Source Type		
Length	8"		LSA [Y/N]	Y		Serial No.			Serial No.		
Distance to Source	10'		FWDA [Y/N]	N		Strength			Strength		
LOGGING DATA											


GENERAL				GAMMA		ACOUSTIC		DENSITY		NEUTRON						
Run	Depth		Speed	Scale		Scale		Matrix	Scale		Matrix	Scale		Matrix		
No.	From	To	ft/min	L	R	L	R		L	R		L	R			
ONE	TD	CSG	REC	0	150	30	-10	47.6								
DIRECTIONAL INFORMATION																
Maximum Deviation								@	KOP							@
Remarks: ANNULAR HOLE VOLUME CALCULATED FOR 5.5 INCH CASING																
CHLORIDES: 2100 MG/L LCM: 6 #/BBL																
GPS COORDINATES: LAT: 37.27 N LONG: 100.58 W																
TODAY'S CREW: K. KING, M. STARK																
THANK YOU FOR CHOOSING HALLIBURTON ENERGY SERVICES, LIBERAL, KS 620-624-8123																
HALLIBURTON DOES NOT GUARANTEE THE ACCURACY OF ANY INTERPRETATION OF THE LOG DATA, CONVERSION OF LOG DATA TO PHYSICAL ROCK PARAMETERS OR RECOMMENDATIONS WHICH MAY BE GIVEN BY HALLIBURTON PERSONNEL OR WHICH APPEAR ON THE LOG OR IN ANY OTHER FORM. ANY USER OF SUCH DATA, INTERPRETATIONS, CONVERSIONS, OR RECOMMENDATIONS AGREES THAT HALLIBURTON IS NOT RESPONSIBLE EXCEPT WHERE DUE TO GROSS NEGLIGENCE OR WILLFUL MISCONDUCT, FOR ANY LOSS, DAMAGES, OR EXPENSES RESULTING FROM THE USE THEREOF.																
HALLIBURTON																

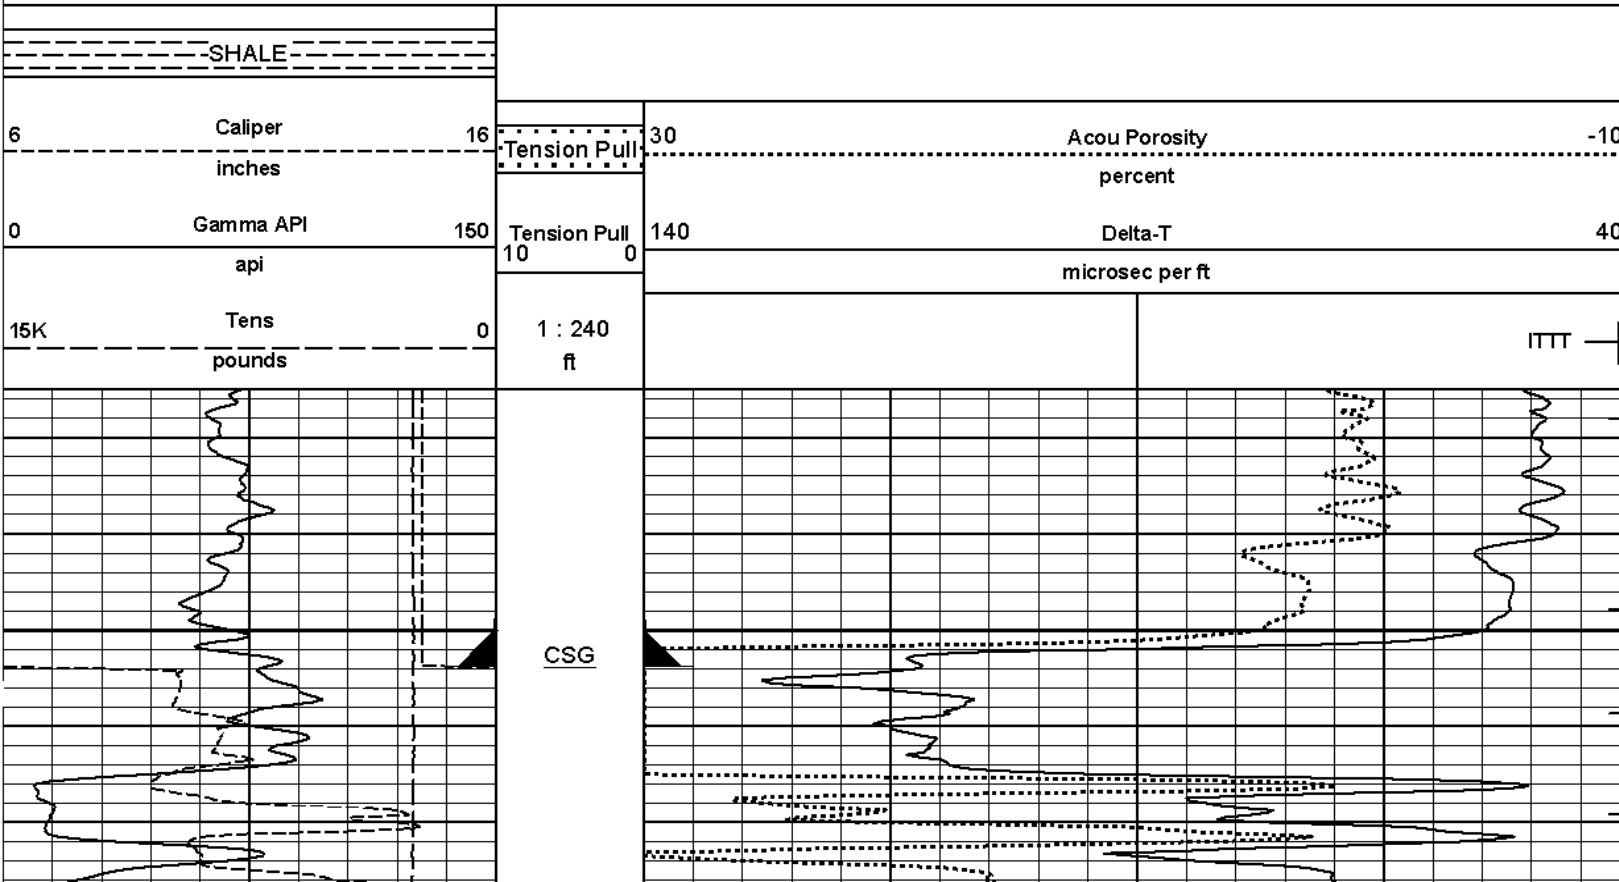

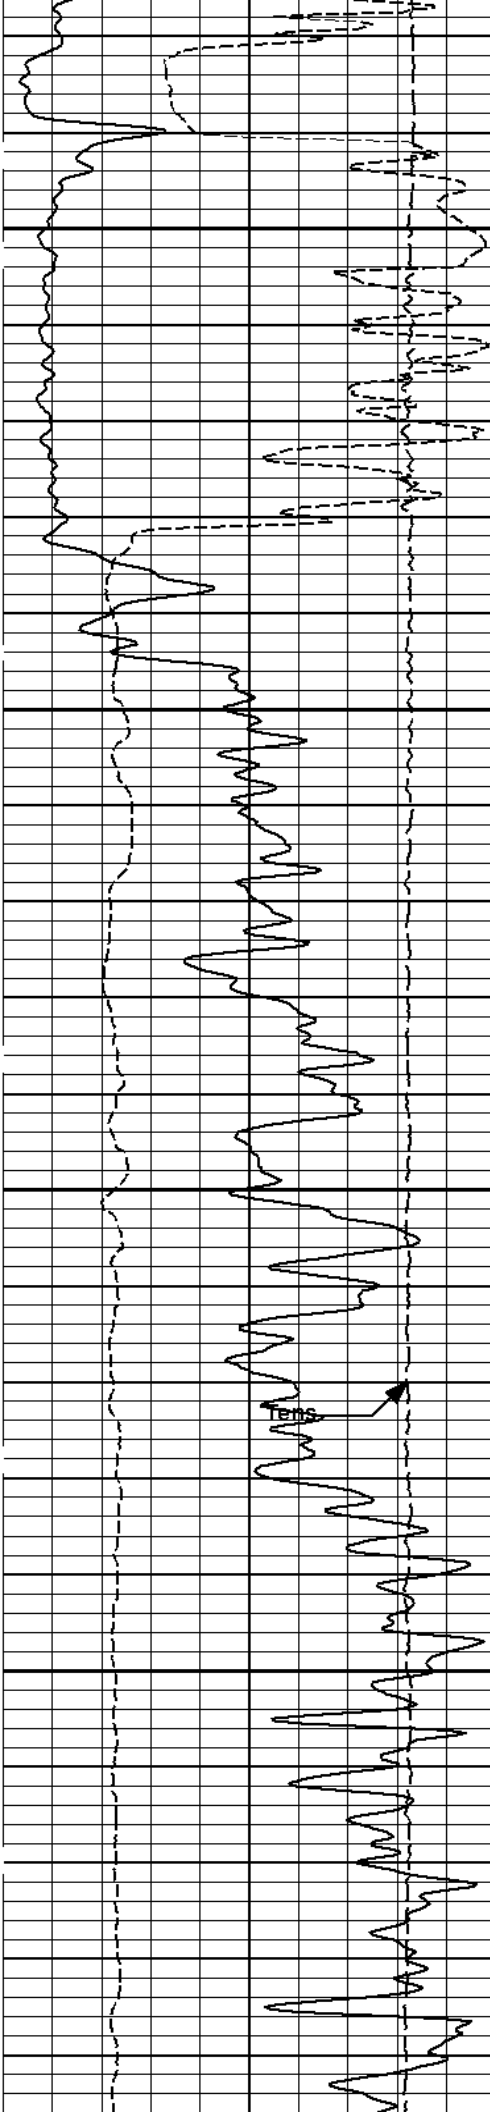

1800

1900

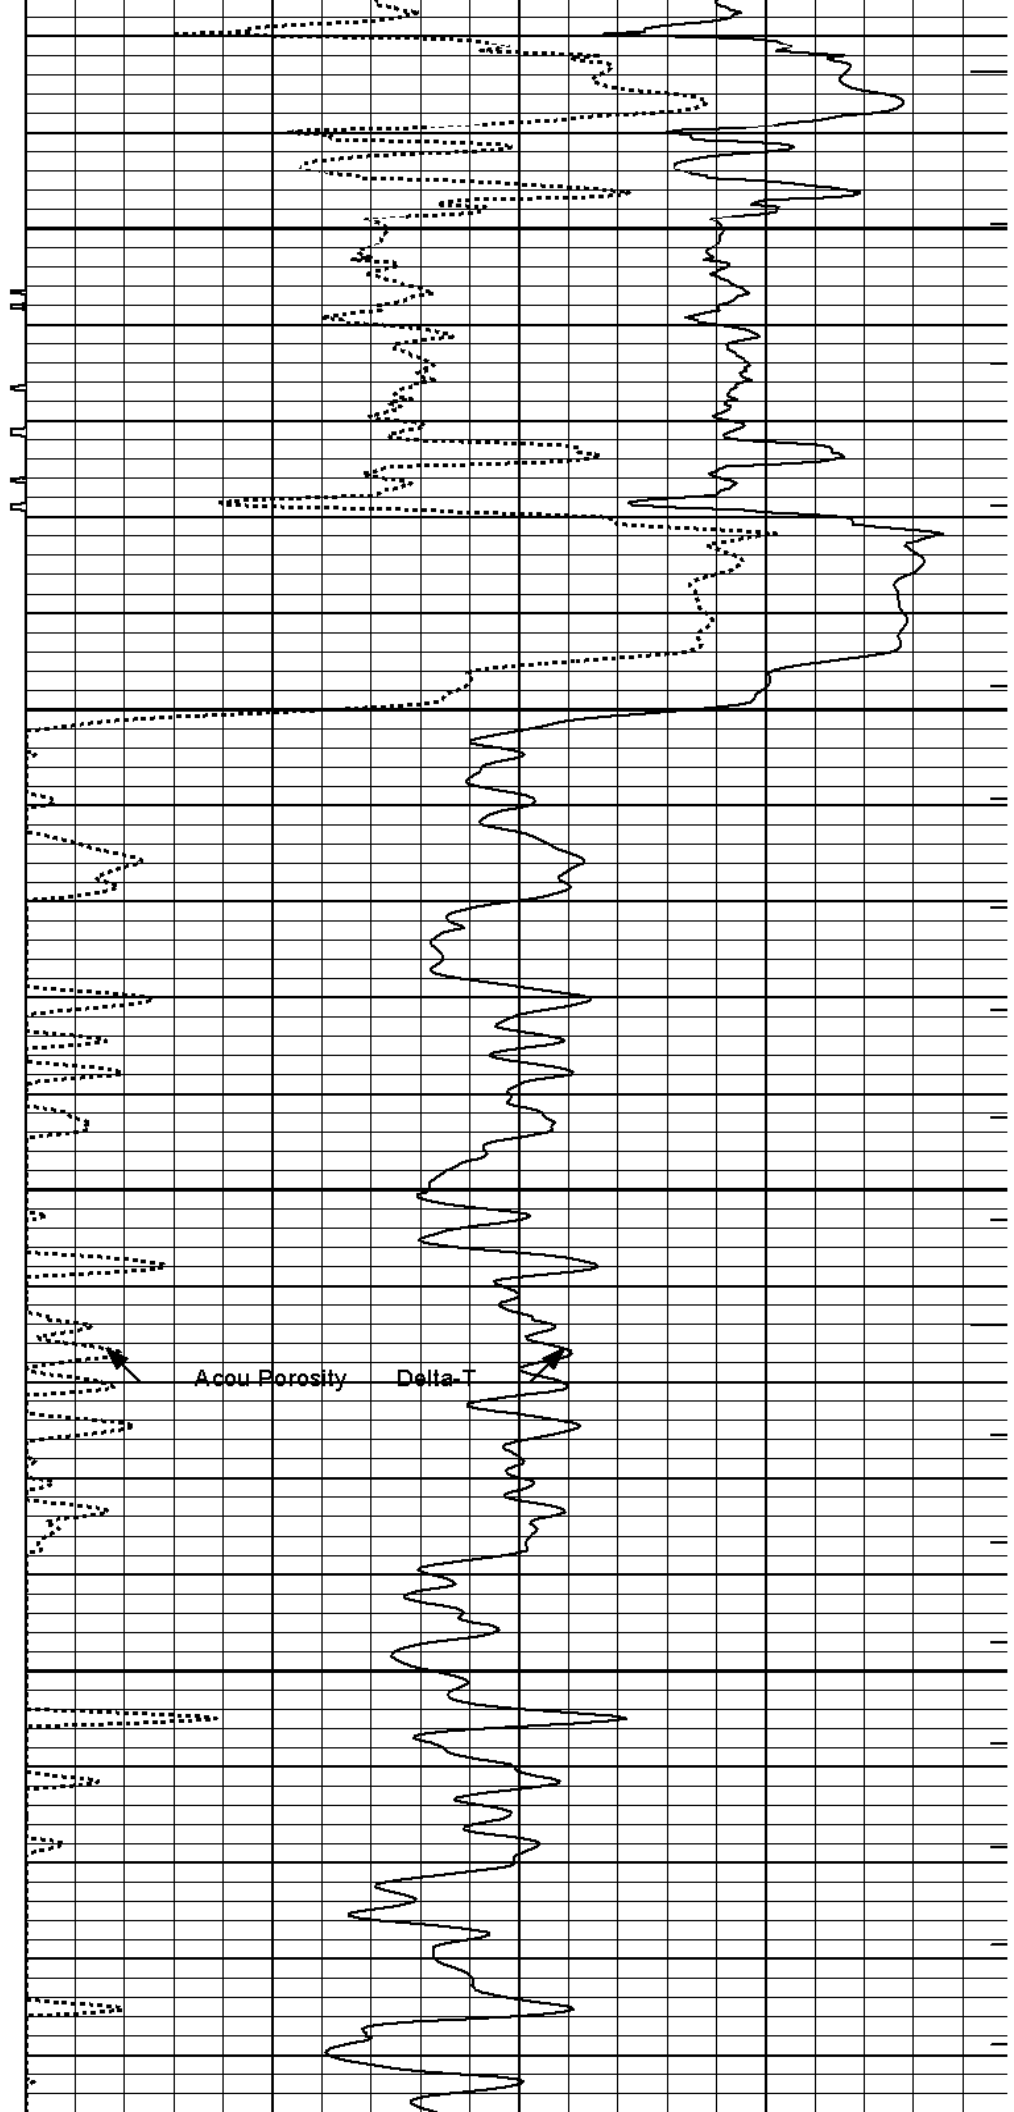

Acou Porosity

Delta-T




2000

2100


2200

Tens

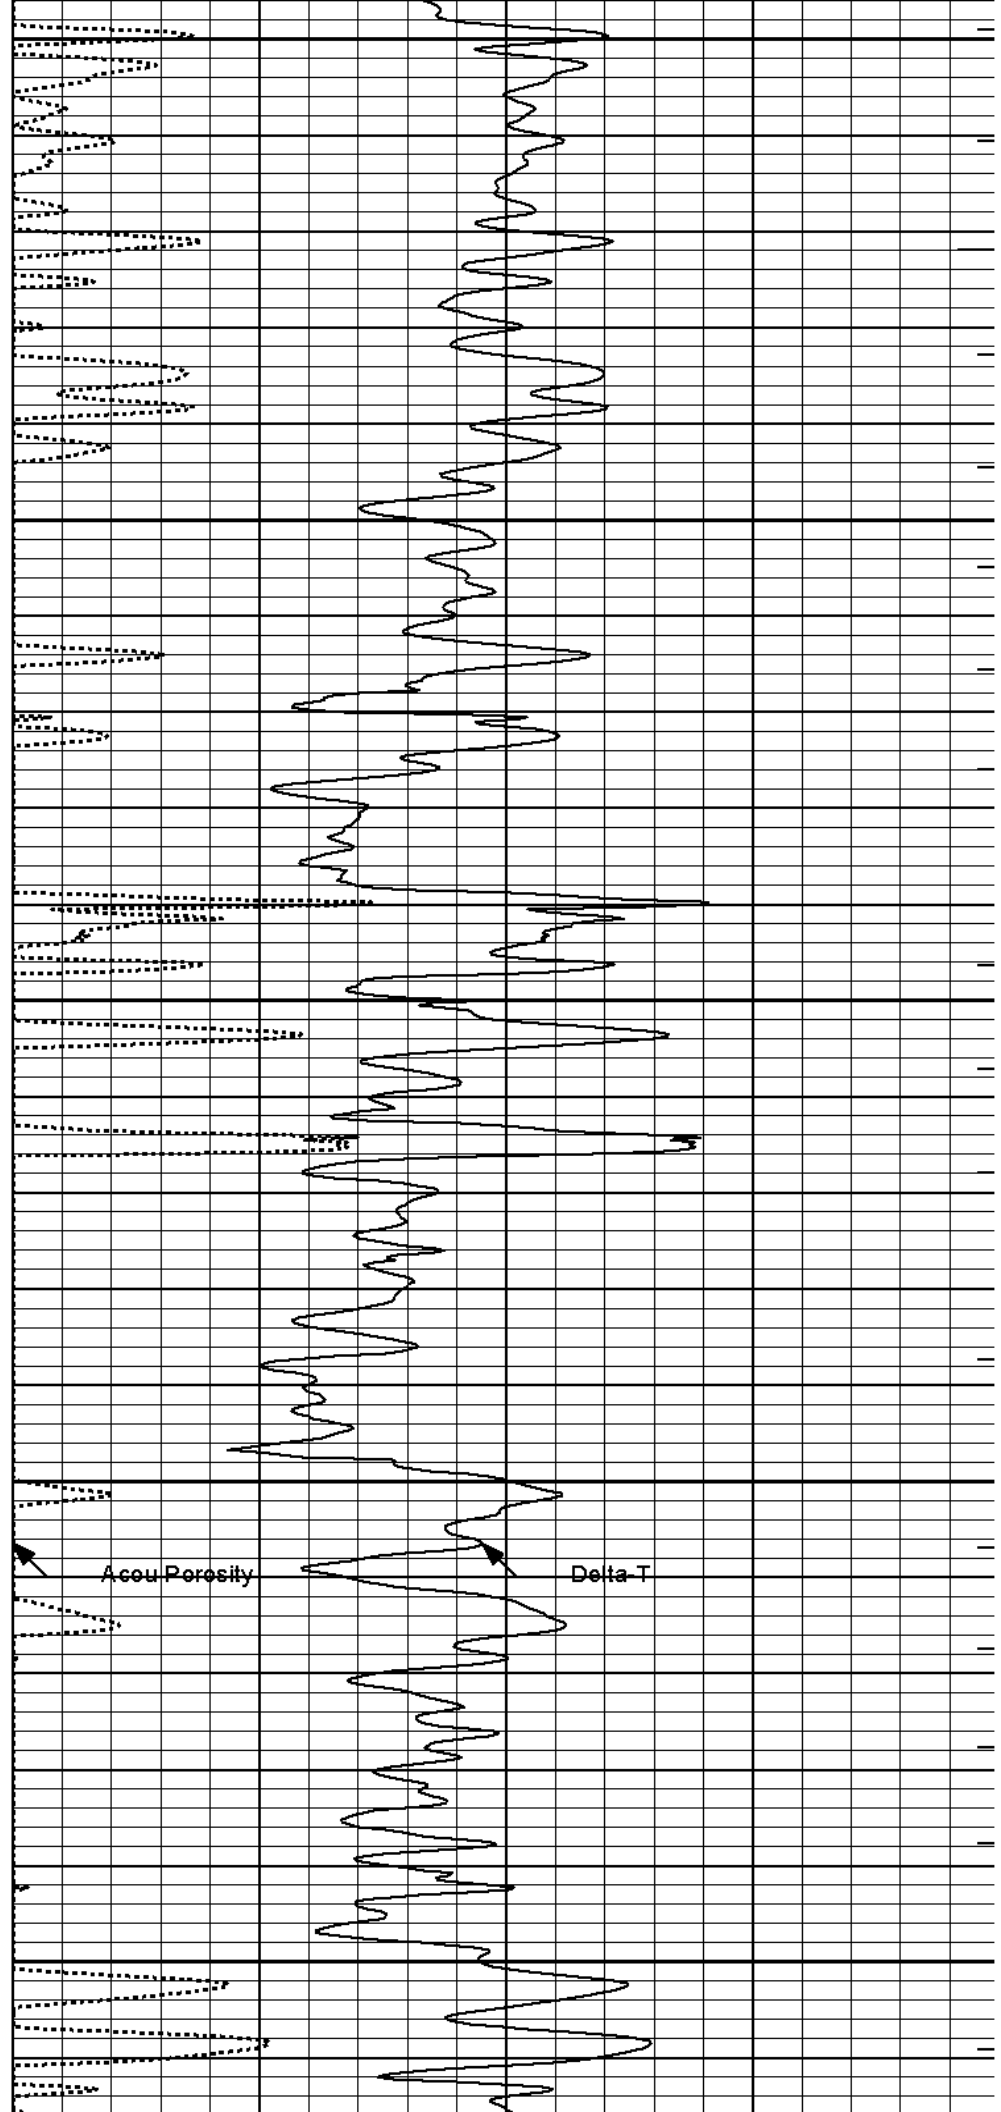

Acou Porosity


Delta T

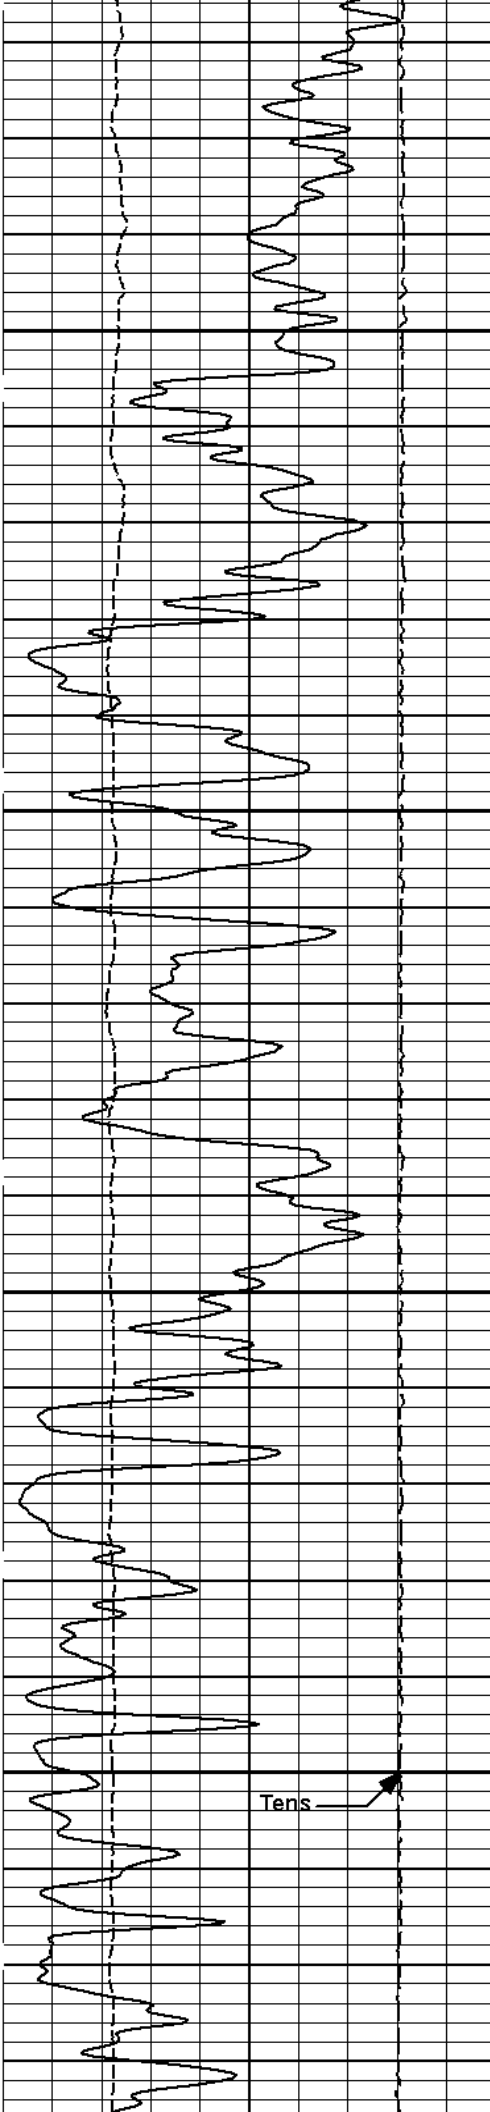

2300


2400

Tens

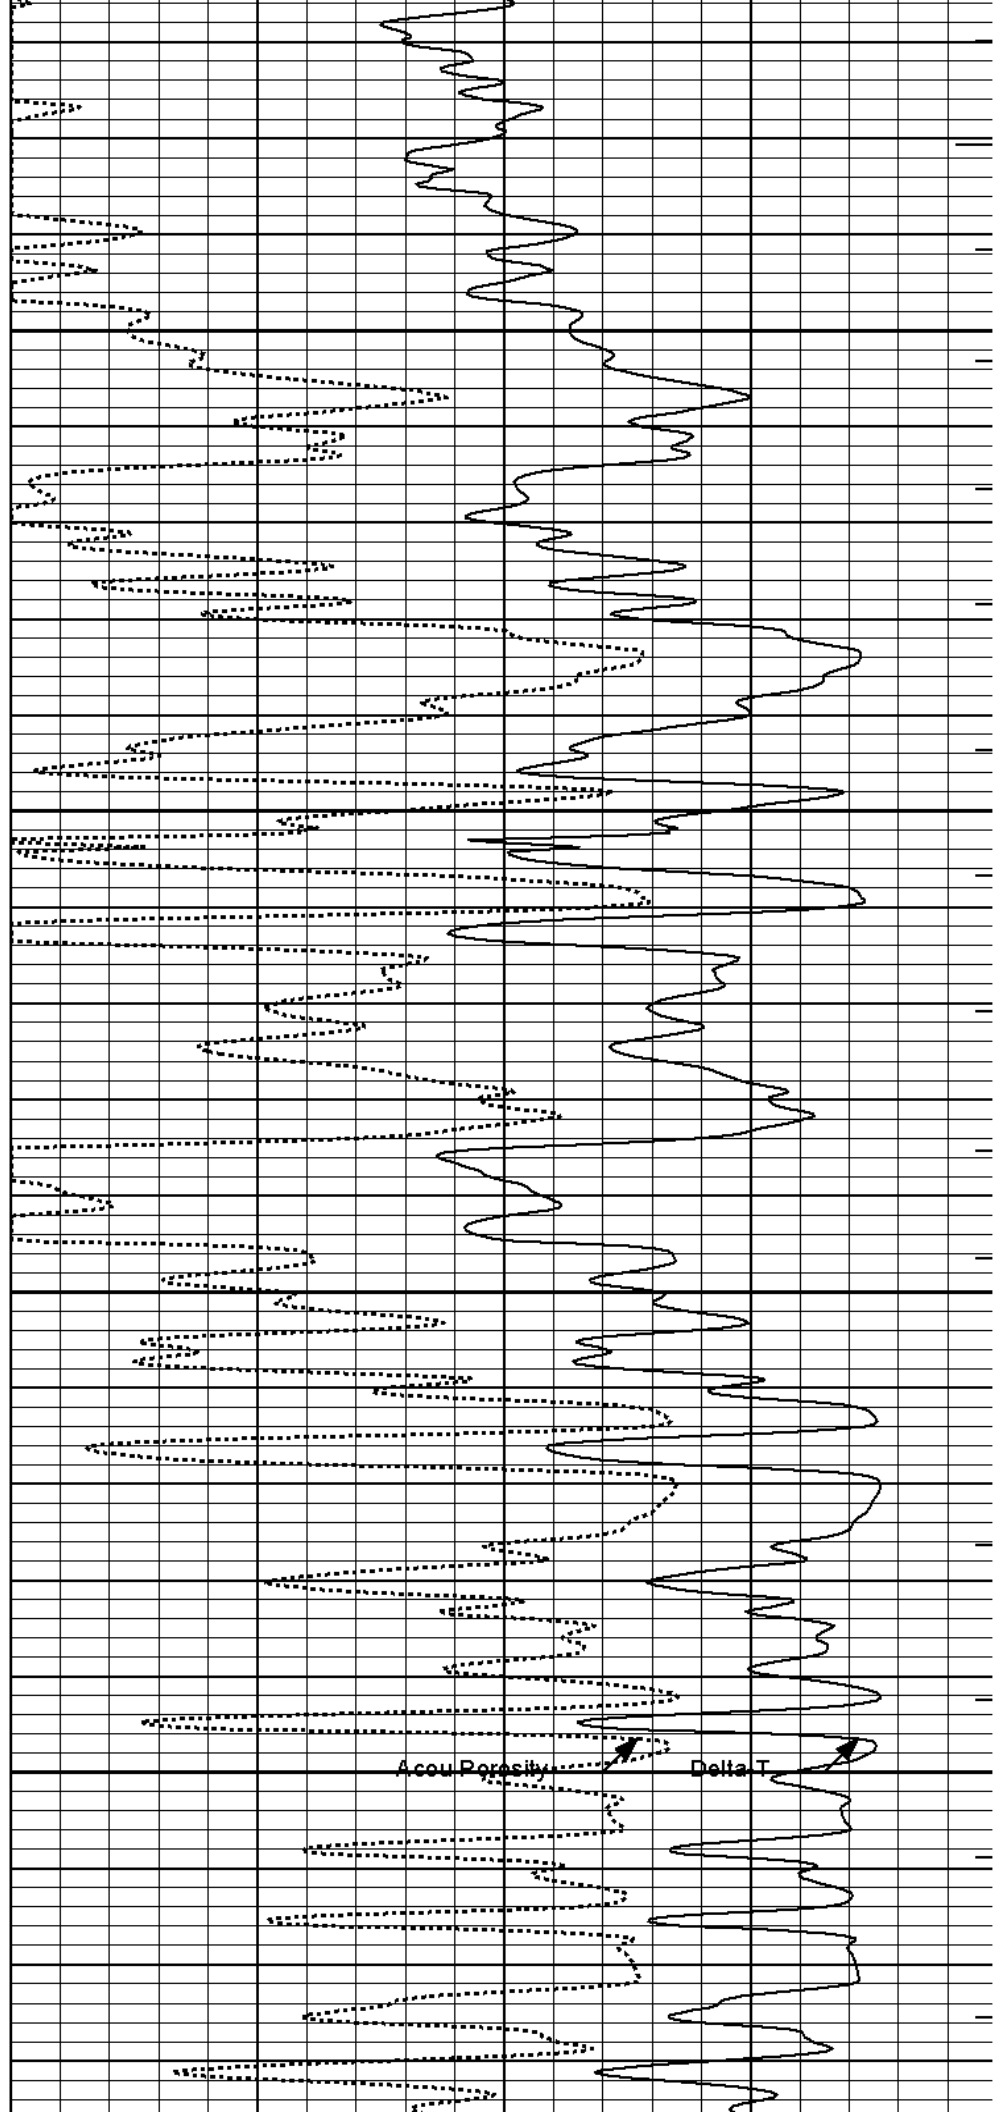


Acou Porosity

Delta T

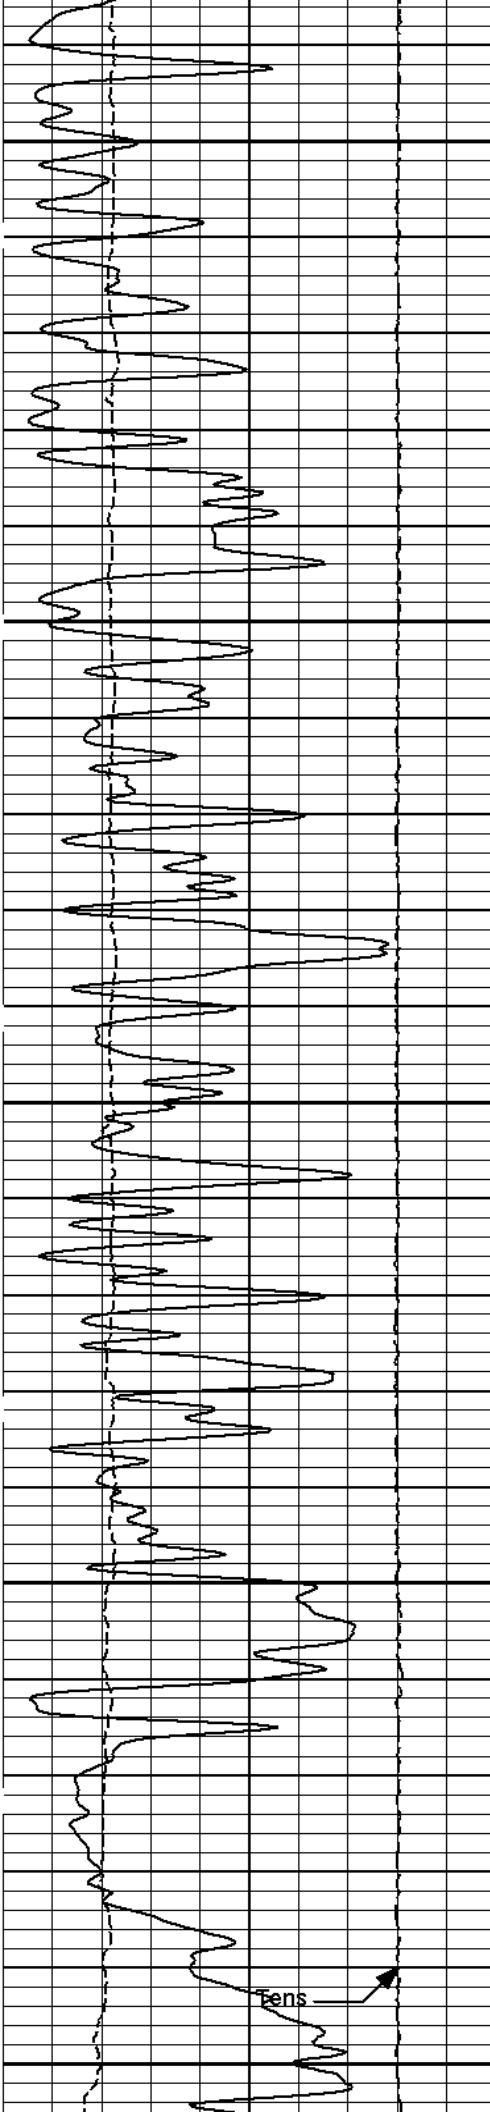


2500

2600

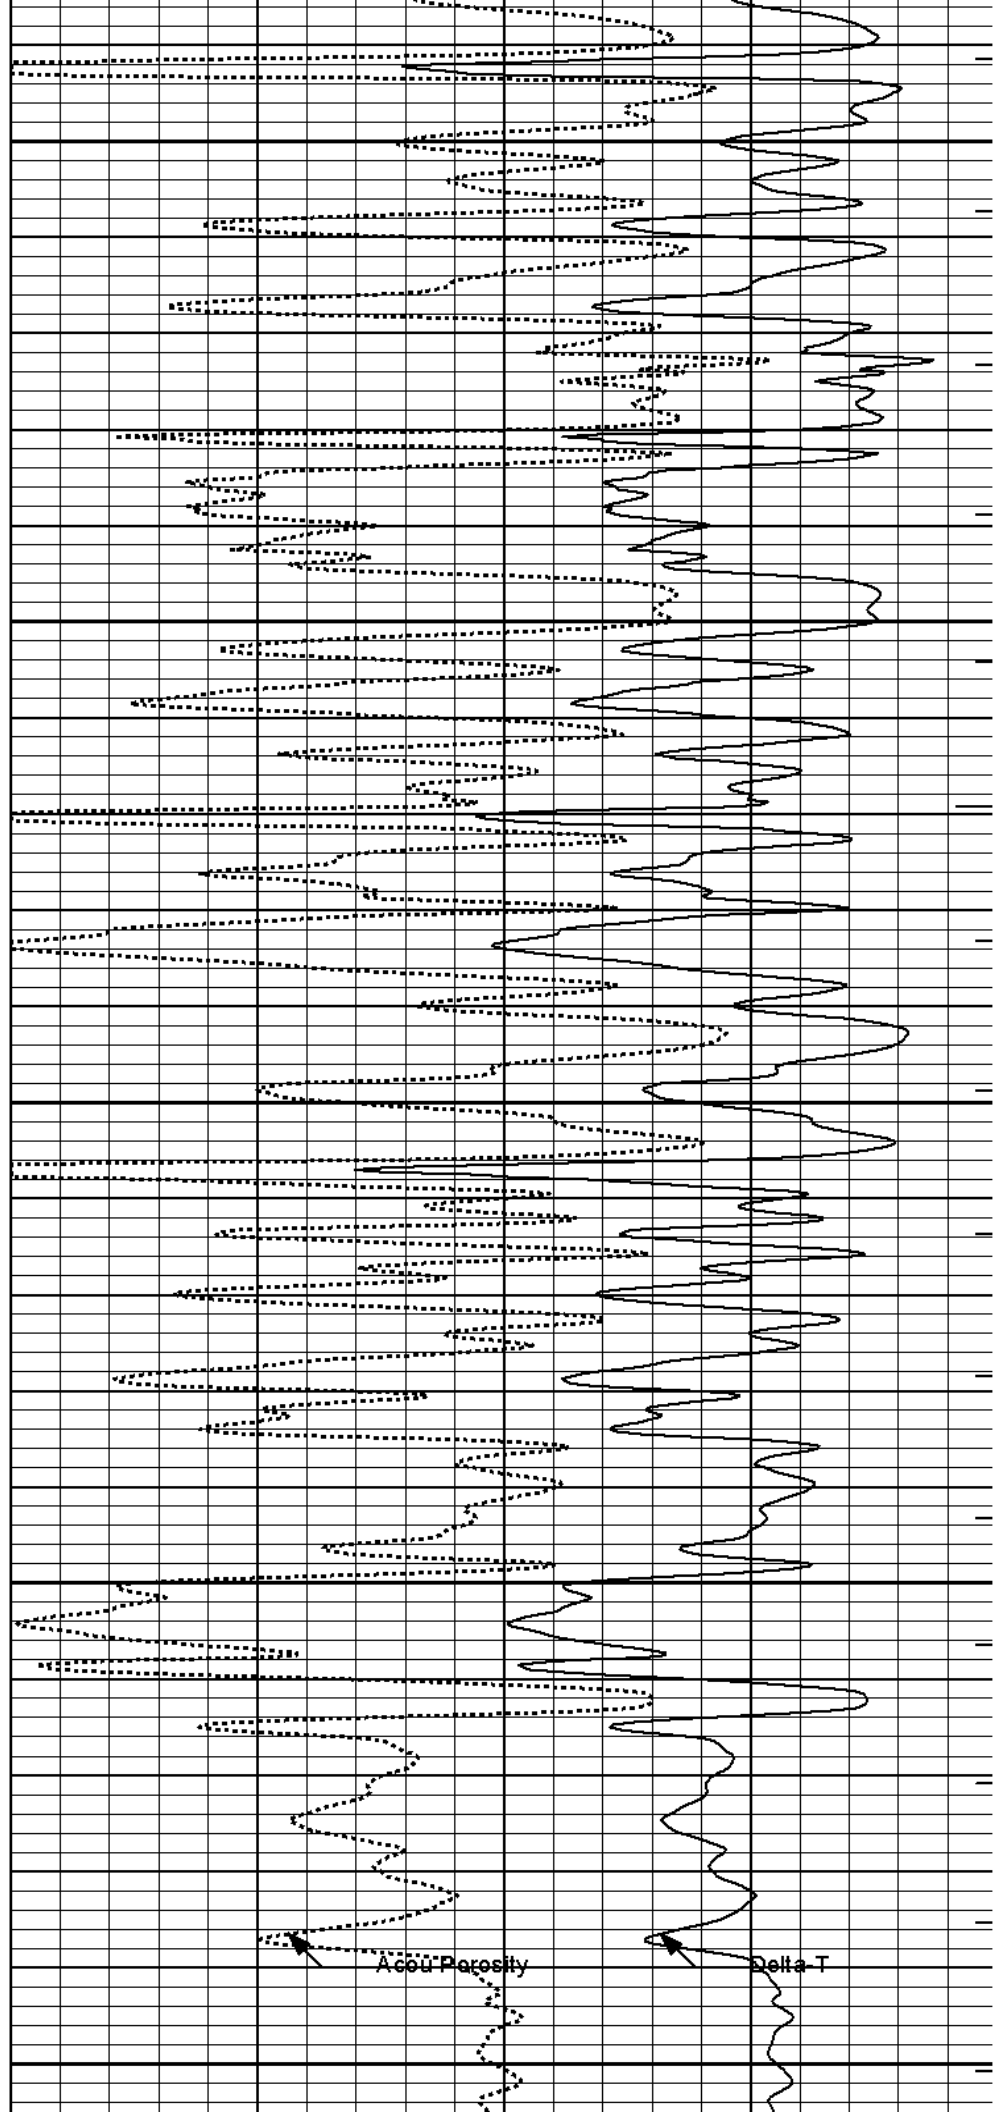


Acou Porosity

Delta T

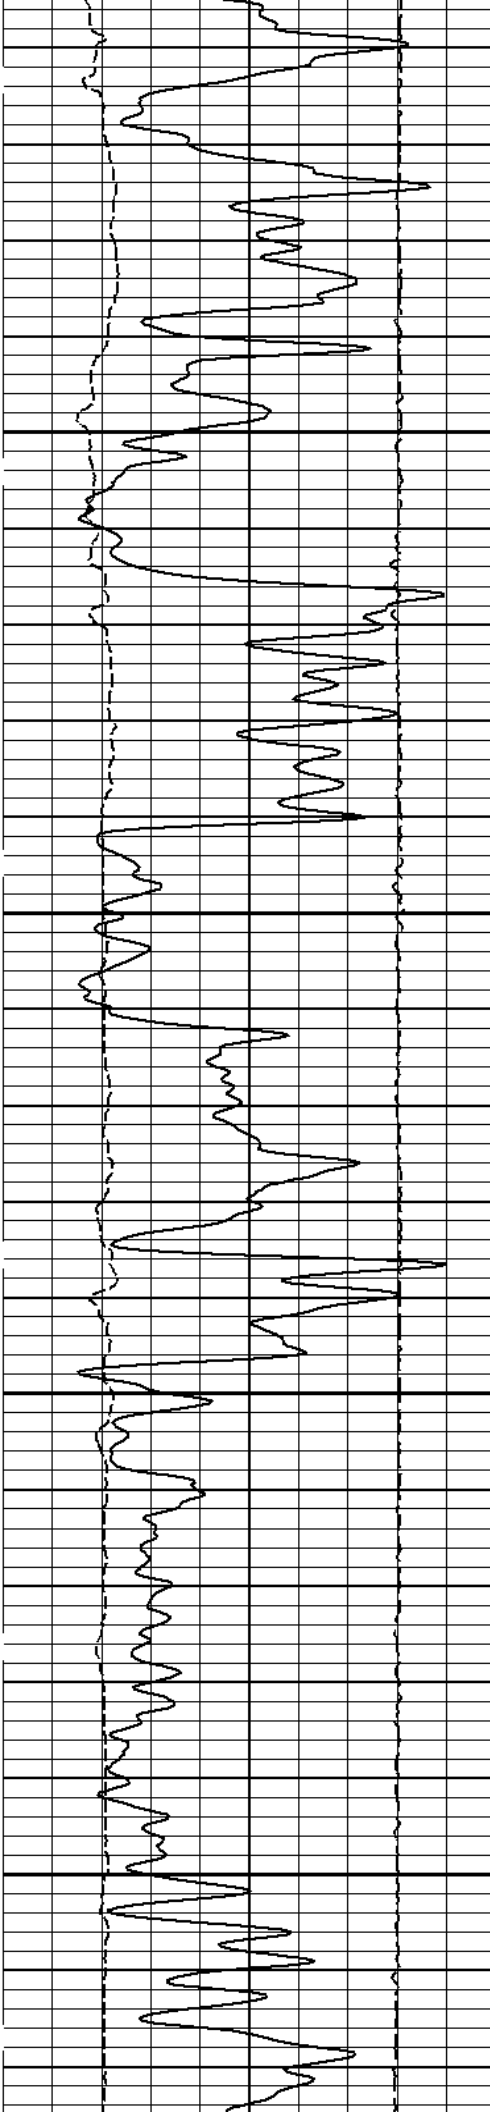

2700


2800

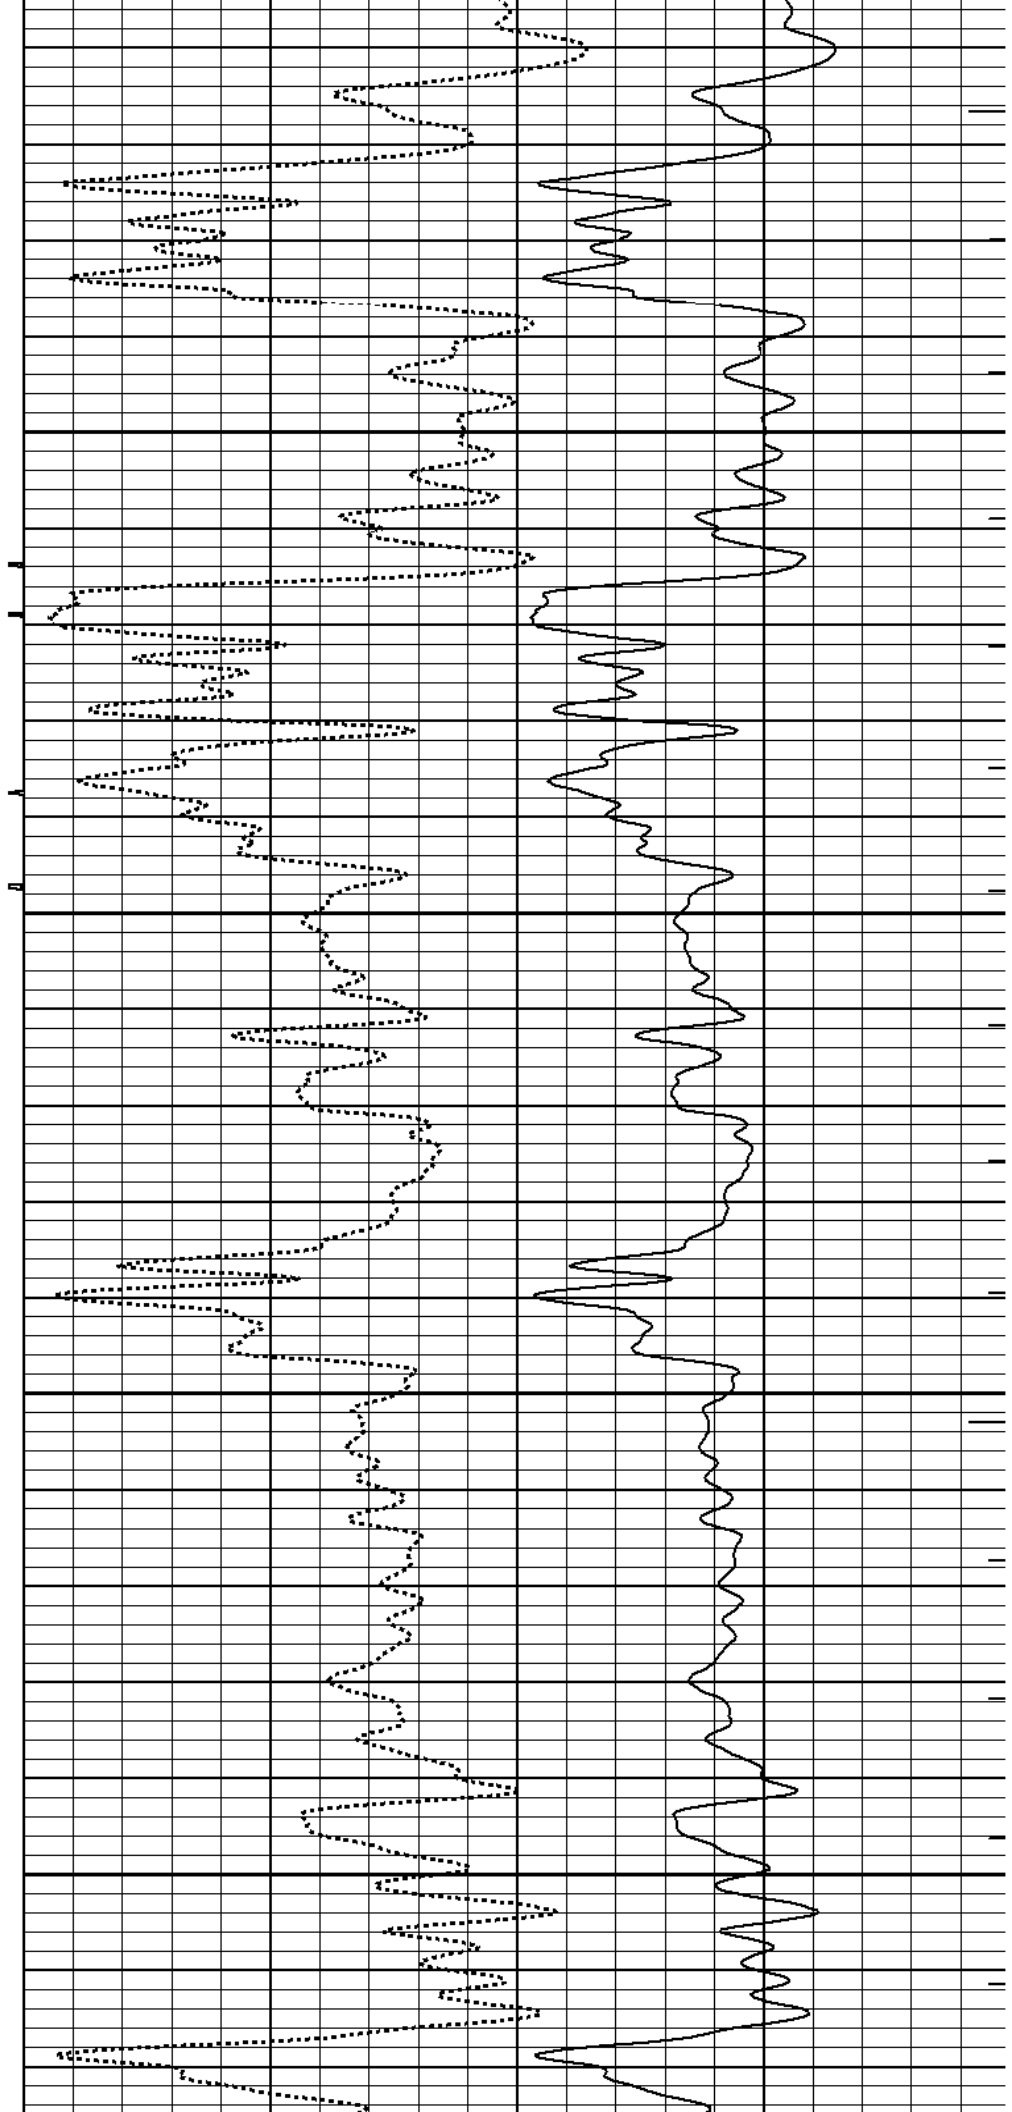



2900

3000

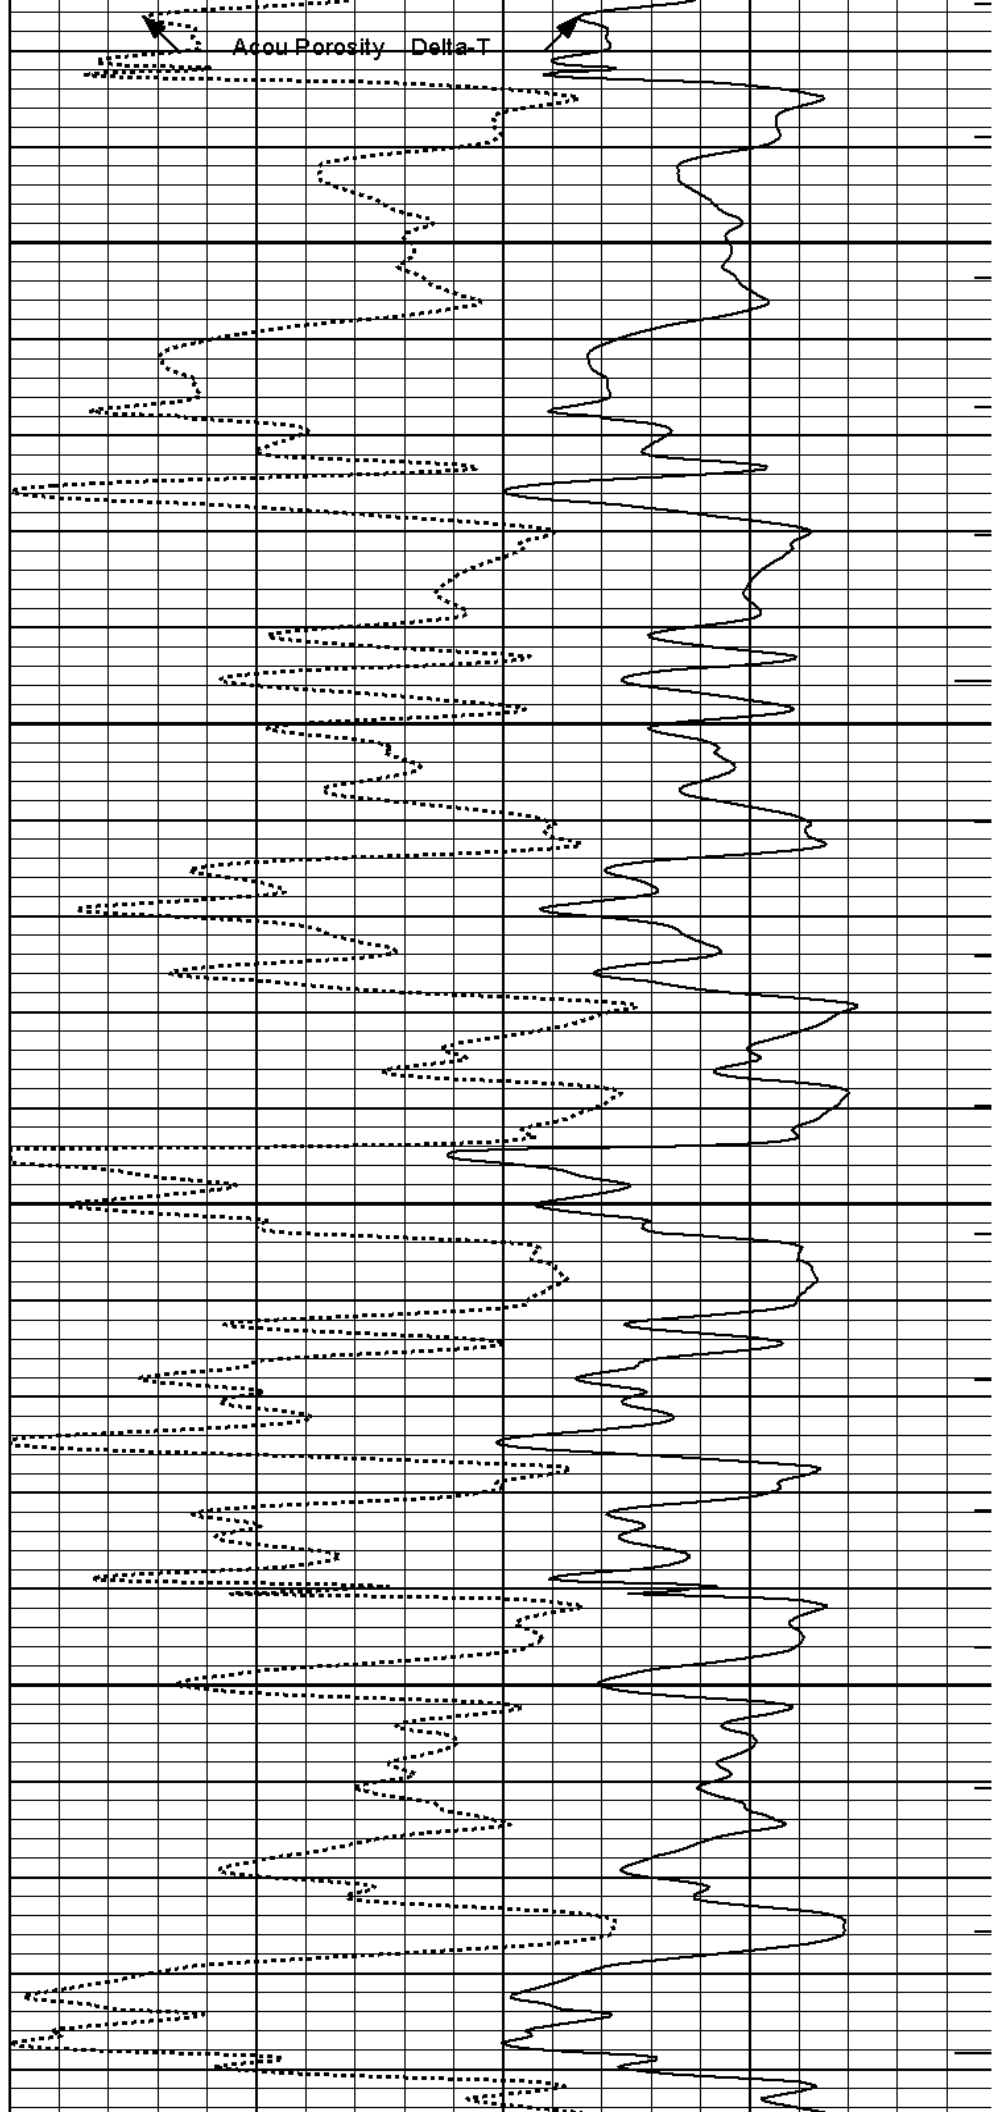





3100

3200


3300

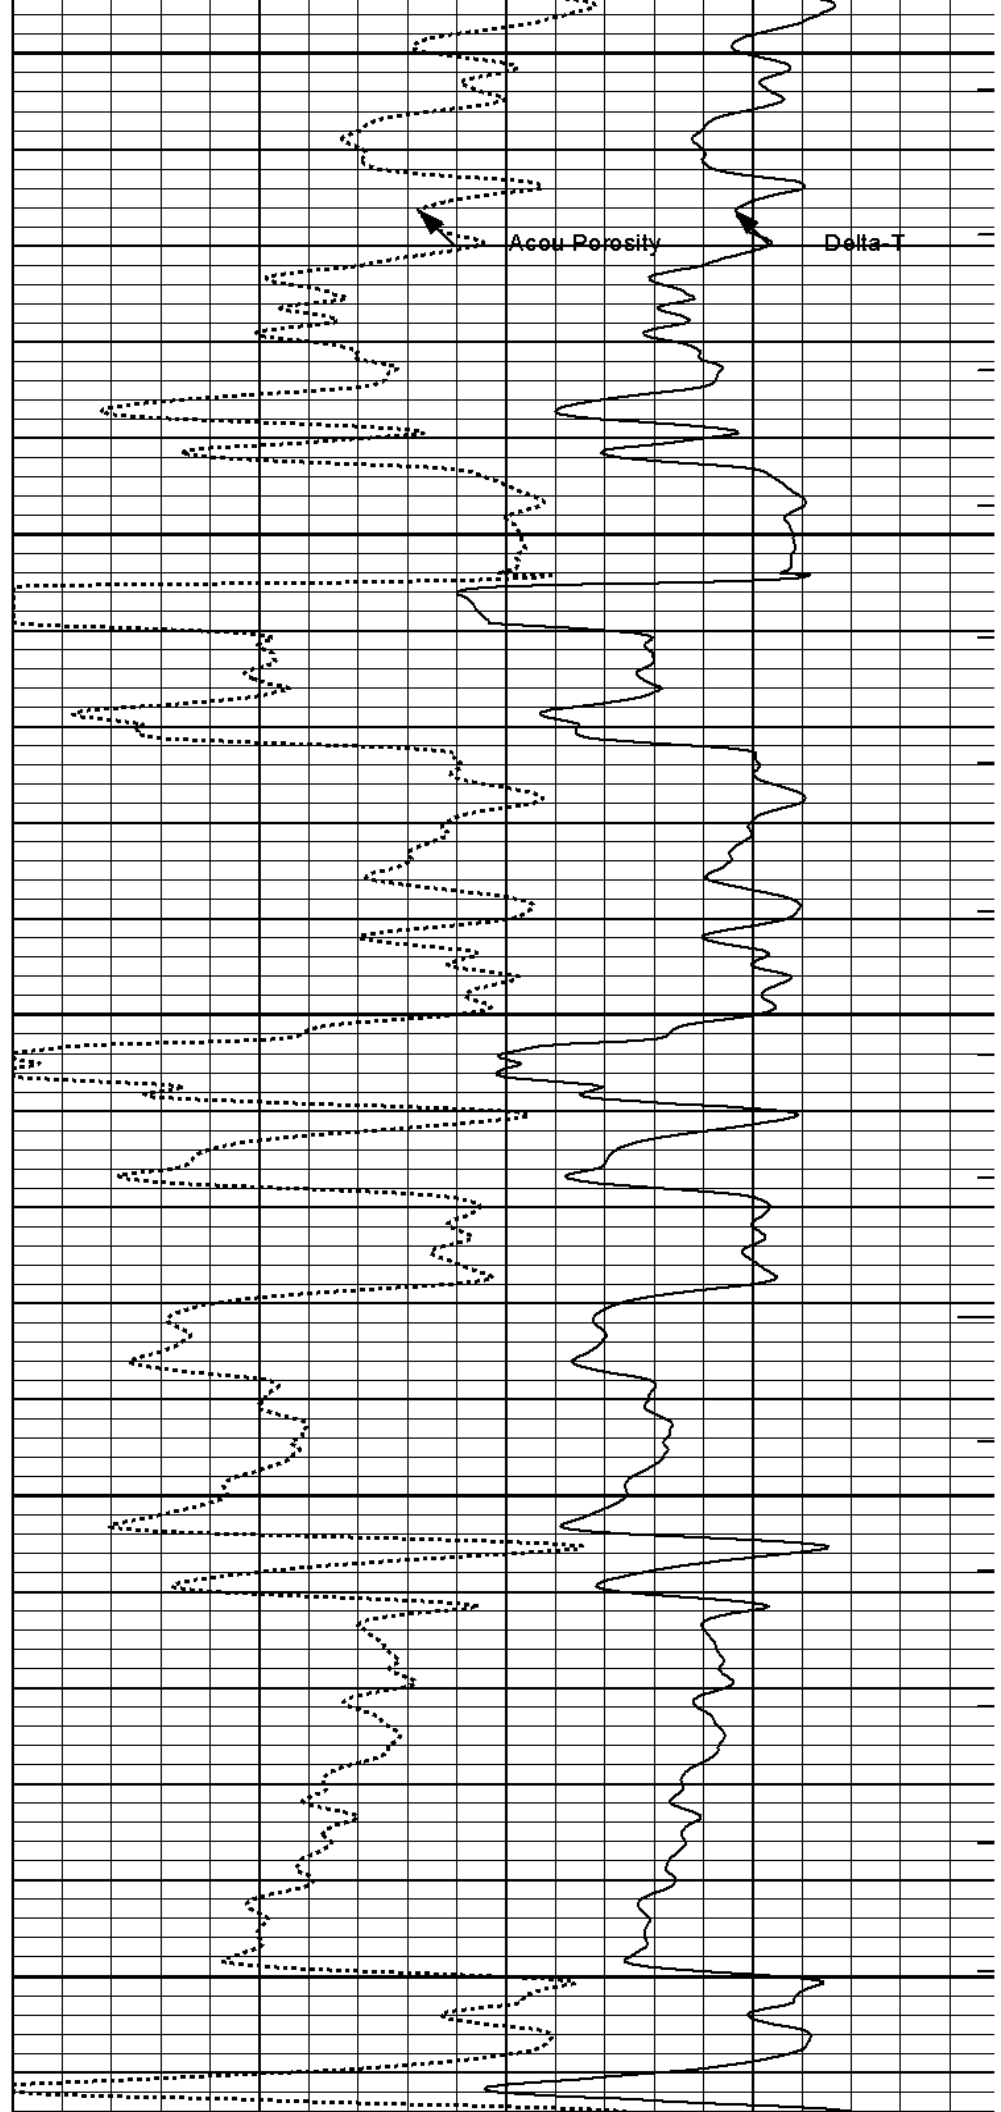


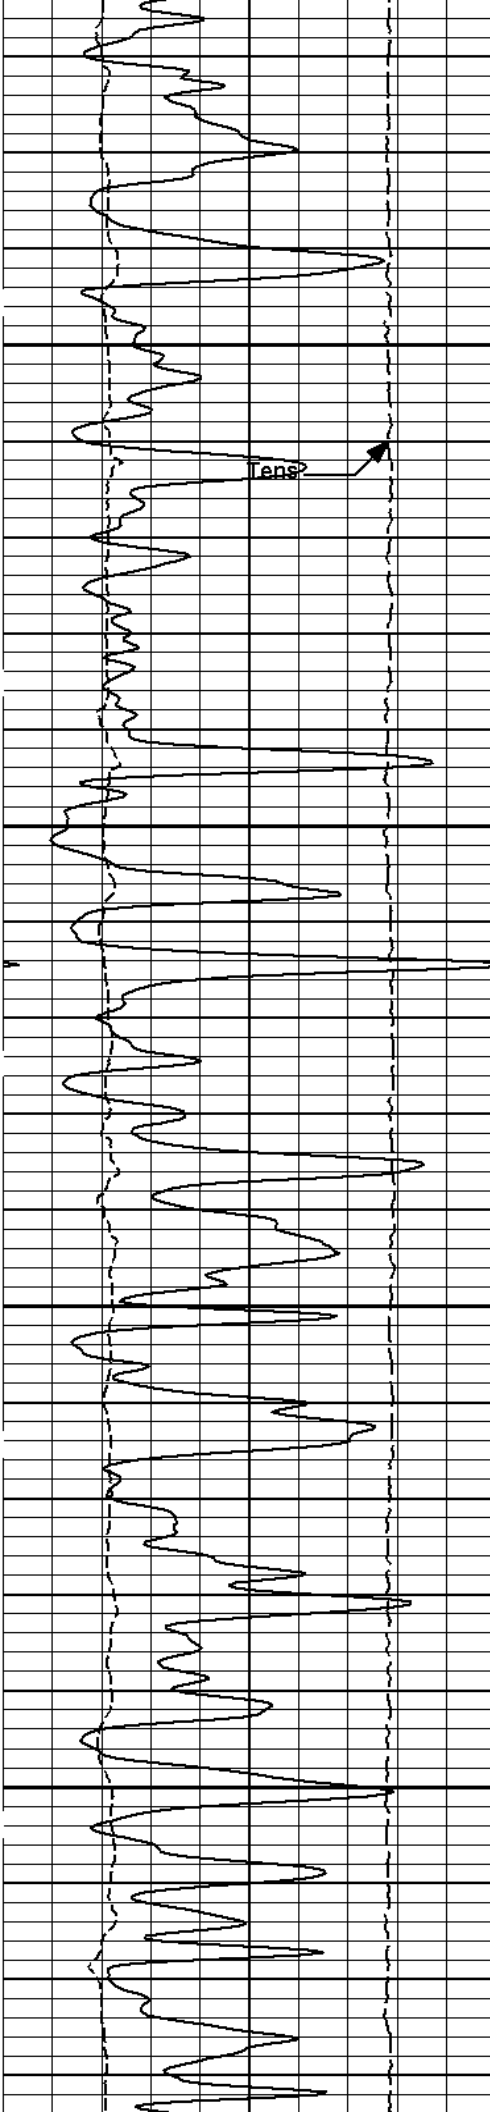

3400


3500

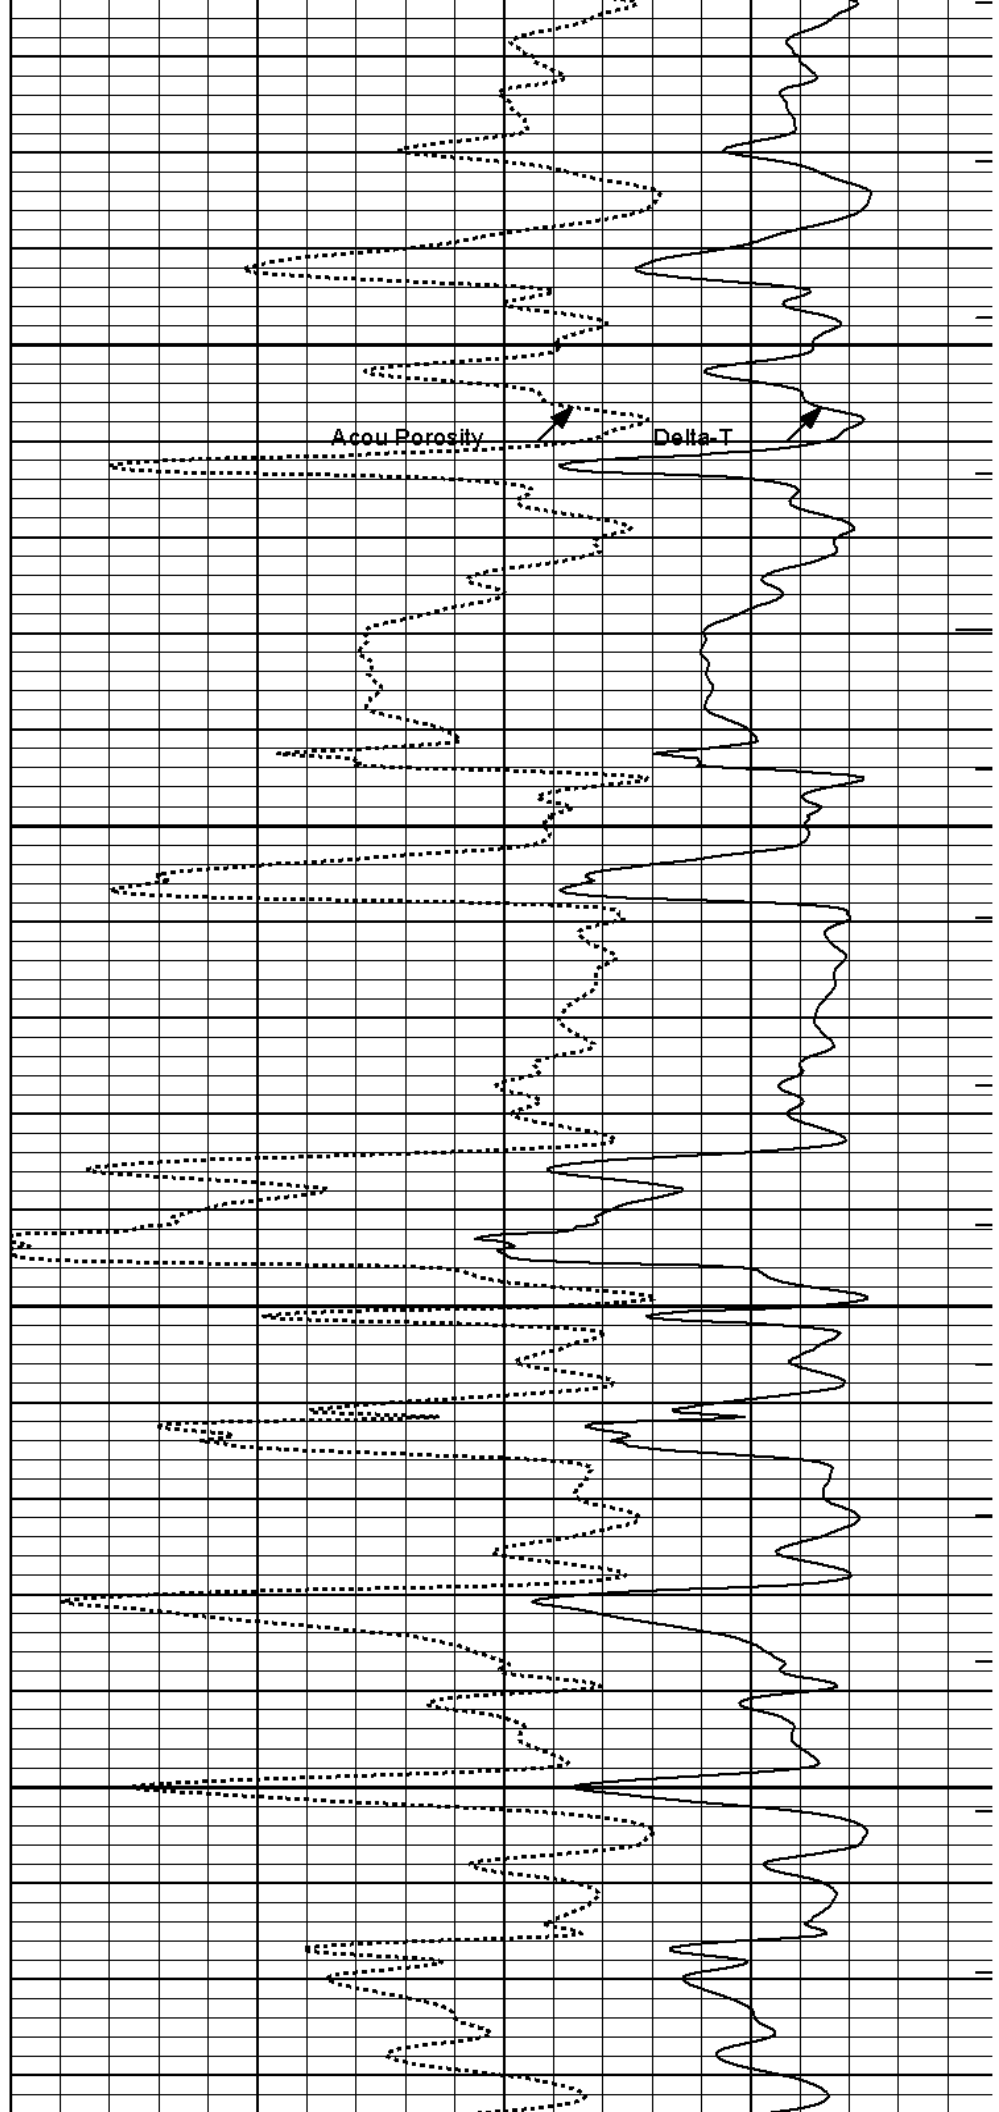


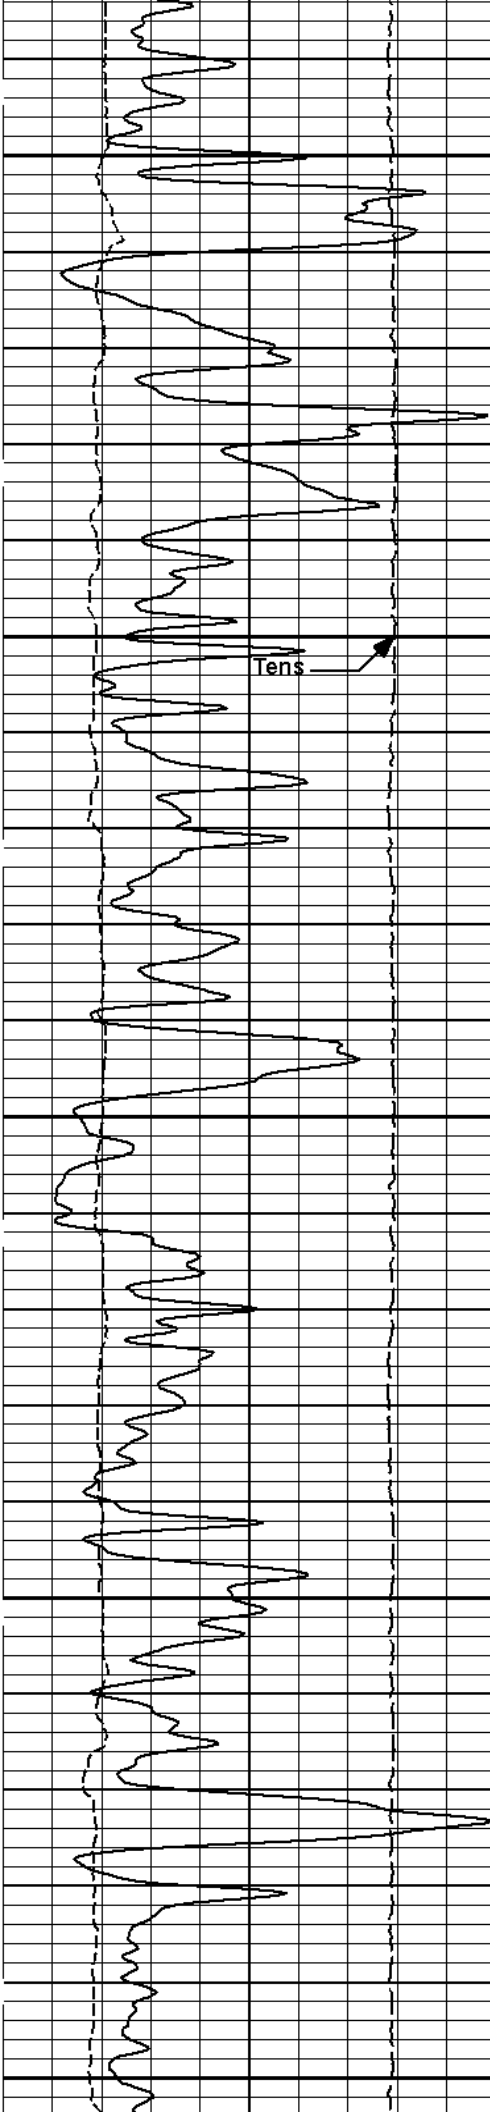

3600


3700

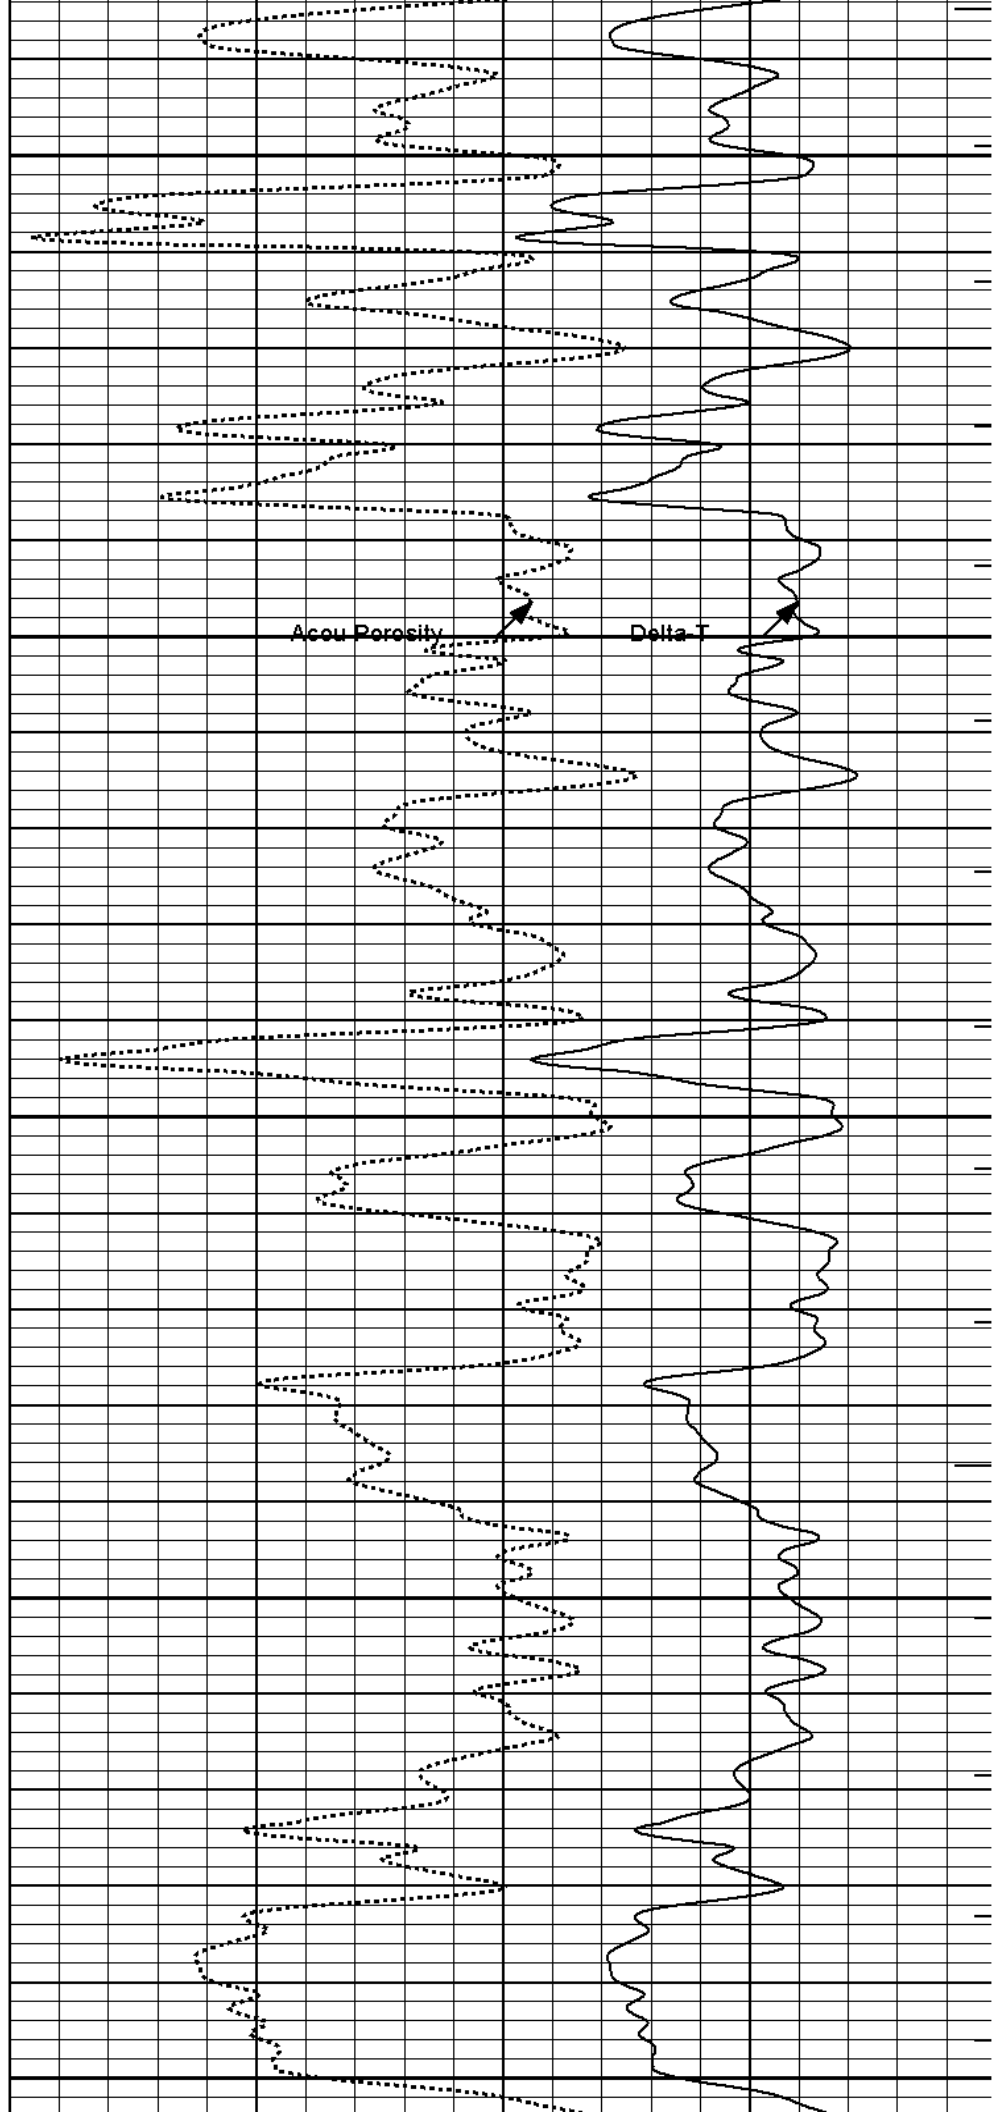


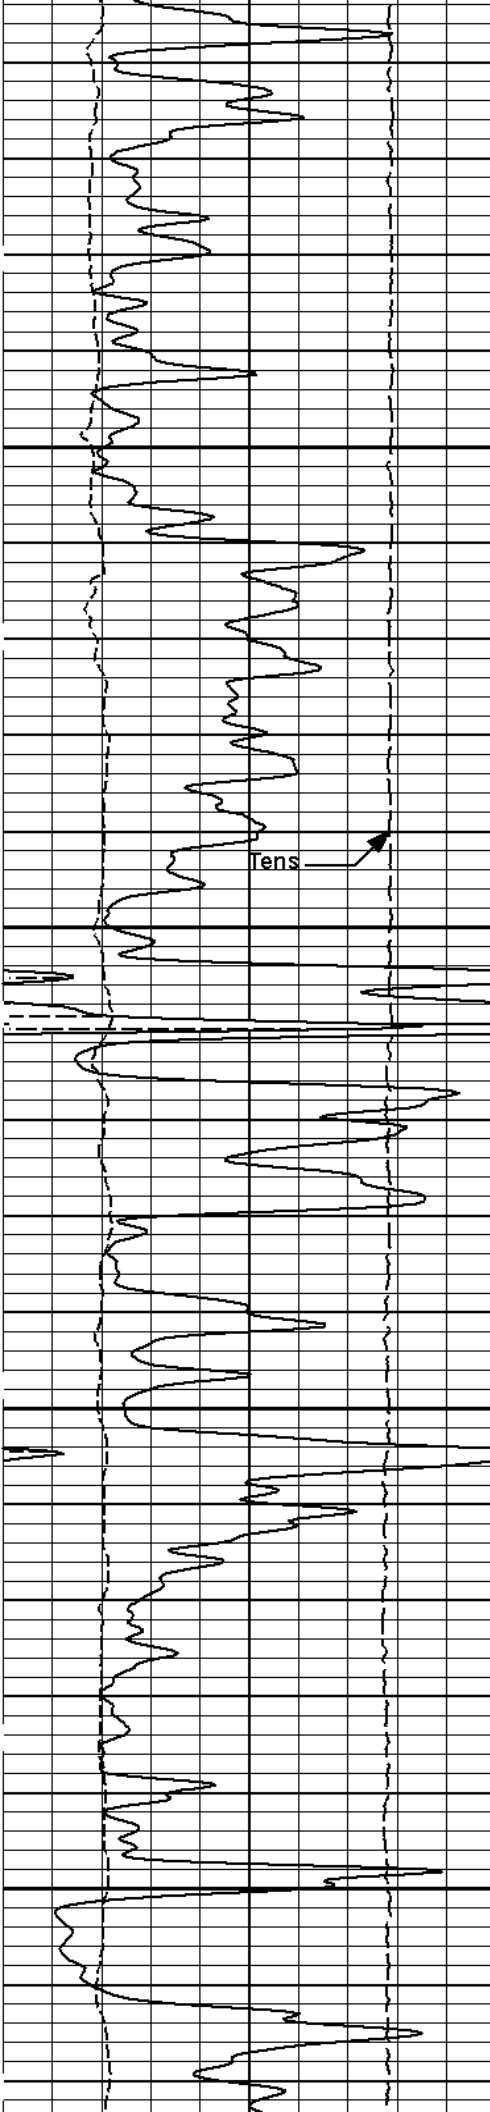

3800


3900

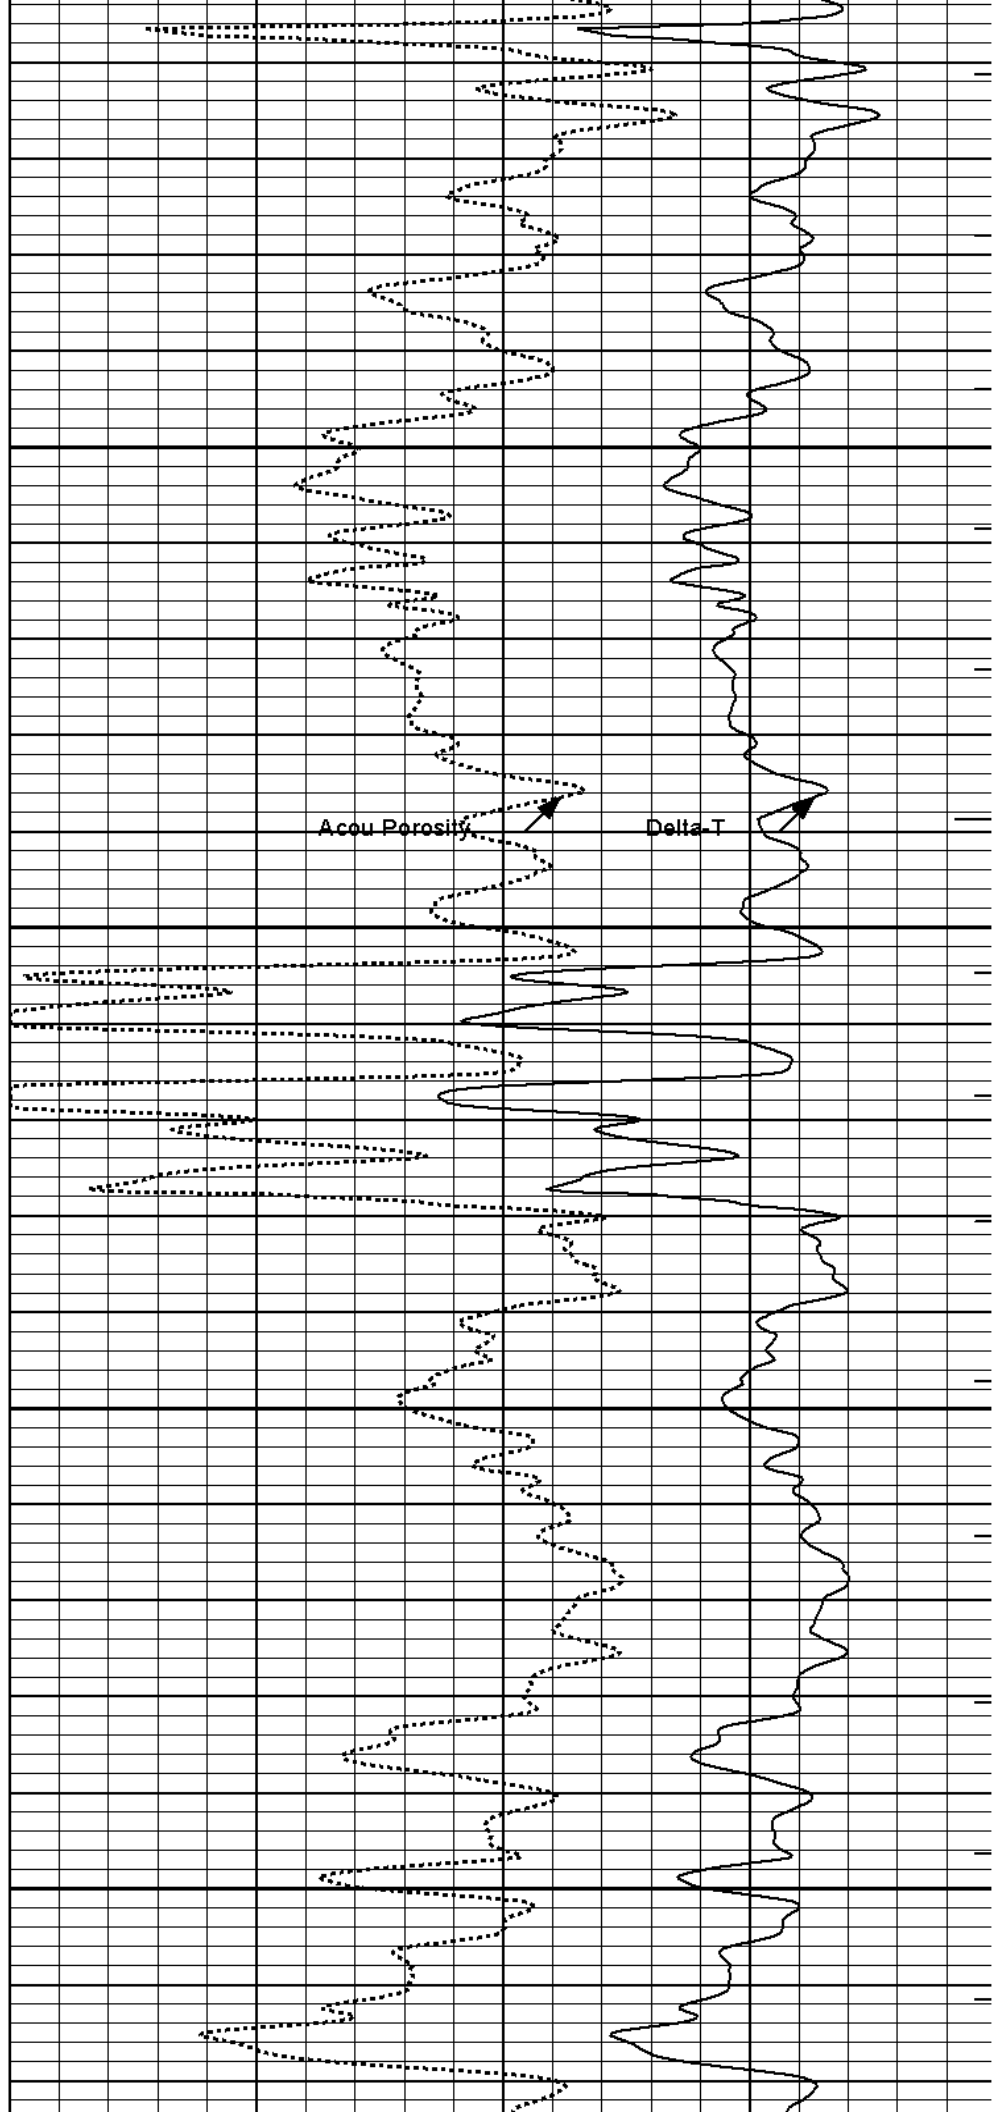

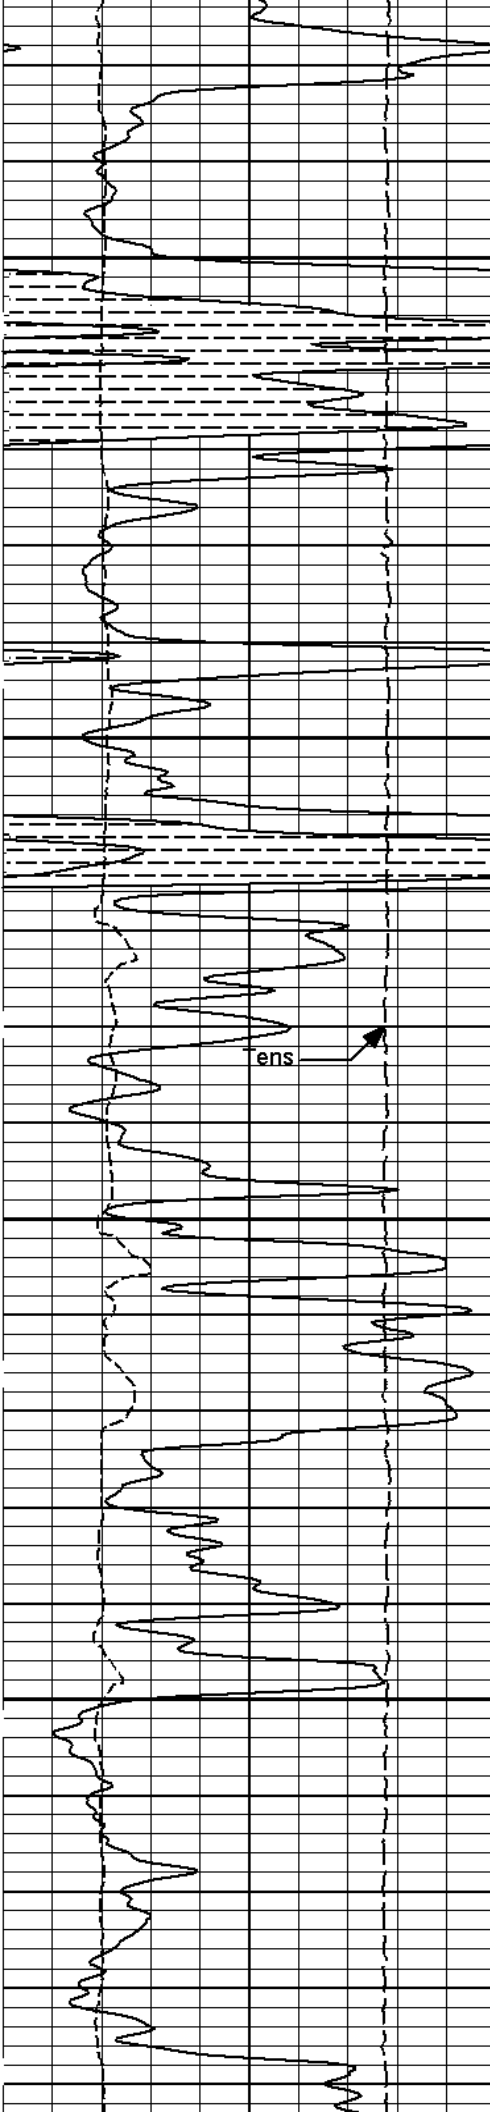


4000

4100

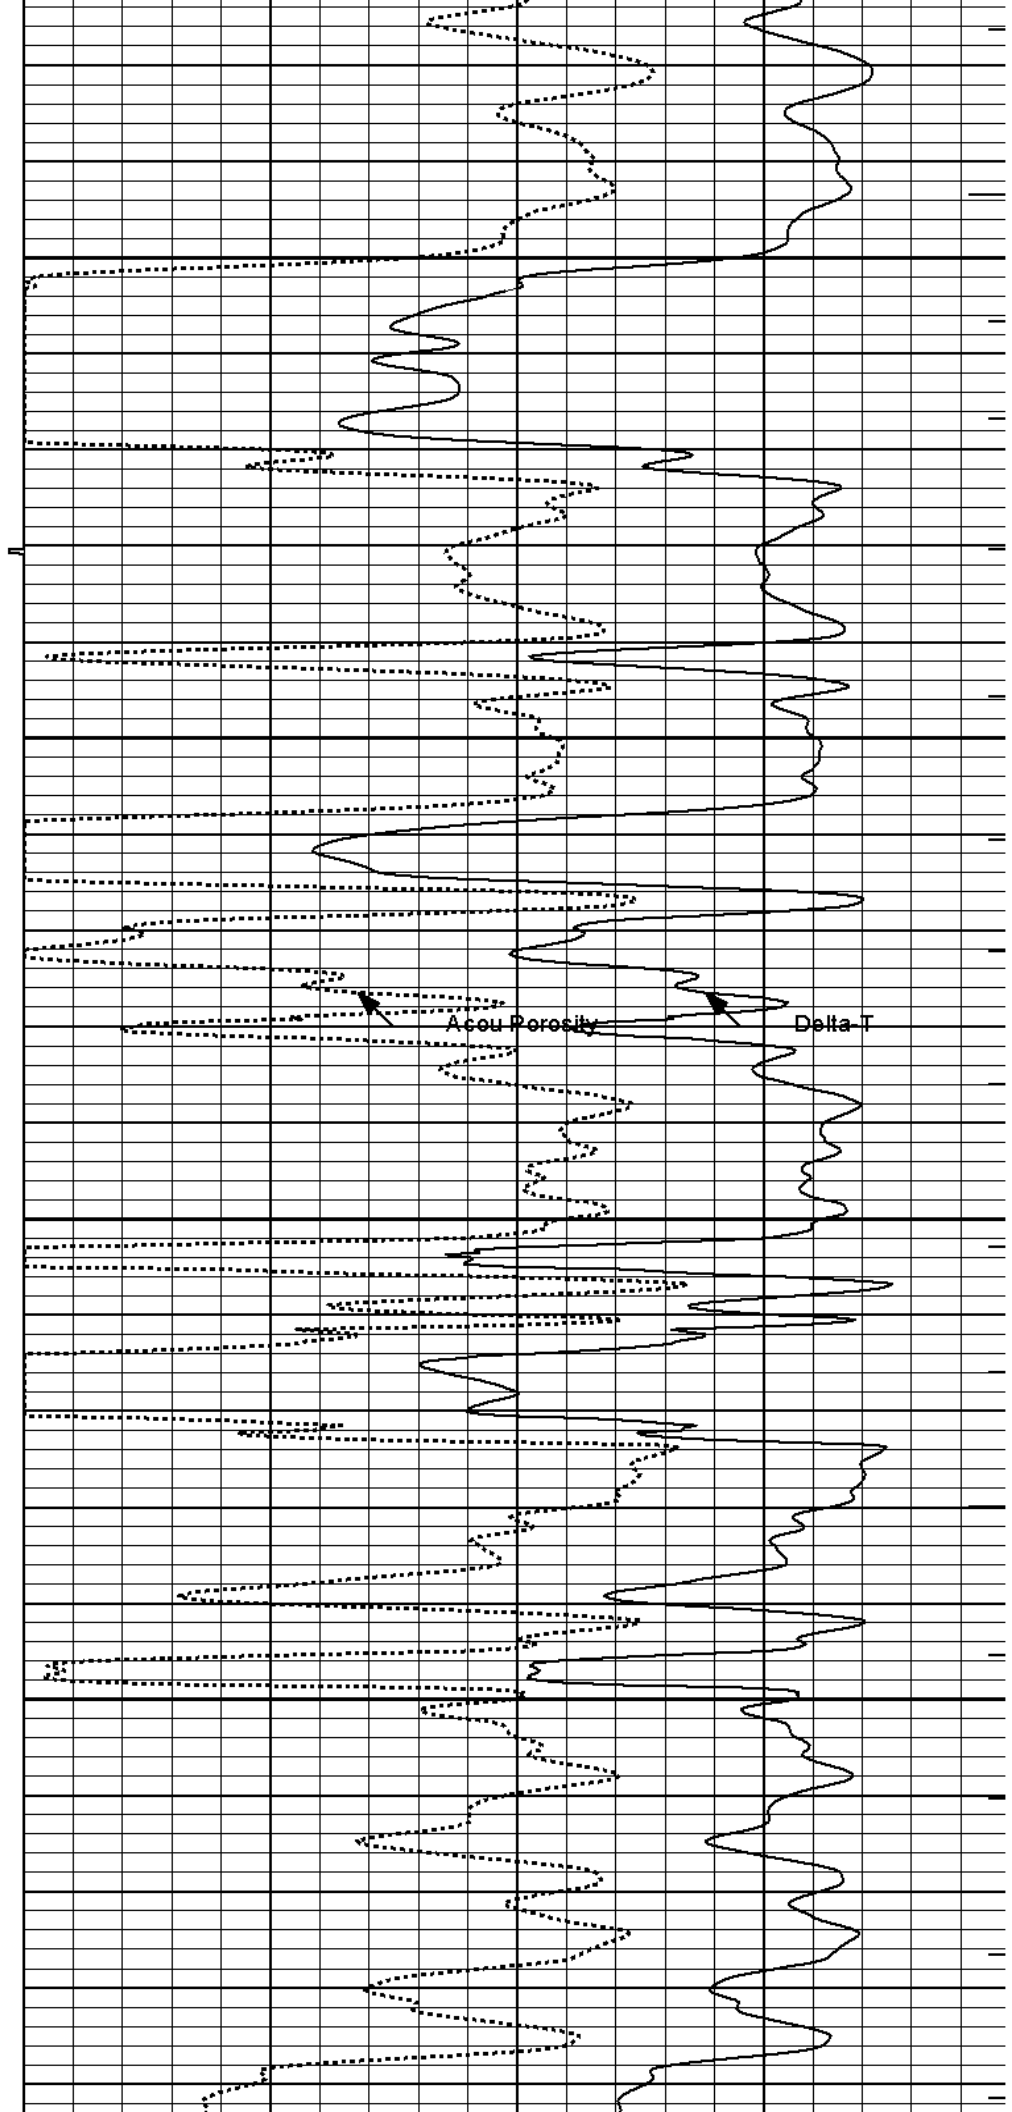

Acou Porosity

Delta T

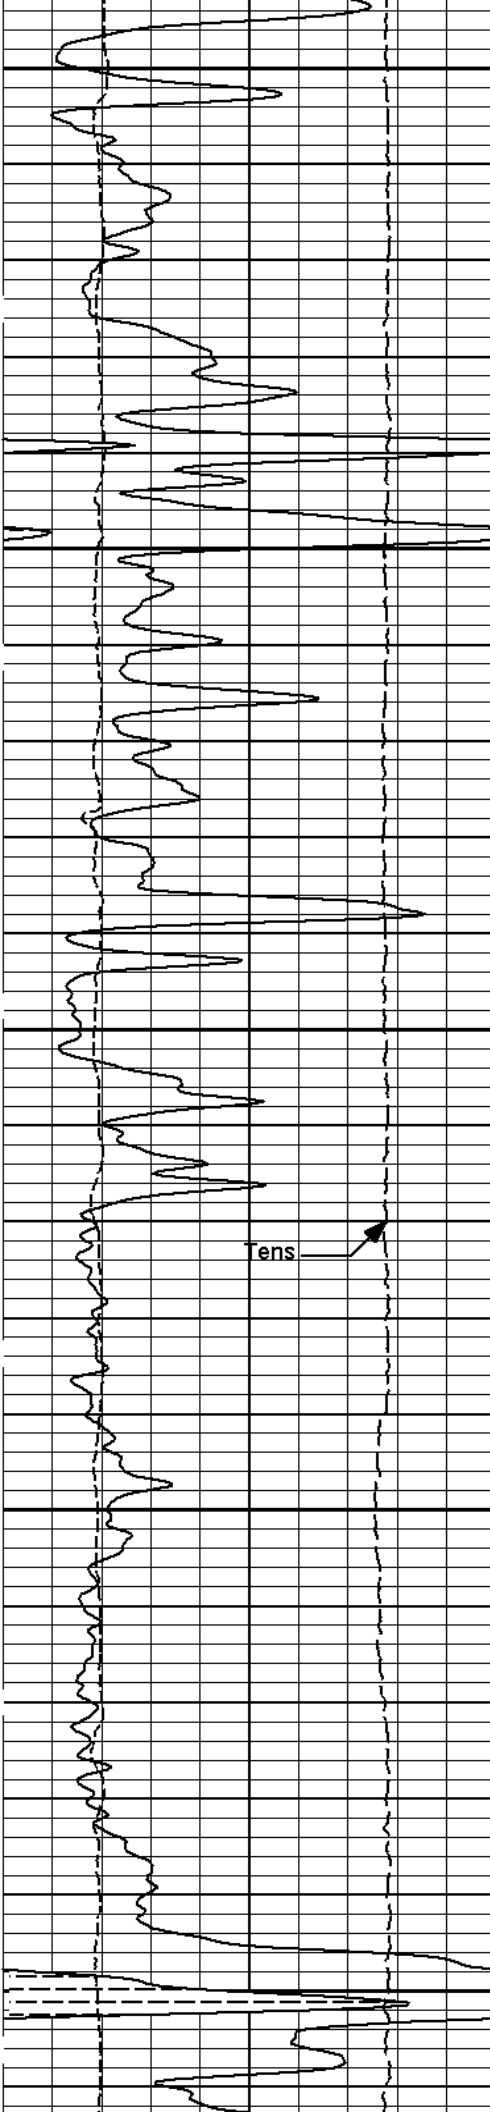


4200

4300

4400

Tens

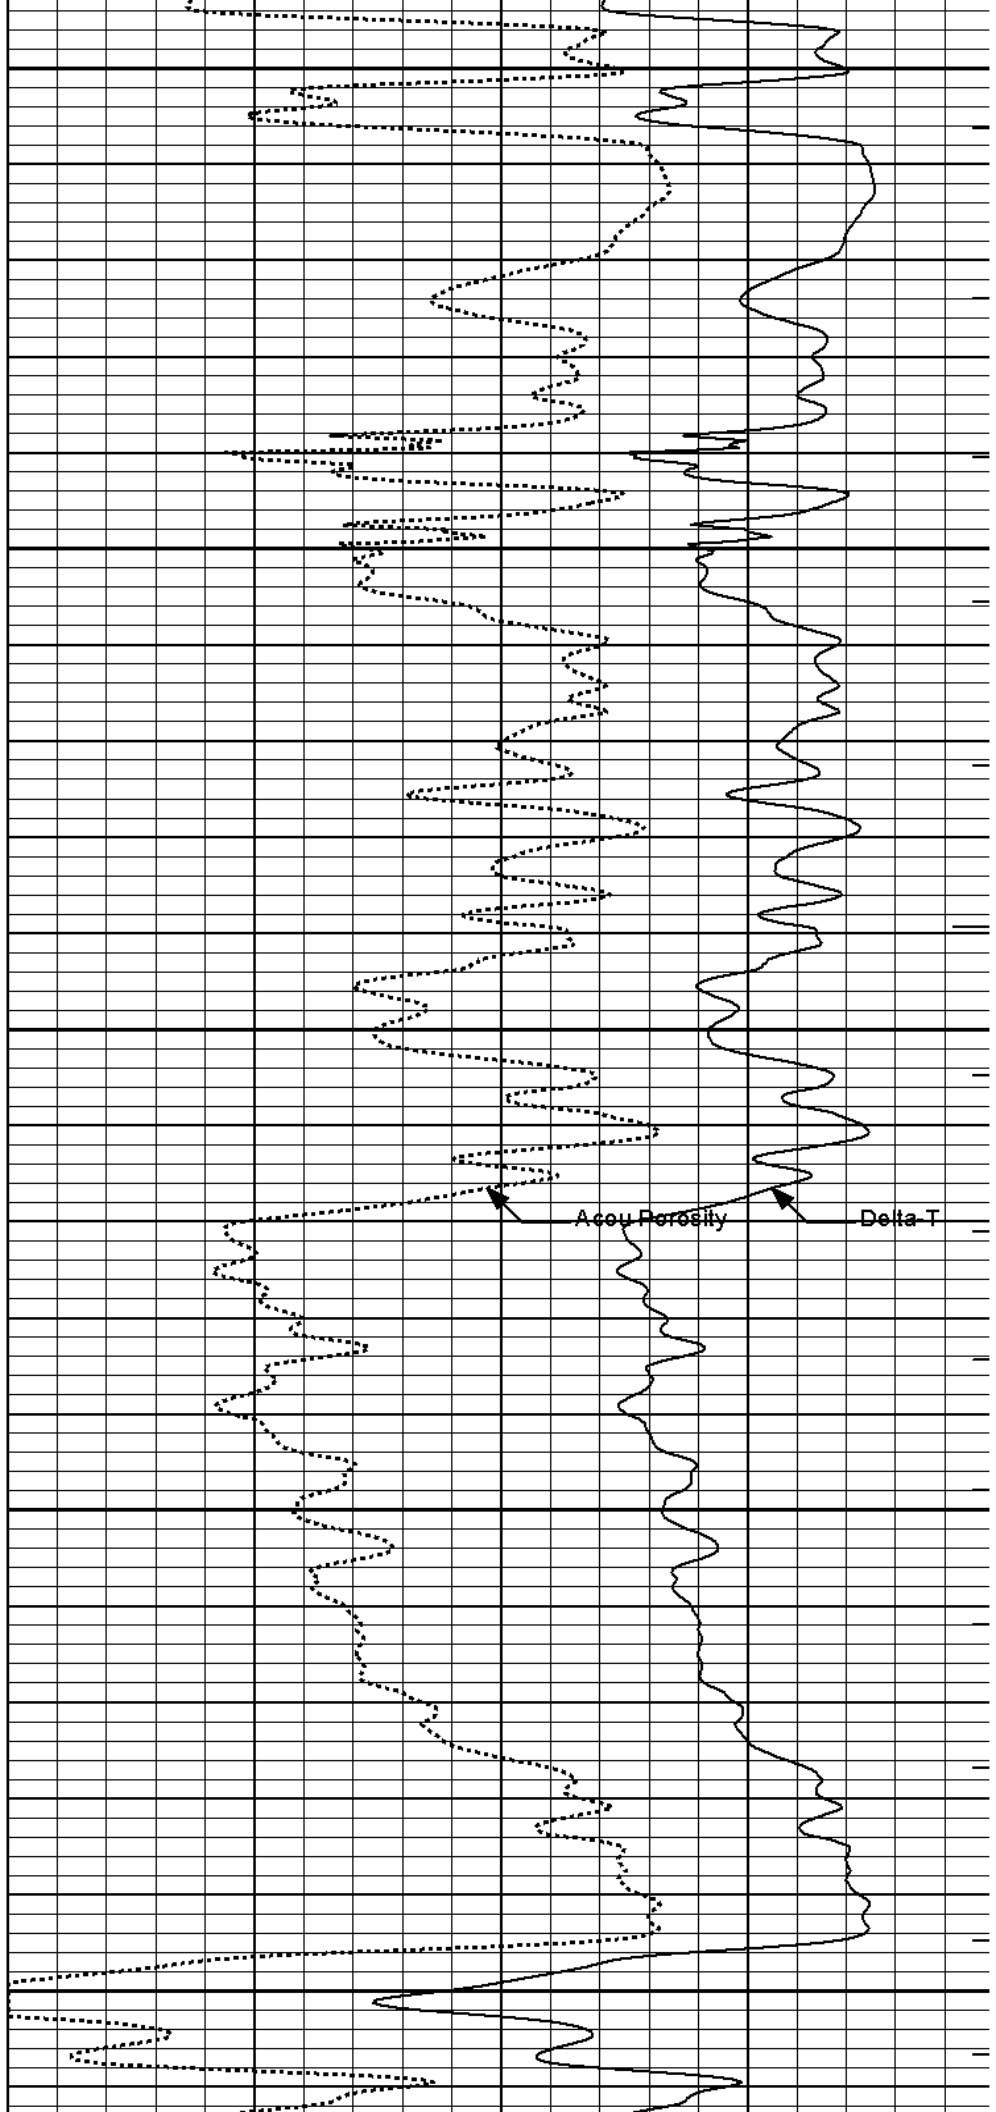

Acou Porosity


Delta-T



4500

Tens

4600

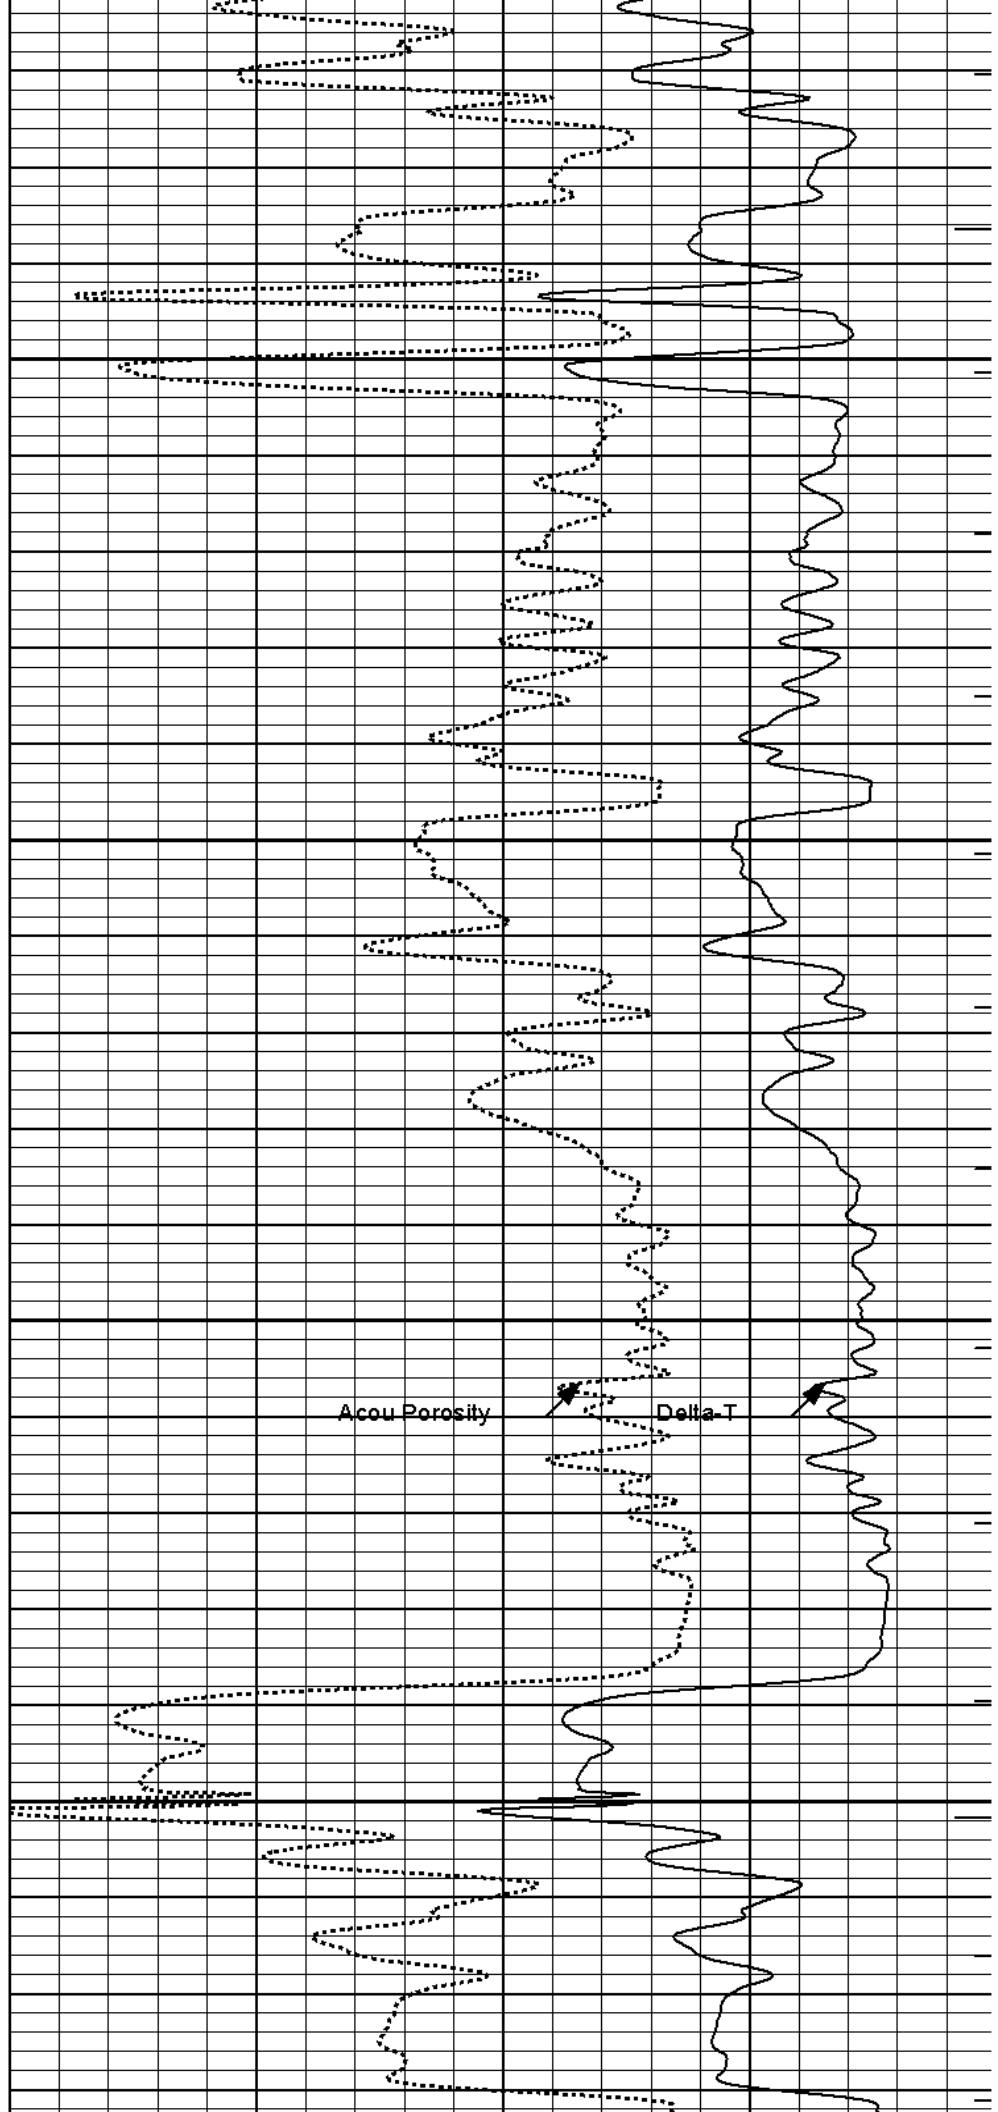

Acou Porosity


Delta-T



4700


4800

Tens

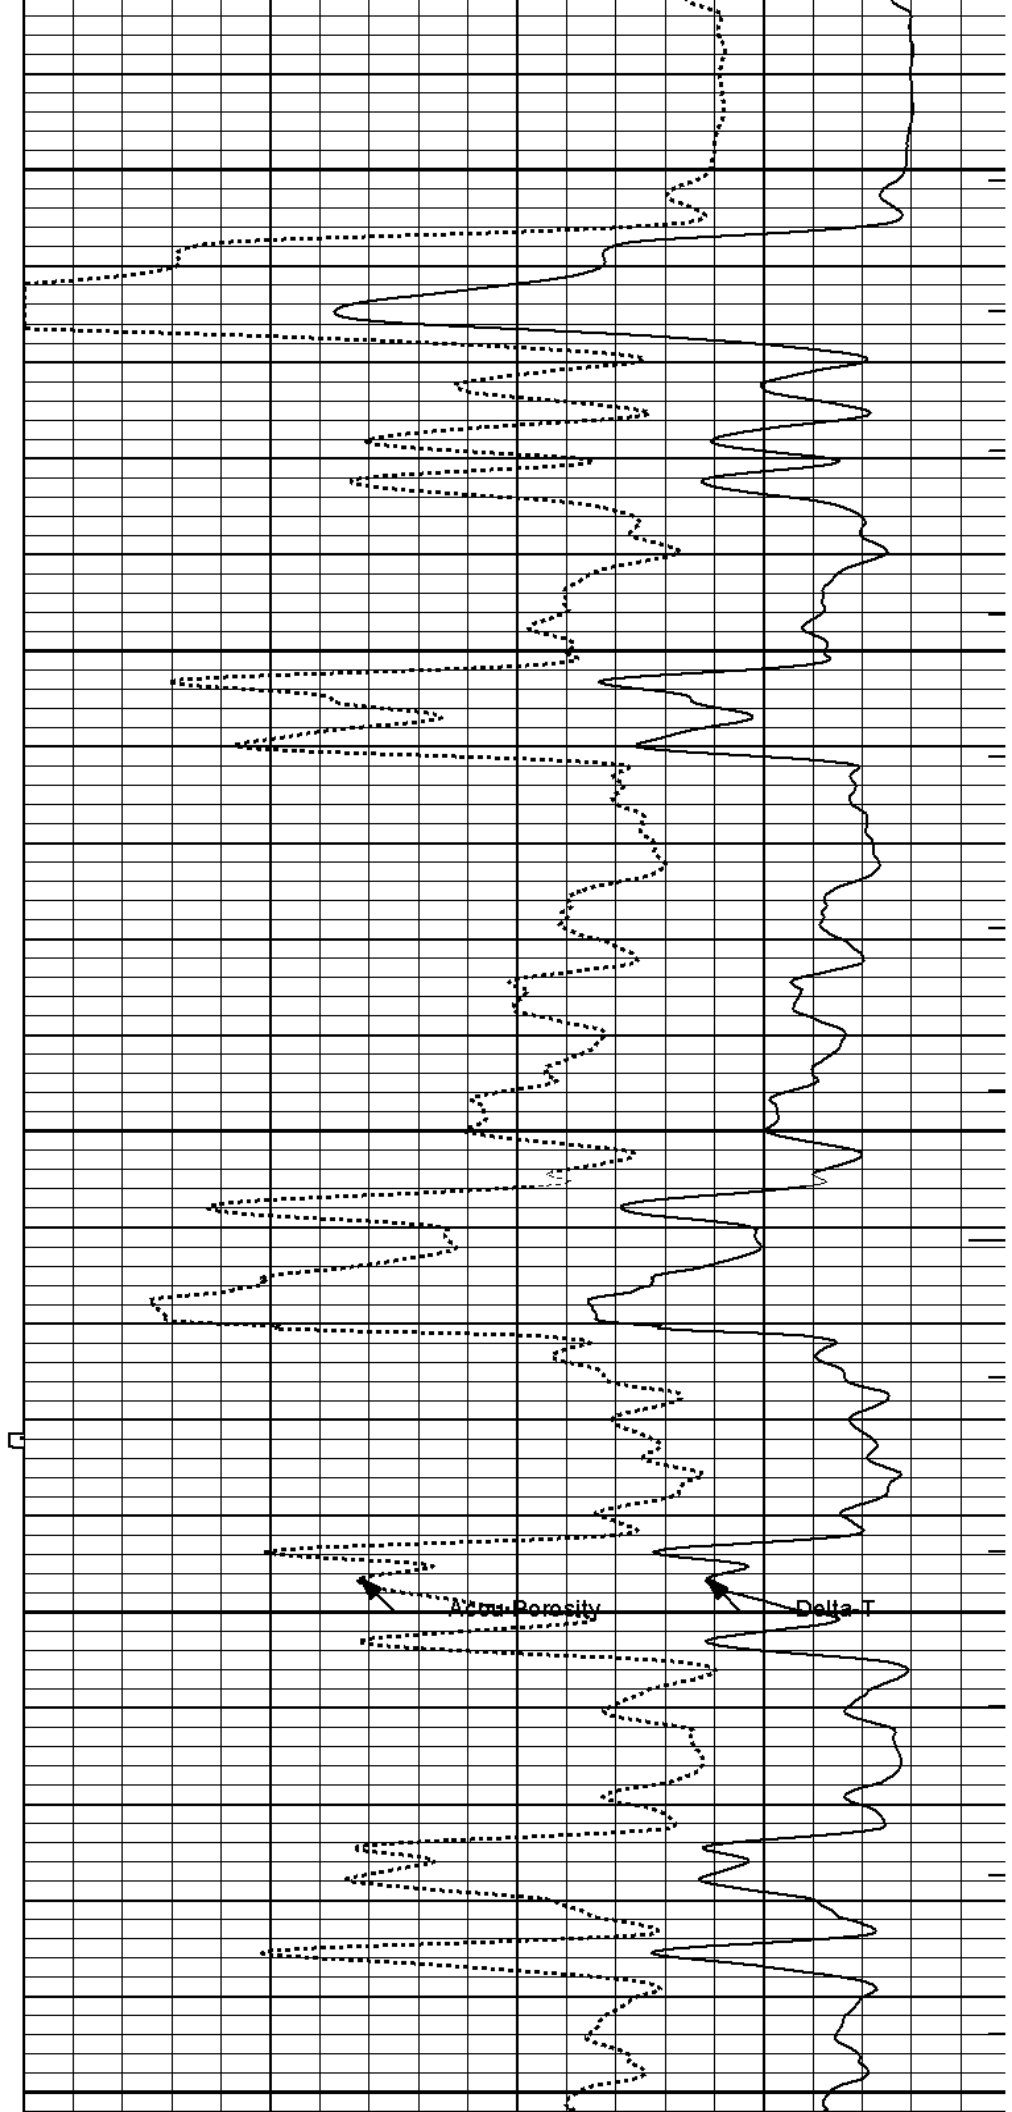

Acoustic Porosity


Delta T

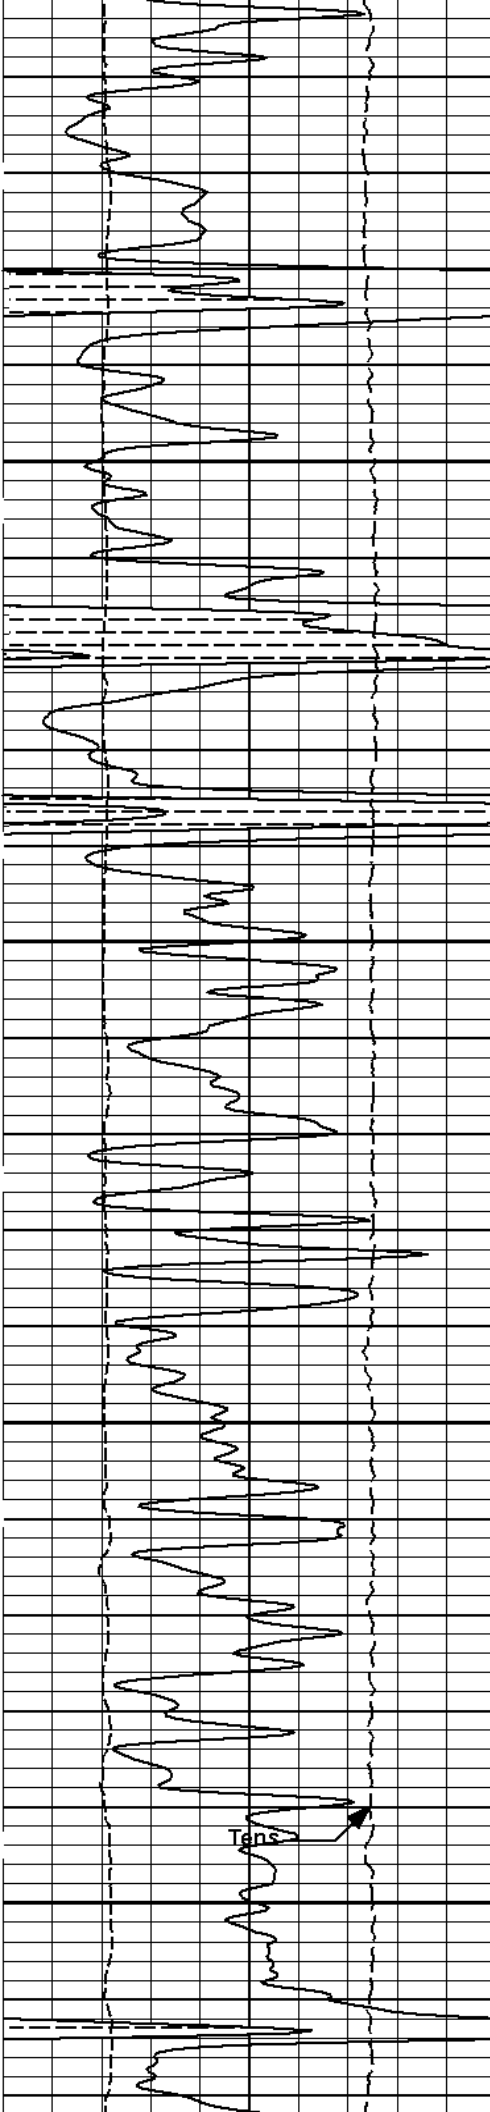

4900


5000

Tens

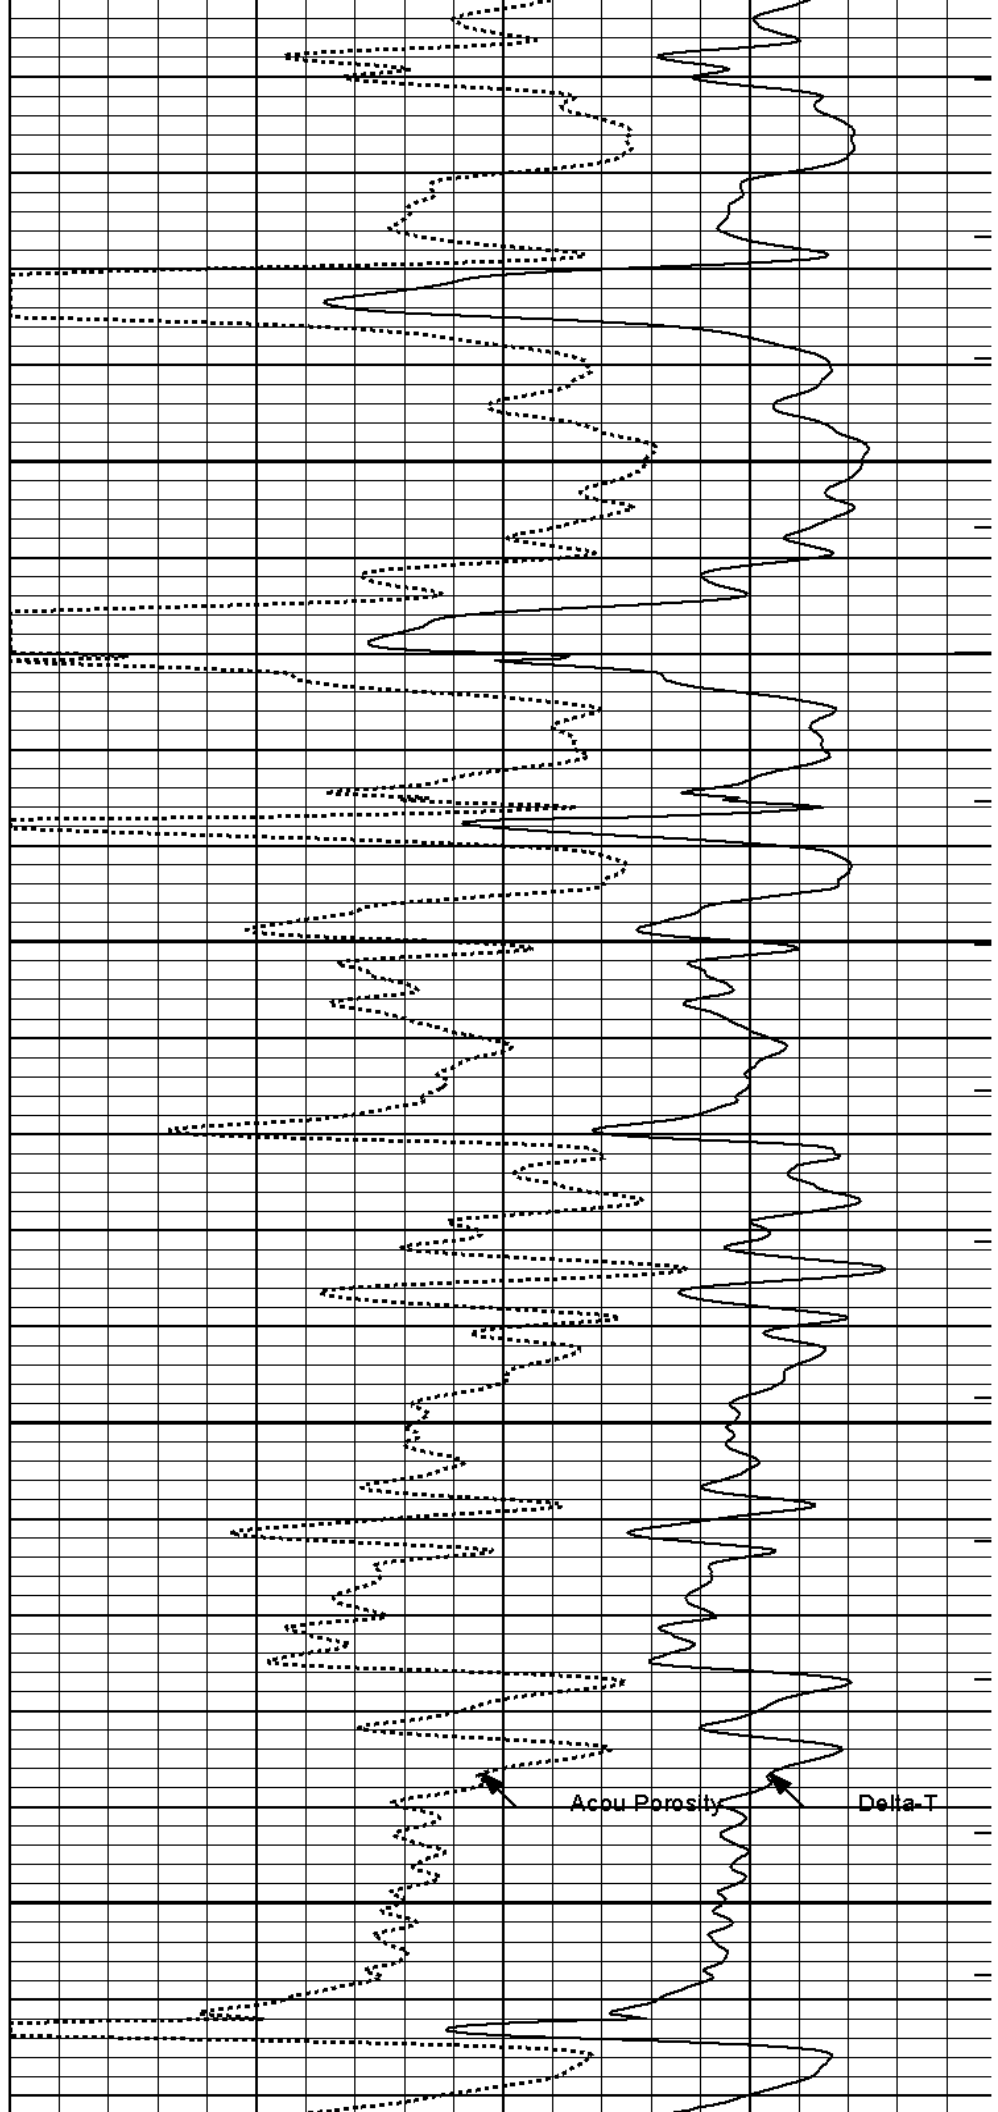


Acou Porosity

Delta-T

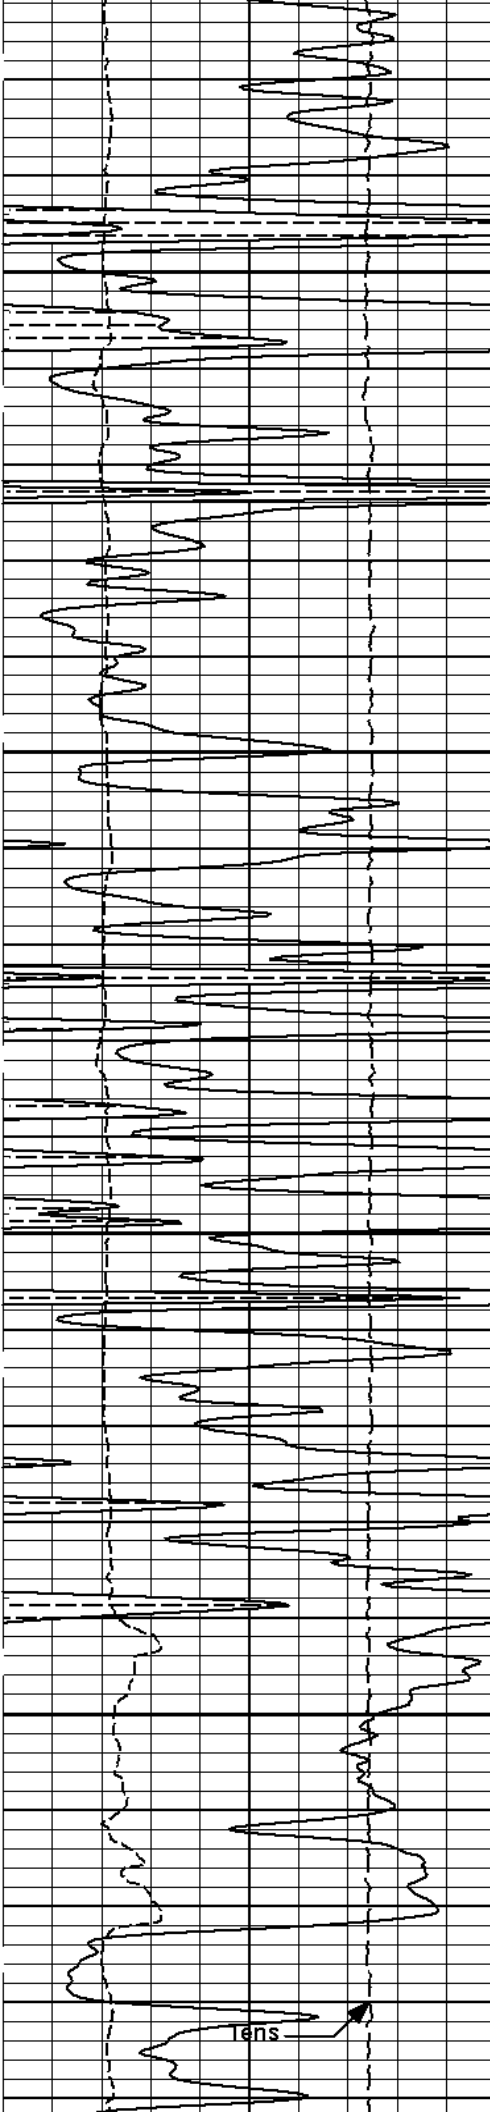

5100

5200

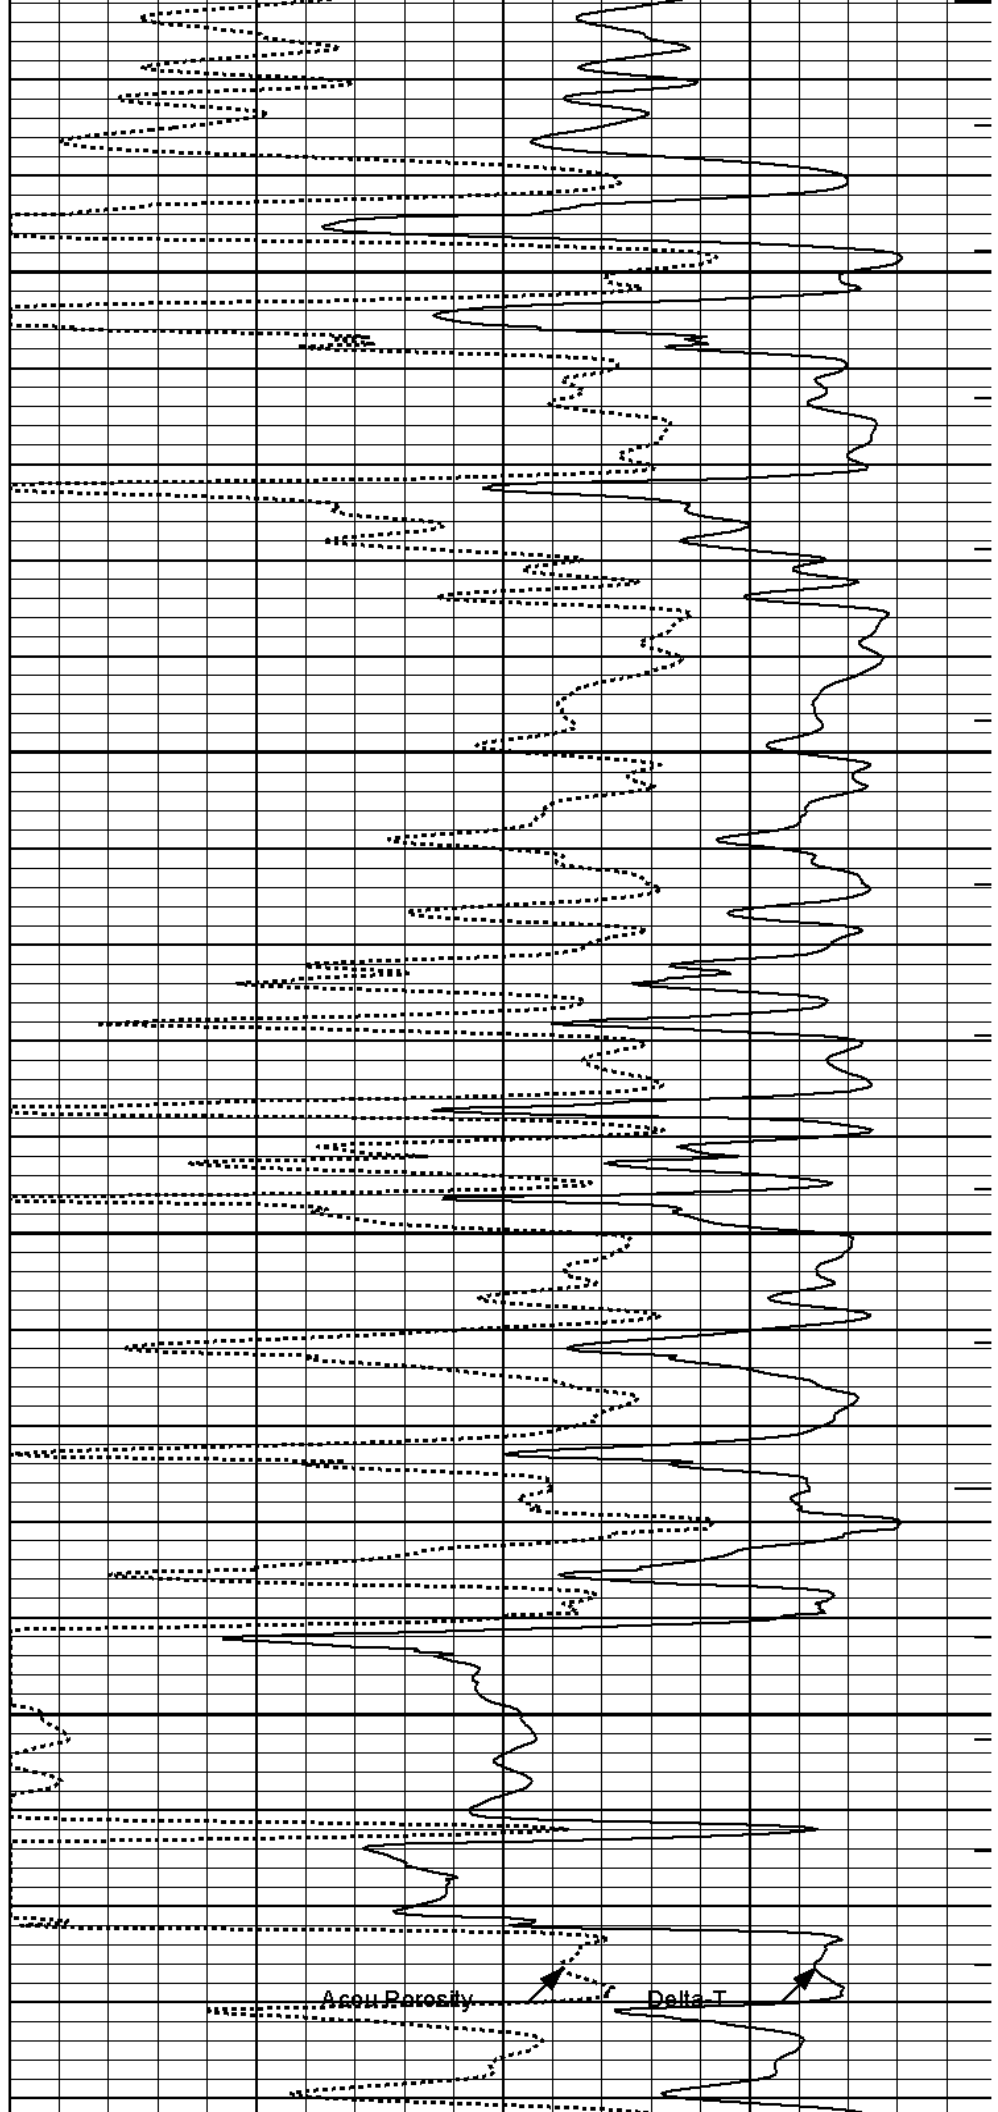





5300

5400

5500

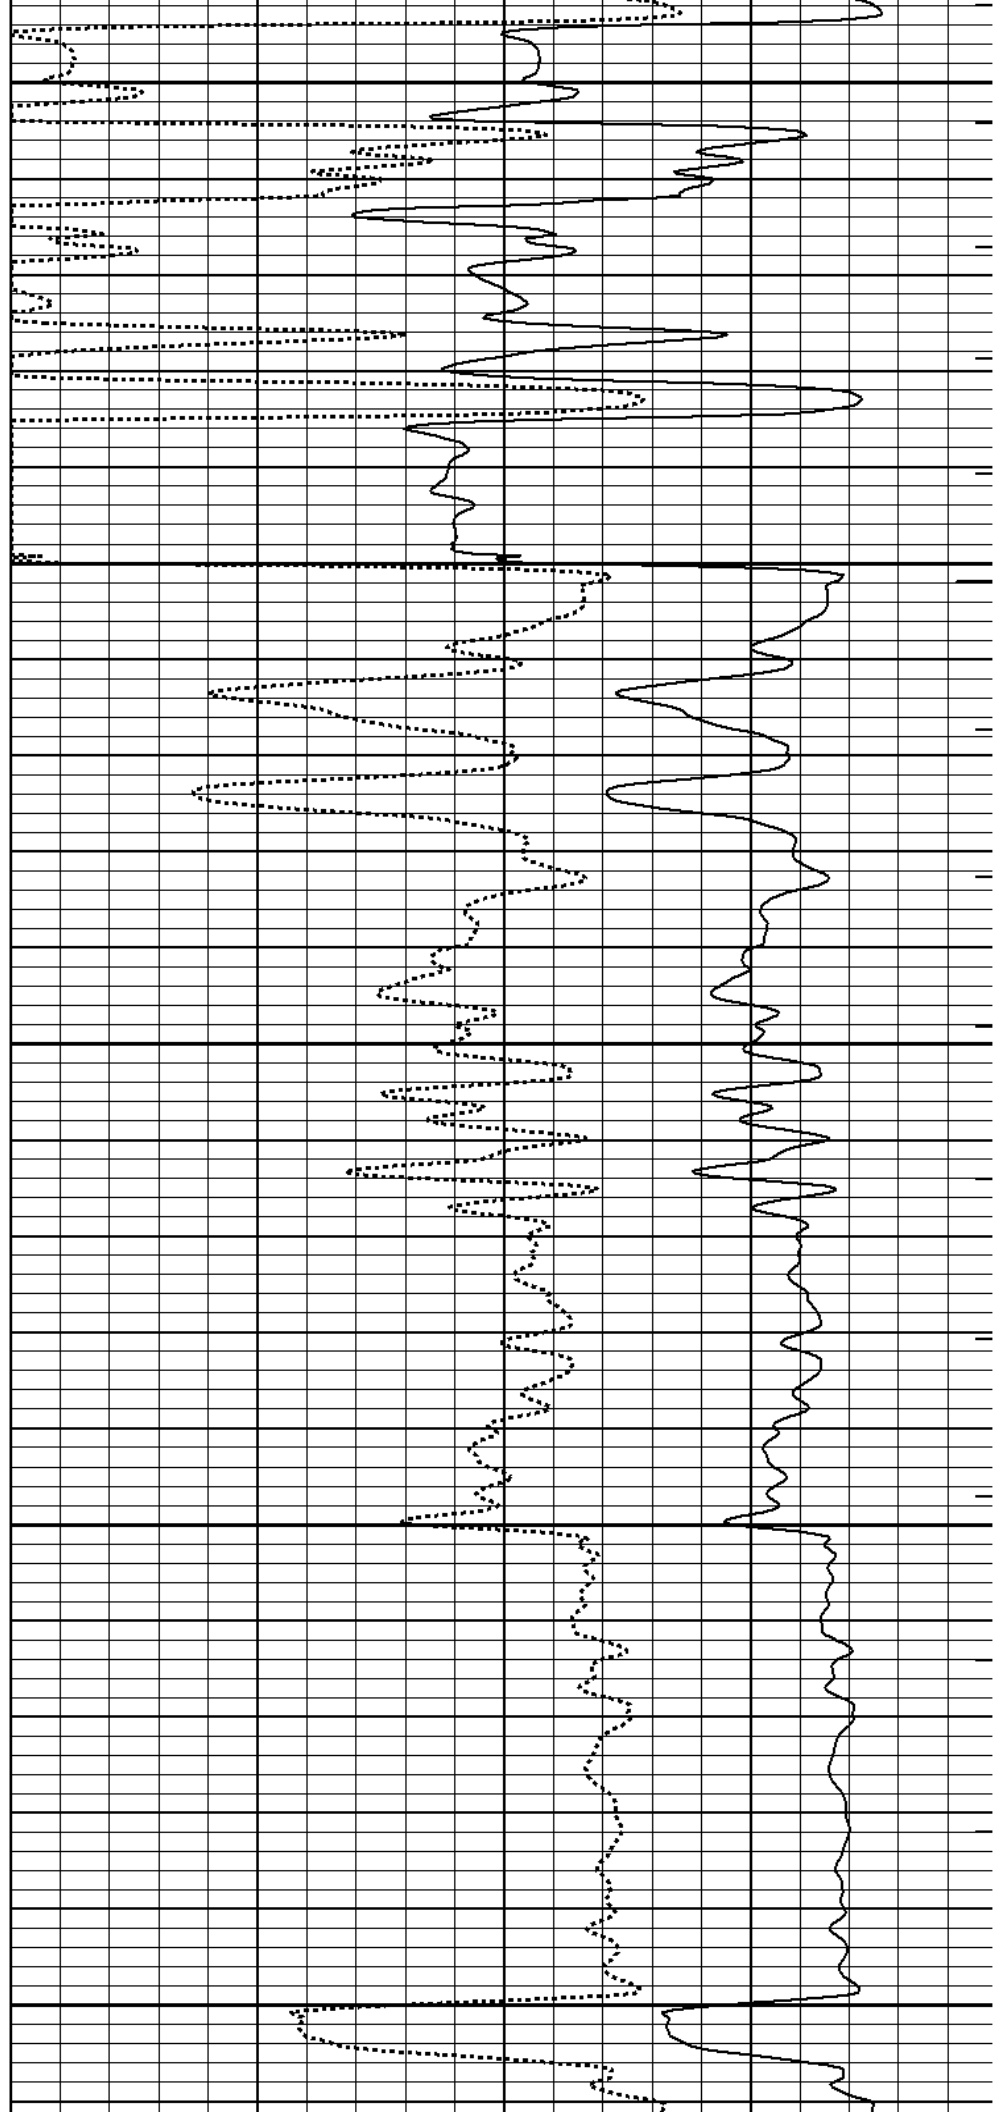

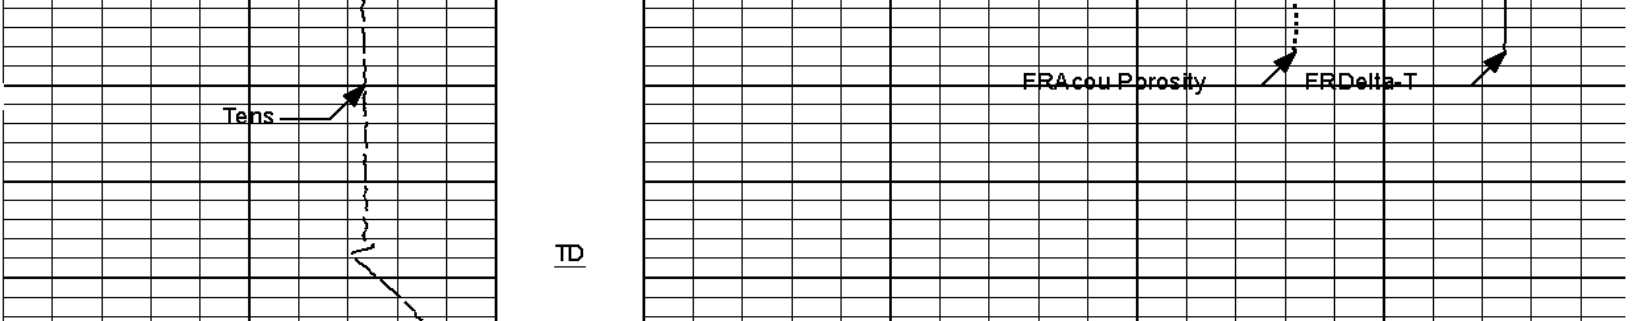

15K	Tens	0	1 : 240		ITT
	pounds		ft		
0	Gamma API	150	Tension Pull	140	Delta-T
	api		10 0		microsec per ft
6	Caliper	16	Tension Pull	30	Acou Porosity
	inches				percent
SHALE					

HALLIBURTON


Plot Time: 16-Apr-11 08:48:43
 Plot Range: 1725 ft to 5544.67 ft
 Data: WILLIAMS_1\Well Based\DAQ-0001-003\
 Plot File: \\SONIC\BSAT_5_MAIN_LIB



5 INCH MAIN LOG


HALLIBURTON

Plot Time: 16-Apr-11 08:48:43
 Plot Range: 5200 ft to 5545.58 ft
 Data: WILLIAMS_1\Well Based\DAQ-0001-002\
 Plot File: \\SONIC\BSAT_5_REP_LIB

REPEAT SECTION

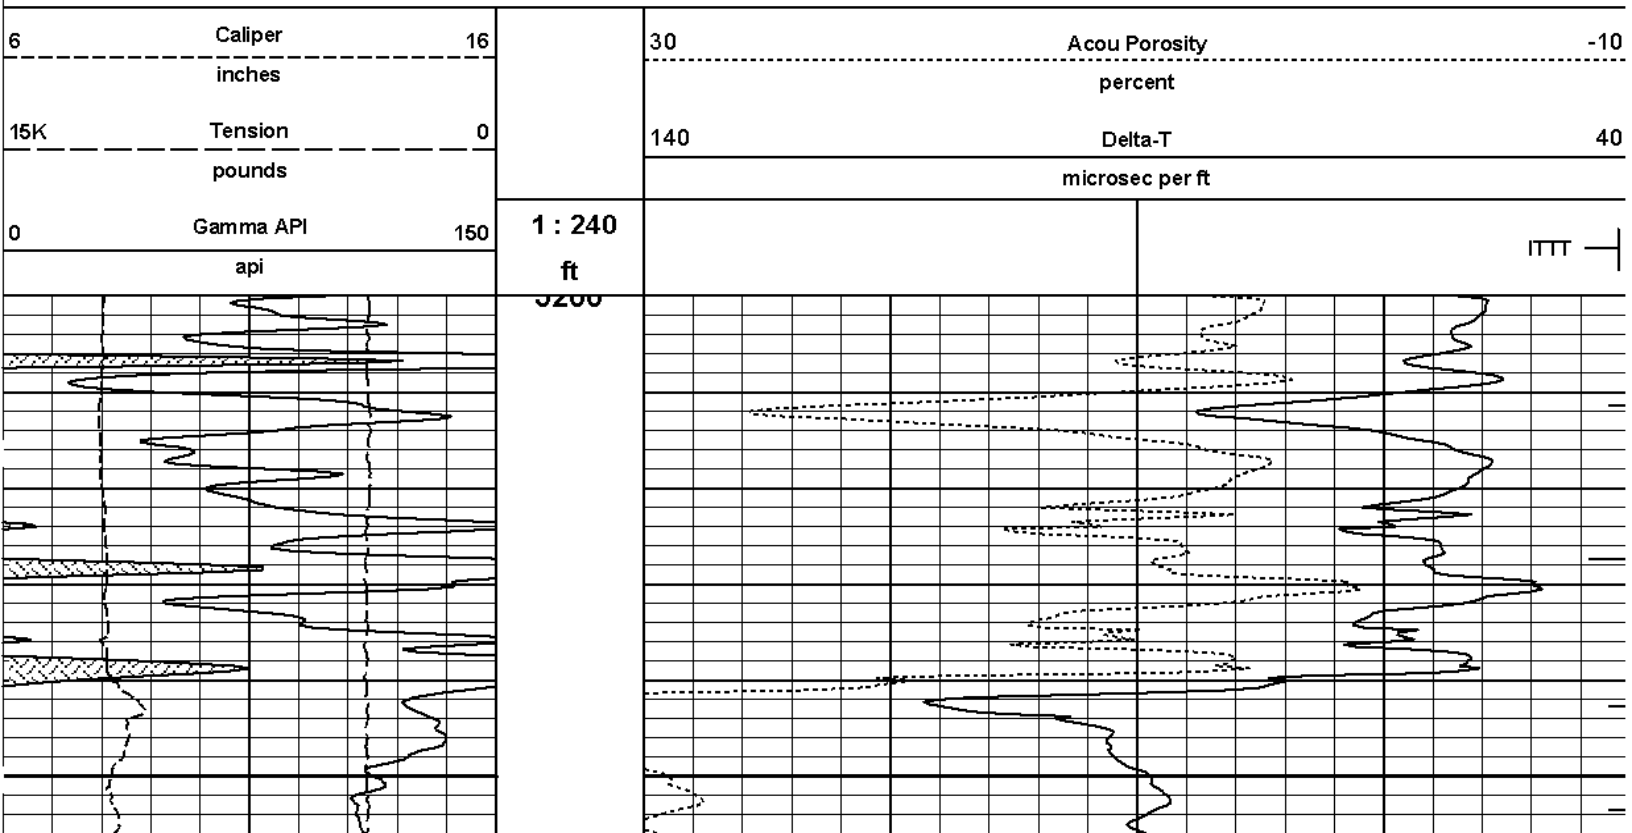

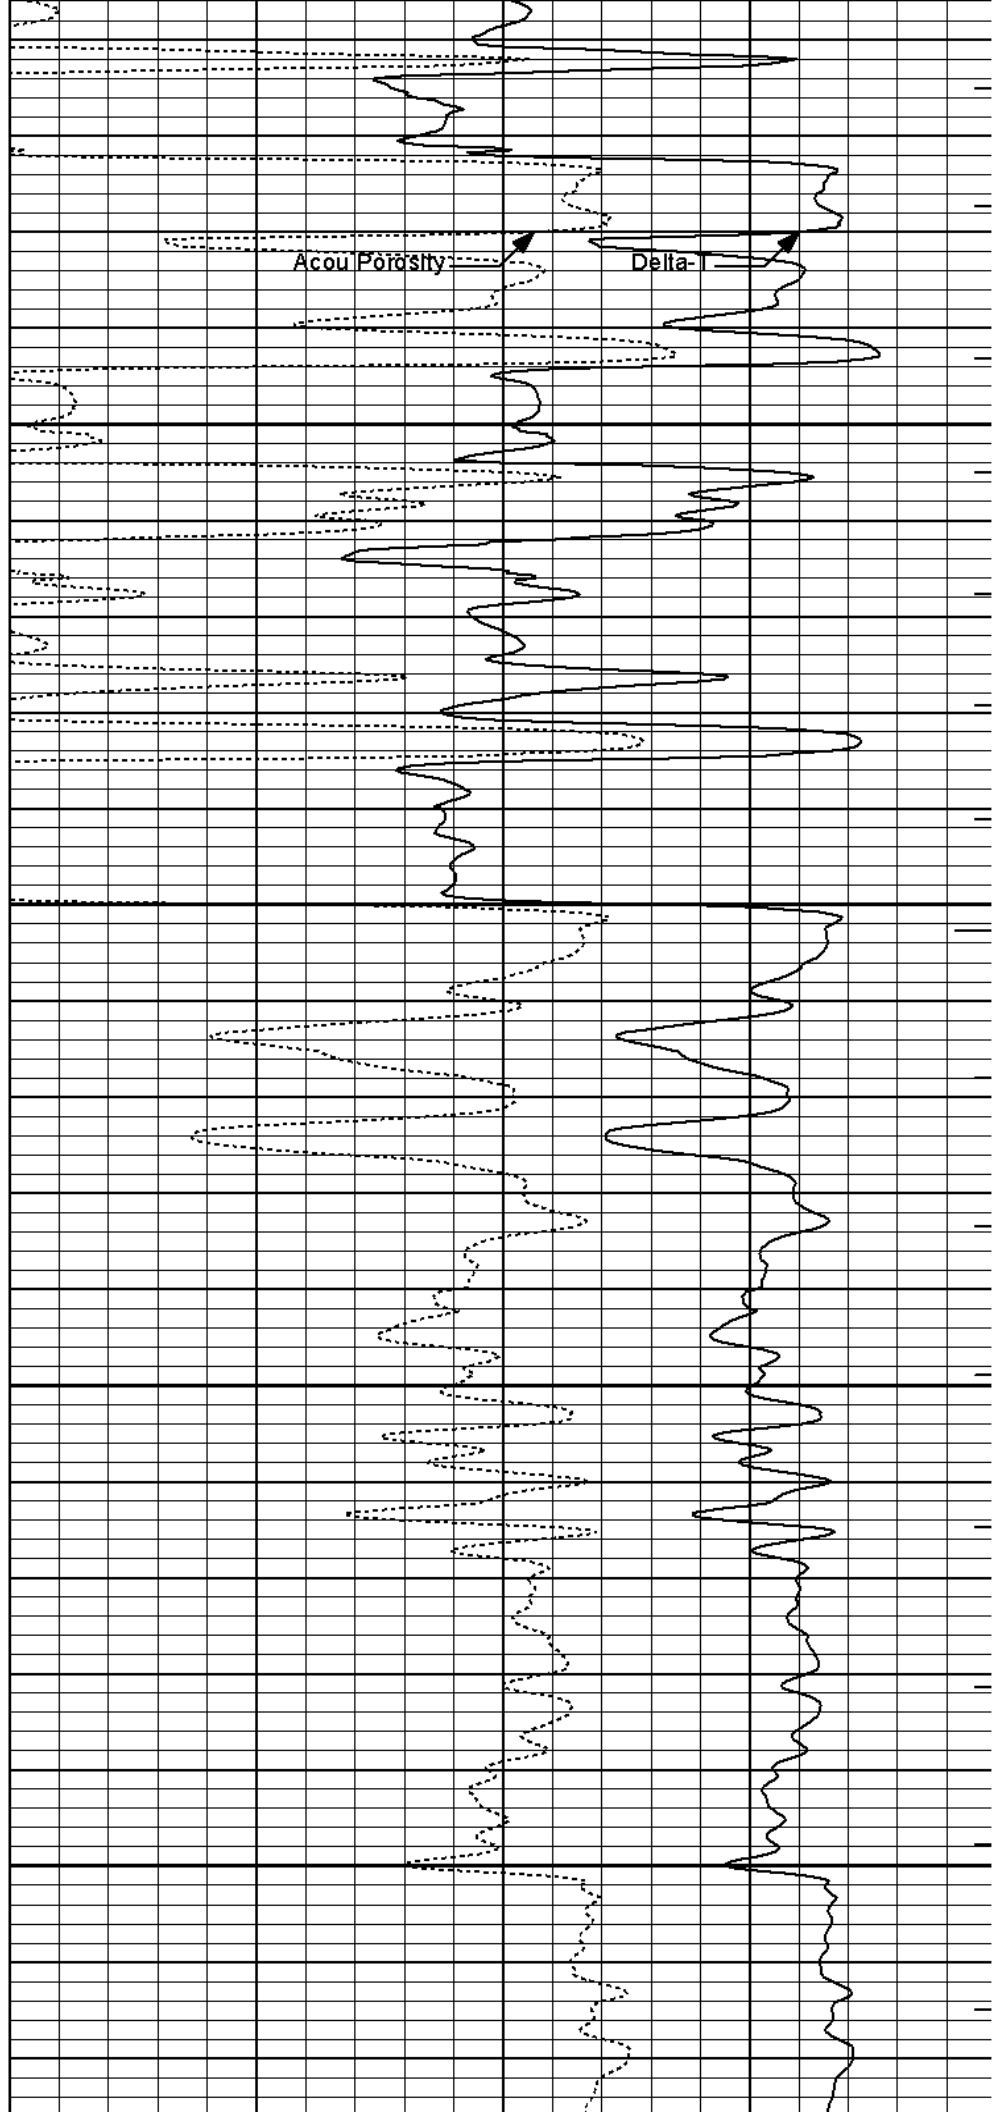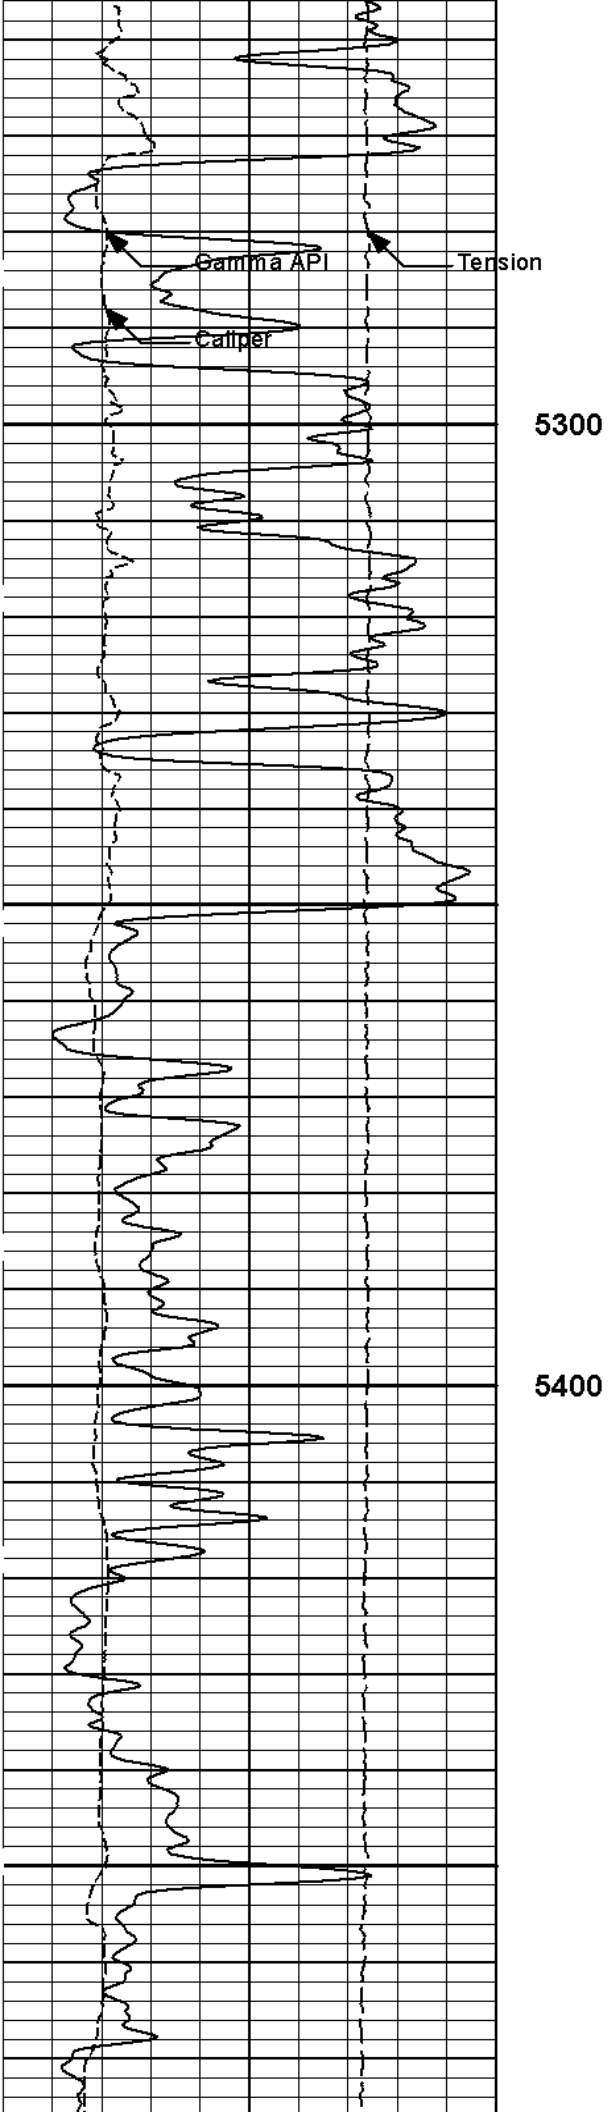

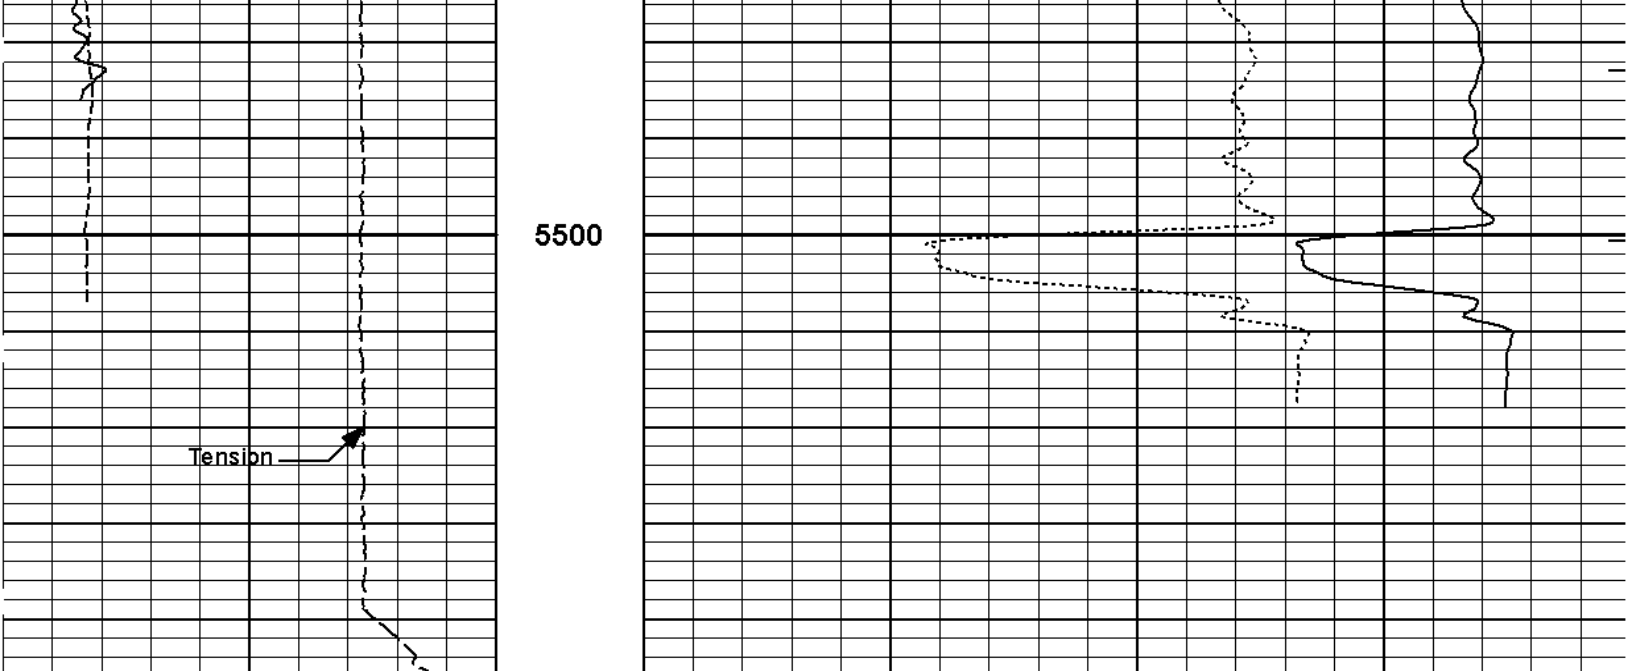

0	Gamma API	150	1 : 240		
	api		ft		ITTT
15K	Tension	0	140	Delta-T	40
	pounds			microsec per ft	
6	Caliper	16	30	Acou Porosity	-10
	inches			percent	

HALLIBURTON

Plot Time: 16-Apr-11 08:48:50
 Plot Range: 5200 ft to 5545.58 ft
 Data: WILLIAMS_1\Well Based\DAQ-0001-002\
 Plot File: \\SONIC\BSAT_5_REP_LIB

REPEAT SECTION

HALLIBURTON

TOOL STRING DIAGRAM REPORT

Description	Overbody Description	O.D.	Diagram	Sensors @ Delays	Length	Accumulated Length
CH_HOS-CH_696 37.50 lbs		Ø 2.750 in →		← Temperature @ 71.31 ft	3.03 ft	72.34 ft
XOHD-TRK696 20.00 lbs		Ø 2.750 in → Ø 3.625 in →			0.95 ft	69.31 ft 68.36 ft
SP Sub-PROT01 60.00 lbs		Ø 3.625 in →		← SP @ 66.59 ft	3.74 ft	64.63 ft
GTET-11039640 165.00 lbs		Ø 3.625 in →		← GammaRay @ 58.56 ft	8.52 ft	

DSNT-11055304
174.00 lbs

DSN Decentralizer-
10755066
6.60 lbs

Ø3.625 in* →
Ø3.625 in →

← DSN Far @ 49.17 ft
← DSN Near @ 48.42 ft

56.10 ft
9.69 ft

SDLT-104_P84
360.00 lbs

Ø4.500 in →
Ø4.750 in →

← SDL Microlog @ 38.60 ft
← SDL Caliper @ 38.42 ft
← SDL @ 38.41 ft

46.42 ft
10.81 ft

BSAT-10747684
300.00 lbs

Ø3.625 in →

← Sonic Receivers @ 27.09 ft

35.60 ft
15.77 ft

ACRt-1962_S909
250.00 lbs

Ø3.625 in →


← Mud Resistivity @ 13.44 ft

← ACRt @ 9.46 ft

19.83 ft
19.25 ft

Cabbage Head-
TRK696
10.00 lbs

Ø 3.625 in
Ø 6.000 in



0.58 ft
0.58 ft
0.00 ft

Mnemonic	Tool Name	Serial Number	Weight (lbs)	Length (ft)	Accumulated Length (ft)	Max. Log. Speed (fpm)
CH_HOS	Hostile Cable Head with Load Cell	CH_696	37.50	3.03	69.31	300.00
XOHD	Hostile to Dits Cross Over	TRK696	20.00	0.95	68.36	300.00
SP	SP Sub	PROT01	60.00	3.74	64.63	300.00
GTET	Gamma Telemetry Tool	11039640	165.00	8.52	56.10	60.00
DSNT	Dual Spaced Neutron	11055304	174.00	9.69	46.42	60.00
DCNT	DSN Decentralizer	10755066	6.60	5.13	* 49.75	300.00
SDLT	Spectral Density Tool	I04_P84	360.00	10.81	35.60	60.00
BSAT	Borehole Sonic Array Tool	10747684	300.00	15.77	19.83	60.00
ACRt	Array Compensated True Resistivity	I962_S909	250.00	19.25	0.58	300.00
CBHD	Cabbage Head	TRK696	10.00	0.58	0.00	300.00
Total			1,383.10	72.34		
						* Not included in Total Length and Length Accumulation.
Data: WILLIAMS_I_110001 SP-GTET-DSN-SDL-BSAT-ACRT-CHVDLE						Date: 15-Apr-11 21:30:41

HALLIBURTON

PARAMETERS REPORT

Depth (ft)	Tool Name	Mnemonic	Description	Value	Units
TOP					
	DSNT	DNOK	Process DSN?	No	
	SDLT	DNOK	Process Density?	No	
	SDLT	MLOK	Process MicroLog Outputs?	No	
3940.00					
	SHARED	BS	Bit Size	7.875	in
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No	
	SHARED	MDBS	Mud Base	Water	
	SHARED	MDWT	Borehole Fluid Weight	9.200	ppg
	SHARED	WAGT	Weighting Agent	Barite	
	SHARED	BSAL	Borehole salinity	0.00	ppm
	SHARED	FSAL	Formation Salinity NaCl	0.00	ppm
	SHARED	KPCT	Percent K in Mud by Weight?	0.00	%
	SHARED	RMUD	Mud Resistivity	1.980	ohmm
	SHARED	TRM	Temperature of Mud	75.0	degF
	SHARED	CSD	Logging Interval is Cased?	No	
	SHARED	ICOD	AHV Casing OD	5.500	in
	SHARED	ST	Surface Temperature	75.0	degF
	SHARED	TD	Total Well Depth	5540.00	ft
	SHARED	BHT	Bottom Hole Temperature	130.0	degF
	SHARED	SVTM	Navigation and Survey Master Tool	NONE	
	SHARED	AZTM	High Res Z Accelerometer Master Tool	GTET	
	SHARED	TEMM	Temperature Master Tool	NONE	
	SHARED	BHSM	Borehole Size Master Tool	NONE	
	GTET	GROK	Process Gamma Ray?	Yes	
	GTET	GRSO	Gamma Tool Standoff	0.000	in
	GTET	GEOK	Process Gamma Ray EVR?	No	
	GTET	TPOS	Tool Position	Centered	

DSNT	DNOK	Process DSN?	Yes	
DSNT	DEOK	Process DSN EVR?	No	
DSNT	NLIT	Neutron Lithology	Limestone	
DSNT	DNSO	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.300	in
DSNT	DNTP	Temperature Correction Type	None	
DSNT	DPRS	DSN Pressure Correction Type	None	
DSNT	SHCO	View More Correction Options	No	
DSNT	UTVD	Use TVD for Gradient Corrections?	No	
DSNT	LHWT	Logging Horizontal Water Tank?	No	
SDLT	DNOK	Process Density?	Yes	
SDLT	DNOK	Process Density EVR?	No	
SDLT	CB	Logging Calibration Blocks?	No	
SDLT	SPVT	SDLT Pad Temperature Valid?	Yes	
SDLT	DTWN	Disable temperature warning	No	
SDLT	DMA	Formation Density Matrix	2.710	g/cc
SDLT	DFL	Formation Density Fluid	1.000	g/cc
SDLT	CLOK	Process Caliper Outputs?	Yes	
SDLT	MLOK	Process MicroLog Outputs?	Yes	
BSAT	MBOK	Compute BCAS Results?	Yes	
BSAT	FLLO	Frequency Filter Low Pass Value?	7000	Hz
BSAT	FLHI	Frequency Filter High Pass Value?	27000	Hz
BSAT	DTFL	Delta -T Fluid	189.00	uspf
BSAT	DTMT	Delta -T Matrix Type	User define	
BSAT	DTMA	Delta -T Matrix	47.60	uspf
BSAT	DTSH	Delta -T Shale	100.00	uspf
BSAT	SPEQ	Acoustic Porosity Equation	Wylie	
ACRt	RTOK	Process ACRt?	Yes	
ACRt	MNSO	Minimum Tool Standoff	1.50	in
ACRt	TCS1	Temperature Correction Source	FP Lwr & FP Up	
ACRt	TPOS	Tool Position	Free Hanging	
ACRt	RMOP	Rmud Source	Mud Cell	
ACRt	RMIN	Minimum Resistivity for MAP	0.20	ohmm
ACRt	RMIN	Maximum Resistivity for MAP	200.00	ohmm
ACRt	THQY	Threshold Quality	0.50	
BOTTOM				
Data: WILLIAMS_I_10001 SP-GTET-DSN-SDL-BSAT-ACRT-CHIDLE			Date: 16-Apr-11 07:16:09	

HALLIBURTON

INPUTS, DELAYS AND FILTERS TABLE

Mnemonic	Input Description	Delay (ft)	Filter Type	Filter Length (ft)
Depth Panel				
TENS	Tension	0.00	NO	
CH_HOS				
DHTN	DownholeTension	0.00	BLK	0.000
SP Sub				
PLTC	Plot Control Mask	66.58	NO	
SP	Spontaneous Potential	66.58	BLK	1.250
SPR	Raw Spontaneous Potential	66.58	NO	
SPO	Spontaneous Potential Offset	66.58	NO	

GTET

TPUL	Tension Pull	58.56	NO	
GR	Natural Gamma Ray API	58.56	TRI	1.750
GRU	Unfiltered Natural Gamma Ray API	58.56	NO	
EGR	Natural Gamma Ray API with Enhanced Vertical Resolution	58.56	W	1.416 , 0.750
ACCZ	Accelerometer Z	0.00	BLK	0.083
DEVI	Inclination	0.00	NO	

DSNT

TPUL	Tension Pull	48.32	NO	
RNDS	Near Detector Telemetry Counts	48.42	BLK	1.417
RFDS	Far Detector Telemetry Counts	49.17	TRI	0.583
DNTT	DSN Tool Temperature	48.42	NO	
DSNS	DSN Tool Status	48.32	NO	
ERND	Near Detector Telemetry Counts EVR	48.42	BLK	0.000
ERFD	Far Detector Telemetry Counts EVR	49.17	BLK	0.000
ENTM	DSN Tool Temperature EVR	48.42	NO	

SDLT

TPUL	Tension Pull	38.41	NO	
NAB	Near Above	38.24	BLK	0.920
NHI	Near Cesium High	38.24	BLK	0.920
NLO	Near Cesium Low	38.24	BLK	0.920
NVA	Near Valley	38.24	BLK	0.920
NBA	Near Barite	38.24	BLK	0.920
NDE	Near Density	38.24	BLK	0.920
NPK	Near Peak	38.24	BLK	0.920
NLI	Near Lithology	38.24	BLK	0.920
NBAU	Near Barite Unfiltered	38.24	BLK	0.250
NLIU	Near Lithology Unfiltered	38.24	BLK	0.250
FAB	Far Above	38.58	BLK	0.250
FHI	Far Cesium High	38.58	BLK	0.250
FLO	Far Cesium Low	38.58	BLK	0.250
FVA	Far Valley	38.58	BLK	0.250
FBA	Far Barite	38.58	BLK	0.250
FDE	Far Density	38.58	BLK	0.250
FPK	Far Peak	38.58	BLK	0.250
FLI	Far Lithology	38.58	BLK	0.250
PTMP	Pad Temperature	38.42	BLK	0.920
NHV	Near Detector High Voltage	35.60	NO	
FHV	Far Detector High Voltage	35.60	NO	
ITMP	Instrument Temperature	35.60	NO	
DDHV	Detector High Voltage	35.60	NO	
TPUL	Tension Pull	38.42	NO	
PCAL	Pad Caliper	38.42	TRI	0.250
ACAL	Arm Caliper	38.42	TRI	0.250
TPUL	Tension Pull	38.60	NO	
MINV	Microlog Lateral	38.60	BLK	0.750
MNOR	Microlog Normal	38.60	BLK	0.750

BSAT

TPUL	Tension Pull	27.09	NO	
STAT	Status	27.09	NO	
DLYT	Delay Time	27.09	NO	
SI	Sample Interval	27.09	NO	
TXRX	Raw Telemetry 10 Receivers	27.09	NO	
TXRX	Raw Telemetry 10 Receivers	27.09	NO	

FRMC	Tool Frame Count	27.09	NO	
ACRt				
TPUL	Tension Pull	2.97	NO	
F1R1	ACRT 12KHz - 80in R value	9.22	BLK	0.000
F1X1	ACRT 12KHz - 80in X value	9.22	BLK	0.000
F1R2	ACRT 12KHz - 50in R value	6.72	BLK	0.000
F1X2	ACRT 12KHz - 50in X value	6.72	BLK	0.000
F1R3	ACRT 12KHz - 29in R value	5.22	BLK	0.000
F1X3	ACRT 12KHz - 29in X value	5.22	BLK	0.000
F1R4	ACRT 12KHz - 17in R value	4.22	BLK	0.000
F1X4	ACRT 12KHz - 17in X value	4.22	BLK	0.000
F1R5	ACRT 12KHz - 10in R value	3.72	BLK	0.000
F1X5	ACRT 12KHz - 10in X value	3.72	BLK	0.000
F1R6	ACRT 12KHz - 6in R value	3.47	BLK	0.000
F1X6	ACRT 12KHz - 6in X value	3.47	BLK	0.000
F2R1	ACRT 36KHz - 80in R value	9.22	BLK	0.000
F2X1	ACRT 36KHz - 80in X value	9.22	BLK	0.000
F2R2	ACRT 36KHz - 50in R value	6.72	BLK	0.000
F2X2	ACRT 36KHz - 50in X value	6.72	BLK	0.000
F2R3	ACRT 36KHz - 29in R value	5.22	BLK	0.000
F2X3	ACRT 36KHz - 29in X value	5.22	BLK	0.000
F2R4	ACRT 36KHz - 17in R value	4.22	BLK	0.000
F2X4	ACRT 36KHz - 17in X value	4.22	BLK	0.000
F2R5	ACRT 36KHz - 10in R value	3.72	BLK	0.000
F2X5	ACRT 36KHz - 10in X value	3.72	BLK	0.000
F2R6	ACRT 36KHz - 6in R value	3.47	BLK	0.000
F2X6	ACRT 36KHz - 6in X value	3.47	BLK	0.000
F3R1	ACRT 72KHz - 80in R value	9.22	BLK	0.000
F3X1	ACRT 72KHz - 80in X value	9.22	BLK	0.000
F3R2	ACRT 72KHz - 50in R value	6.72	BLK	0.000
F3X2	ACRT 72KHz - 50in X value	6.72	BLK	0.000
F3R3	ACRT 72KHz - 29in R value	5.22	BLK	0.000
F3X3	ACRT 72KHz - 29in X value	5.22	BLK	0.000
F3R4	ACRT 72KHz - 17in R value	4.22	BLK	0.000
F3X4	ACRT 72KHz - 17in X value	4.22	BLK	0.000
F3R5	ACRT 72KHz - 10in R value	3.72	BLK	0.000
F3X5	ACRT 72KHz - 10in X value	3.72	BLK	0.000
F3R6	ACRT 72KHz - 6in R value	3.47	BLK	0.000
F3X6	ACRT 72KHz - 6in X value	3.47	BLK	0.000
RMUD	Mud Resistivity	12.76	BLK	0.000
F1RT	Transmitter Reference 12 KHz Real Signal	2.97	BLK	0.000
F1XT	Transmitter Reference 12 KHz Imaginary Signal	2.97	BLK	0.000
F2RT	Transmitter Reference 36 KHz Real Signal	2.97	BLK	0.000
F2XT	Transmitter Reference 36 KHz Imaginary Signal	2.97	BLK	0.000
F3RT	Transmitter Reference 72 KHz Real Signal	2.97	BLK	0.000
F3XT	Transmitter Reference 72 KHz Imaginary Signal	2.97	BLK	0.000
TFPU	Upper Feedpipe Temperature Calculated	2.97	BLK	0.000
TFPL	Lower Feedpipe Temperature Calculated	2.97	BLK	0.000
ITMP	Instrument Temperature	2.97	BLK	0.000
TCVA	Temperature Correction Values Loop Off	2.97	NO	
TIDV	Instrument Temperature Derivative	2.97	NO	
TUDV	Upper Temperature Derivative	2.97	NO	
TLDV	Lower Temperature Derivative	2.97	NO	
TRBD	Receiver Board Temperature	2.97	NO	

COMPANY	OXY USA INC		
WELL	WILLIAMS I-1		
FIELD	VICTORY		
COUNTY	HASKELL	STATE	KANSAS

HALLIBURTON

**BOREHOLE COMPENSATED
SONIC ARRAY
LOG**