

LOG-TECH



Dual Induction Log

DIGITAL LOG

(785) 625-3858

API No.

15-069-20,341-00-00

Company Falcon Exploration, Inc.

Well John Koehn No. 1-18 (SE)

Field Wildcat

County

Gray

State

Kansas

Location

S2 SW NW SE
1,560' FSL & 2,310' FEL

Sec: 18

Twp: 28 S

Rge: 29 W

Elevation

Permanent Datum Ground Level Elevation 2799
Log Measured From Kelly Bushing 13 Ft. Above Perm. Datum
Drilling Measured From Kelly Bushing

K.B. 2812
D.F.
G.L. 2799

Date

4/16/2011

Run Number

One

Depth Driller

5655

Depth Logger

5658

Bottom Logged Interval

5657

Top Log Interval

0

Casing Driller

8.625 @ 1871

Casing Logger

1872

Bit Size

7.875

Type Fluid in Hole

Chemical

Salinity, ppm CL

2100

Density / Viscosity

9.1

55

pH / Fluid Loss

9.5

8.0

Source of Sample

Flowline

Rm @ Meas. Temp

1.50 @ 62

Rmf @ Meas. Temp

1.13 @ 62

Rmc @ Meas. Temp

2.03 @ 62

Source of Rmf / Rmc

Charts

Rm @ BHT

.70 @ 133

Operating Rig Time

6 Hours

Max Rec. Temp. F

133

Equipment Number

10

Location

Hays

Recorded By

Jim Schuler

Witnessed By

Dave Williams

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858


Montezuma, Kansas, Ingalls Black Top North 1/2 Mile to BB Road,
4 West to 8 Road, North 1/2, West Into Around the Farm Equipment
to the South and East


Database File: falcon_exp_johnkoehn_1_18_sehd.db
Dataset Pathname: DIL/falstk
Presentation Format: dil2in
Dataset Creation: Sat Apr 16 05:43:25 2011
Charted by: Depth in Feet scaled 1:600

0	Gamma Ray	150
-200	SP	0

0	Shallow Resistivity	50
0	Deep Resistivity	50
1000	Conductivity	0
15000	Line Tension	0

50	Shallow Resistivity	500
50	Deep Resistivity	500

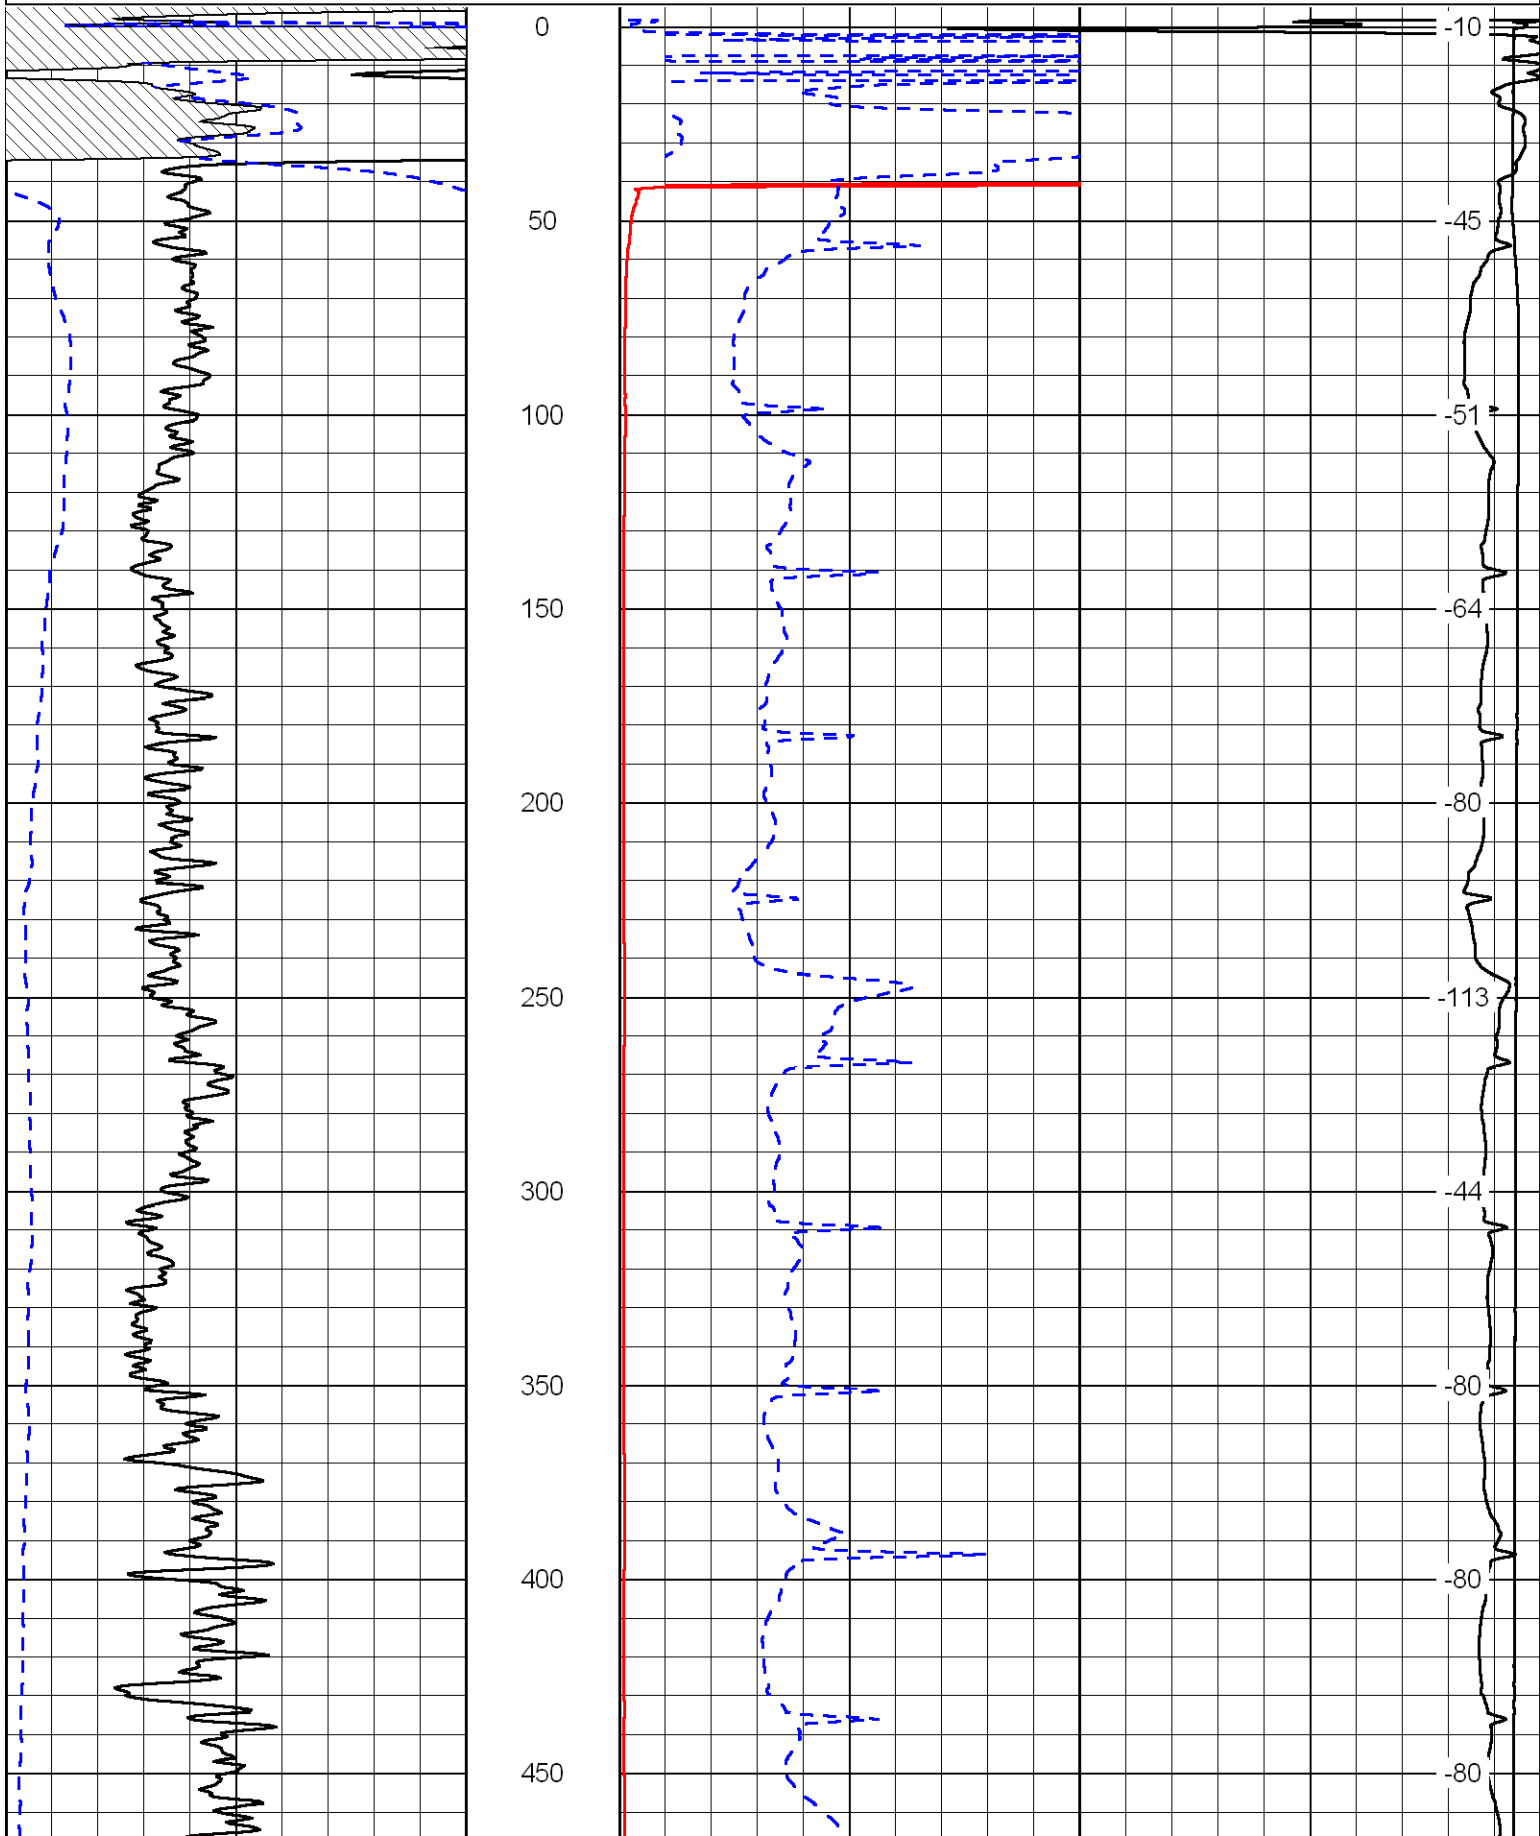

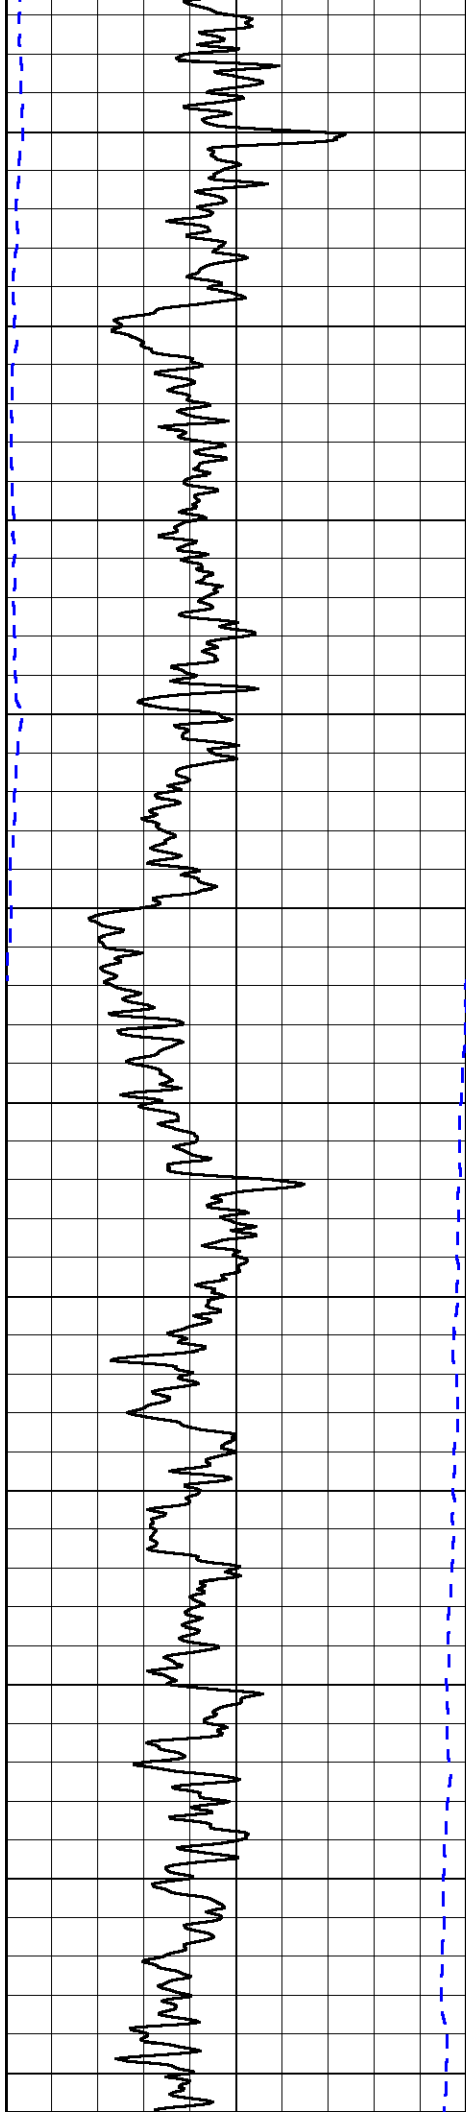

500

550

600

650

700

750


800

850

900

950

1000

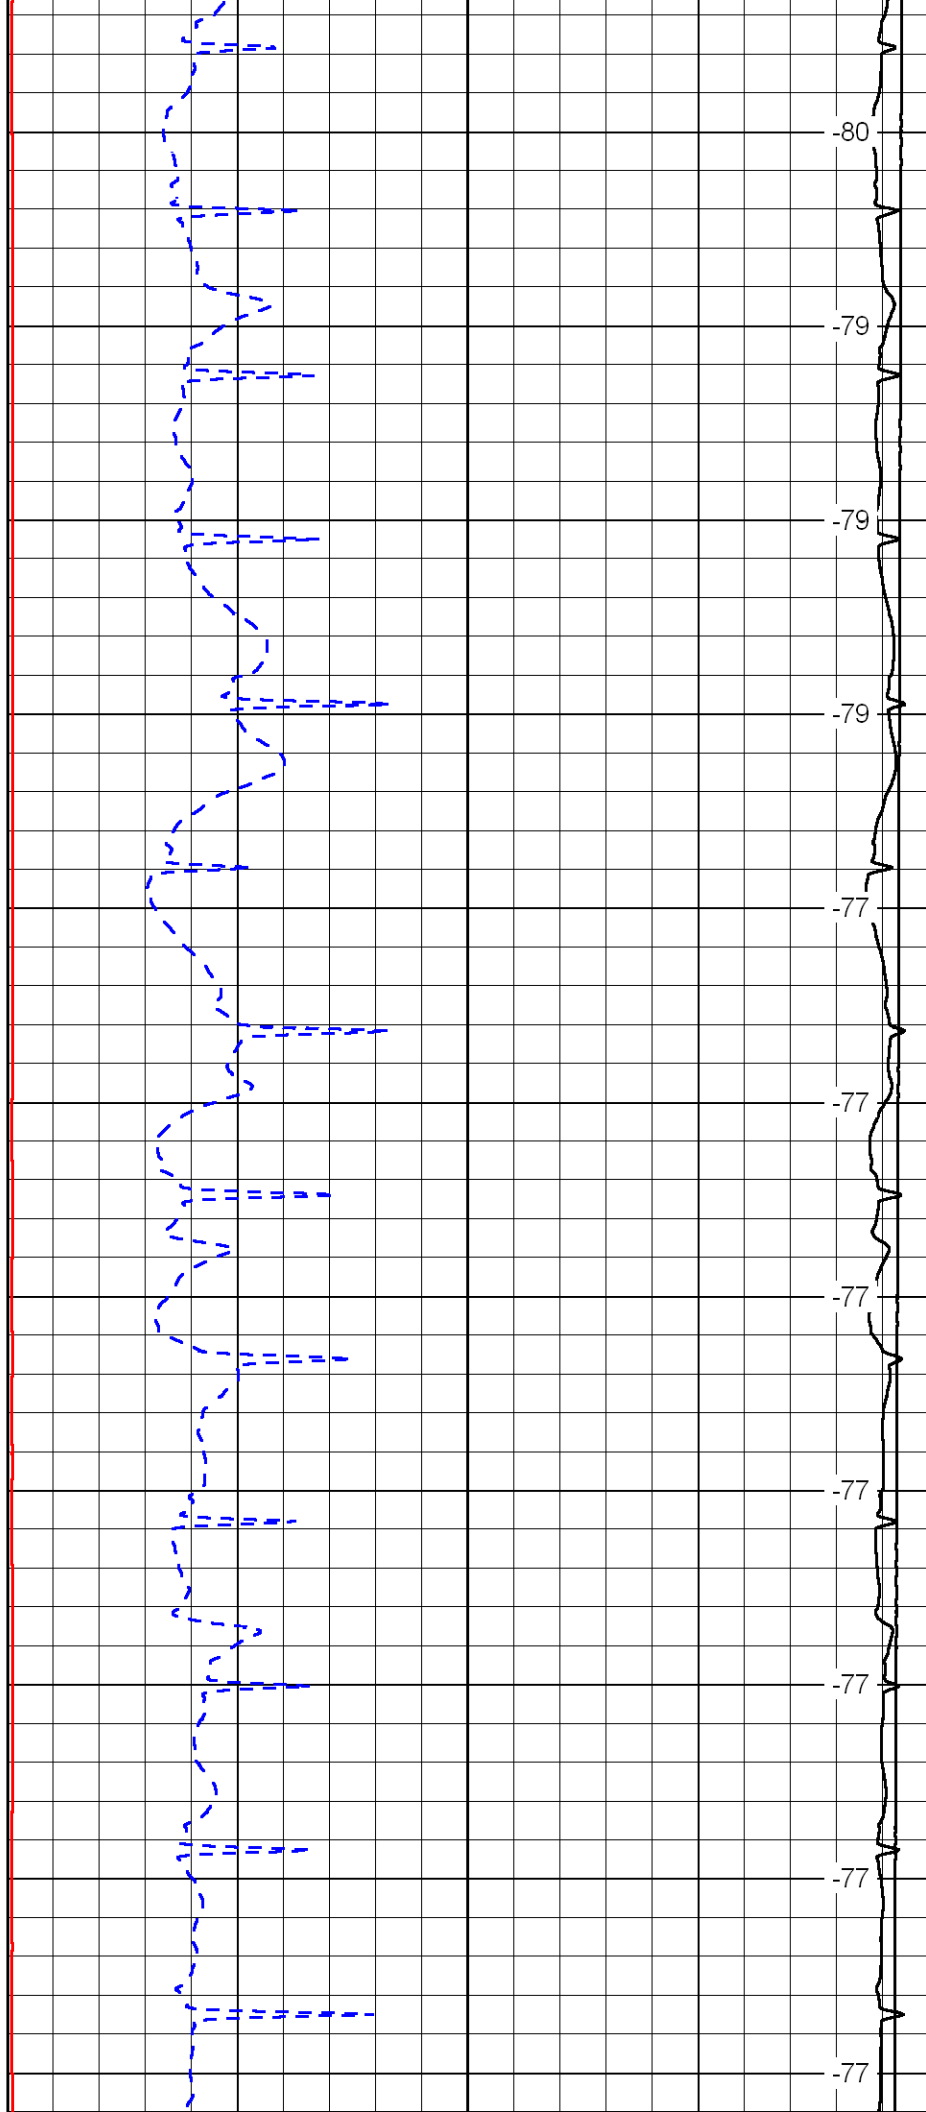

-80

-79

-79

-79

-77

-77


-77



-77




-77




-77



-77


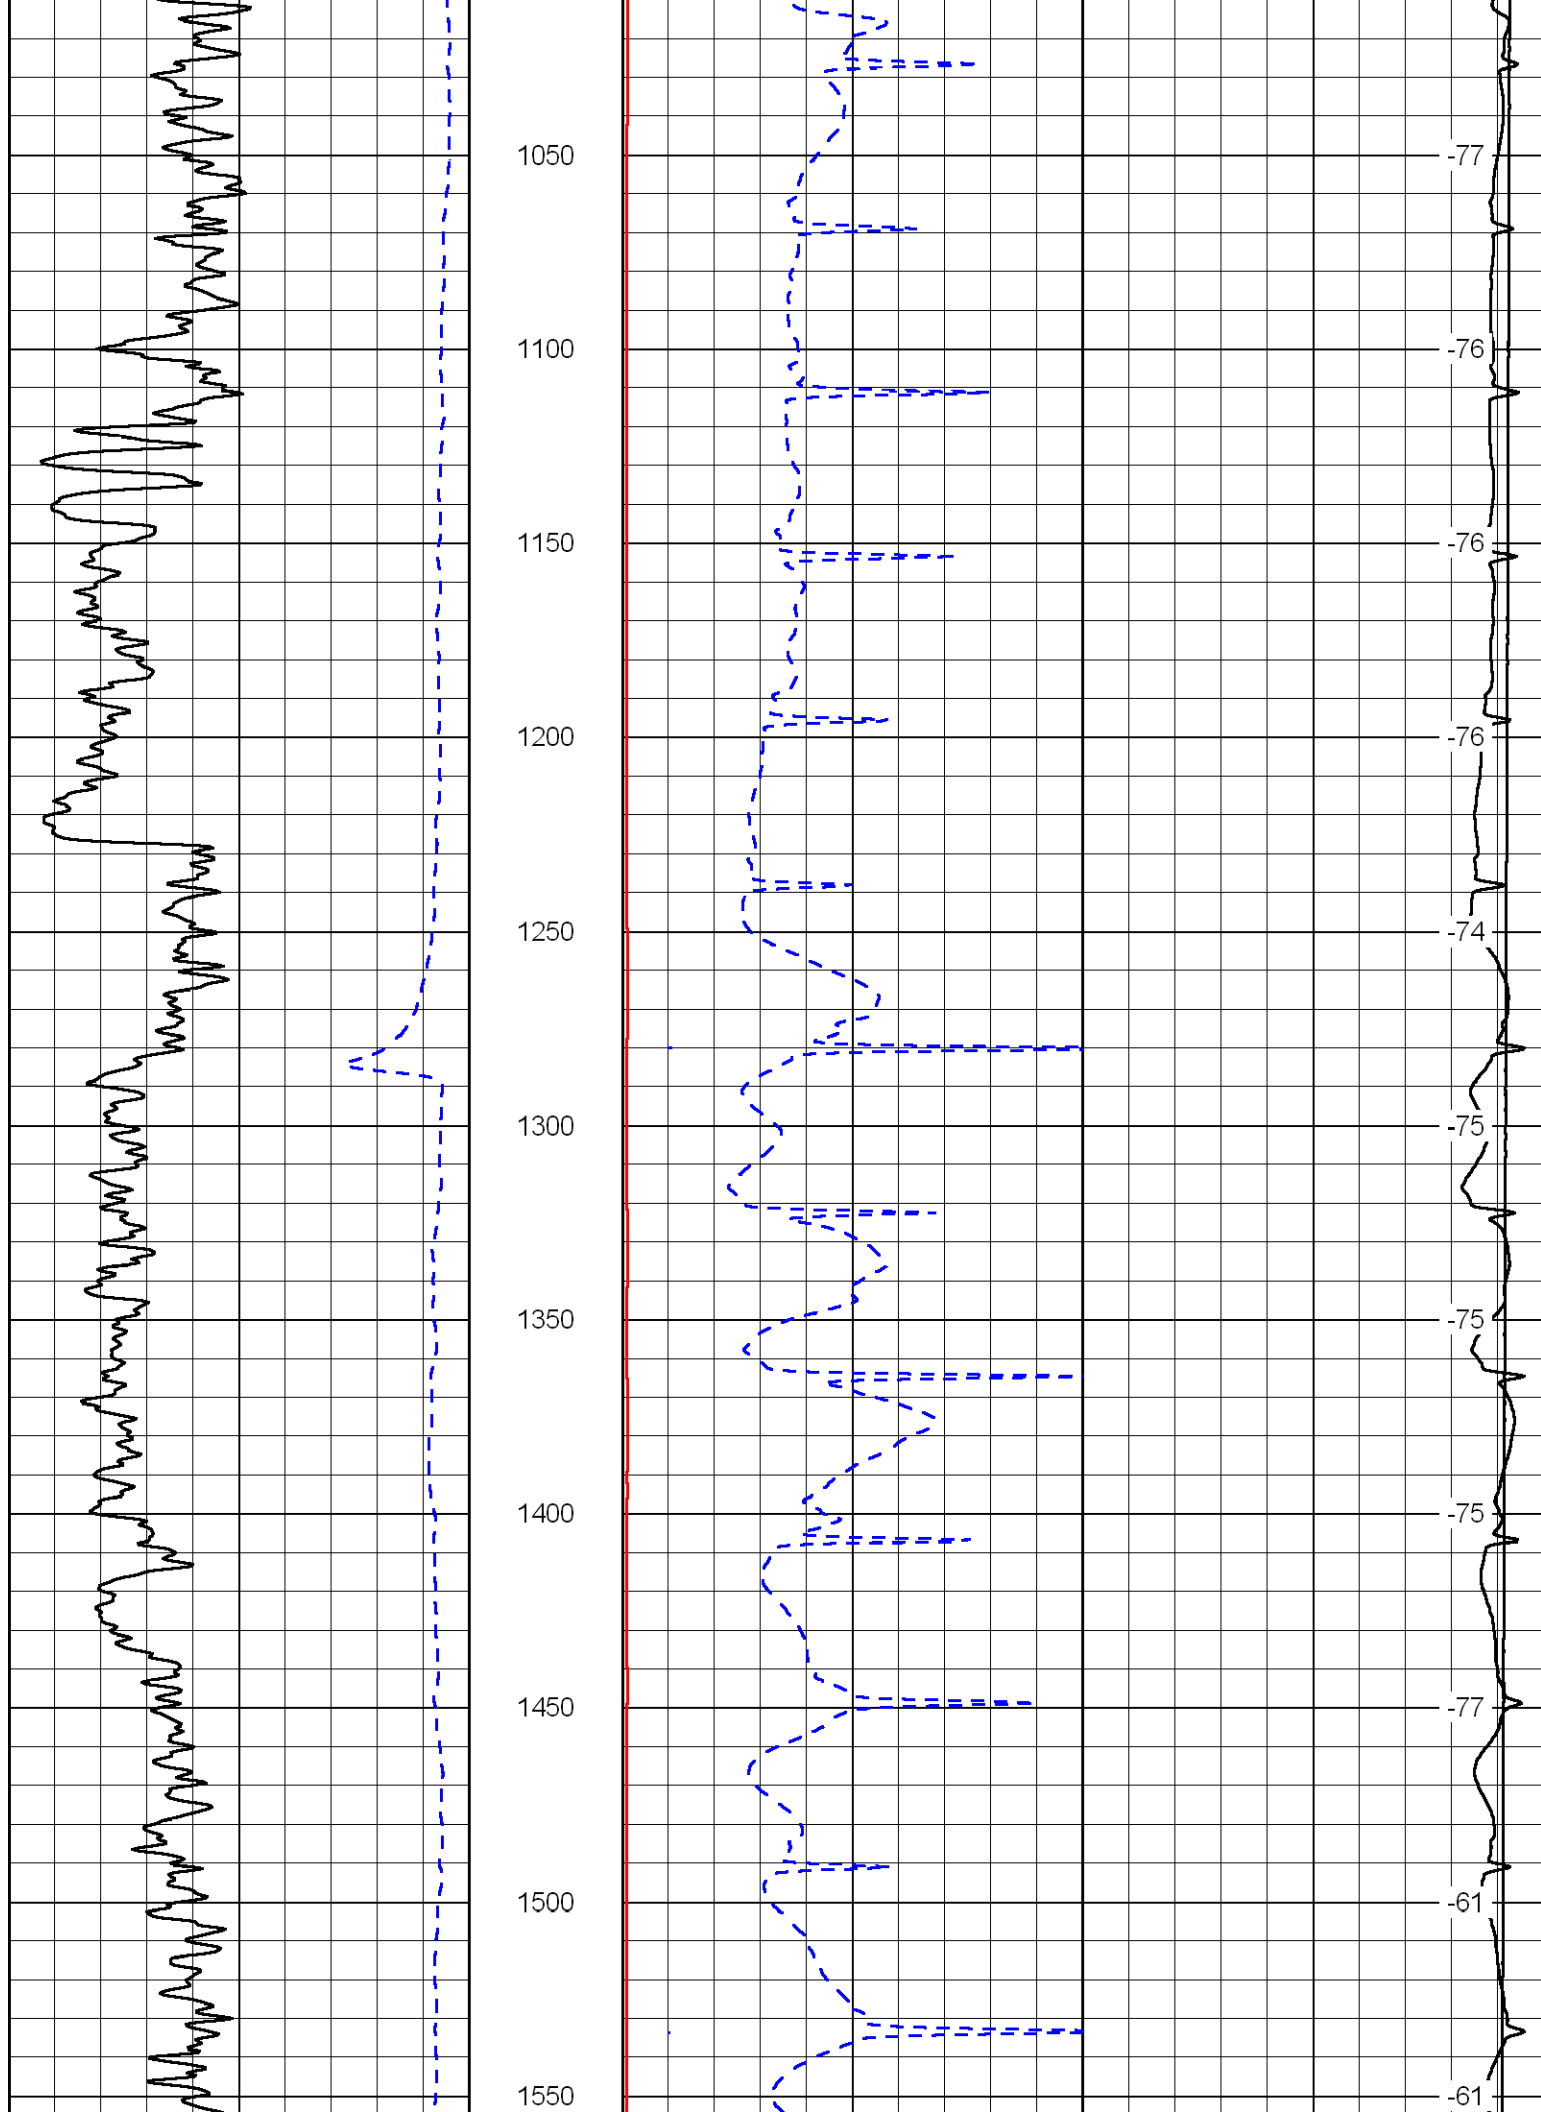


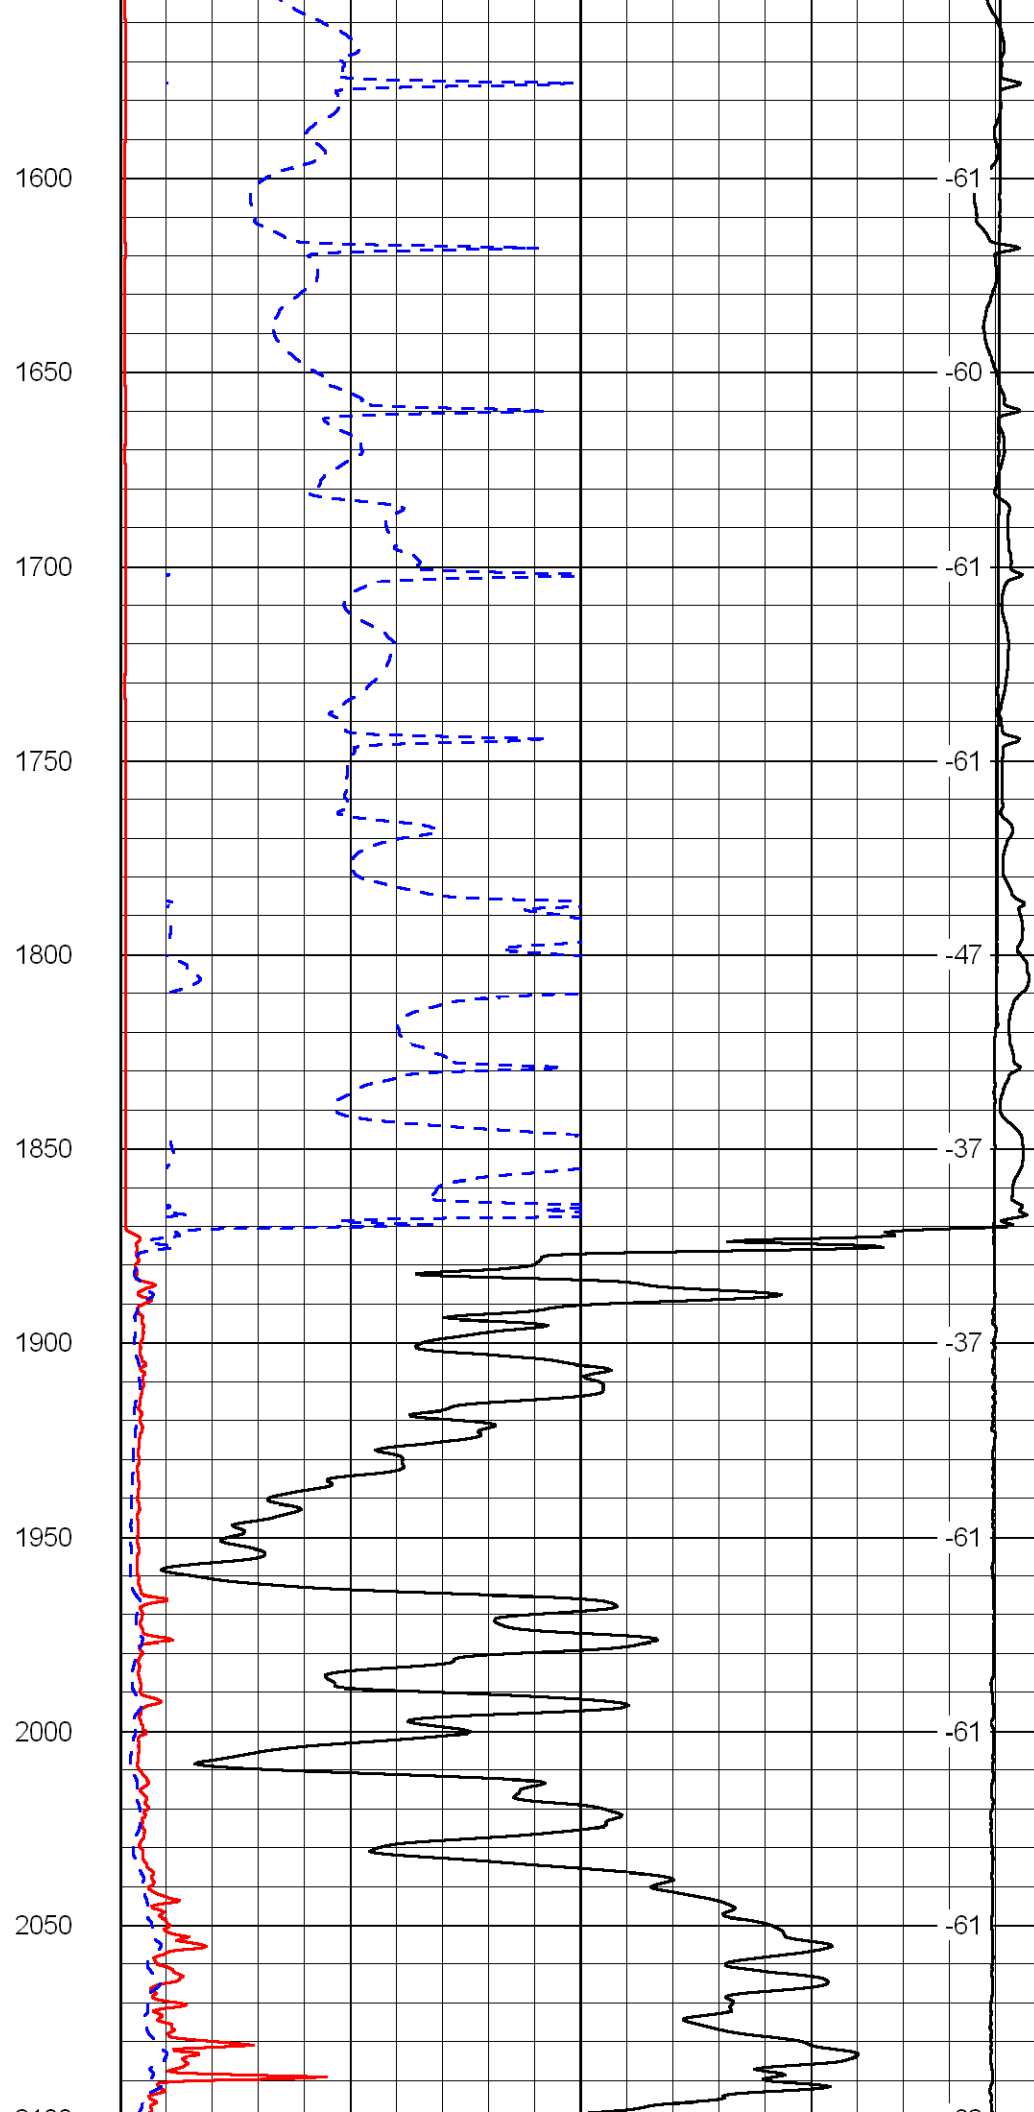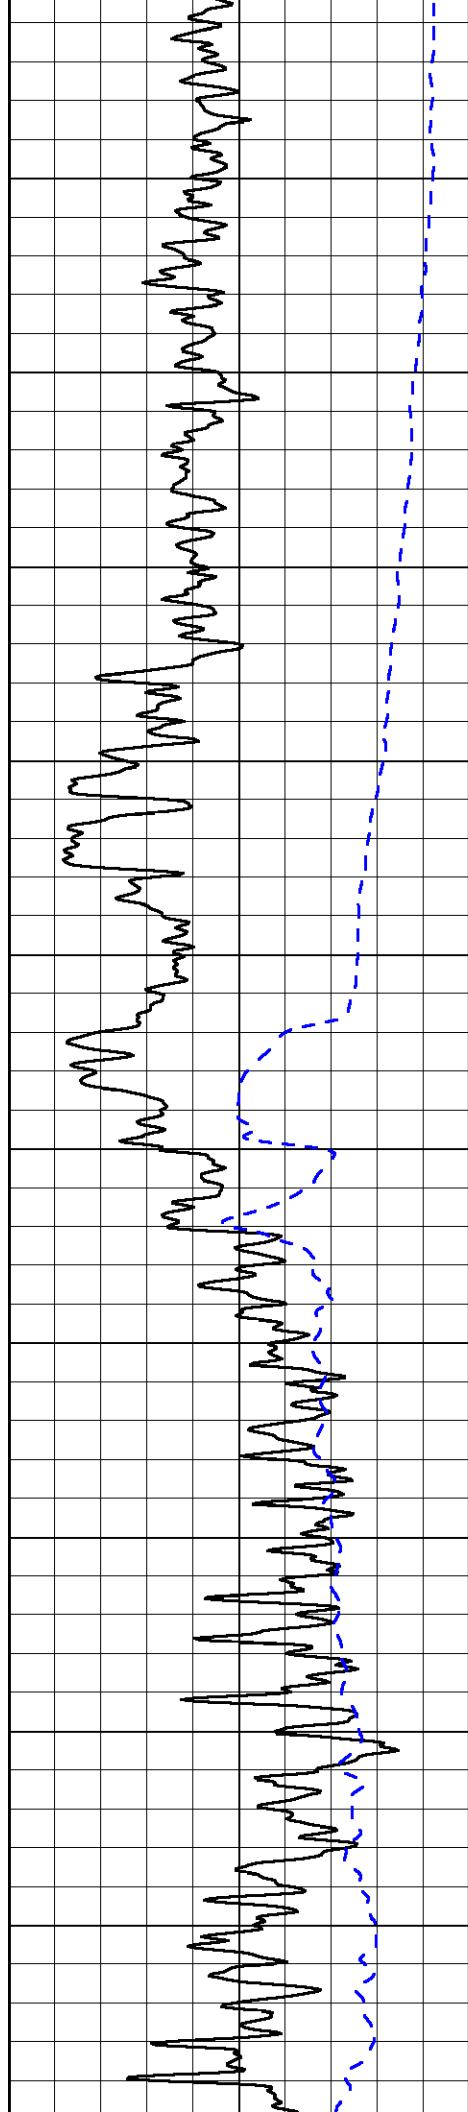


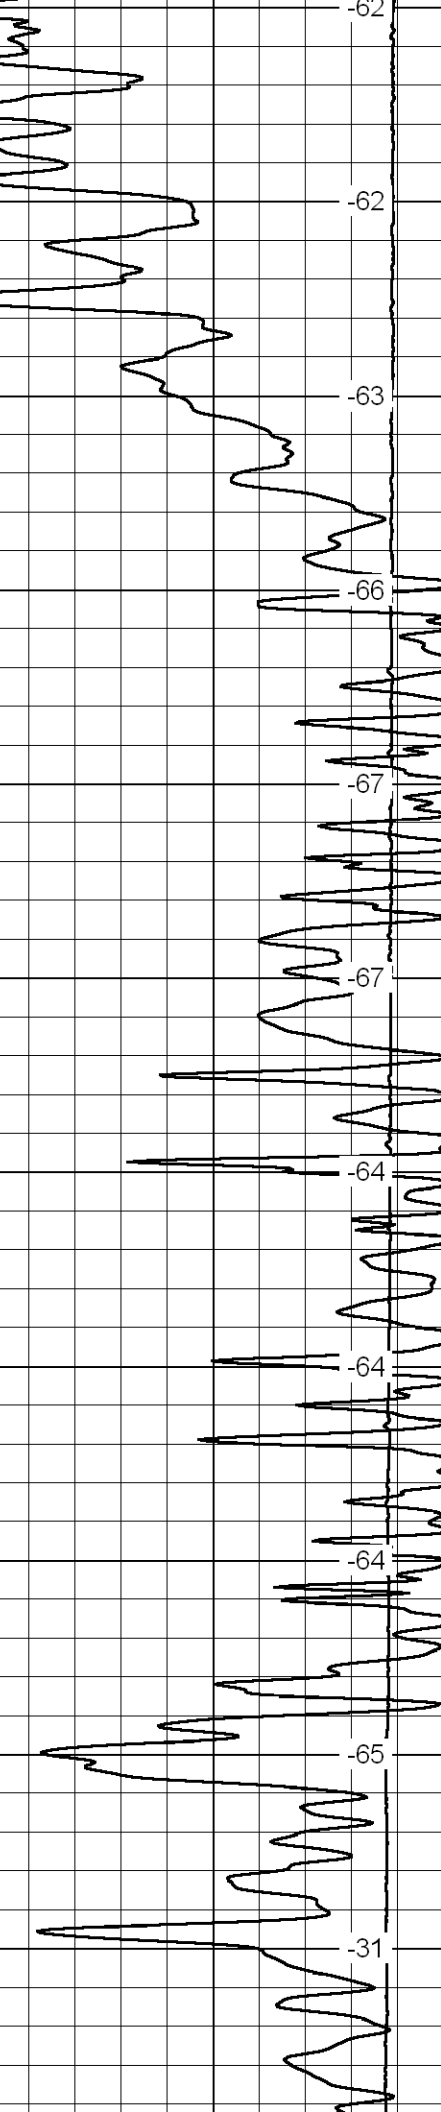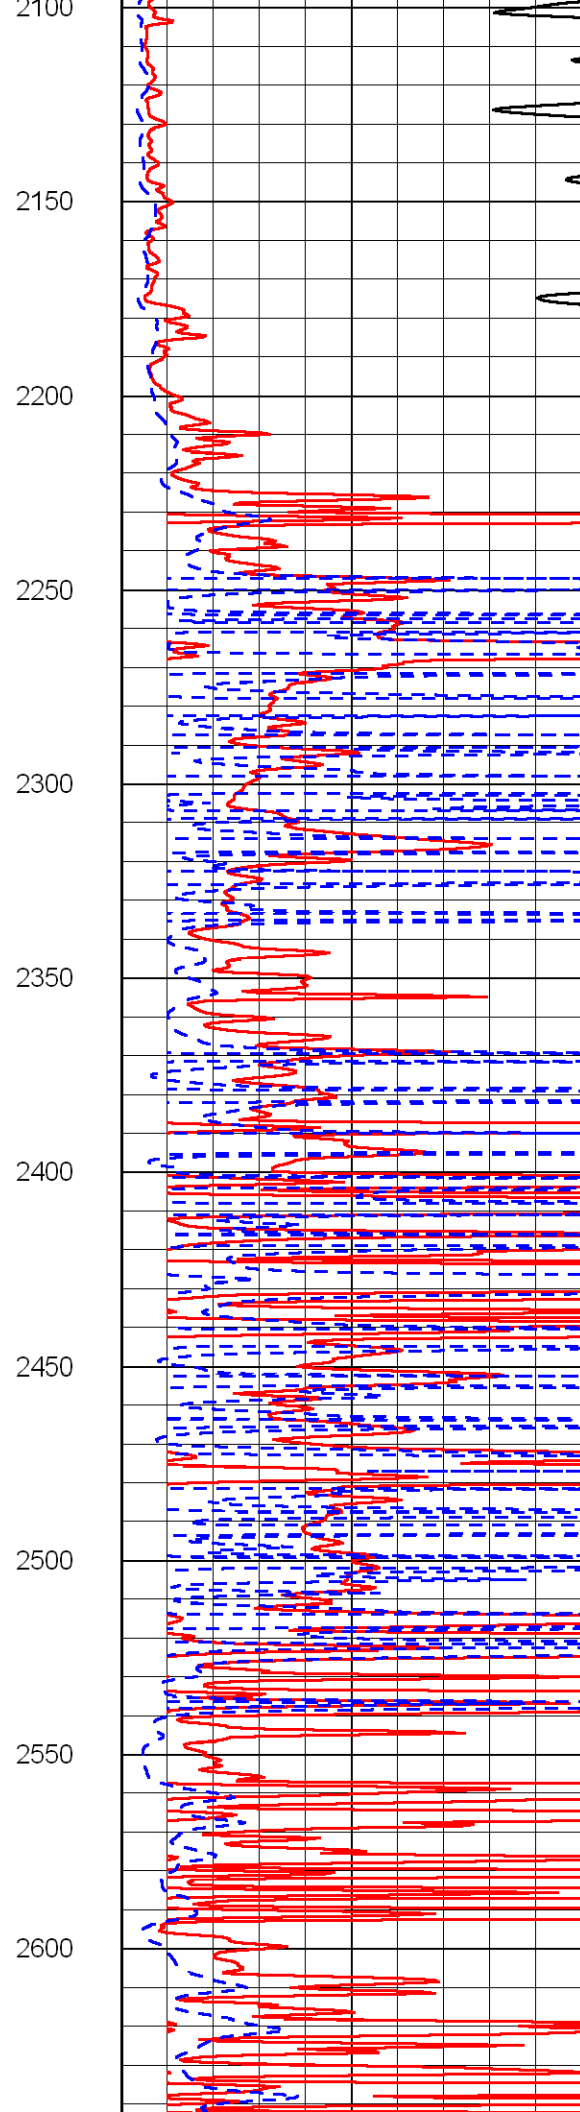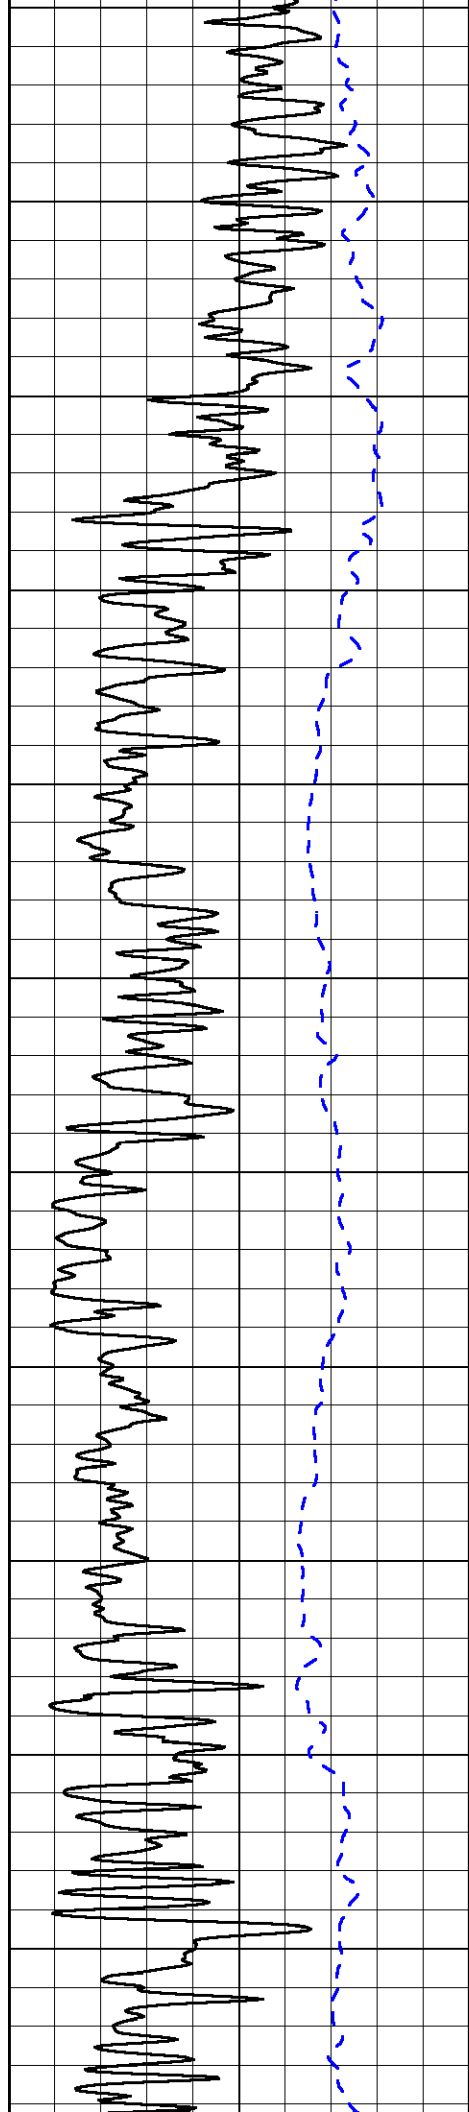

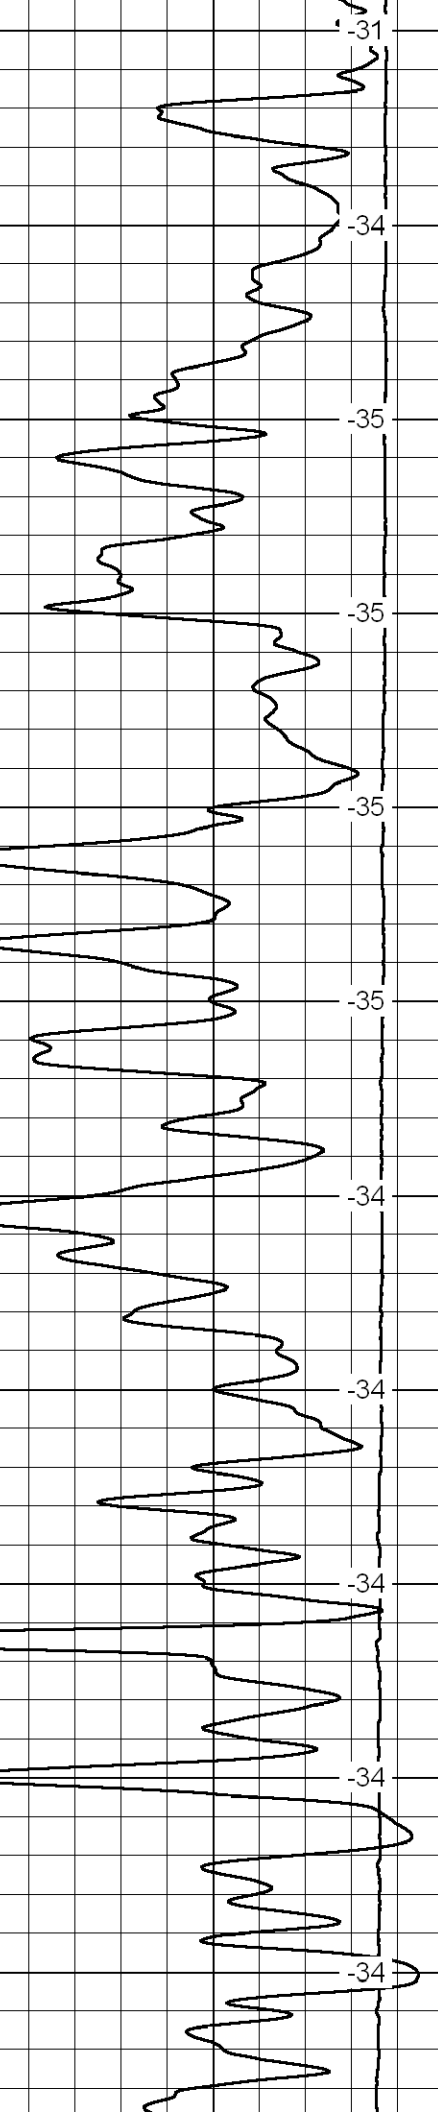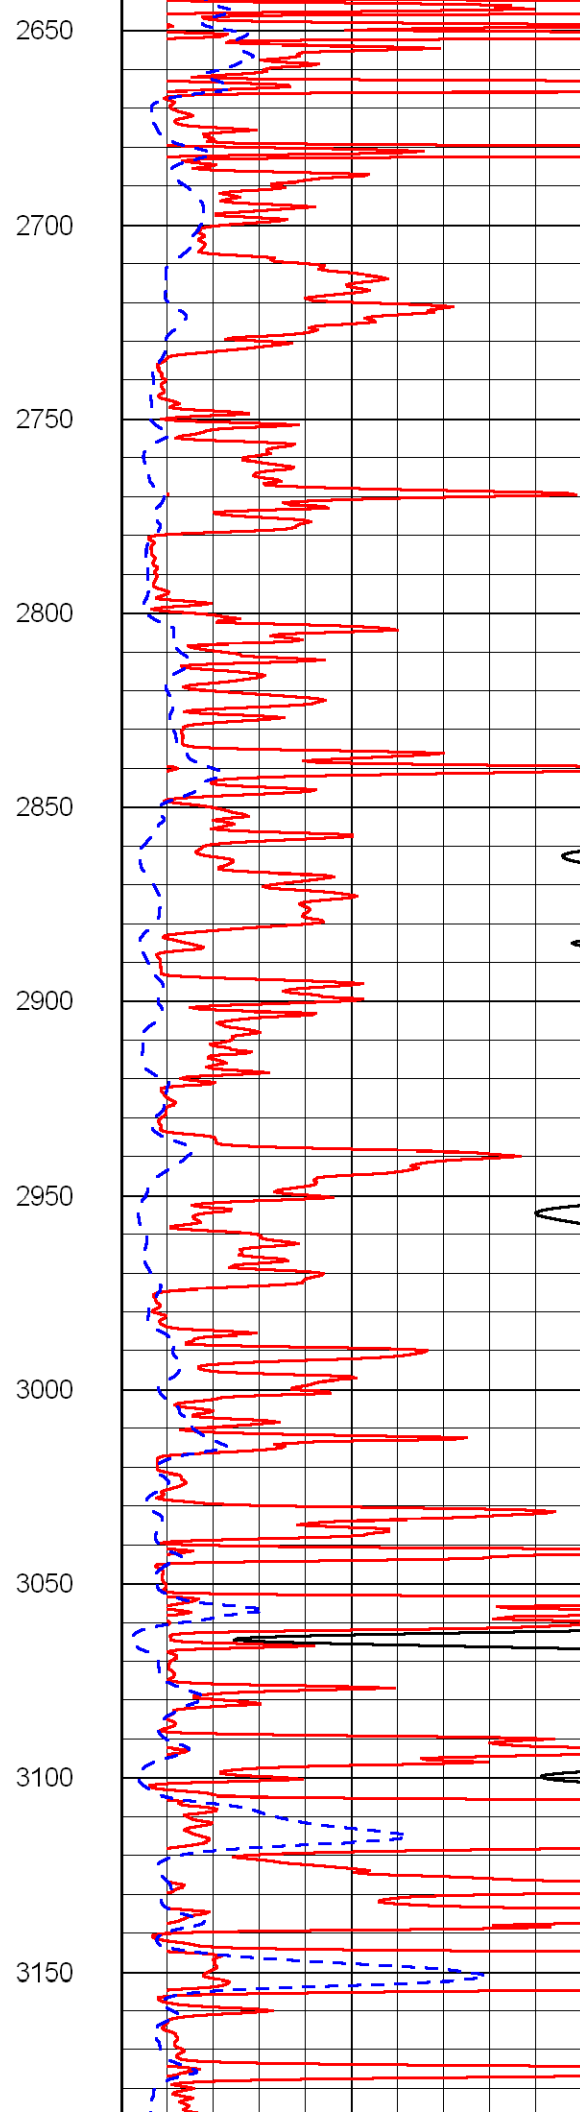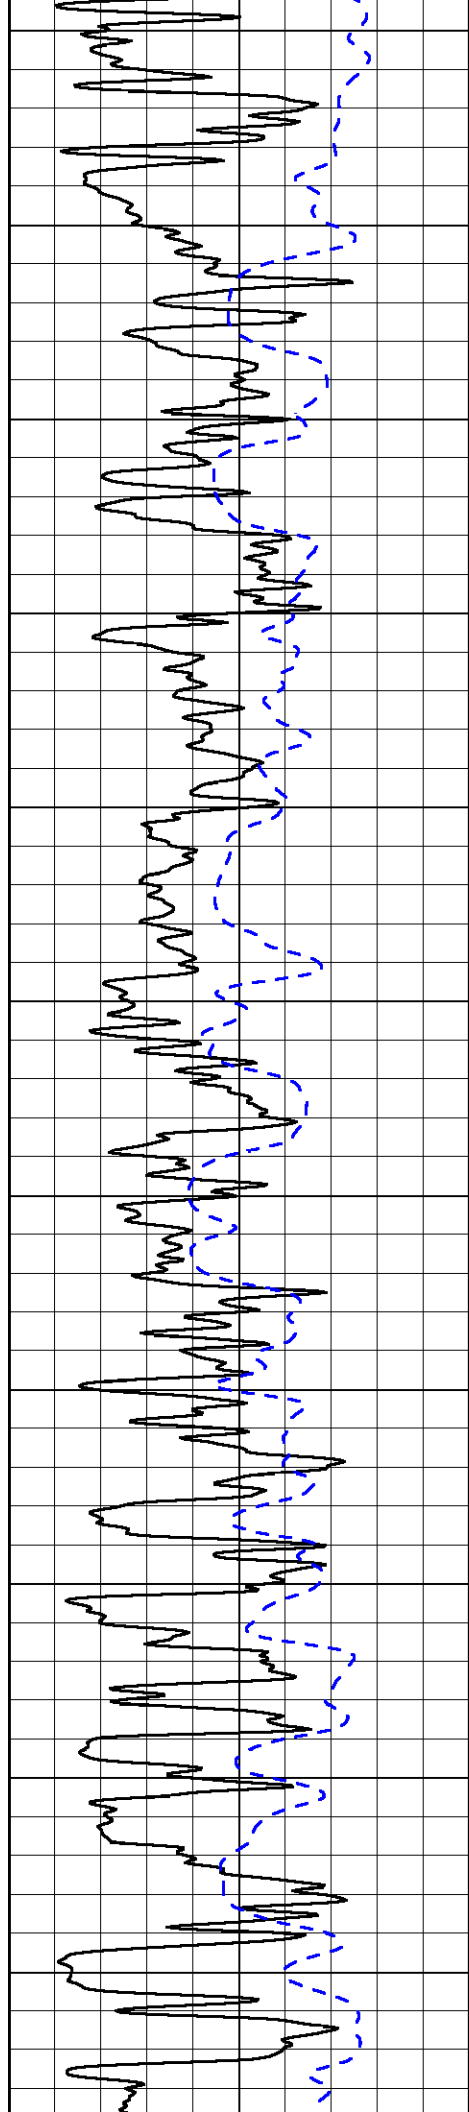

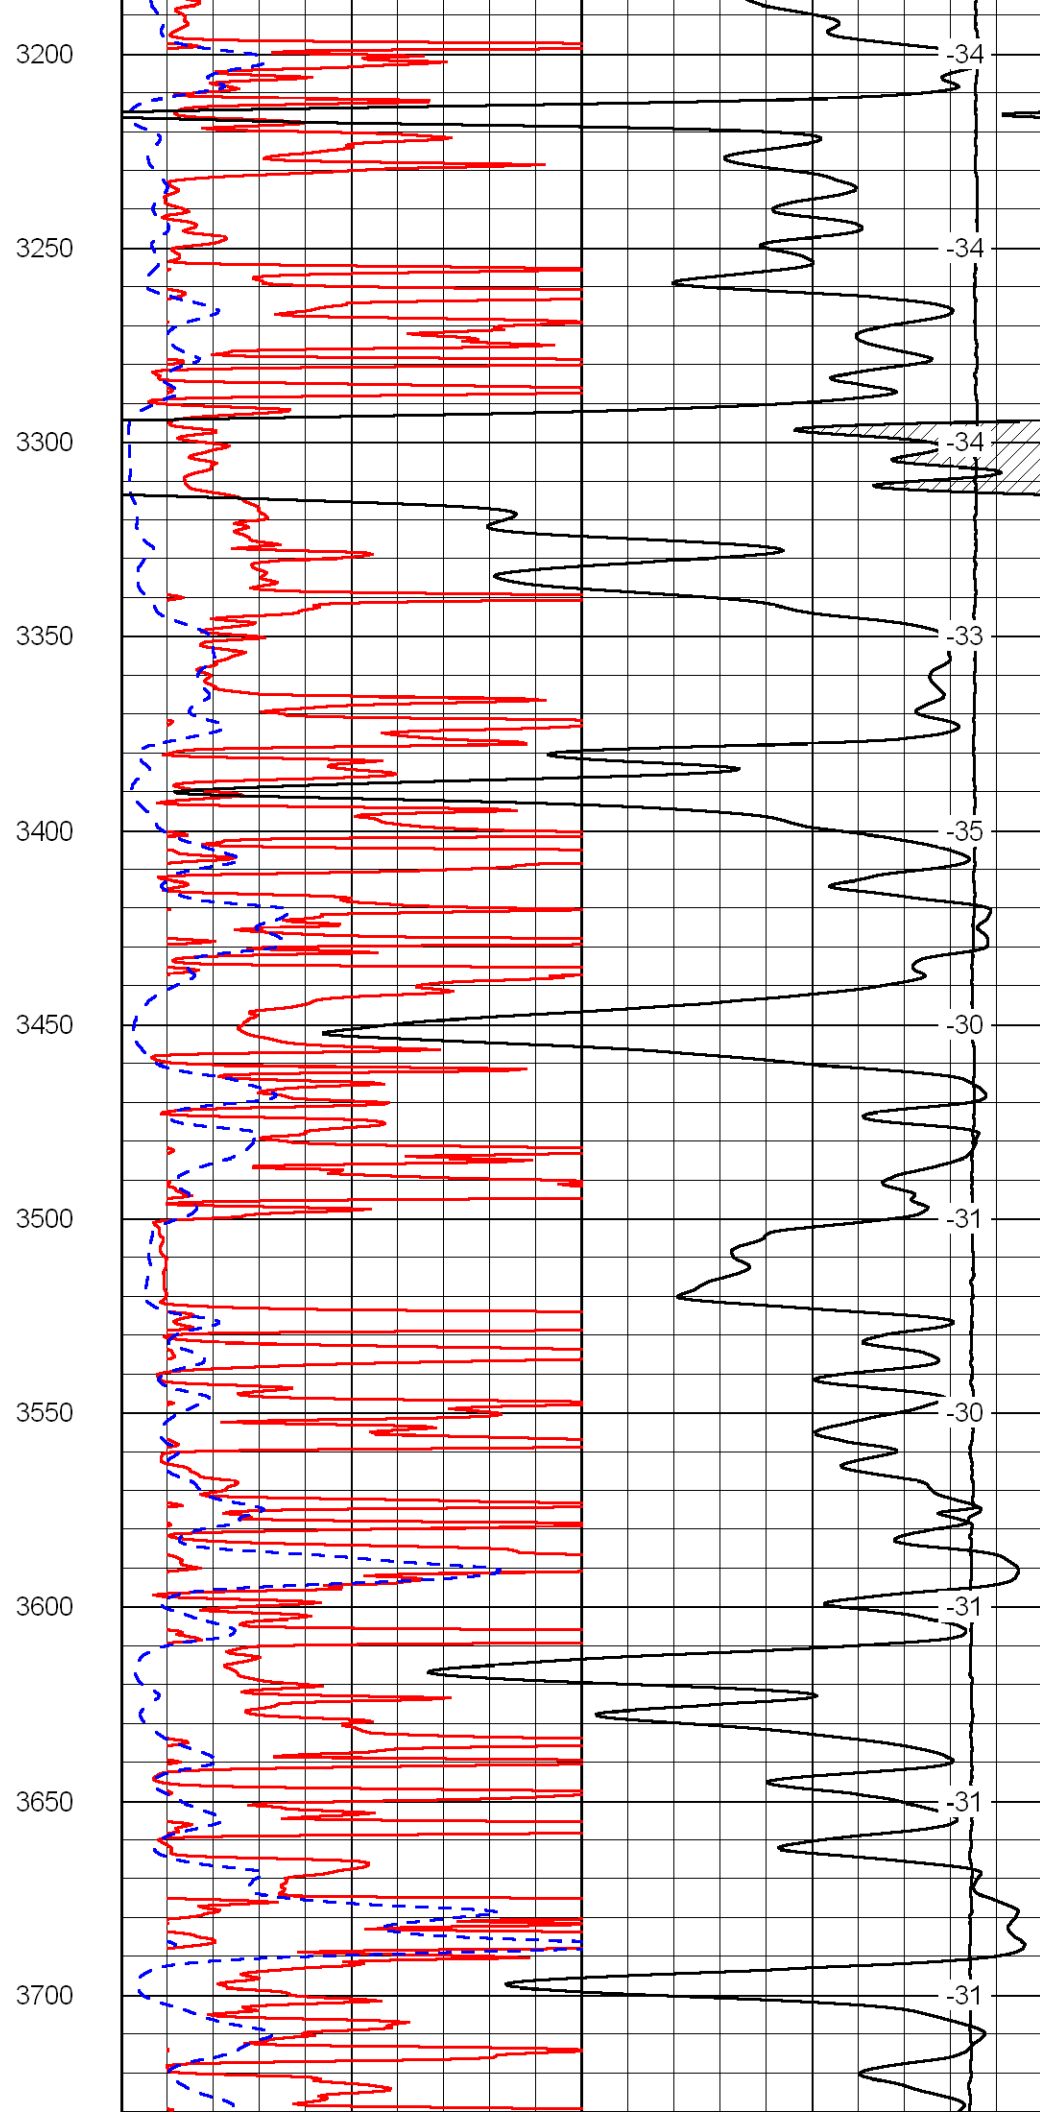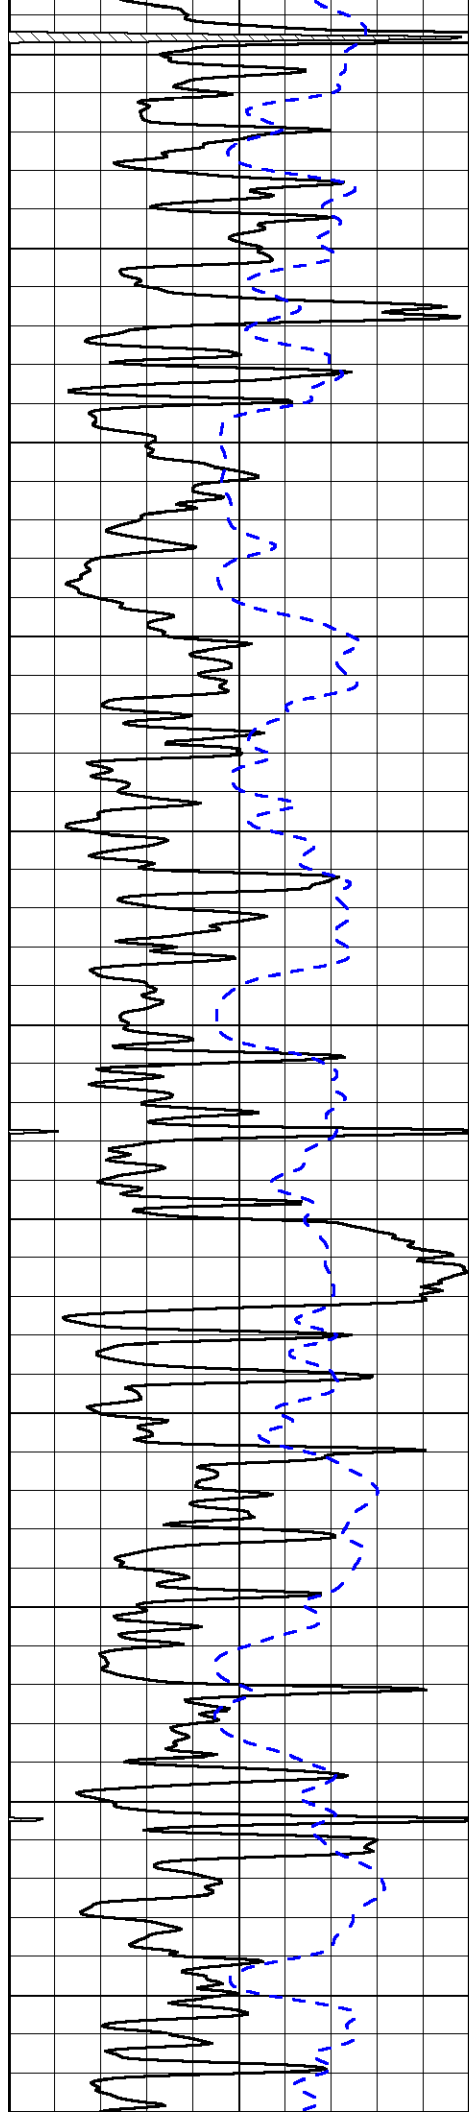

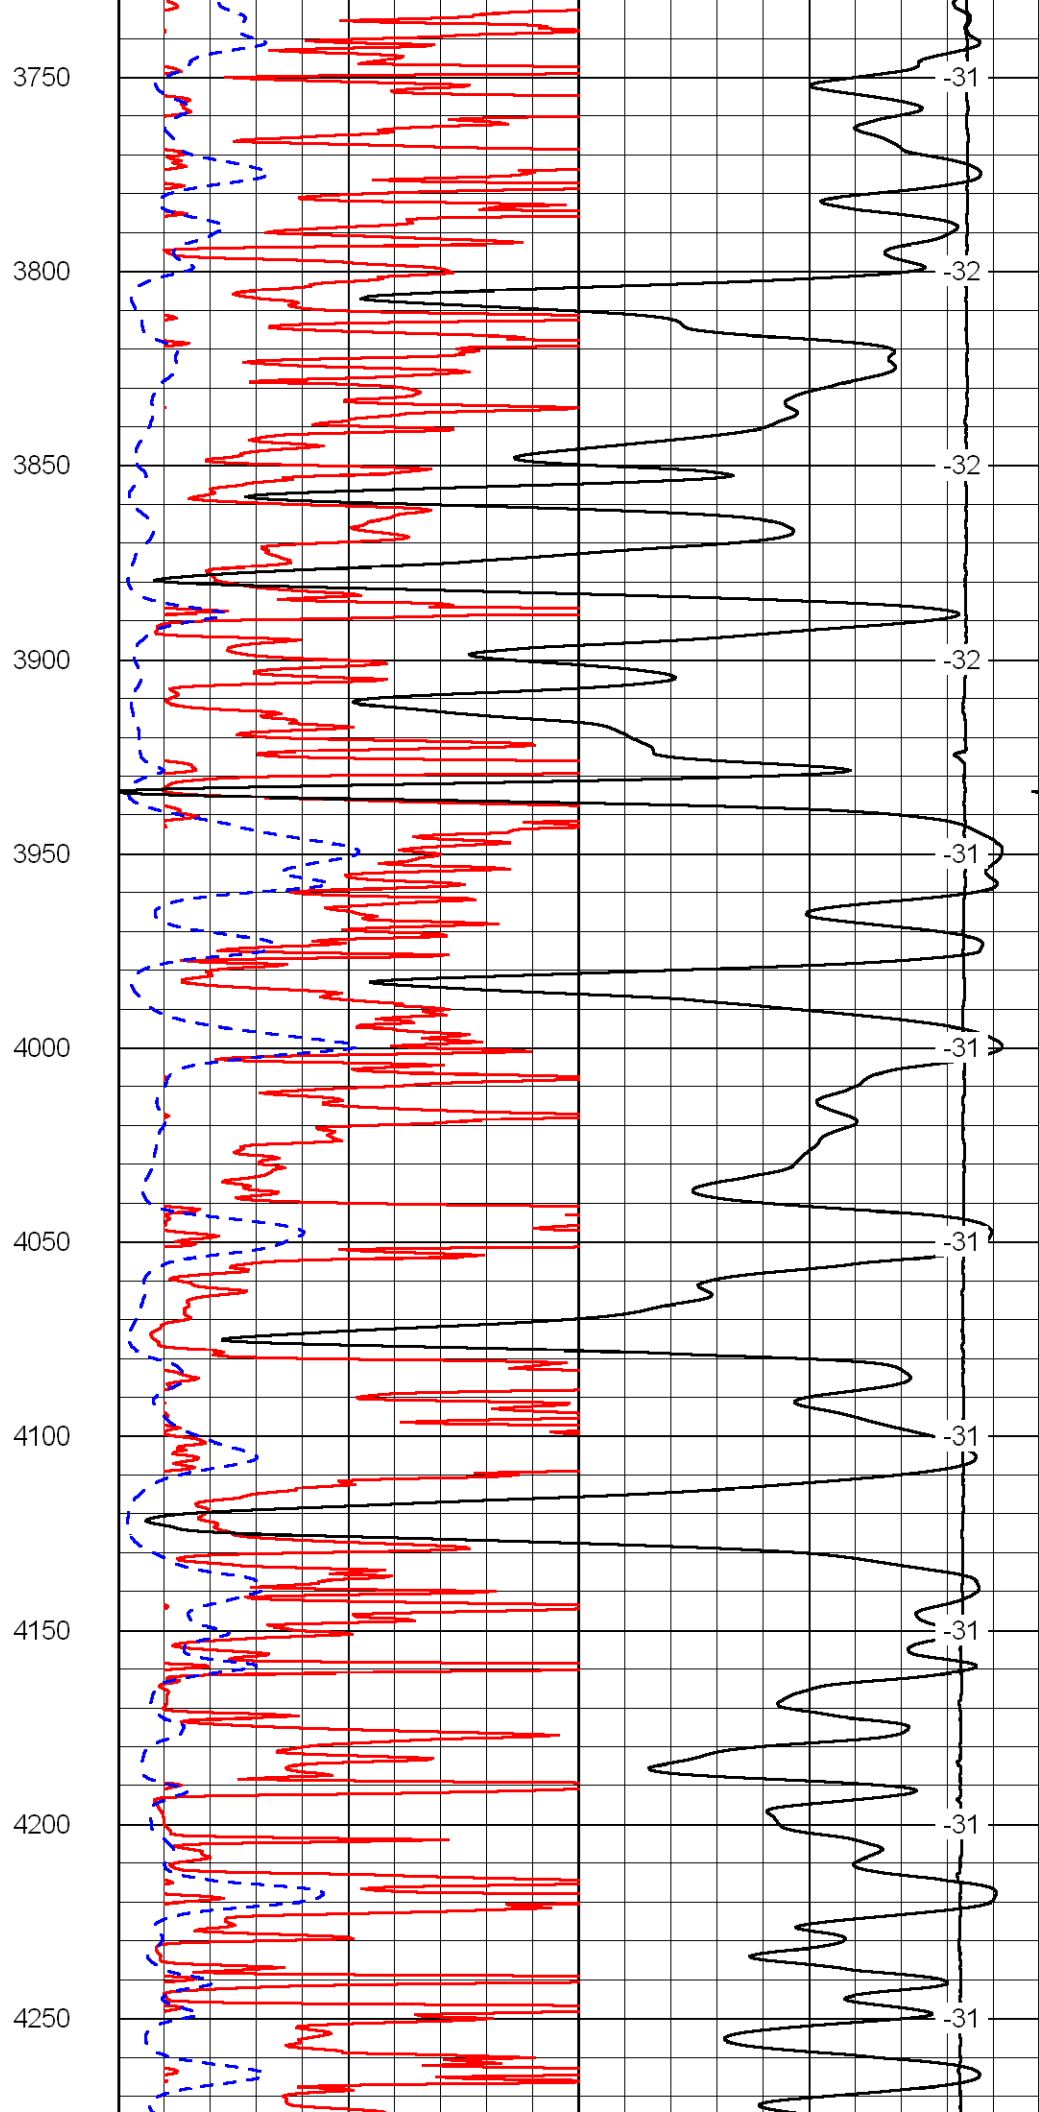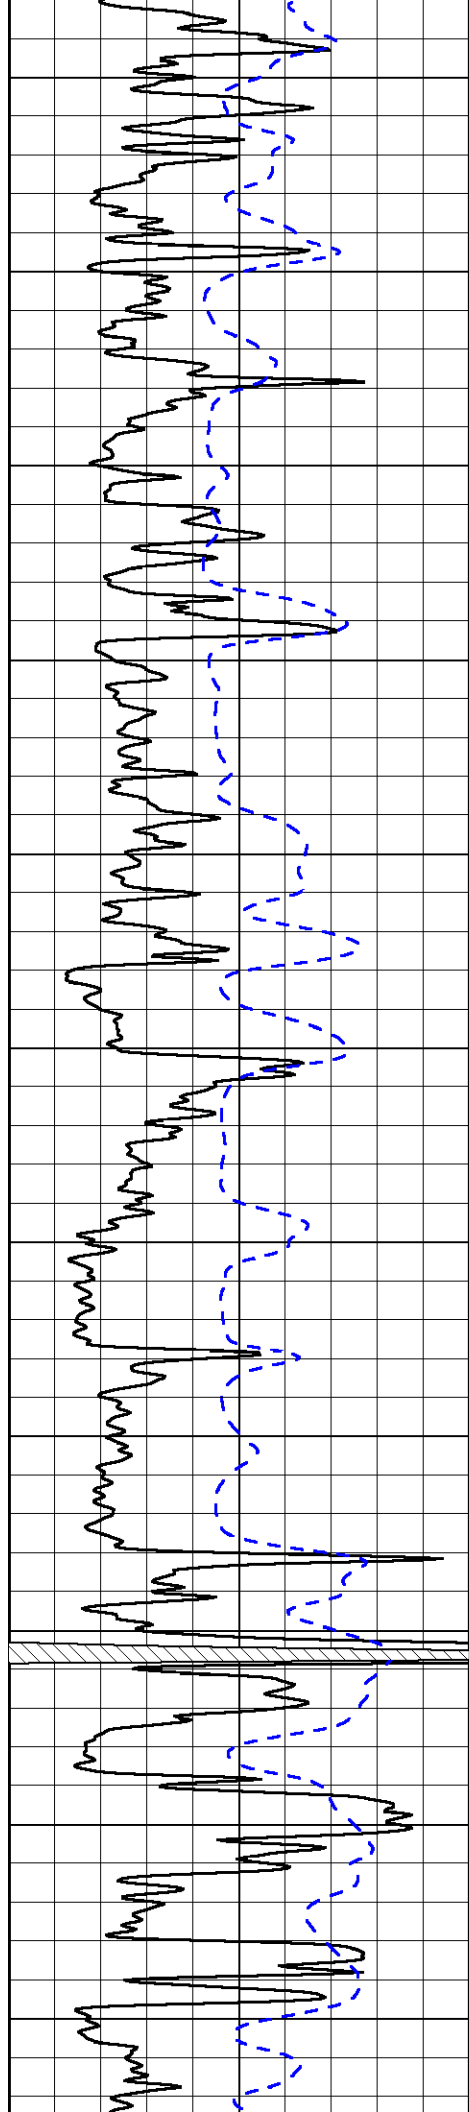

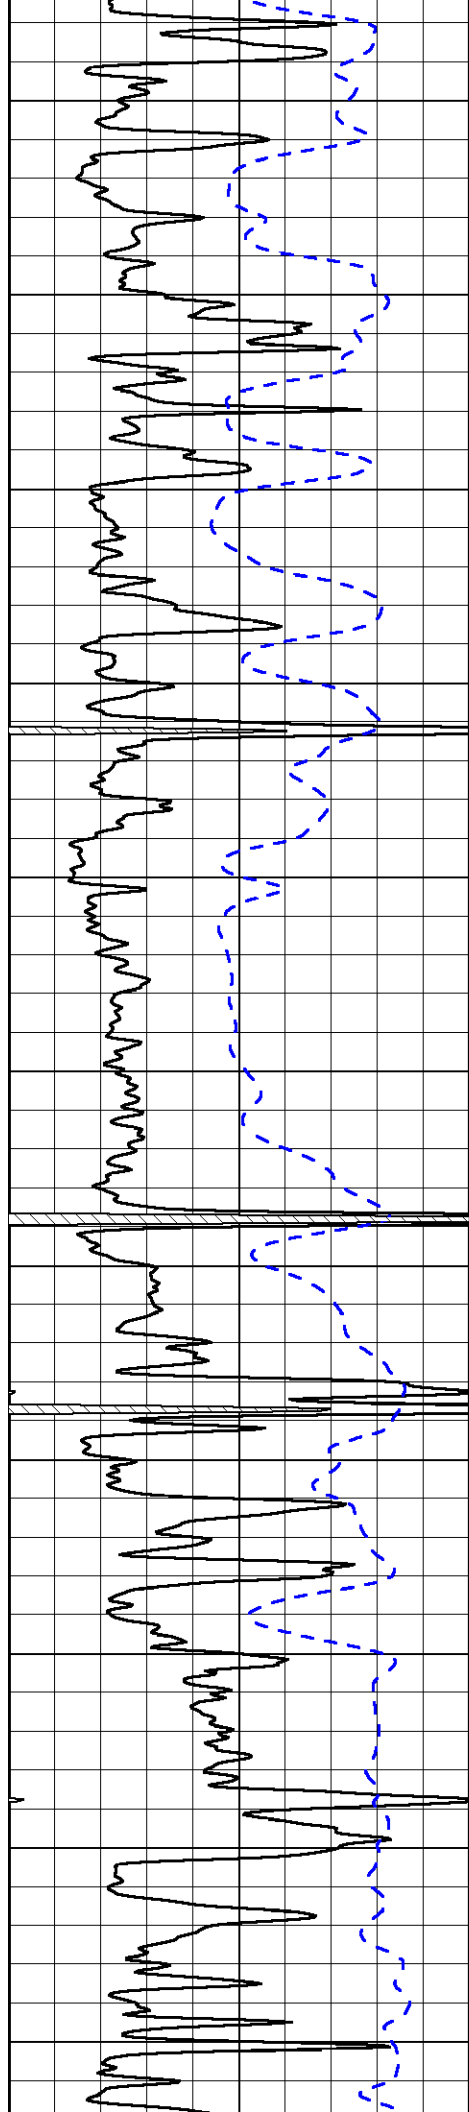

4300

4350

4400

4450

4500

4550



4600

4650

4700

4750

4800

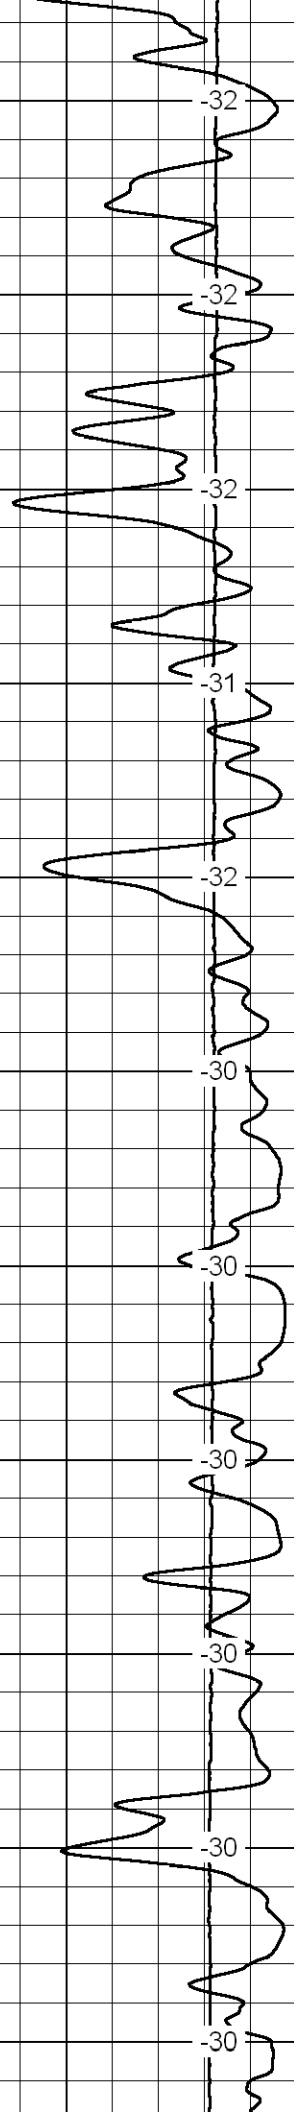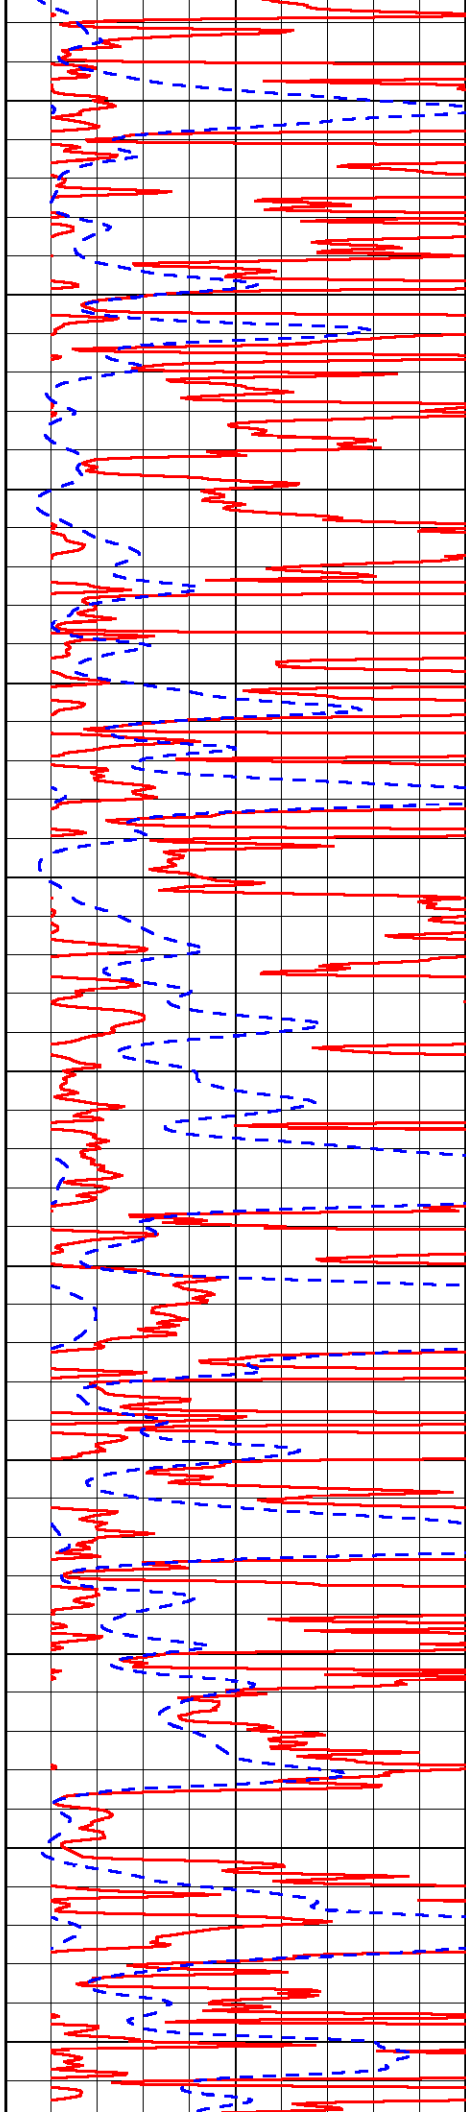

-32

-32

-32

-31

-32

-30


-30

-30

-30

-30

-30

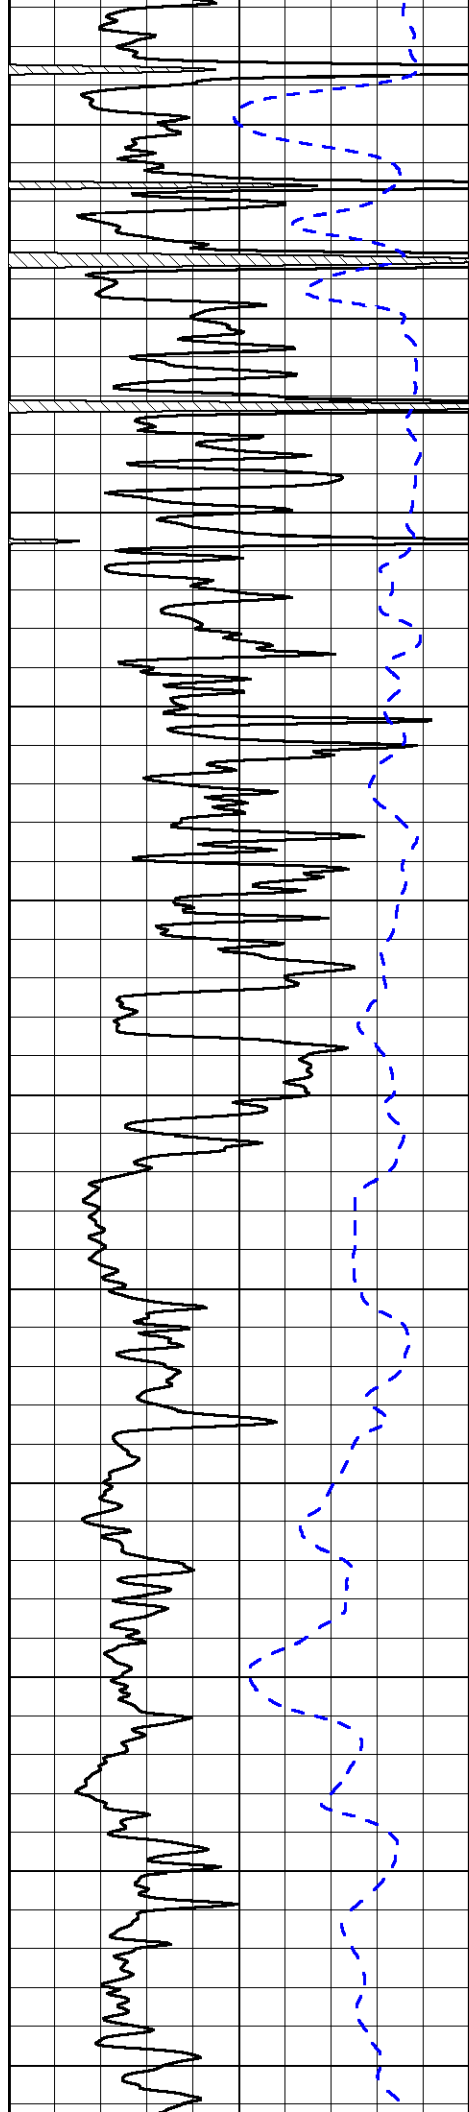

4850

4900

4950

5000

5050

5100


5150

5200

5250

5300

5350

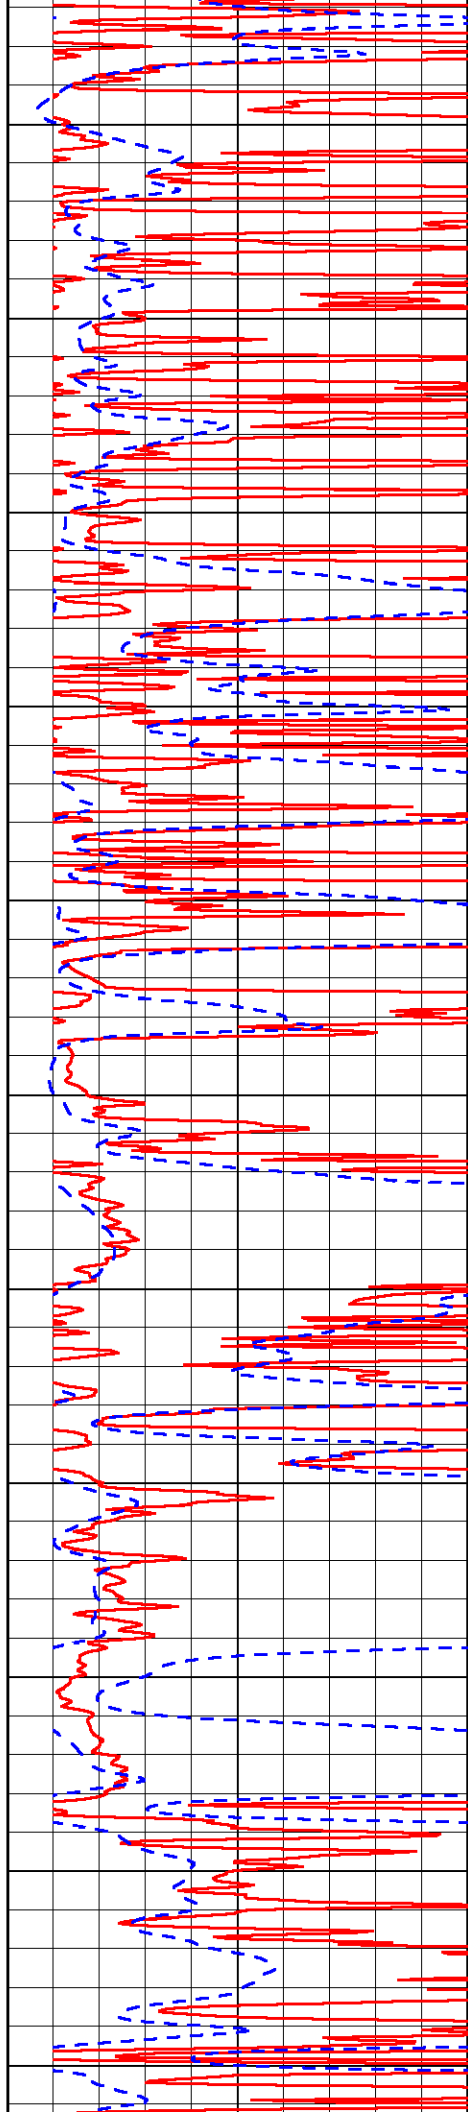

-30

-30

-29

-29

-29

-29


-29


-29

-29



-29


-29

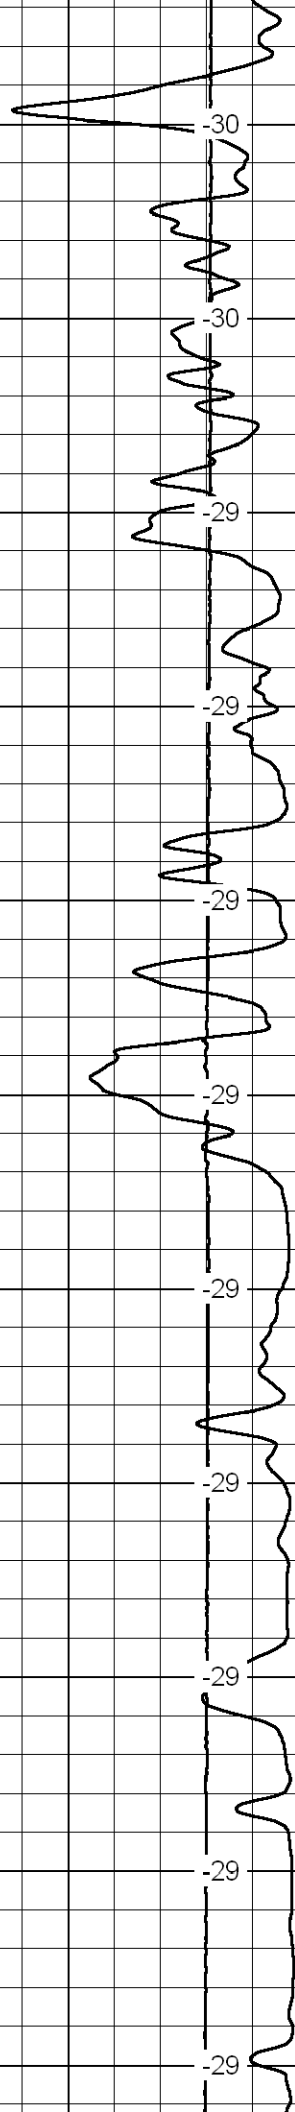

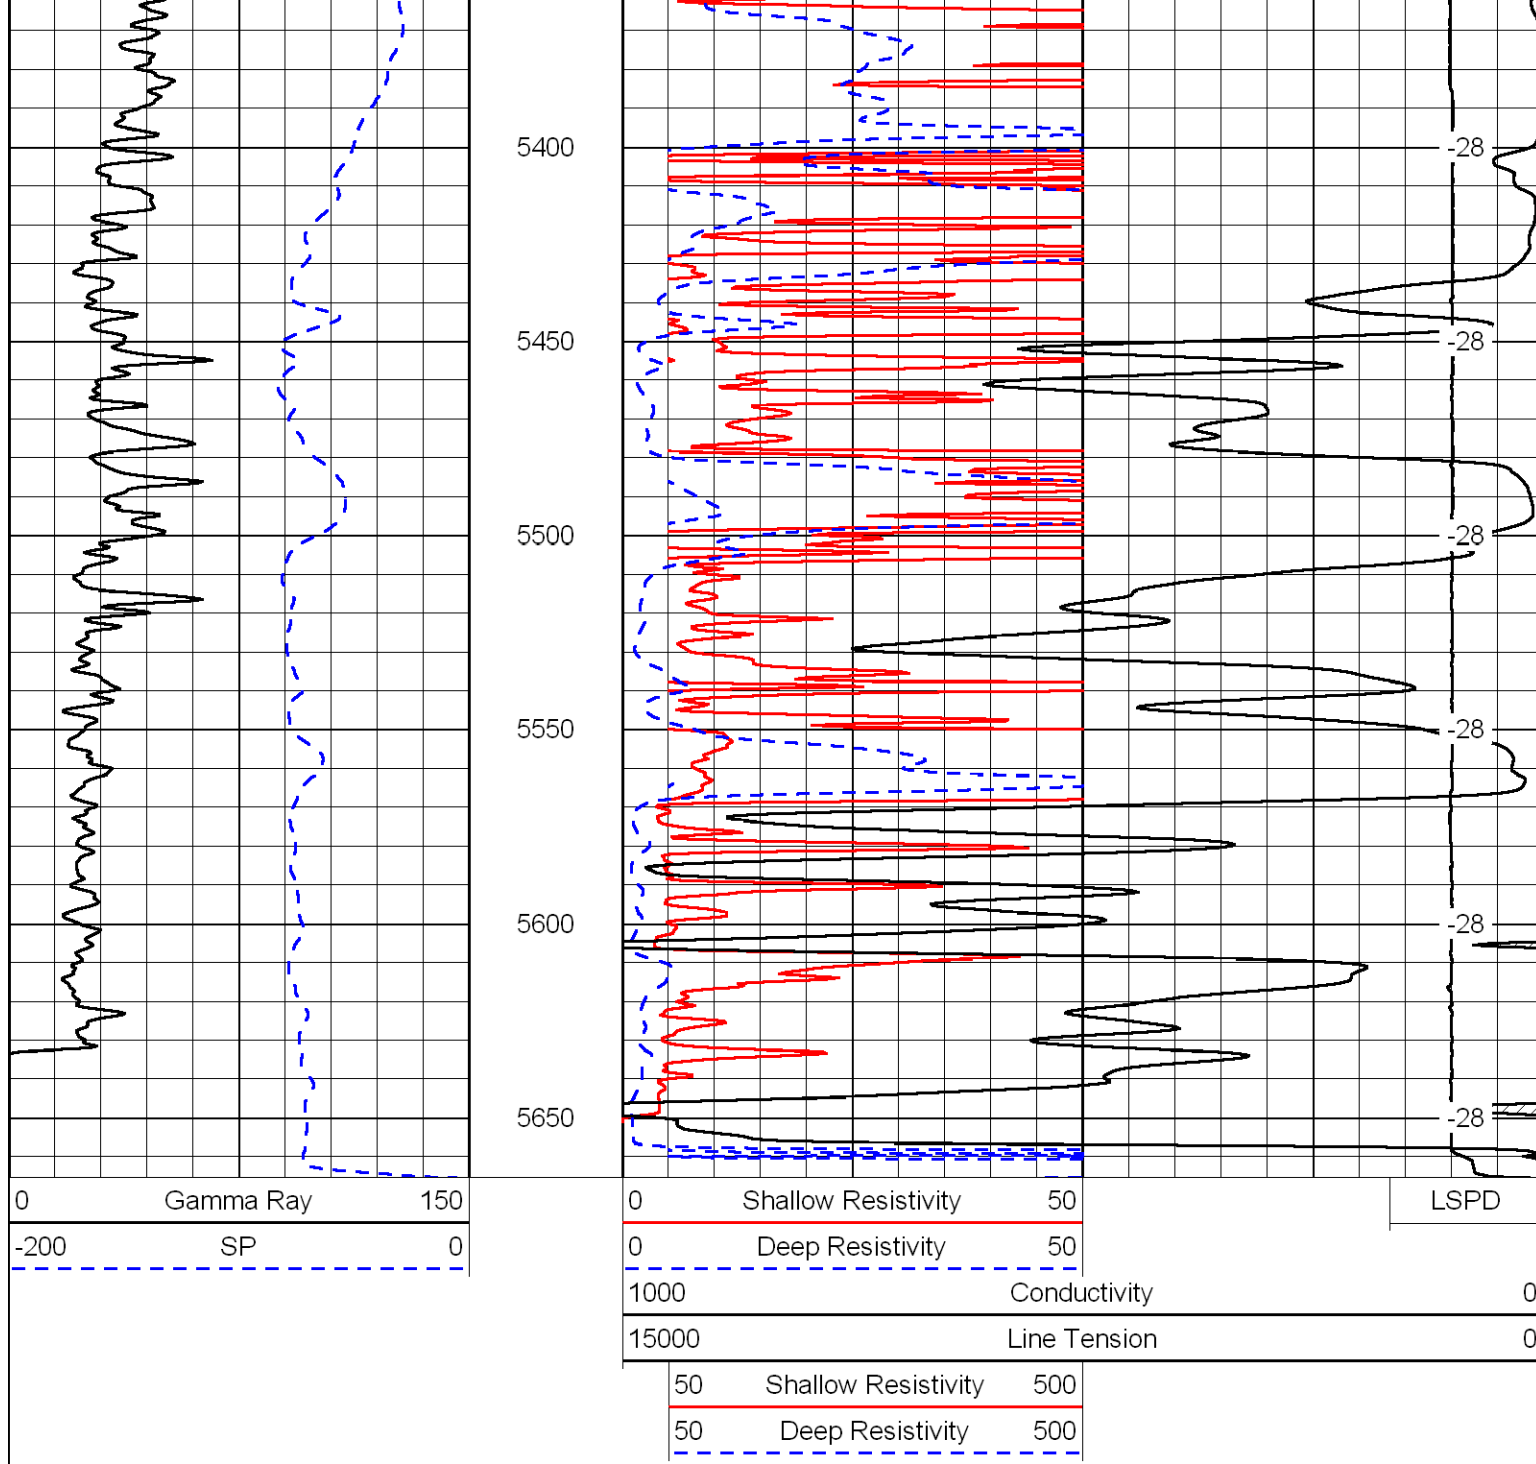

Database File: falcon_exp_johnkoehn_1_18_sehd.db
Dataset Pathname: DIL/falstk
Presentation Format: dil
Dataset Creation: Sat Apr 16 05:43:25 2011
Charted by: Depth in Feet scaled 1:240

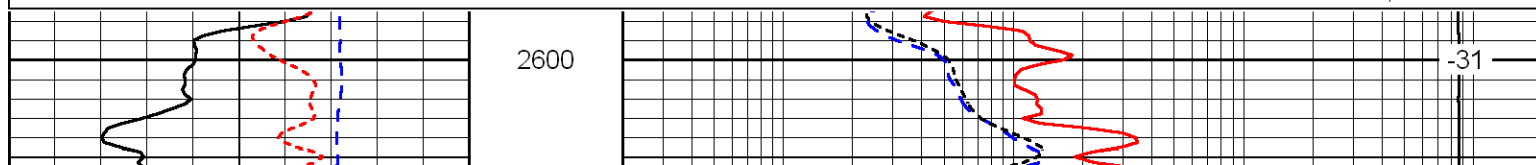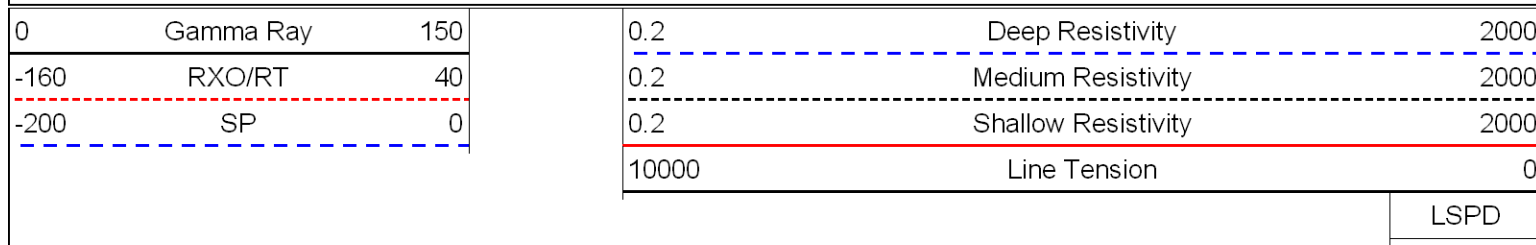

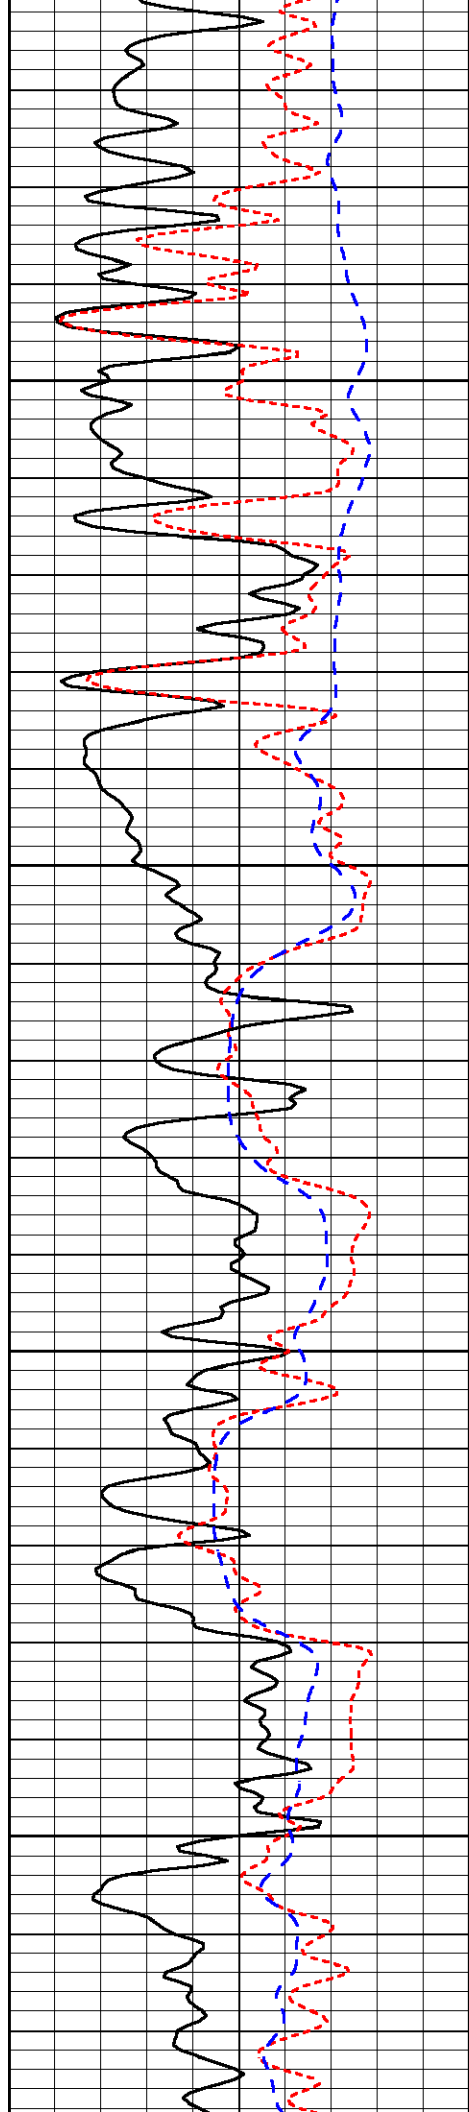


2650

2700

2750

2800

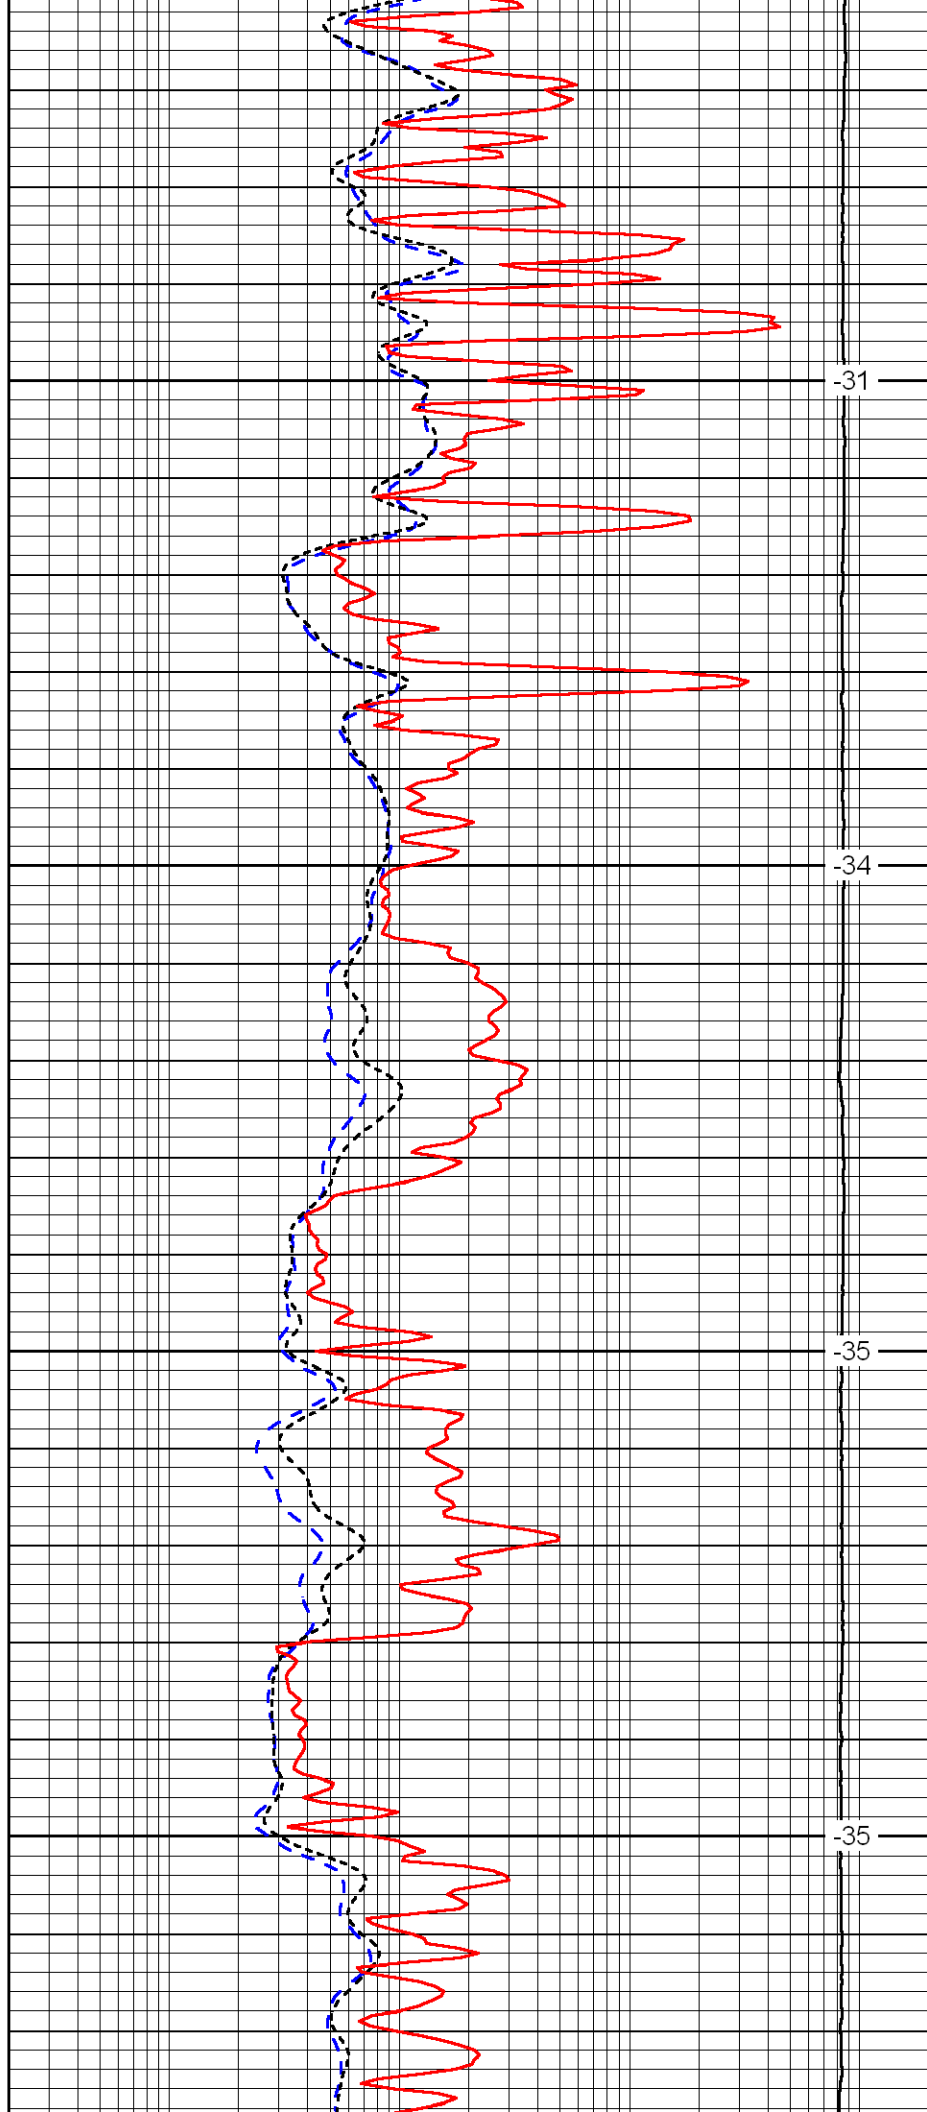


-31

-34

-35

-35

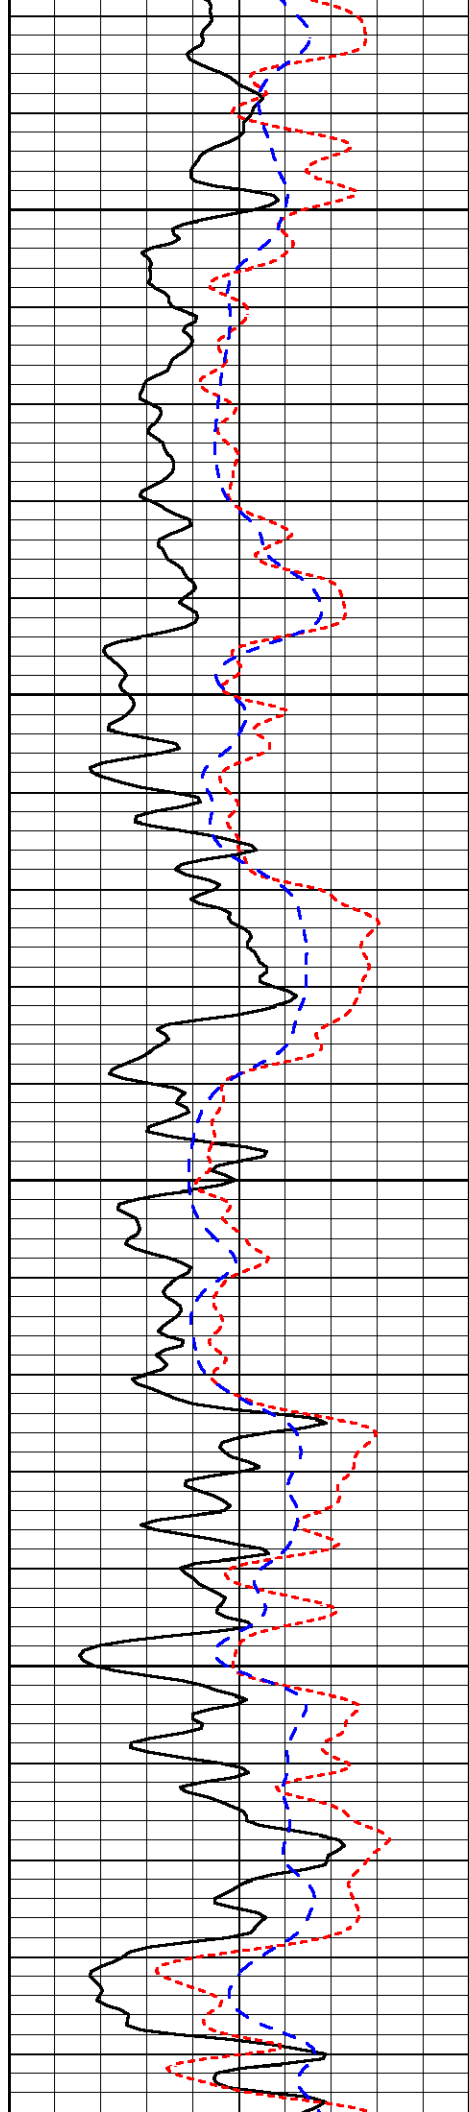


2850

2900

2950

3000

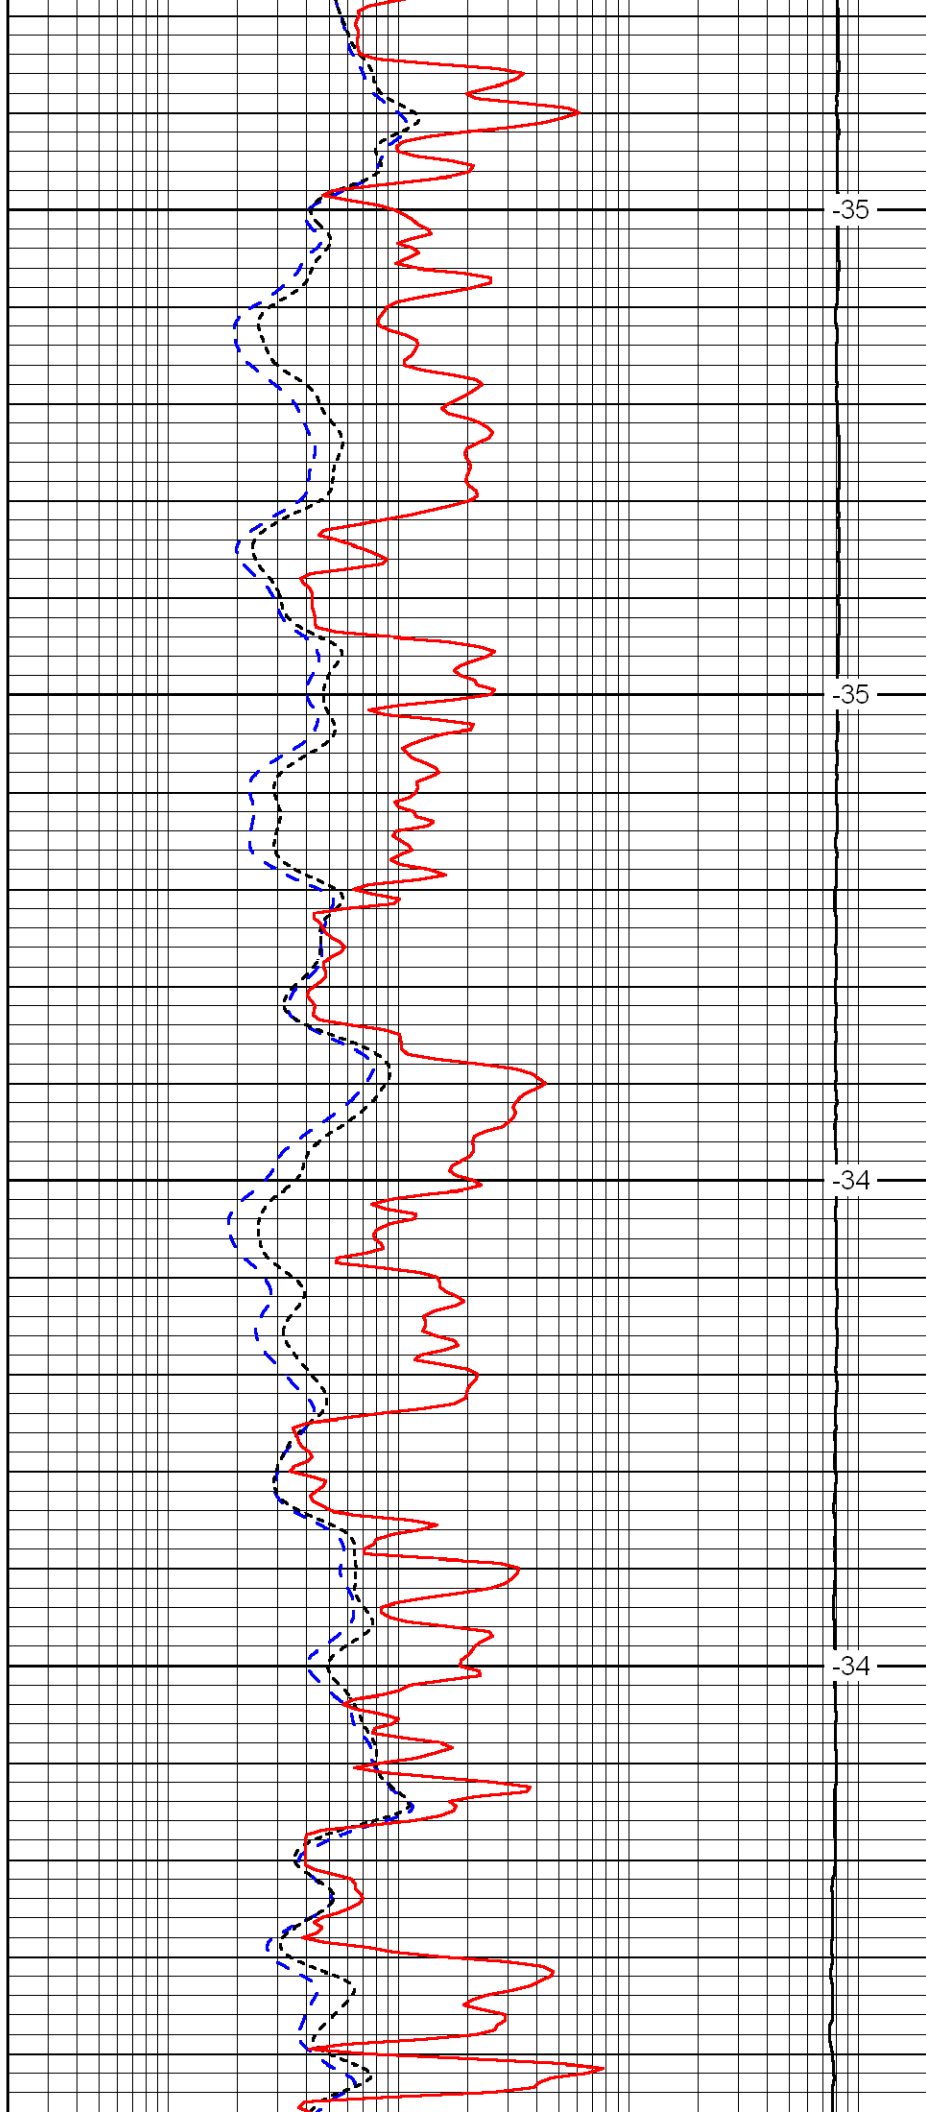


-35

-35

-34

-34

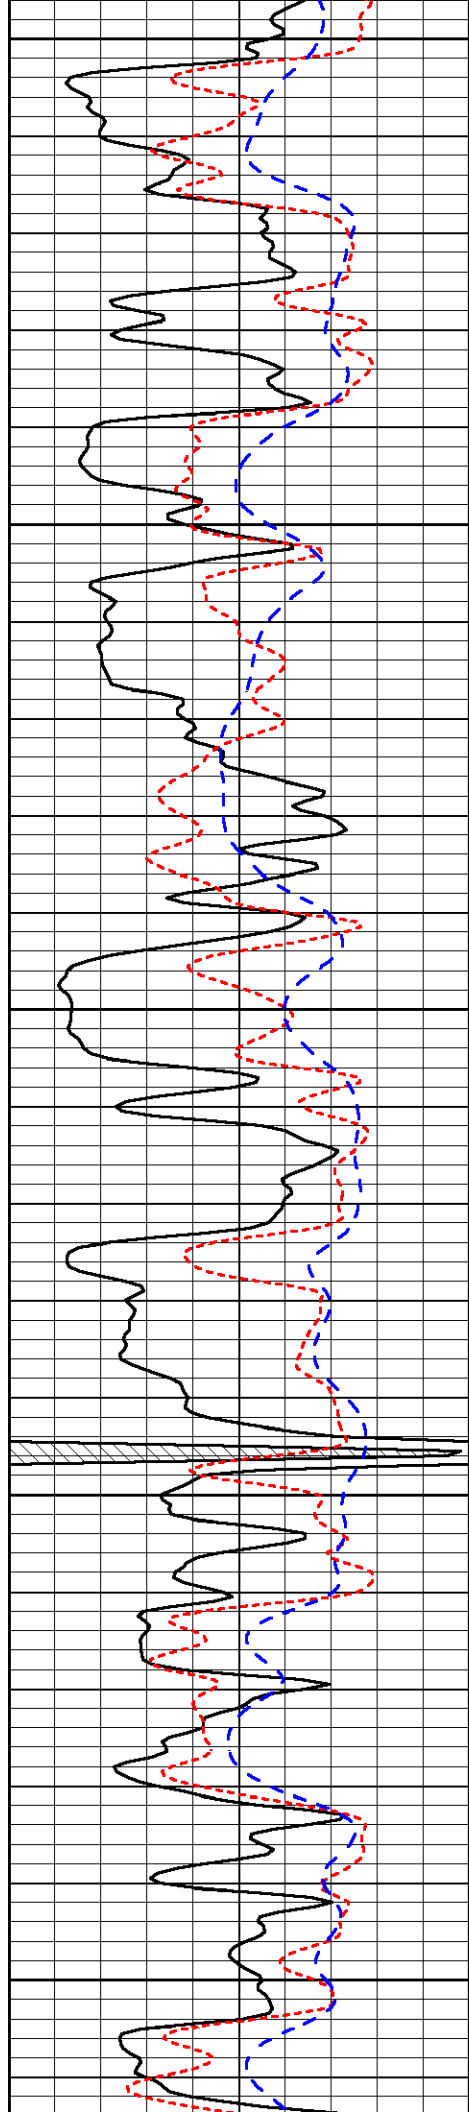


3050

3100

3150

3200

3250

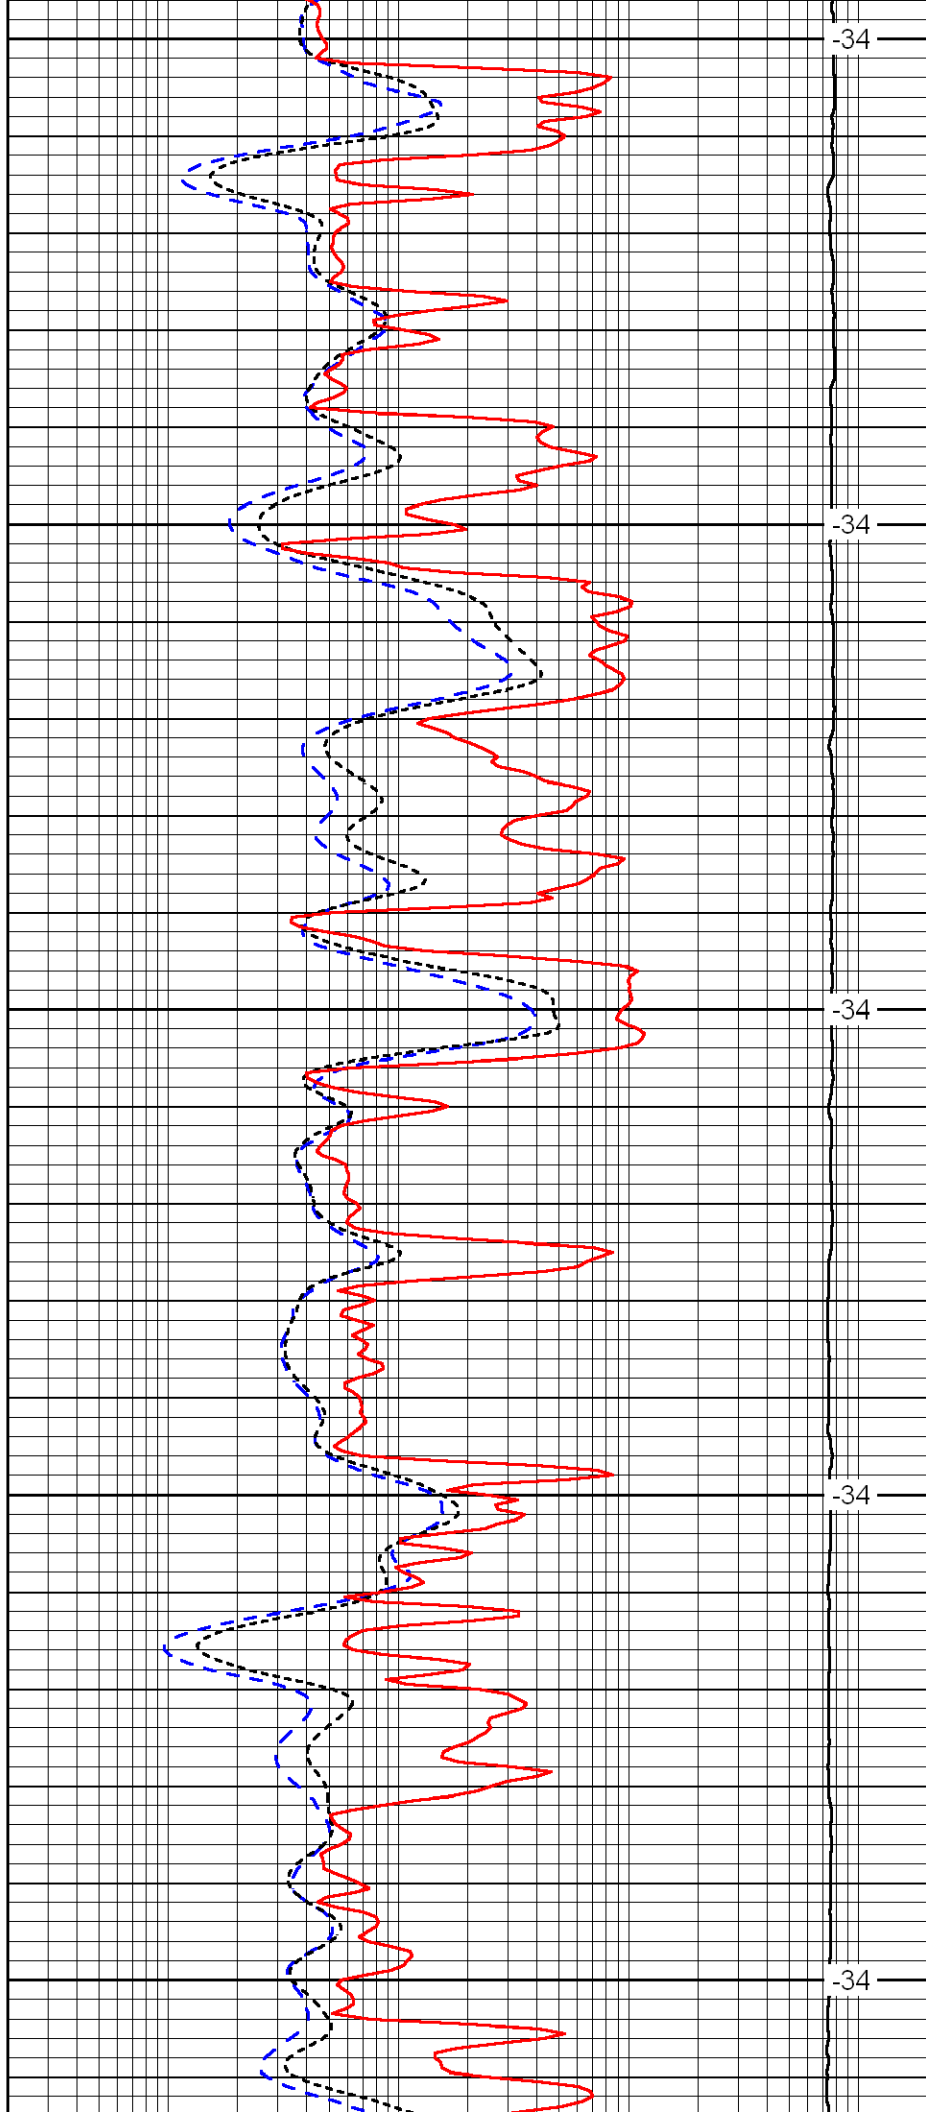


-34

-34

-34

-34

-34

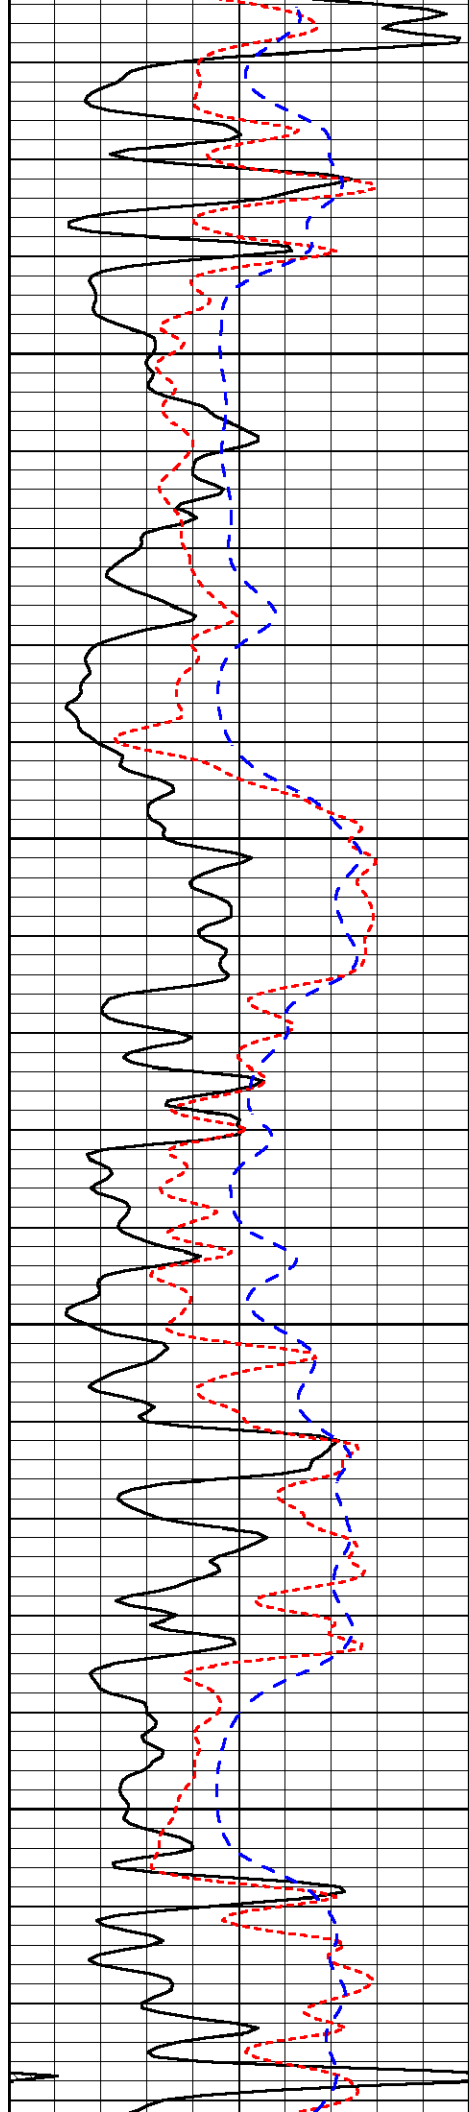


3300

3350

3400

3450

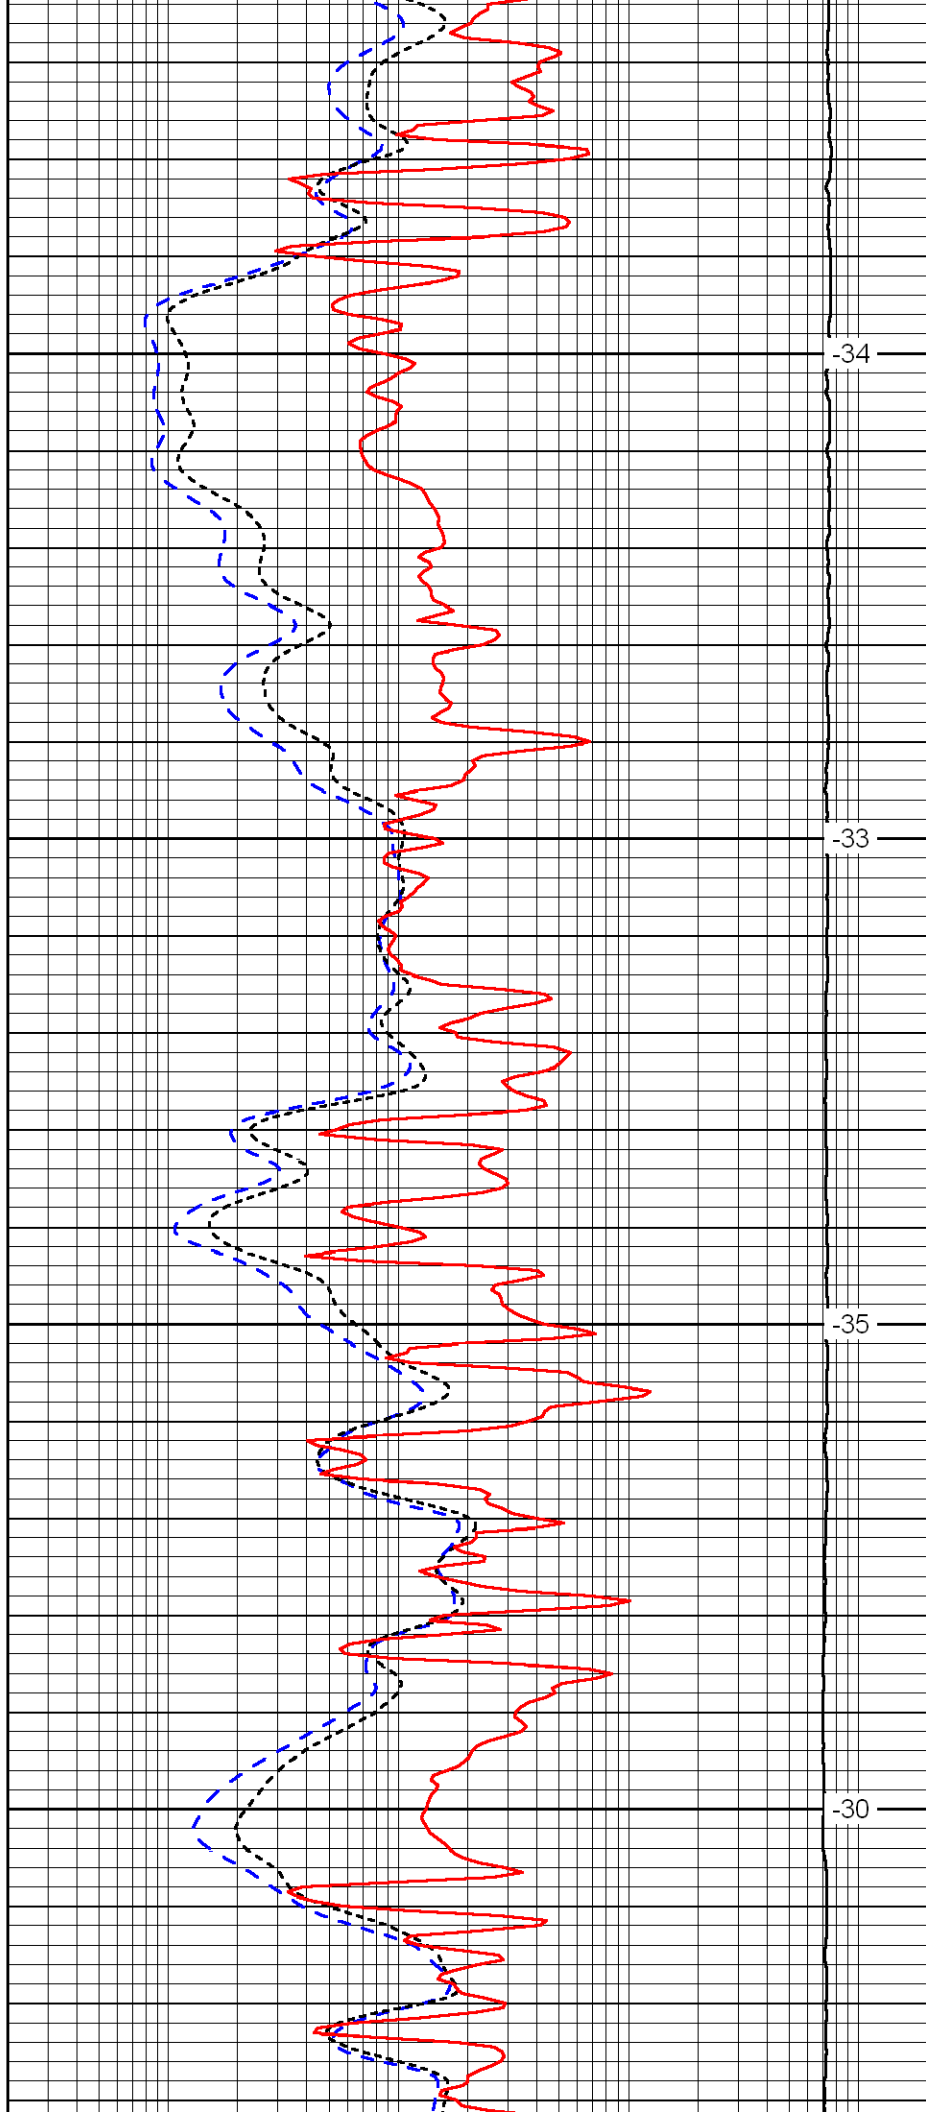


-34

-33

-35

-30

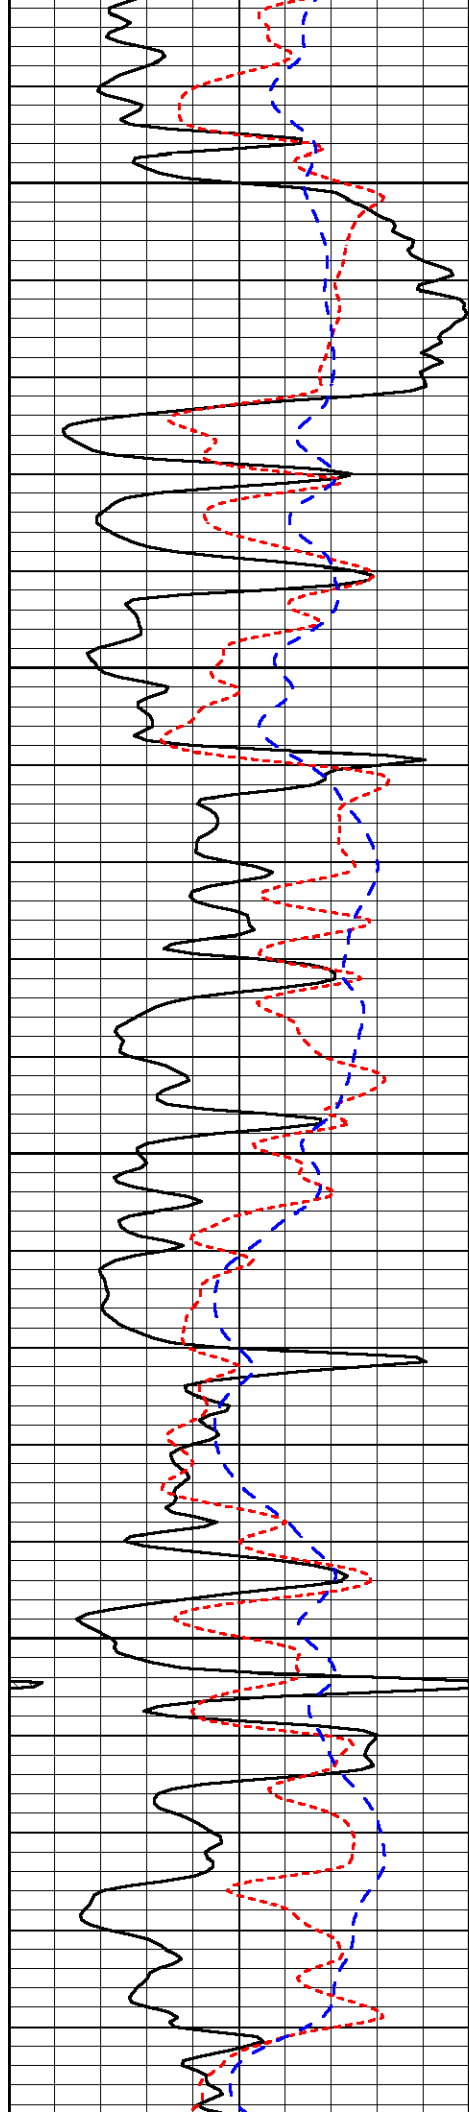


3500

3550

3600

3650

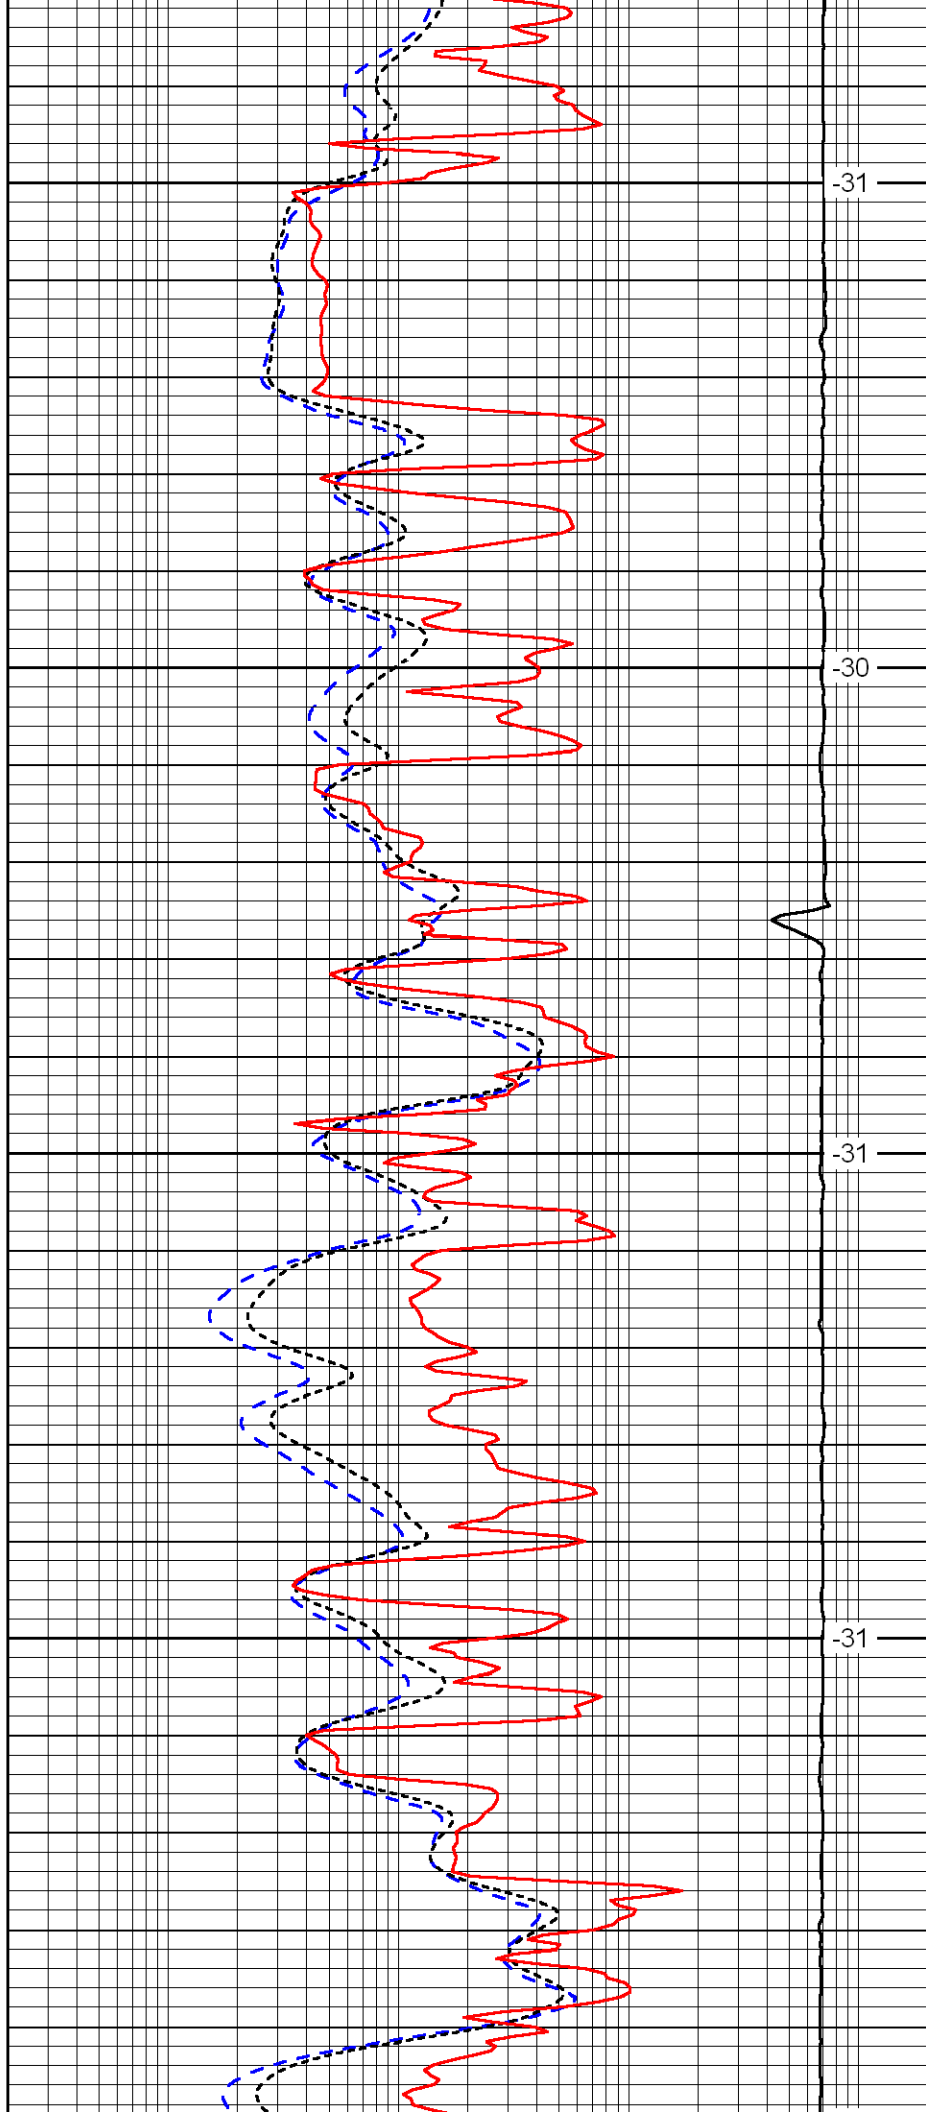


-31

-30

-31

-31

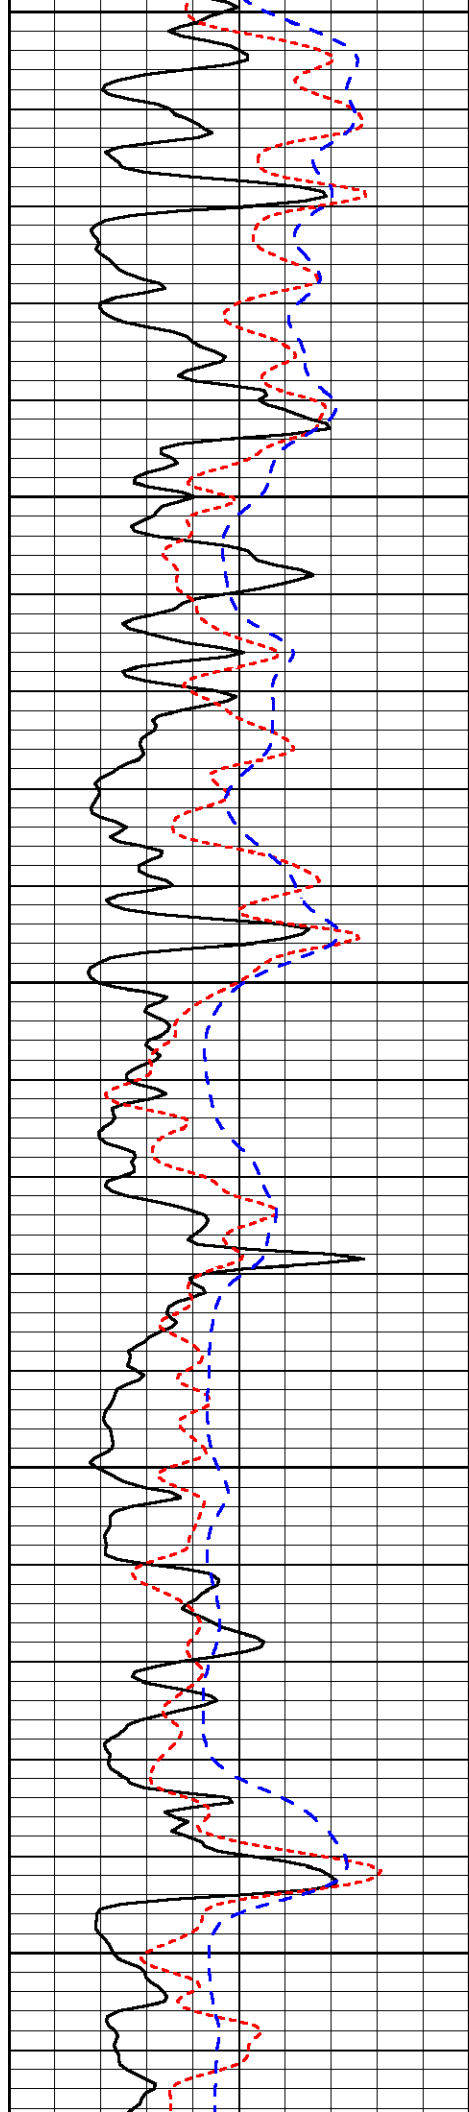


3700

3750

3800

3850

3900

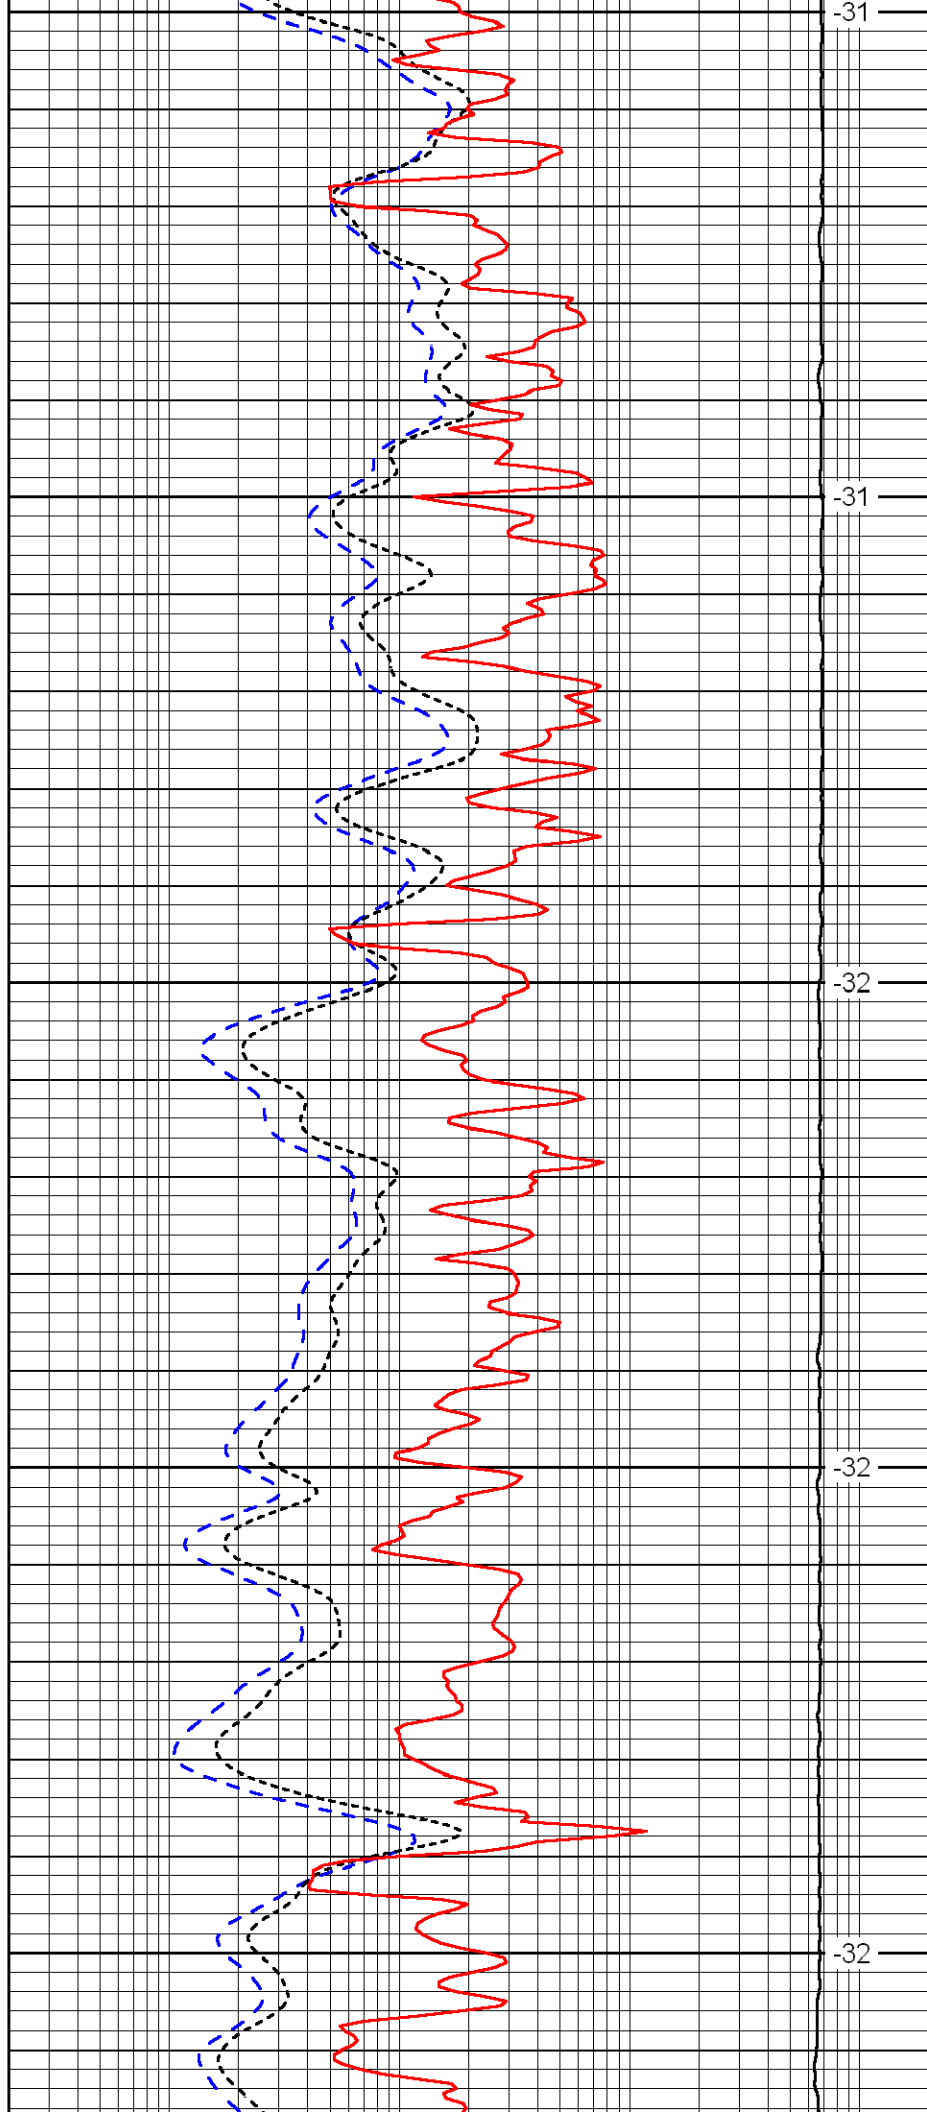


-31

-31

-32

-32

-32

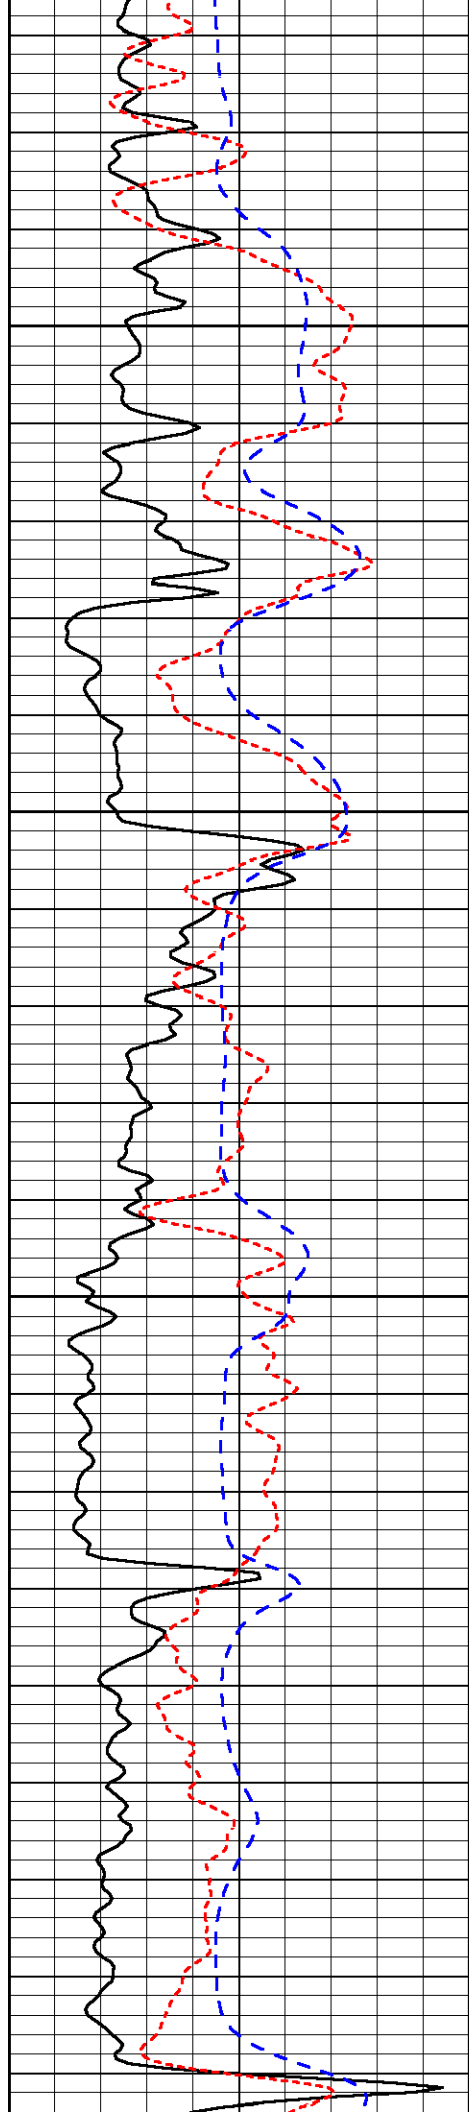


3950

4000

4050

4100

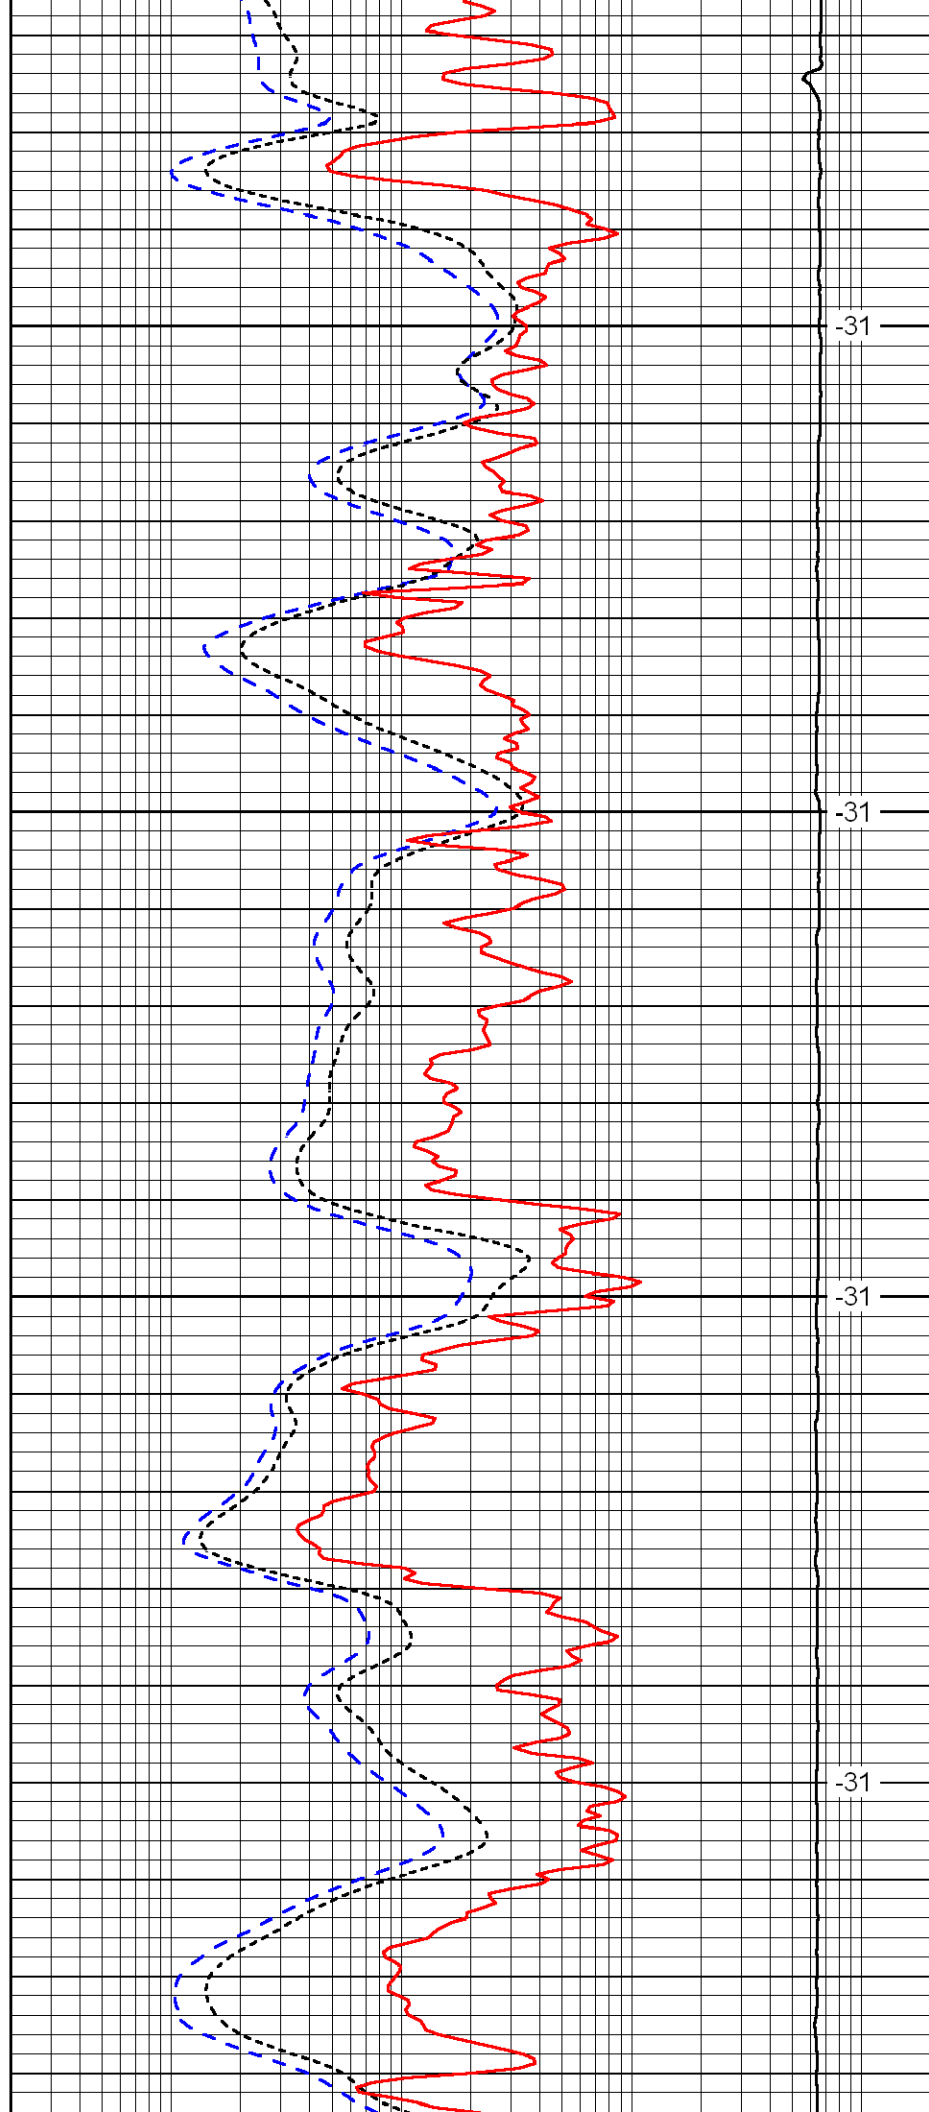


-31

-31

-31

-31

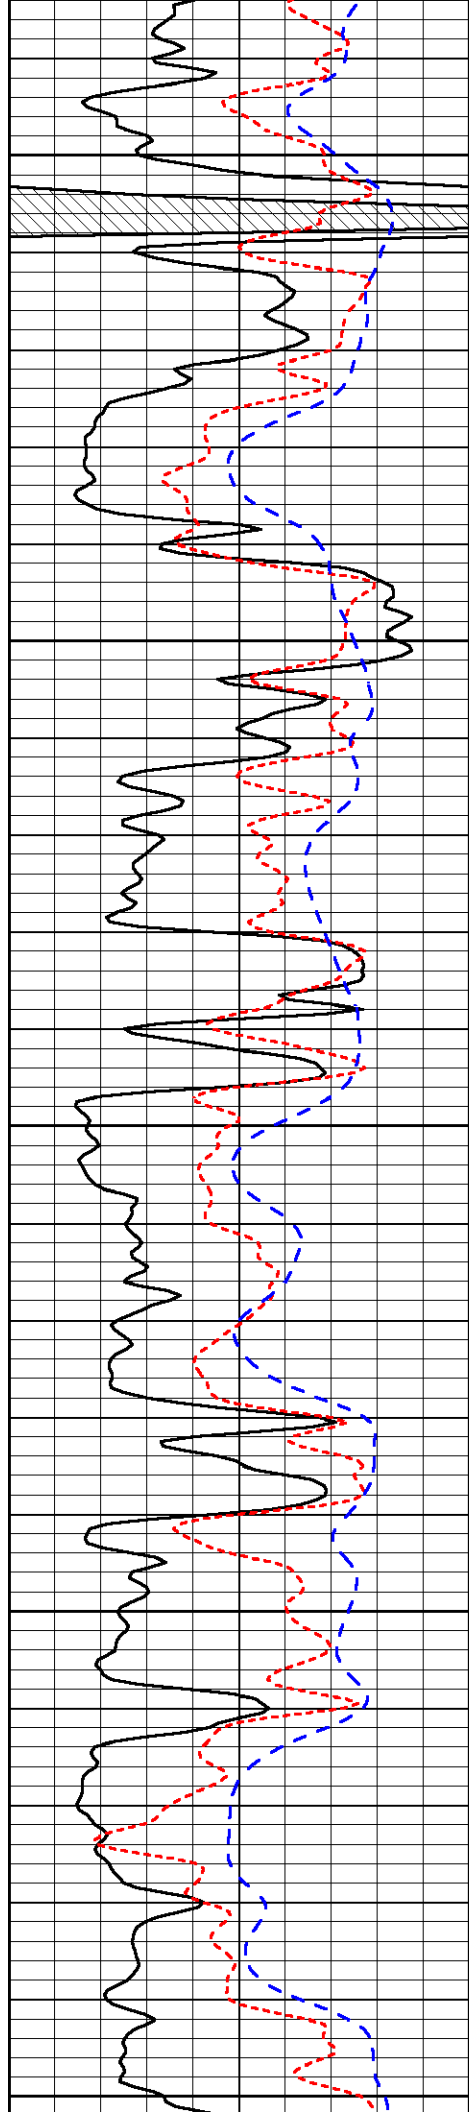


4150

4200

4250

4300

4350

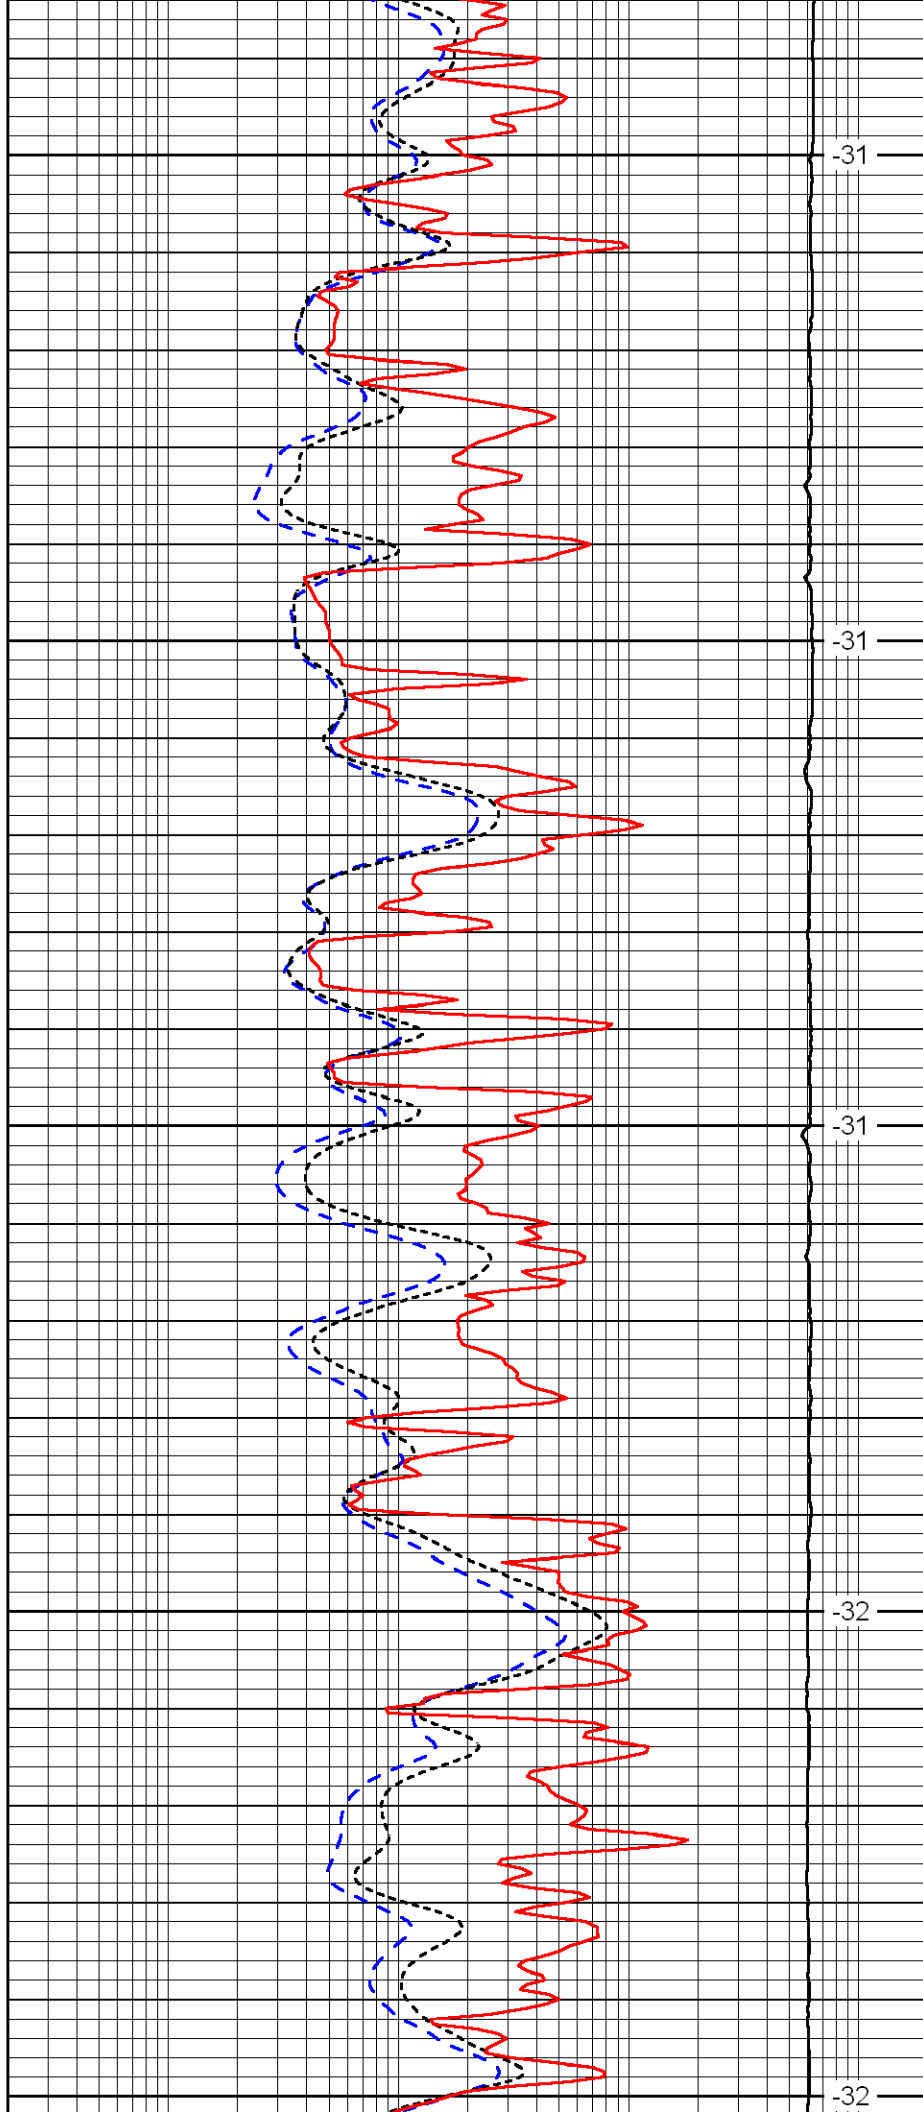


-31

-31

-31

-32

-32

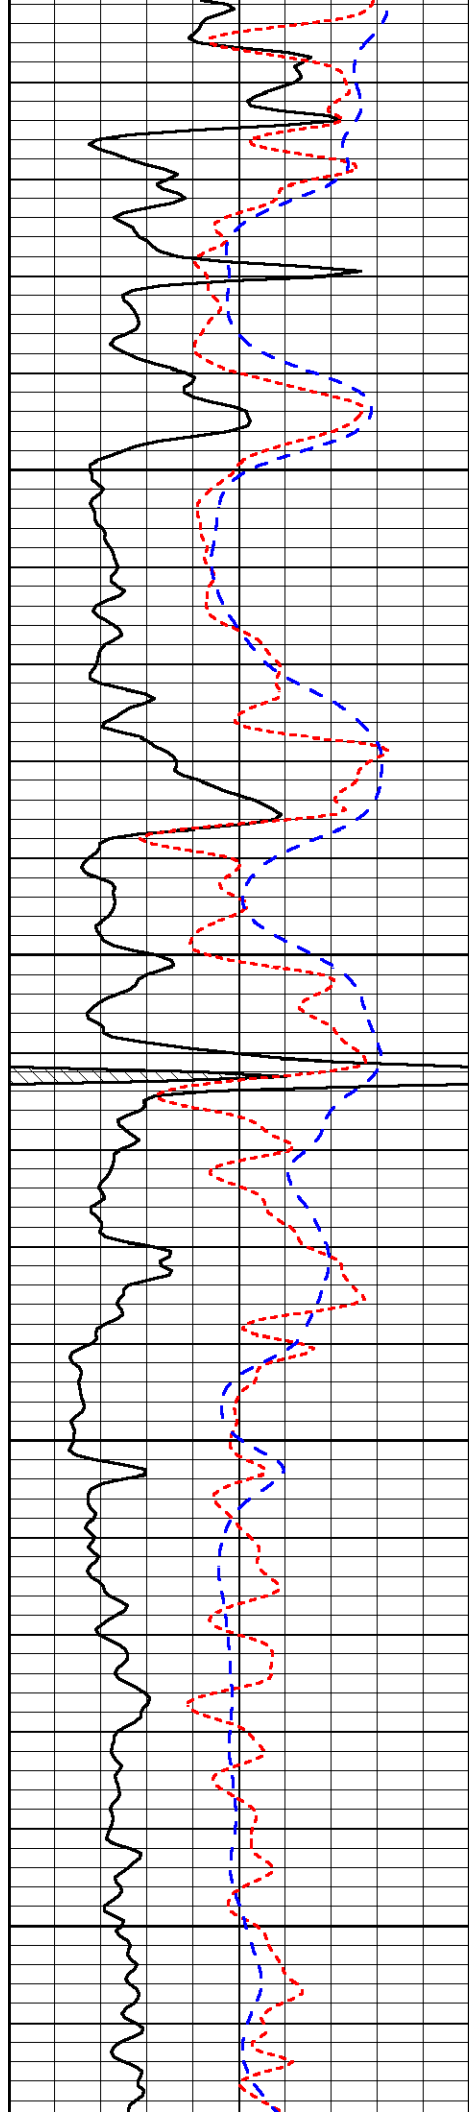


4400

4450

4500

4550

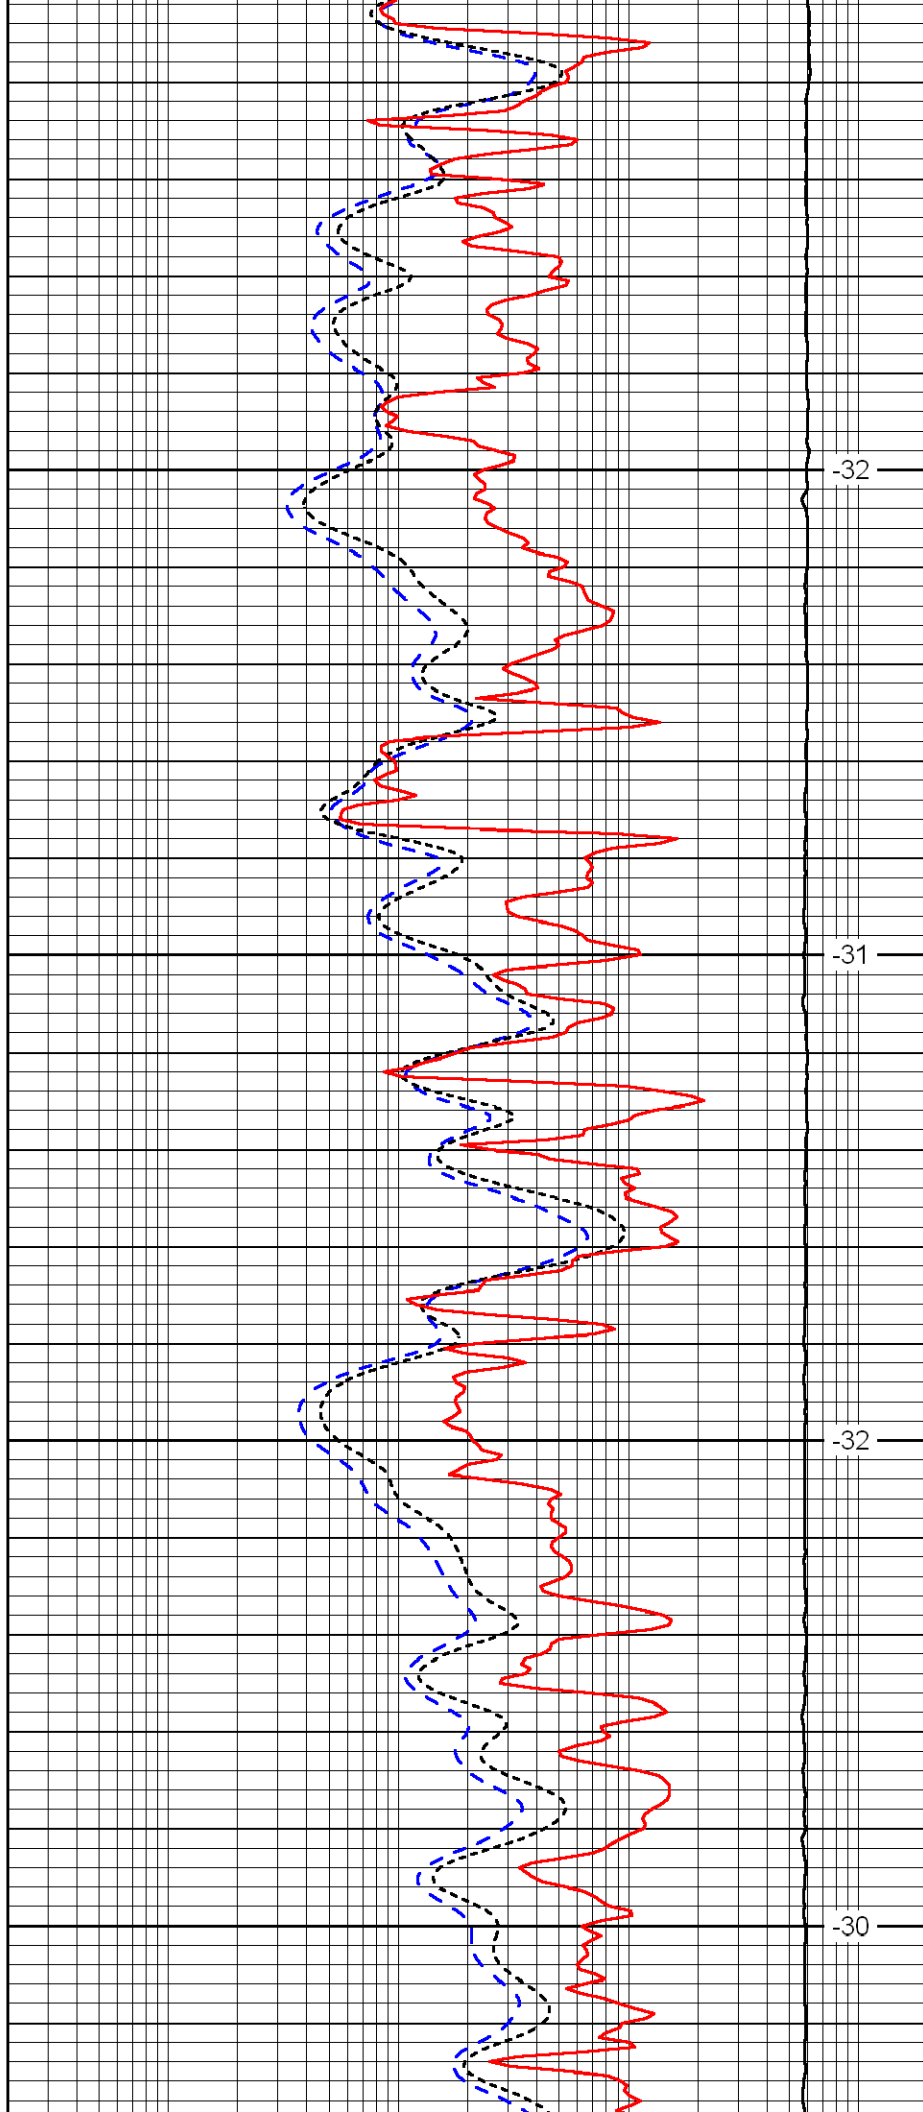


-32

-31

-32

-30

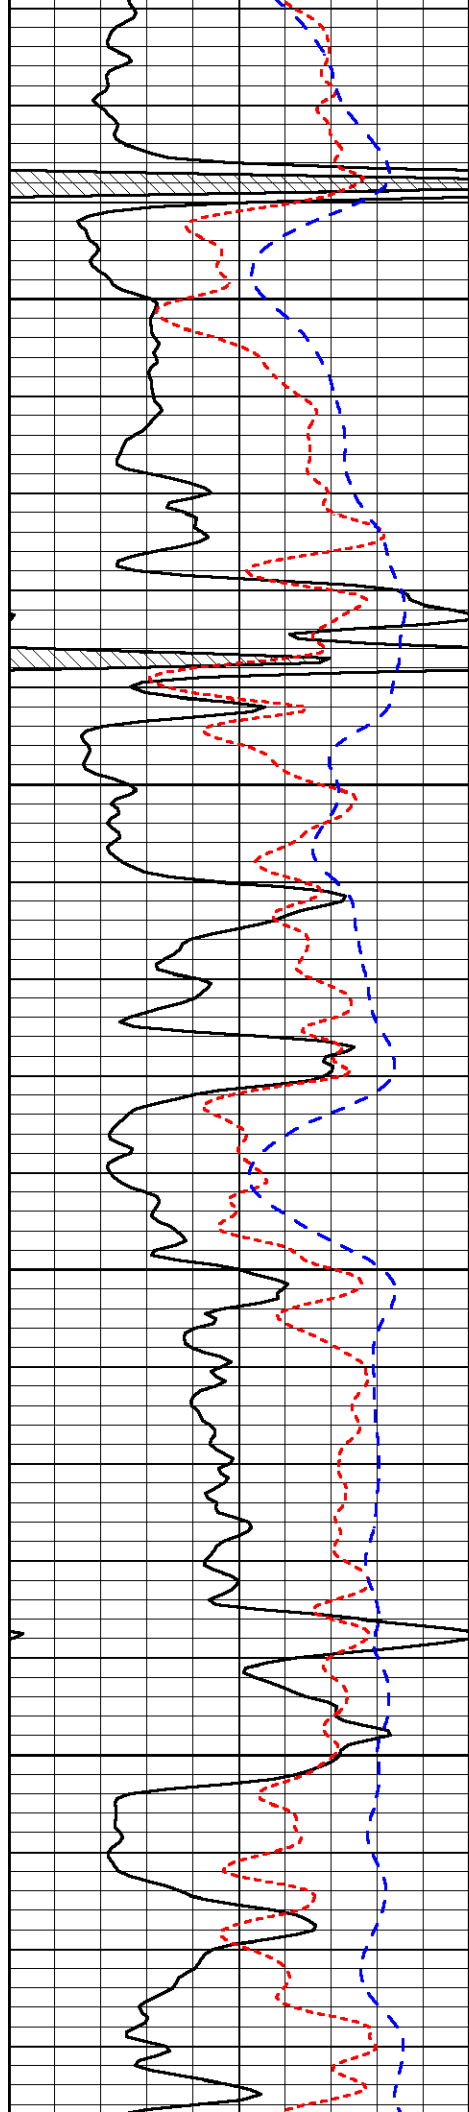


4600

4650

4700

4750

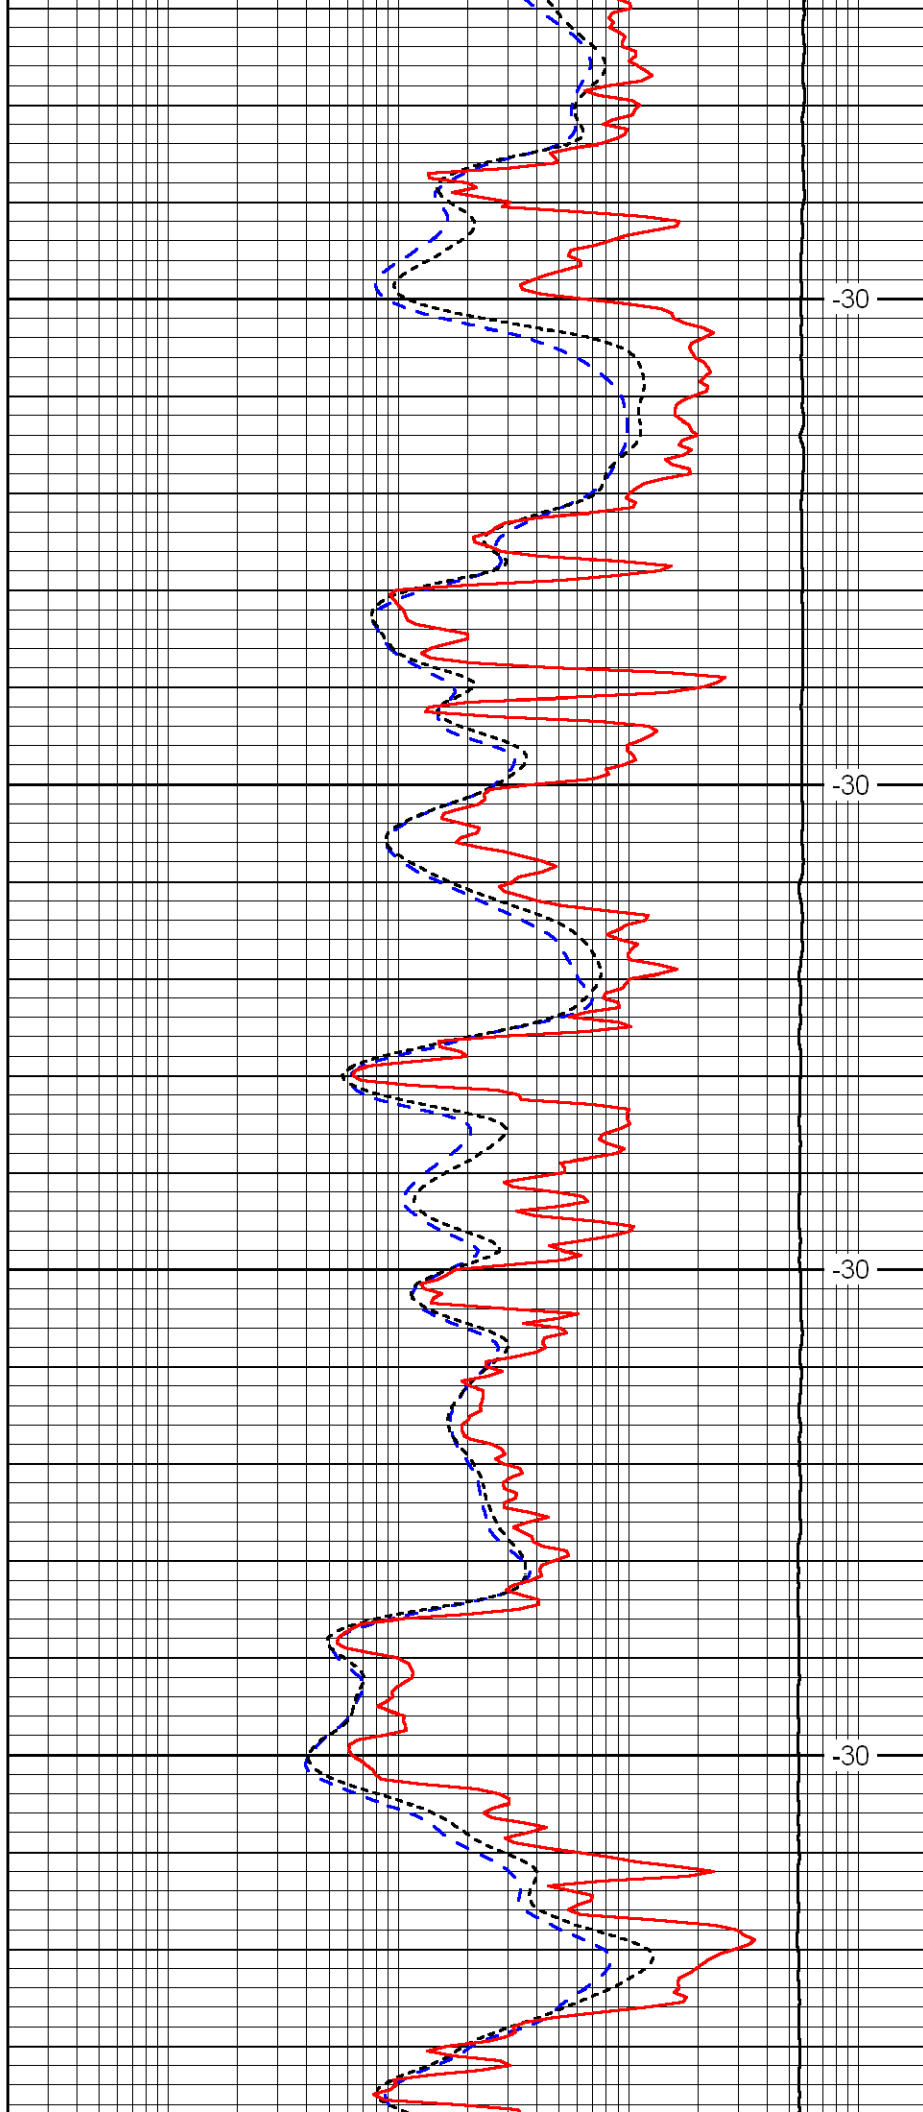


-30

-30

-30

-30

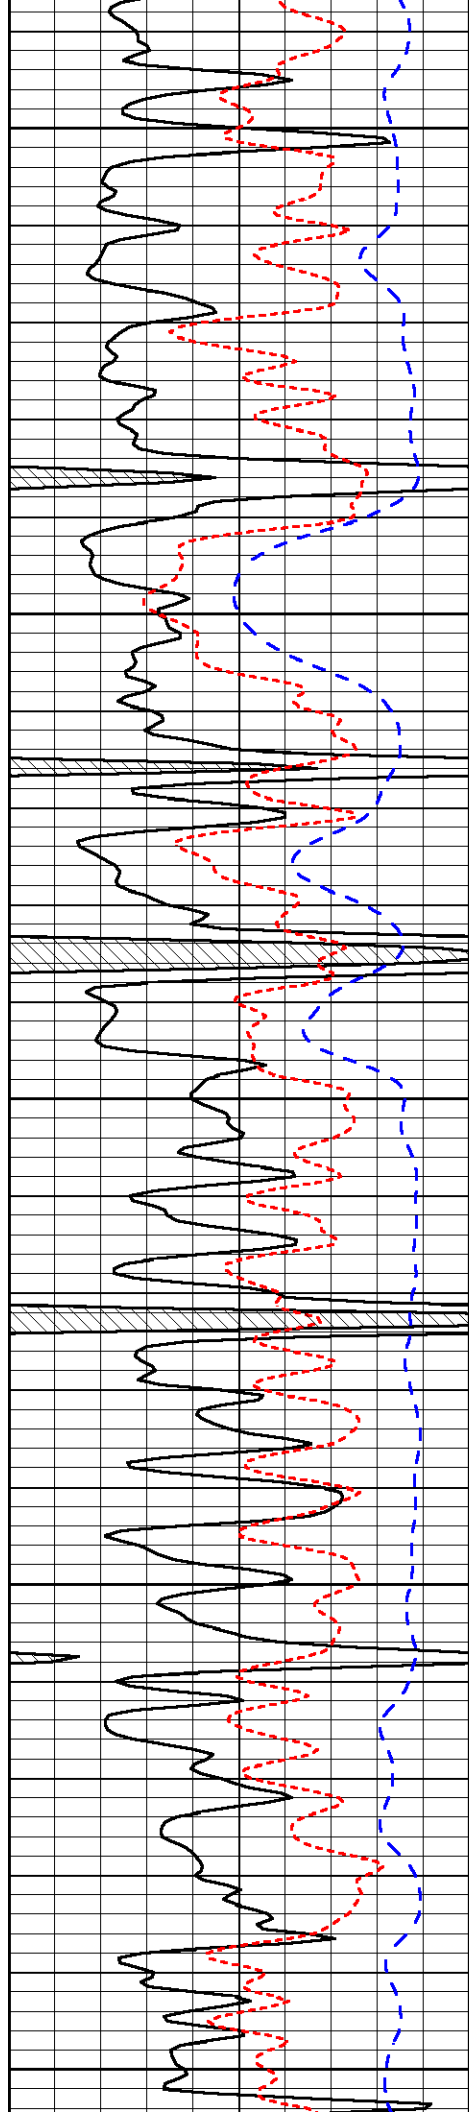


4800

4850

4900

4950

5000

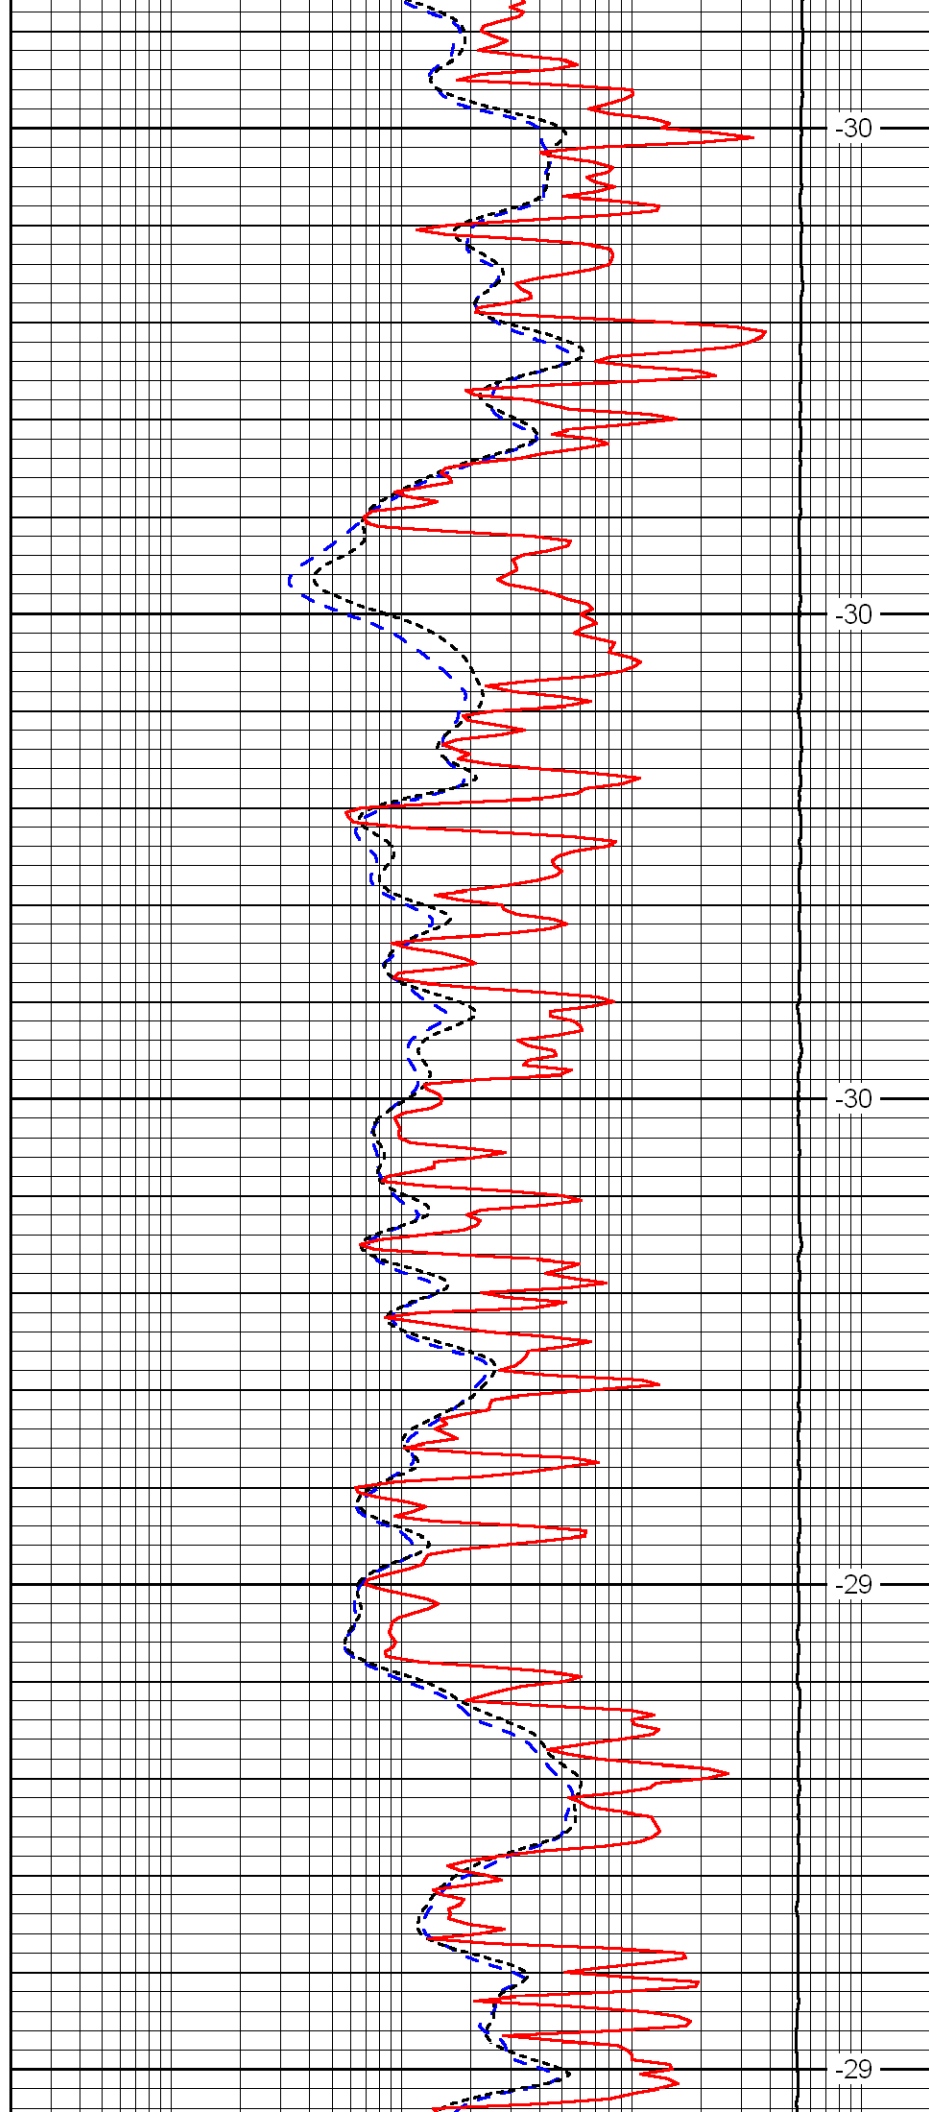


-30

-30

-30

-29

-29

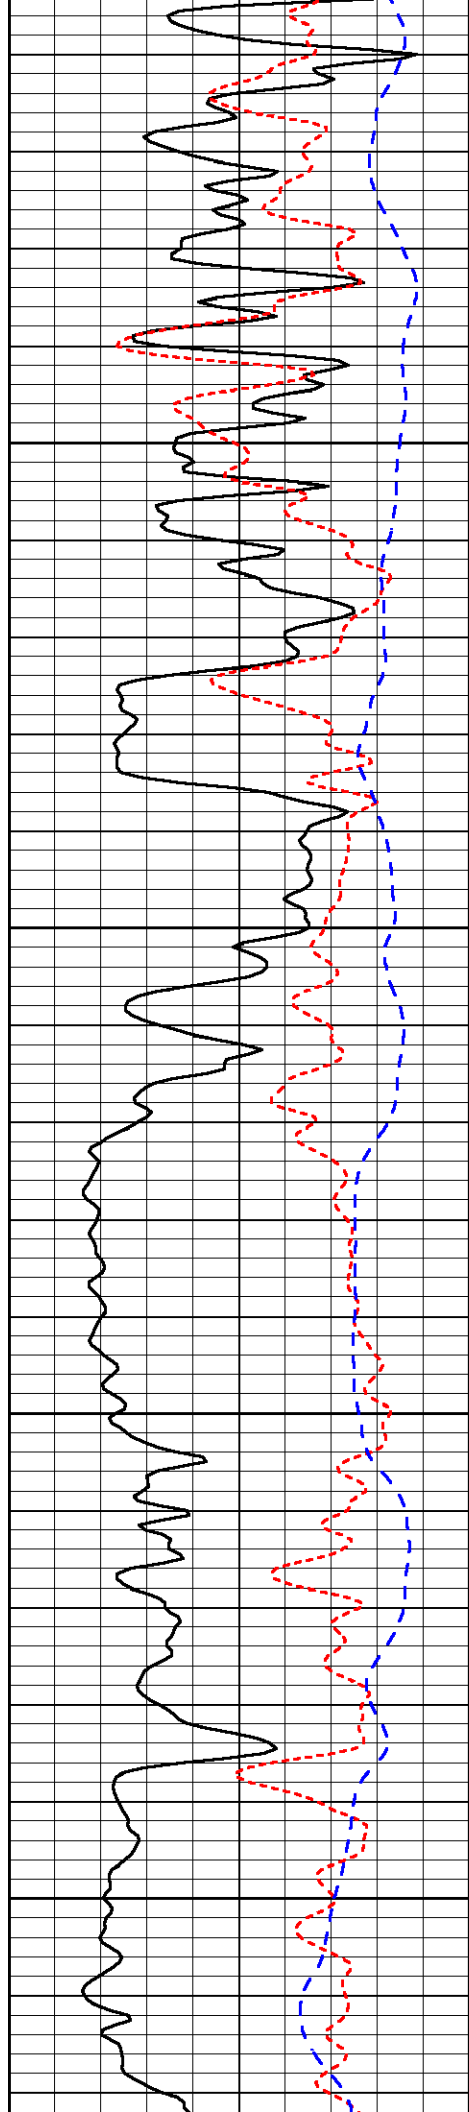


5050

5100

5150

5200

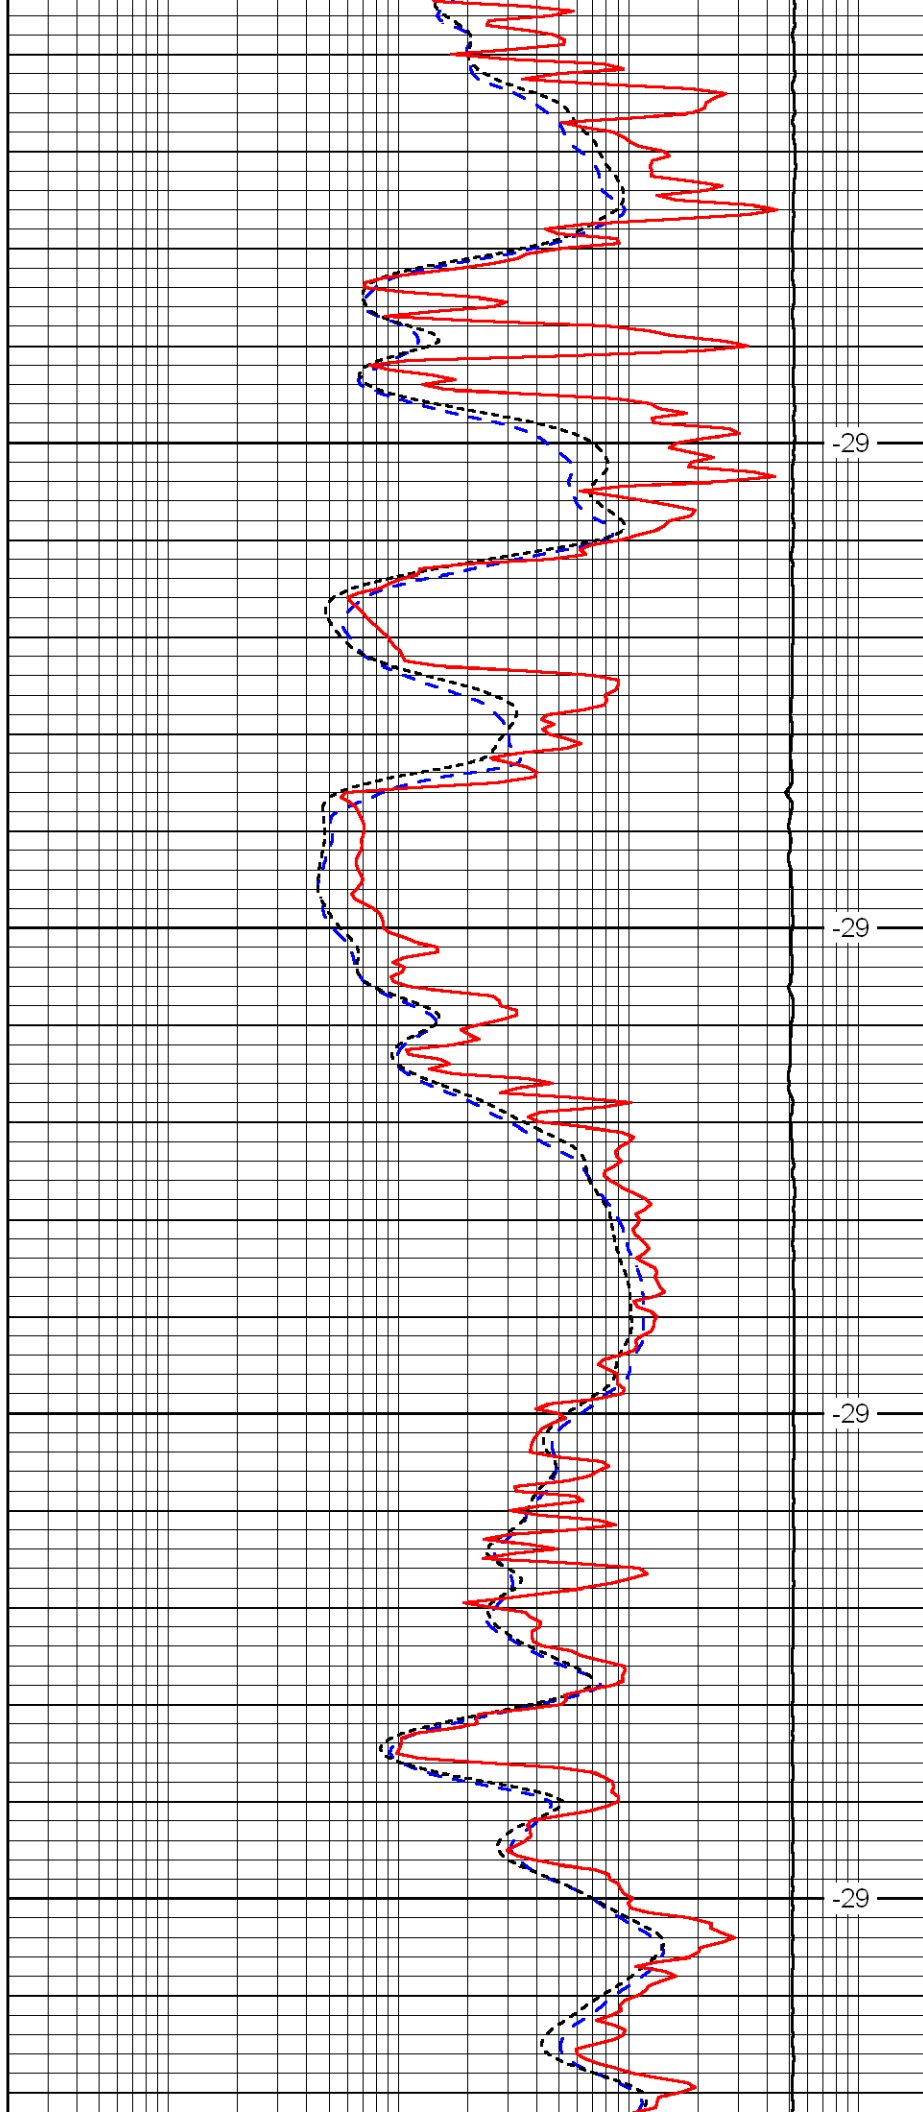


-29

-29

-29

-29

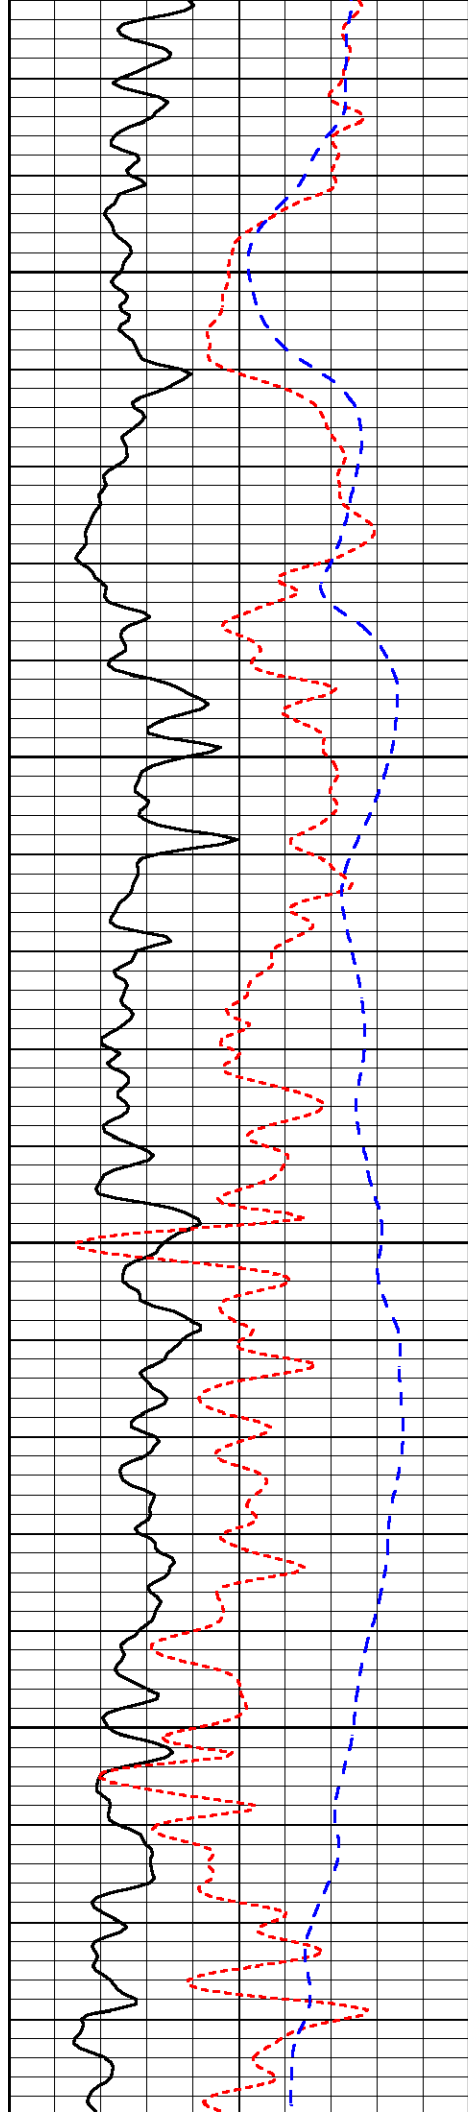


5250

5300

5350

5400

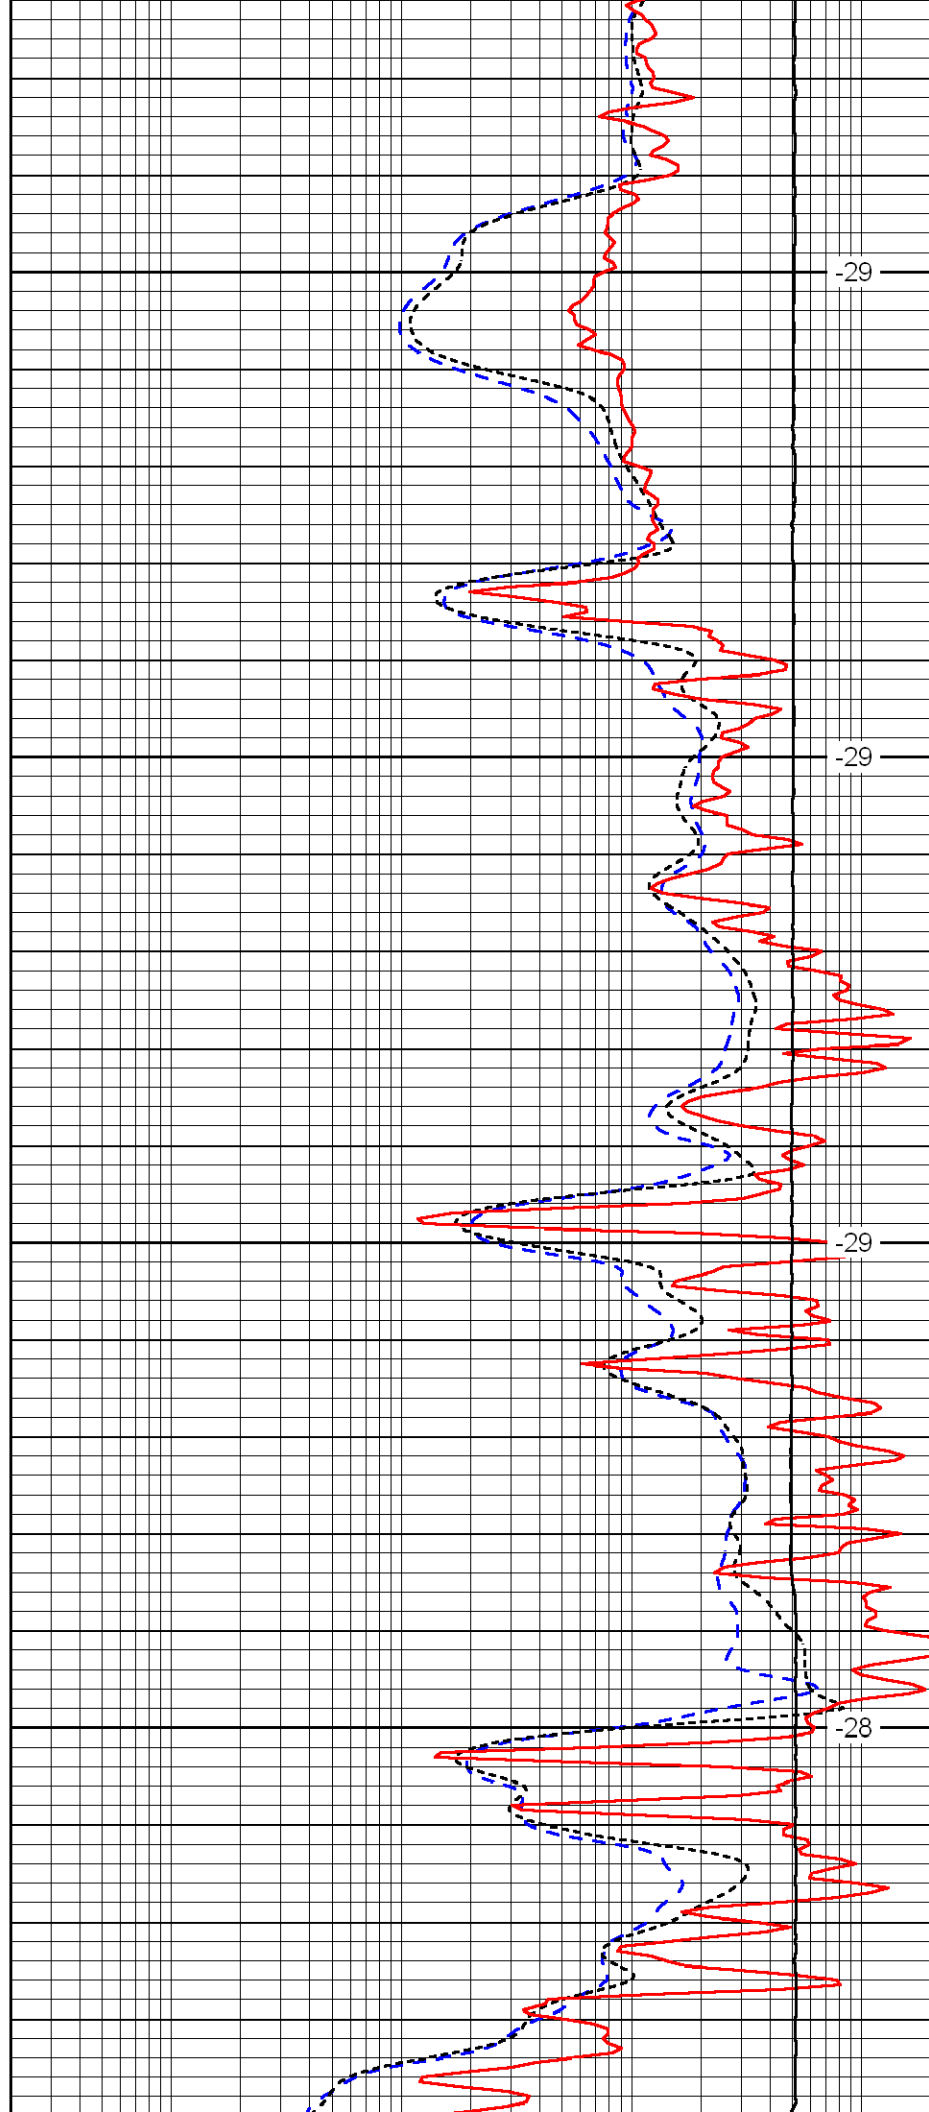


-29

-29

-29

-28

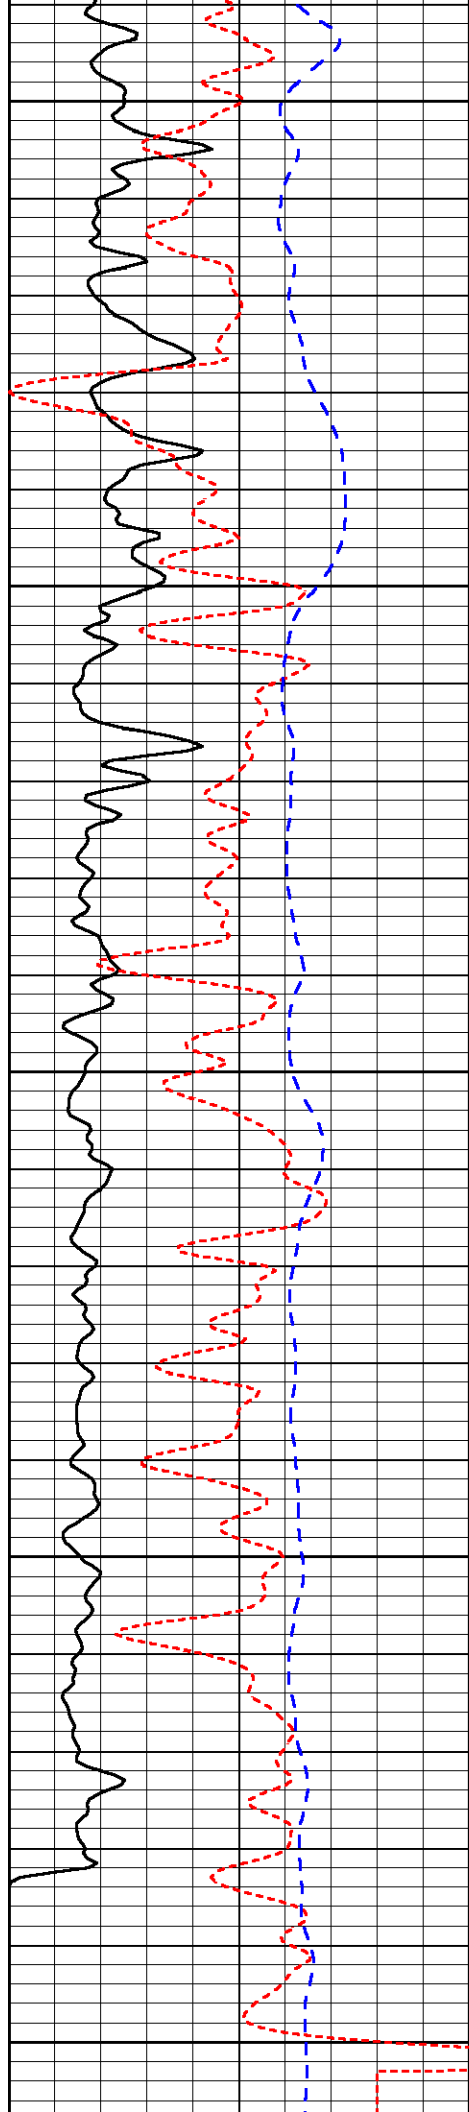


5450

5500

5550

5600

5650

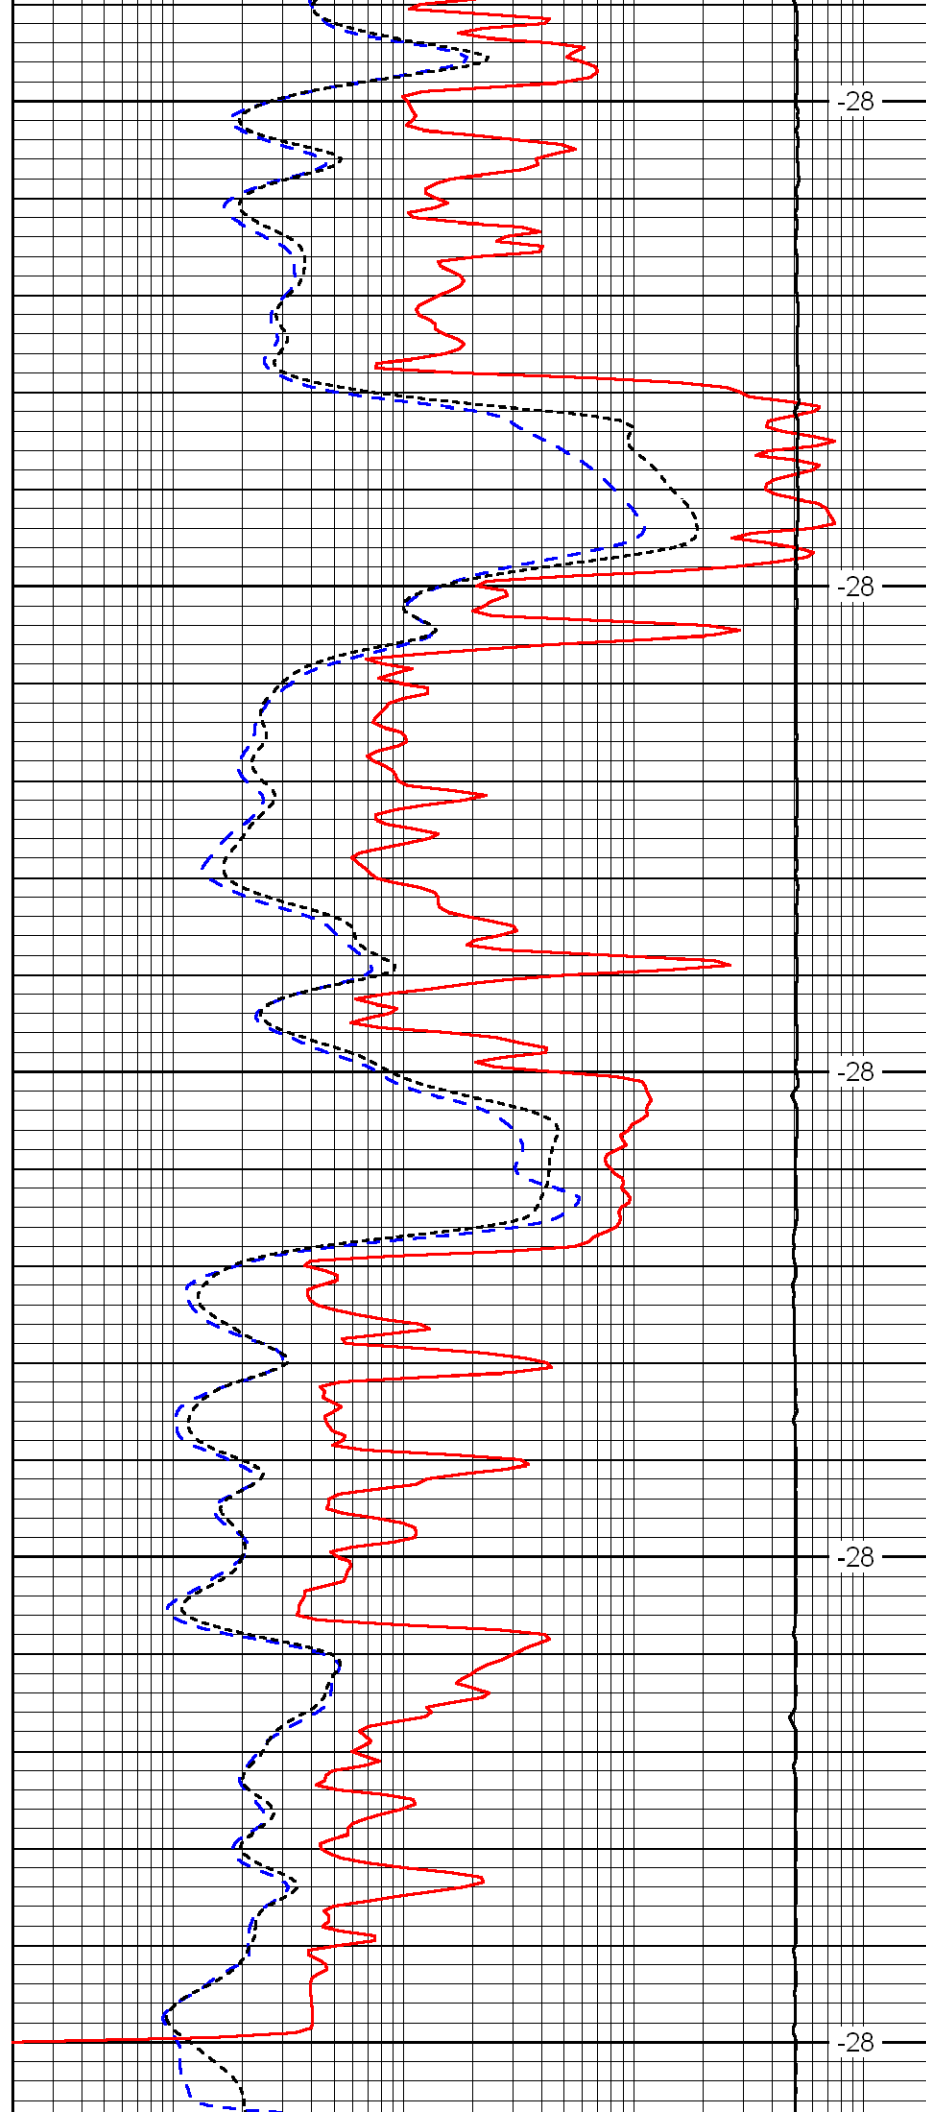

-28

-28

-28

-28

-28

