



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company TDI, Inc.		
	Well Jerry No. 2		
	Field Reichert		
	County Ellis	State	Kansas
	Location	N/2 NW SW NE 1485' FNL & 2310' FEL	
	Sec: 10	Twp: 15 S	Rge: 19 W
Permanent Datum	Ground Level	Elevation 2035	Other Services CNL/CDL DIL
Log Measured From	Kelly Bushing	10 Ft. Above Perm. Datum	K.B. 2045
Drilling Measured From	Kelly Bushing		D.F. 2035
Date	6/28/2011		
Run Number	Two		
Depth Driller	3720		
Depth Logger	3718		
Bottom Logged Interval	3717		
Top Log Interval	2800		
Casing Driller	8.625 @ 235		
Casing Logger	233		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	7500		
Density / Viscosity	9.4 44		
pH / Fluid Loss	8.0 14.6		
Source of Sample	Flowline		
Rm @ Meas. Temp	2.00 @ 78		
Rmf @ Meas. Temp	1.5 @ 78		
Rmc @ Meas. Temp	2.70 @ 78		
Source of Rmf / Rmc	Charts		
Rm @ BHT	1.38 @ 113		
Operating Rig Time	3 1/2 Hours		
Max Rec. Temp. F	113		
Equipment Number	15		
Location	Hays		
Recorded By	D. Kerr		
Witnessed By	Tom Denning	Herb Deines	

<<< Fold Here >>>



All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Antonino KS, 1 West, 1 South
1/2 West, South Into

Database File: c:\warrior\data\tdi_jerry no. 2\tdihd.db
Dataset Pathname: dil\tdistk
Presentation Format: micro
Dataset Creation: Tue Jun 28 04:14:06 2011
Charted by: Depth in Feet scaled 1:240

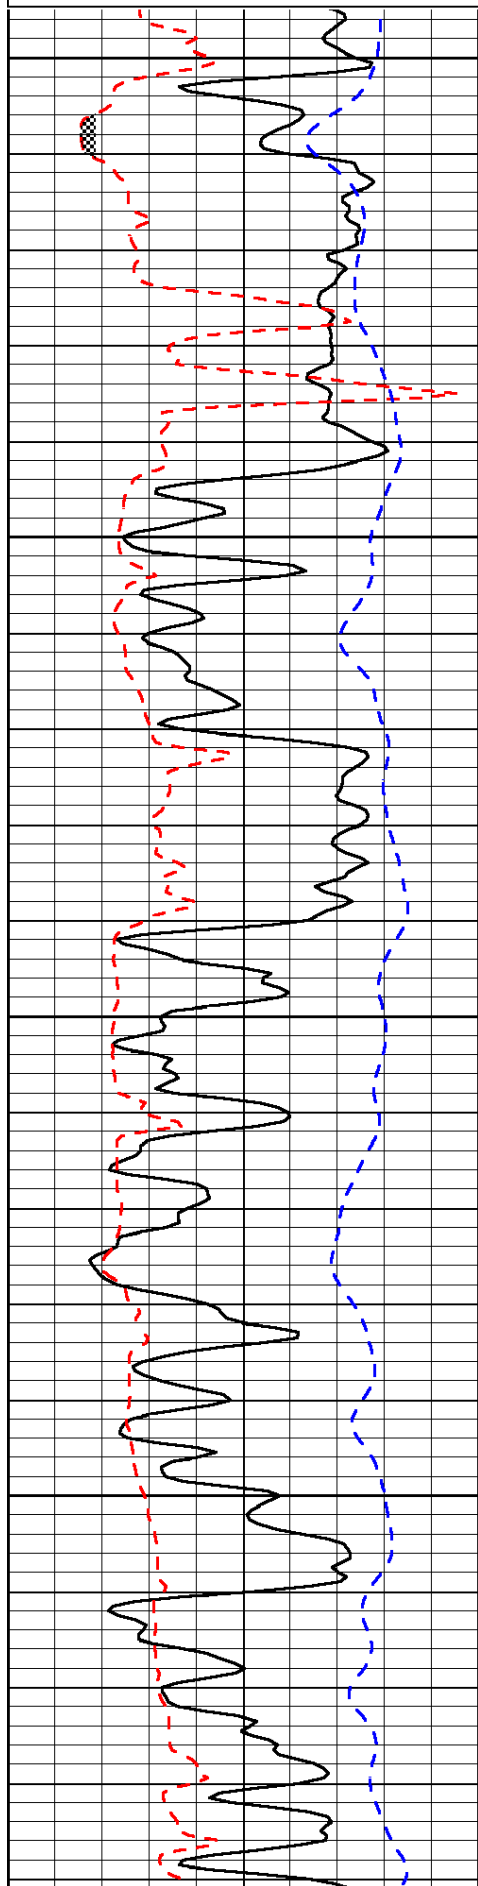
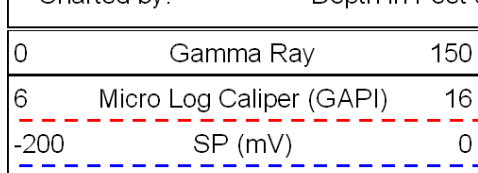


2800

2850

2900

2950

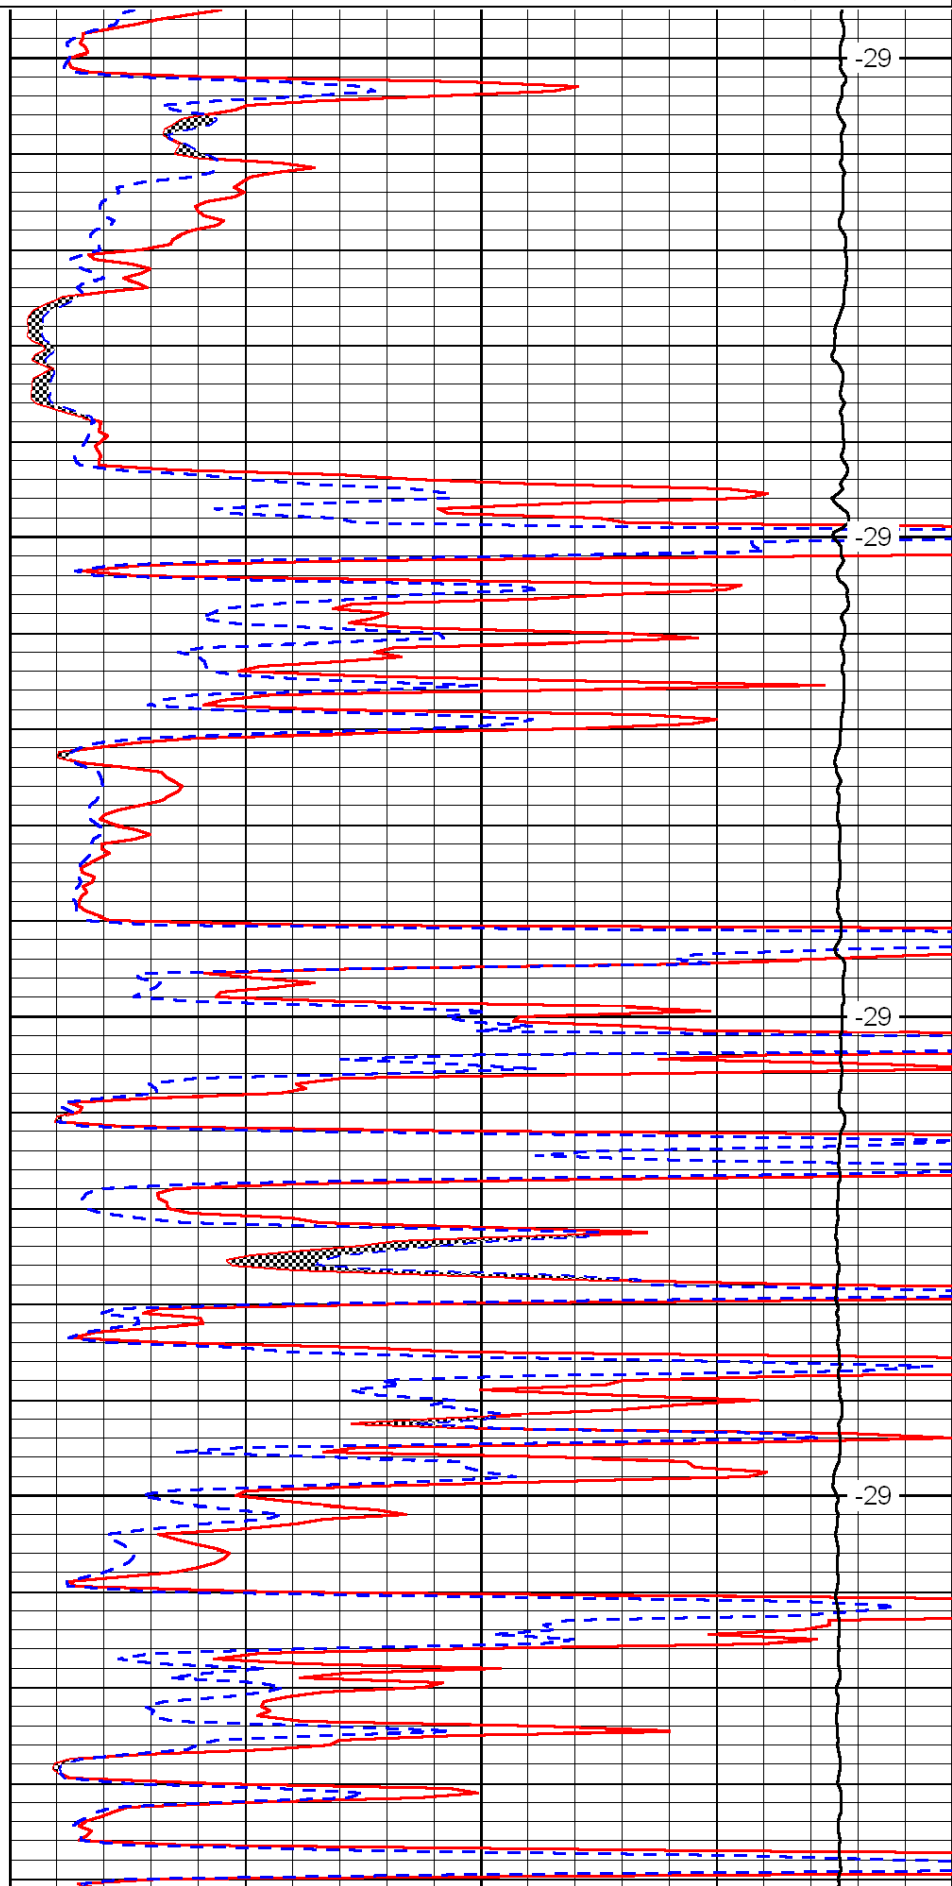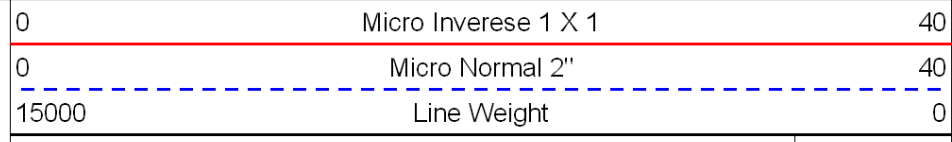



-29


-29

-29

-29

LSPD

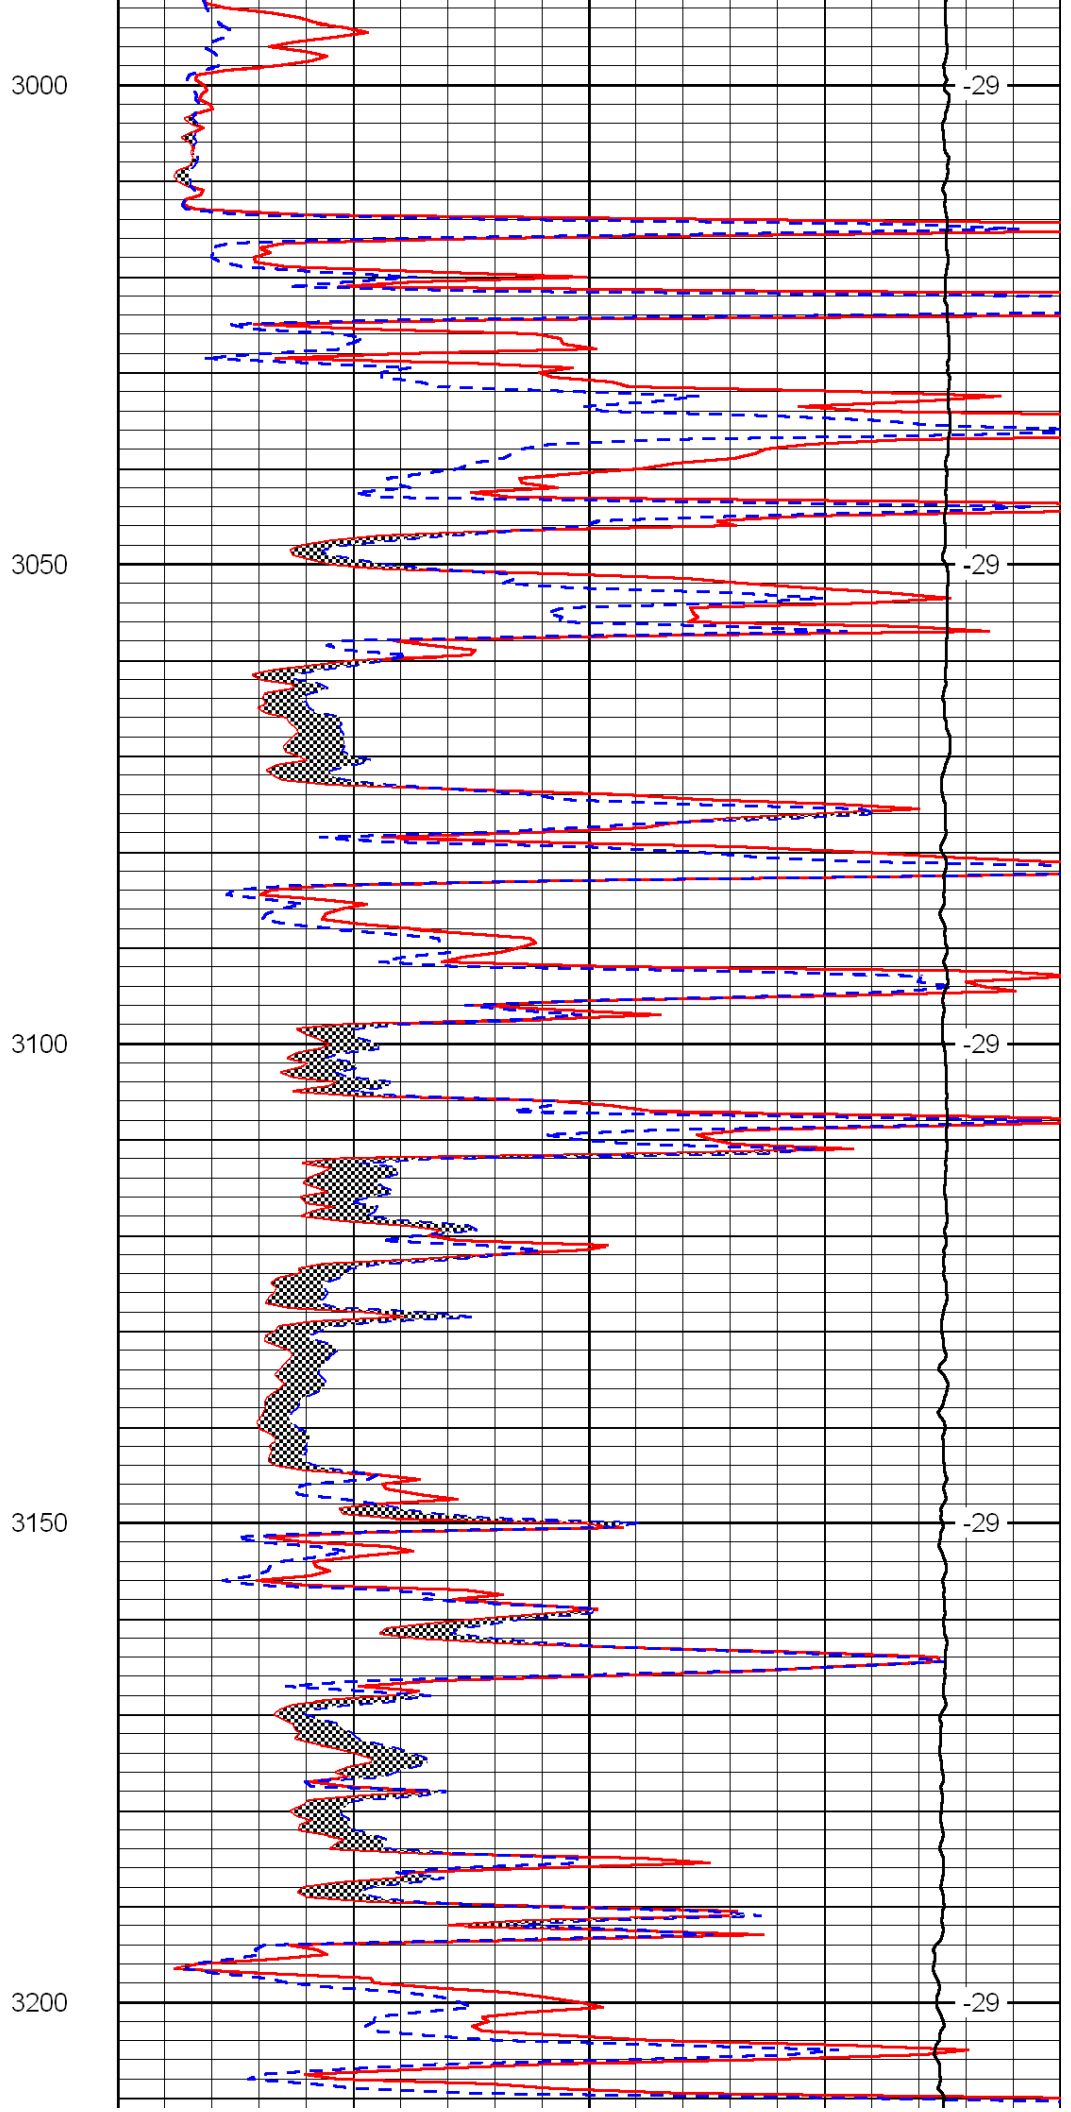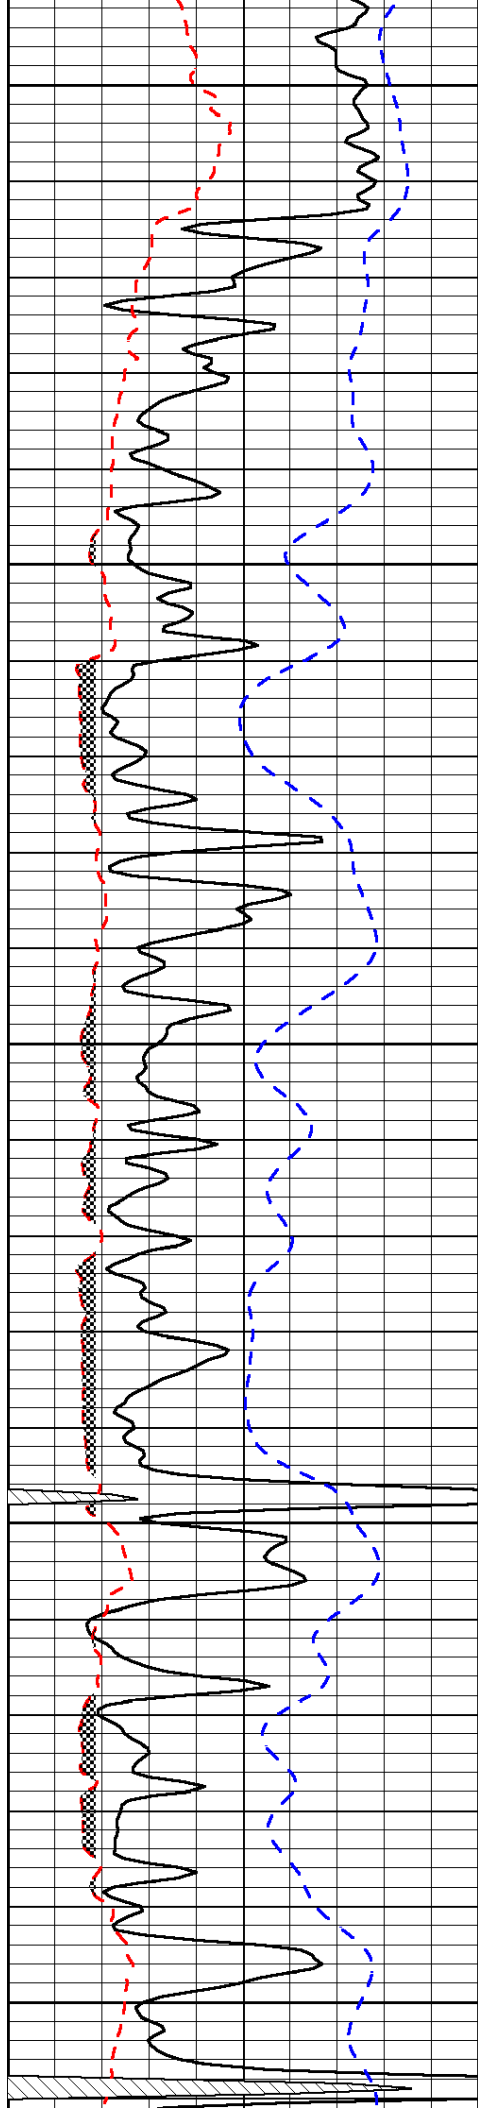

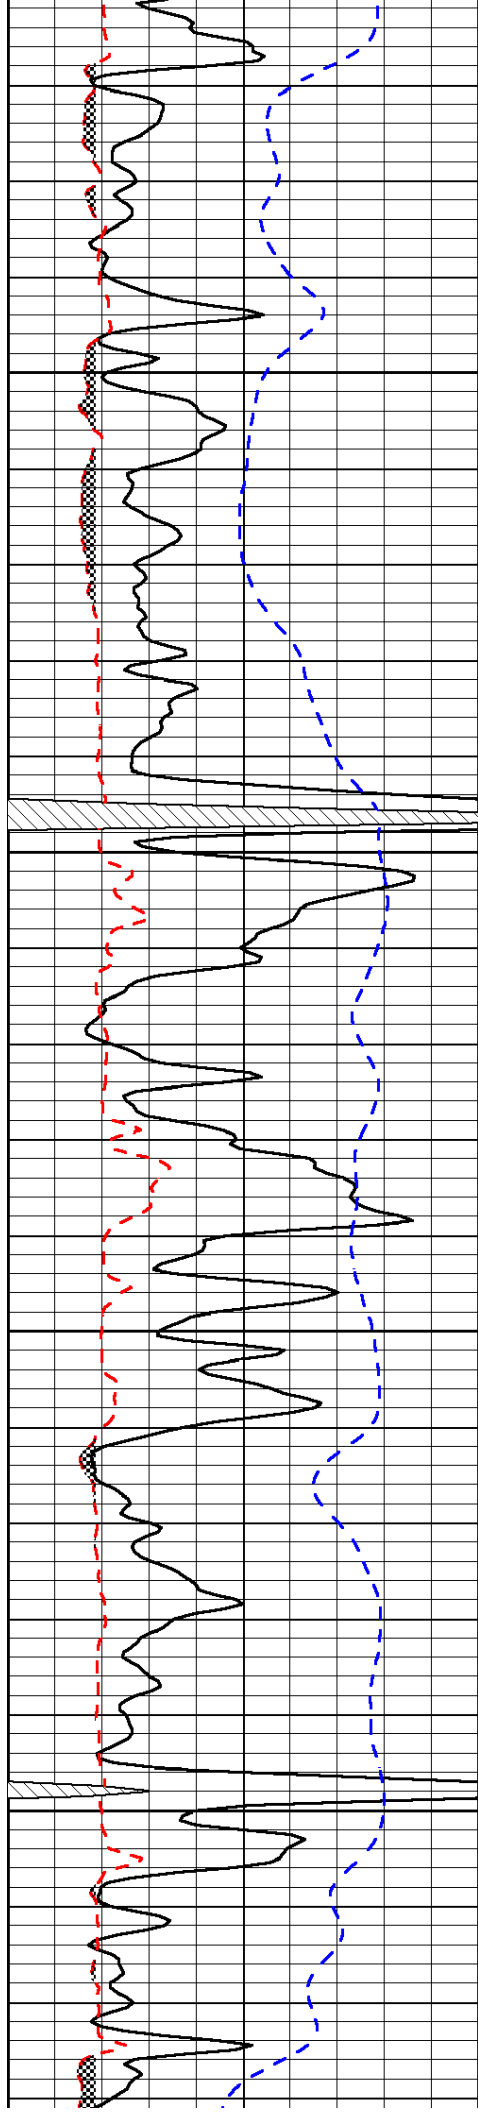


3250

3300

3350

3400

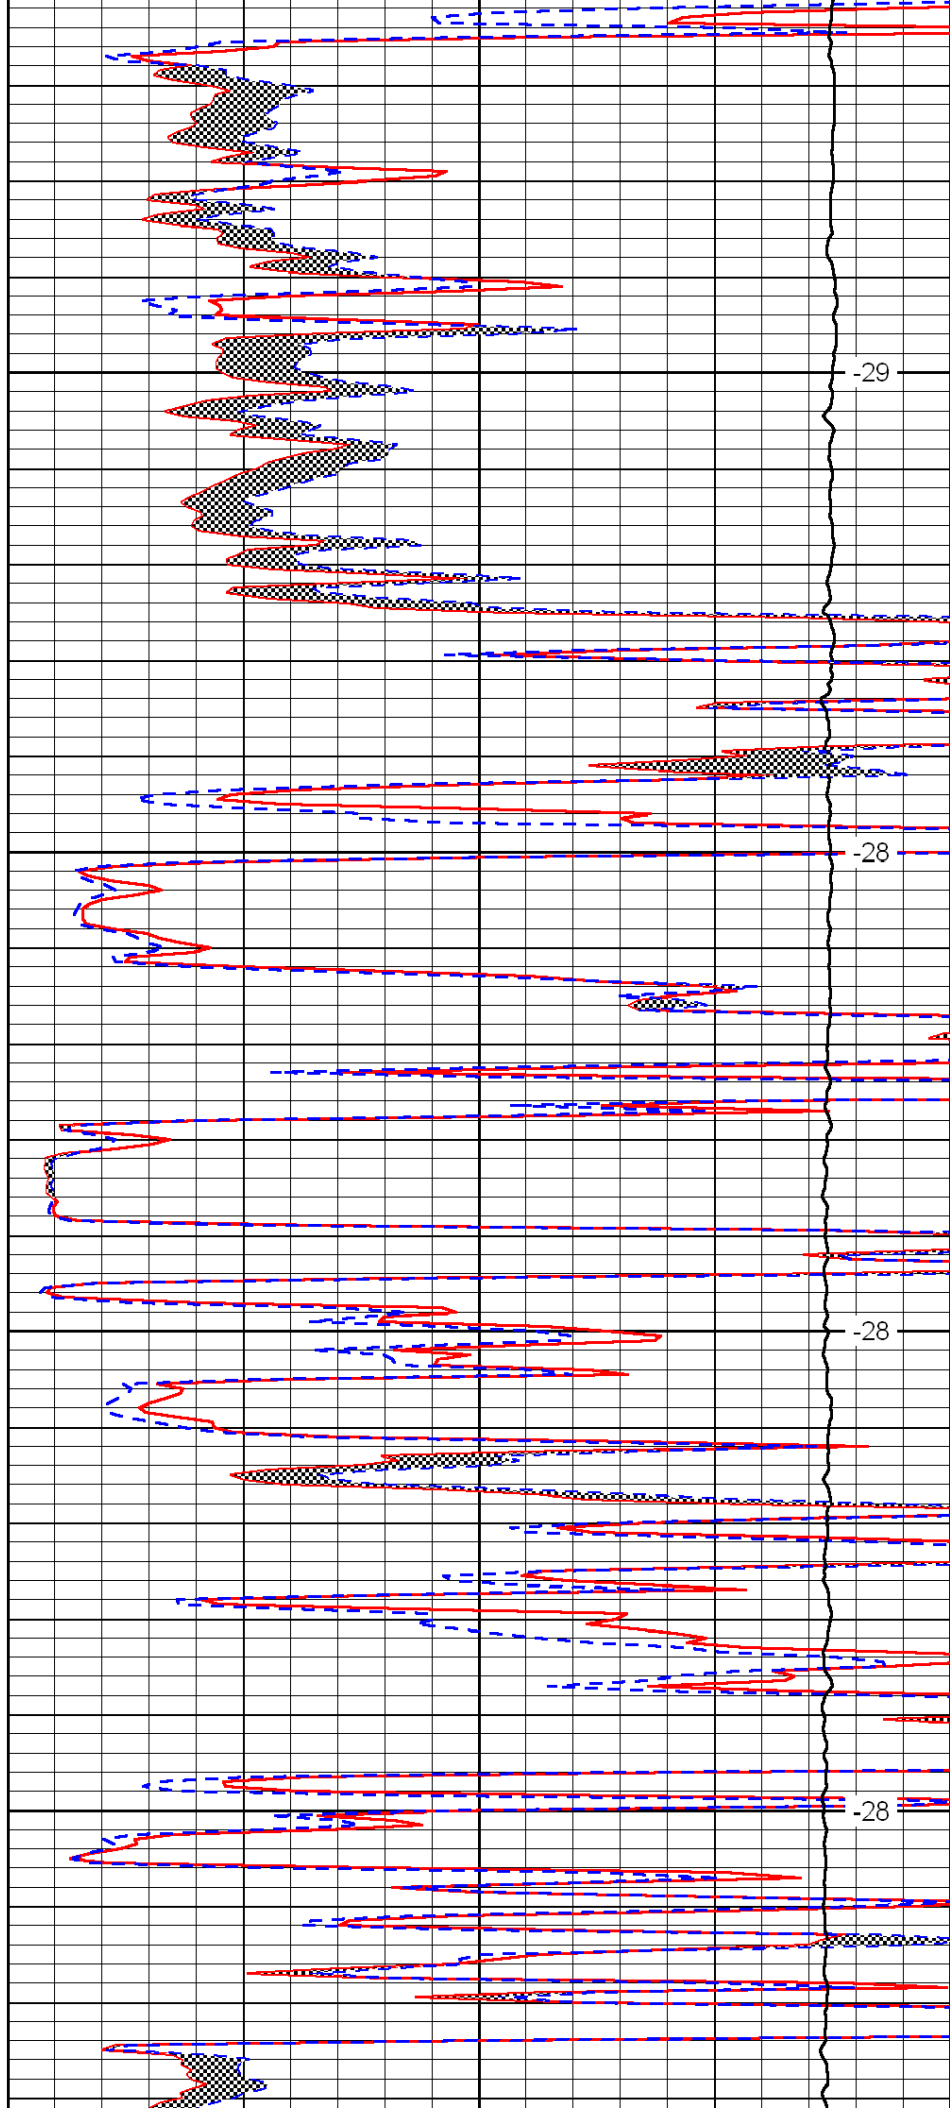


-29

-28

-28

-28

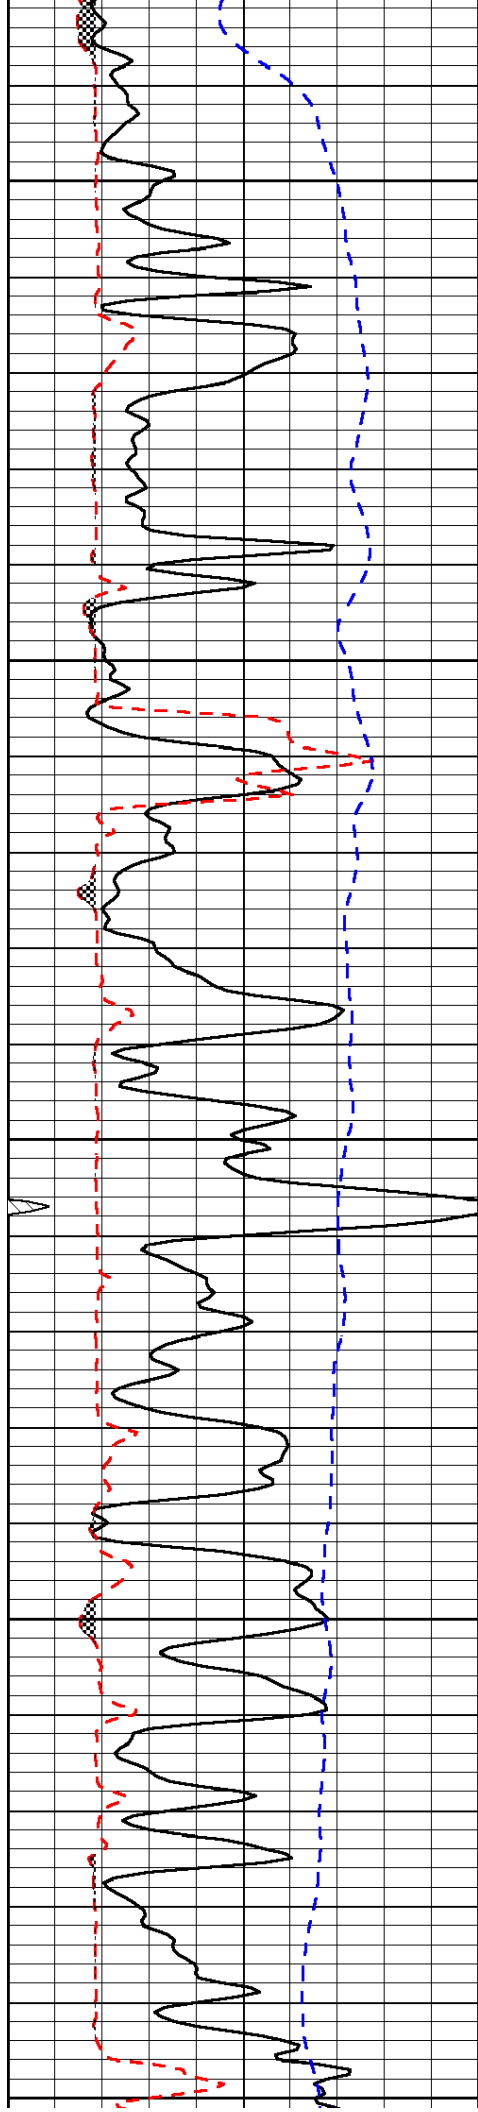


3450

3500

3550

3600

3650

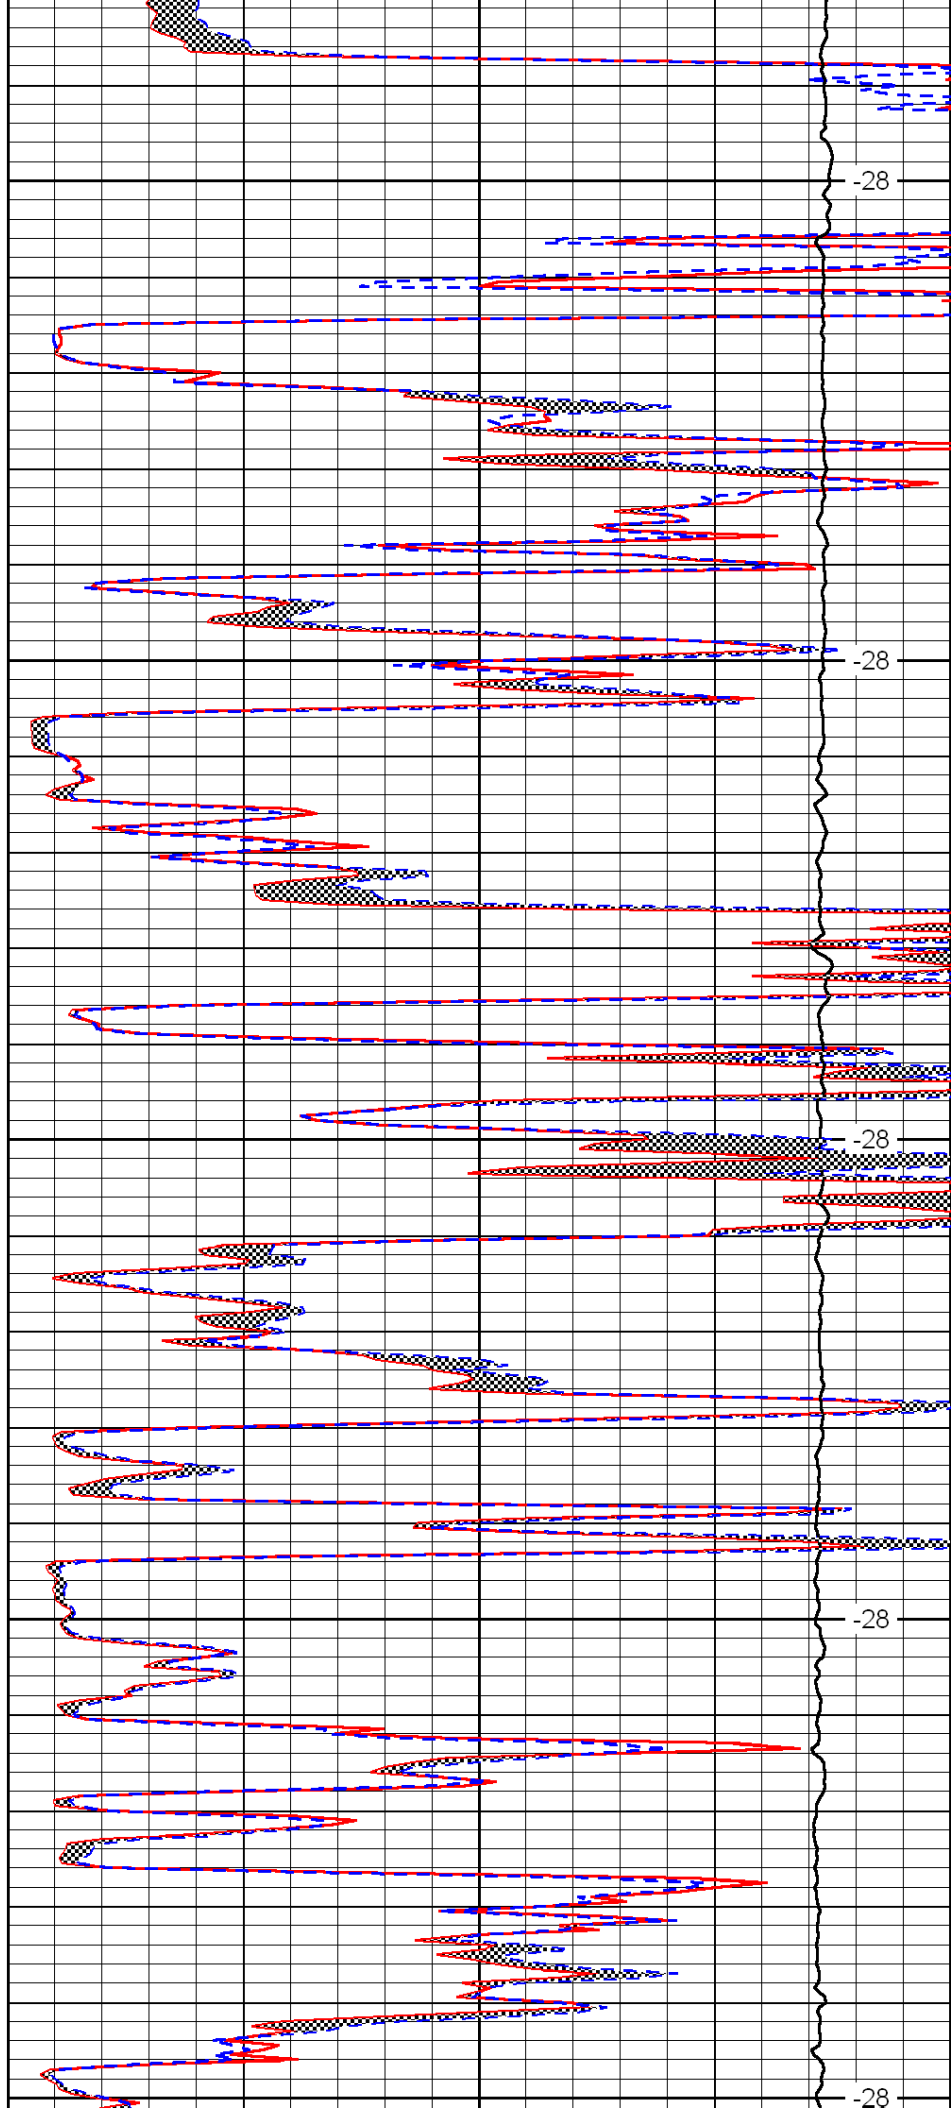


-28

-28


-28

-28

-28

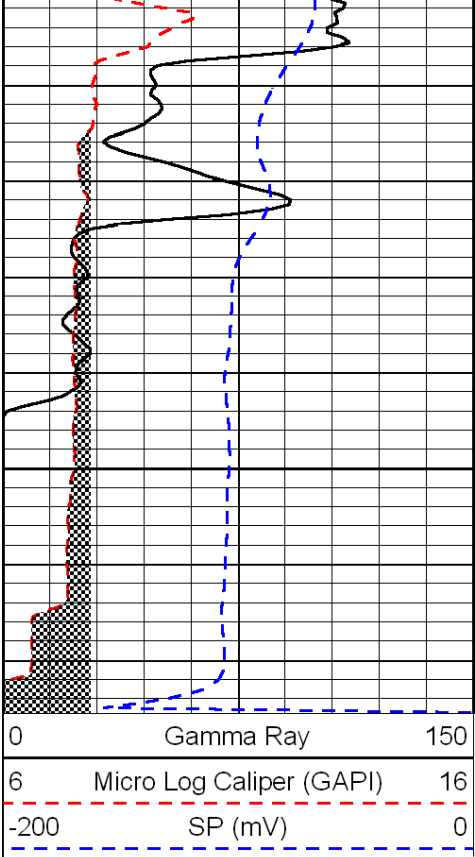

3700

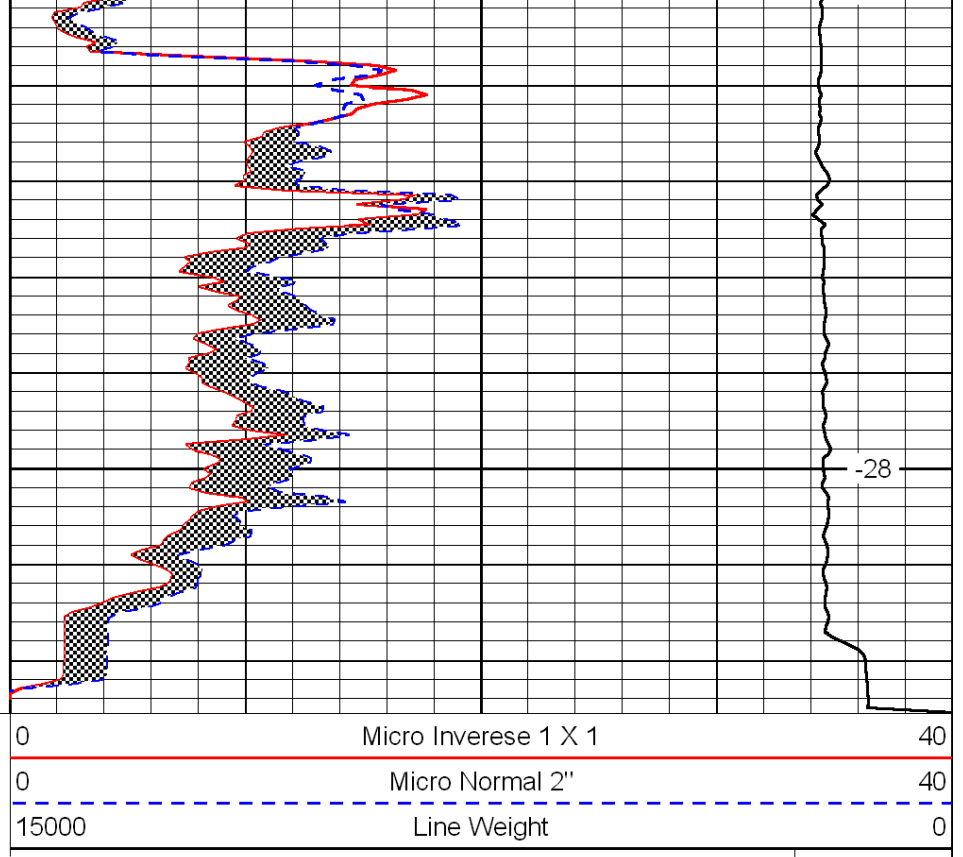

-28

LSPD