



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company Val Energy, Inc		
15-007-23,712-00-00	Well Thom C No.2-12		
	Field		
	County Barber	State	Kansas
	Location 1320' FNL & 495' FWL	Other Services CNL/CDL DIL	
	Sec: 12	Twp: 34 S	Rge: 11 W
Permanent Datum	Ground Level	Elevation 1394	
Log Measured From	Kelly Bushing	11 Ft. Above Perm. Datum	
Drilling Measured From	Kelly Bushing	K.B. 1405 D.F. 1394 G.L. 1394	
Date	6/17/2011		
Run Number	Two		
Depth Driller	4730		
Depth Logger	4724		
Bottom Logged Interval	4723		
Top Log Interval	3250		
Casing Driller	8.625 @ 226		
Casing Logger	223		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity,ppm CL	5000		
Density / Viscosity	9.2 58		
pH / Fluid Loss	10 9.2		
Source of Sample	Flowline		
Rm @ Meas. Temp	.45 @ 86		
Rmf @ Meas. Temp	.34 @ 86		
Rmc @ Meas. Temp	.61 @ 86		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.31 @ 123		
Operating Rig Time	4 1/2 Hours		
Max Rec. Temp. F	123		
Equipment Number	10		
Location	Hays		
Recorded By	D.Kerr		
Witnessed By	Steve Van Buskirk		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Medicine Lodge 9 South to Gearlane Road,
East to Bethel Road, 1 South to Black Kettle Road, 1/8 East, South Into

Database File: c:\warrior\data\val_thom c no.2-12\val_thomc_2_12hd.db
Dataset Pathname: dil\valstk
Presentation Format: micro
Dataset Creation: Fri Jun 17 15:09:07 2011
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

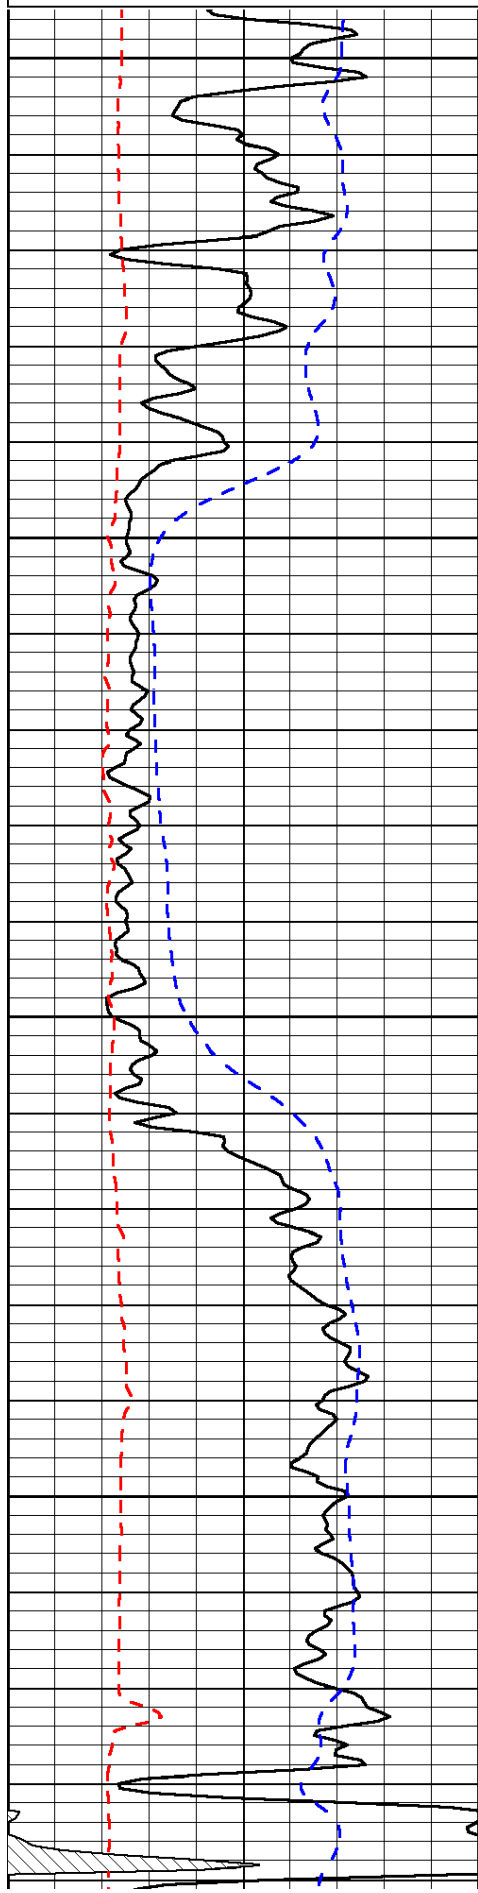


3250

3300

3350

3400

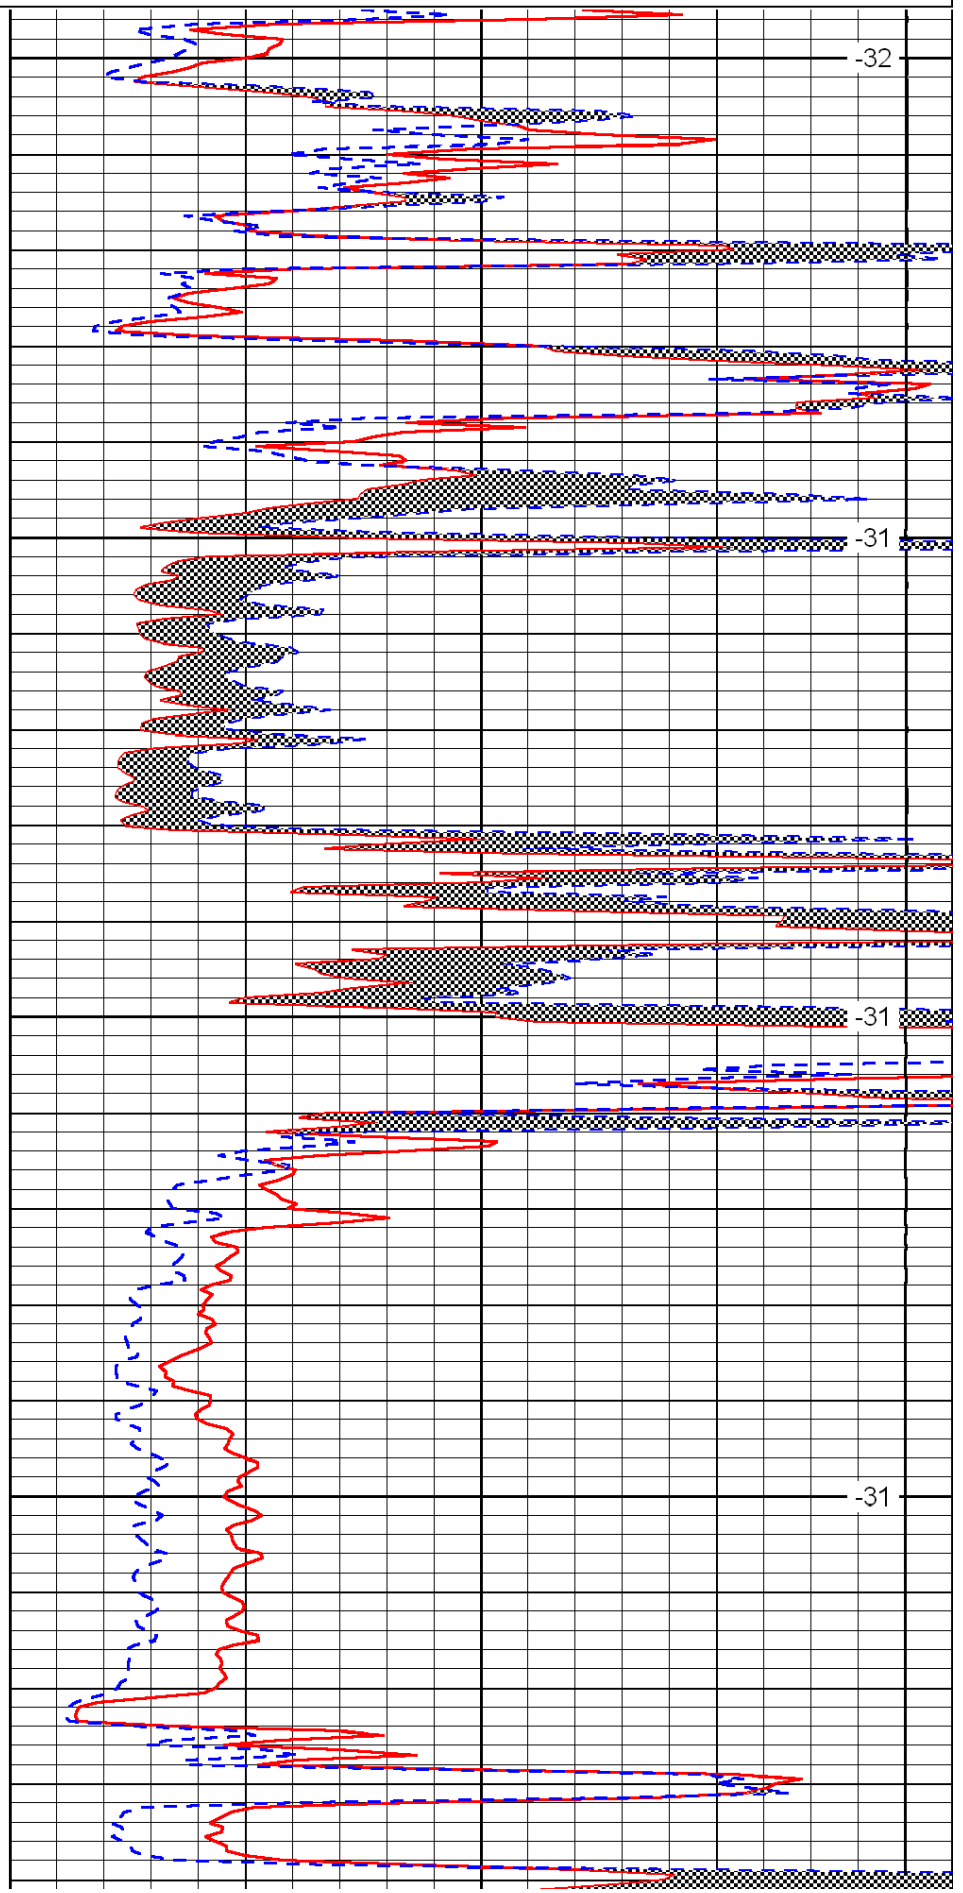


-32

-31

-31

-31

LSPD

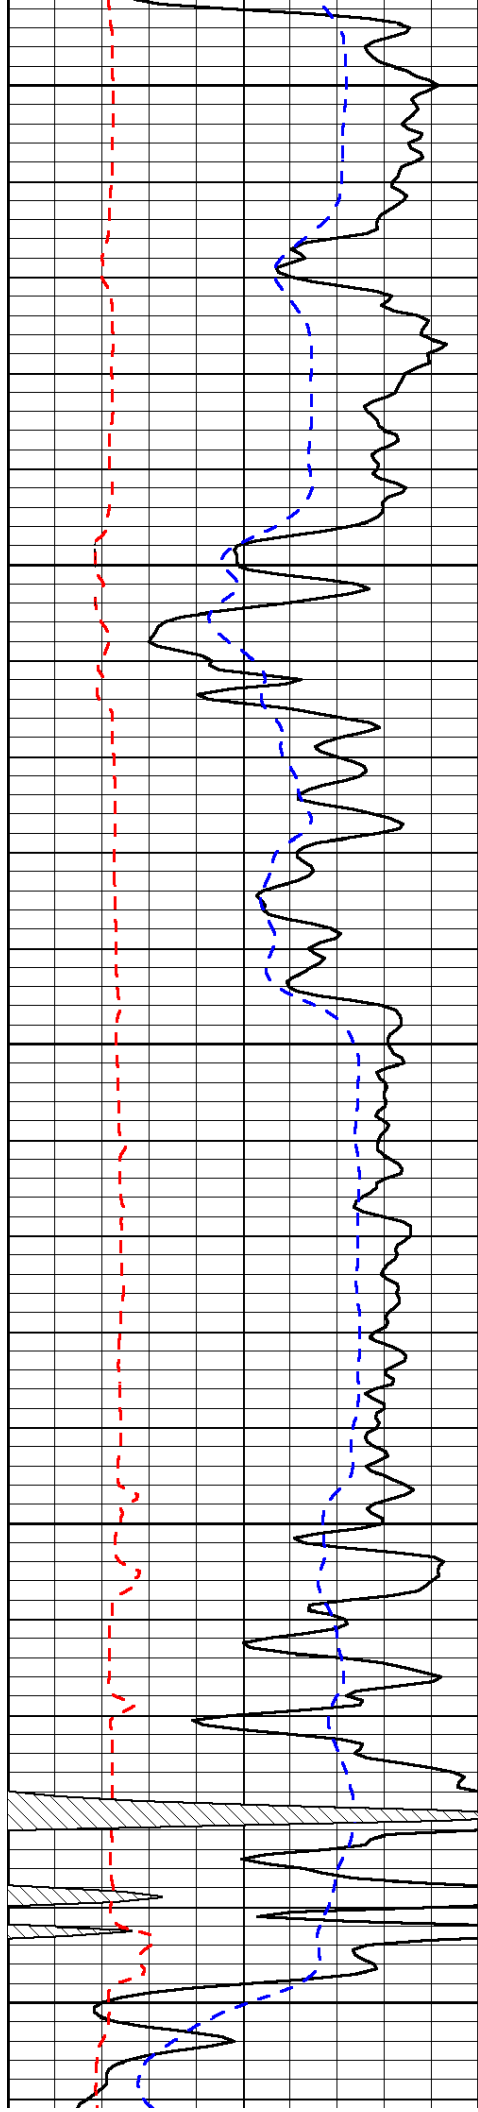


3450

3500

3550

3600

3650

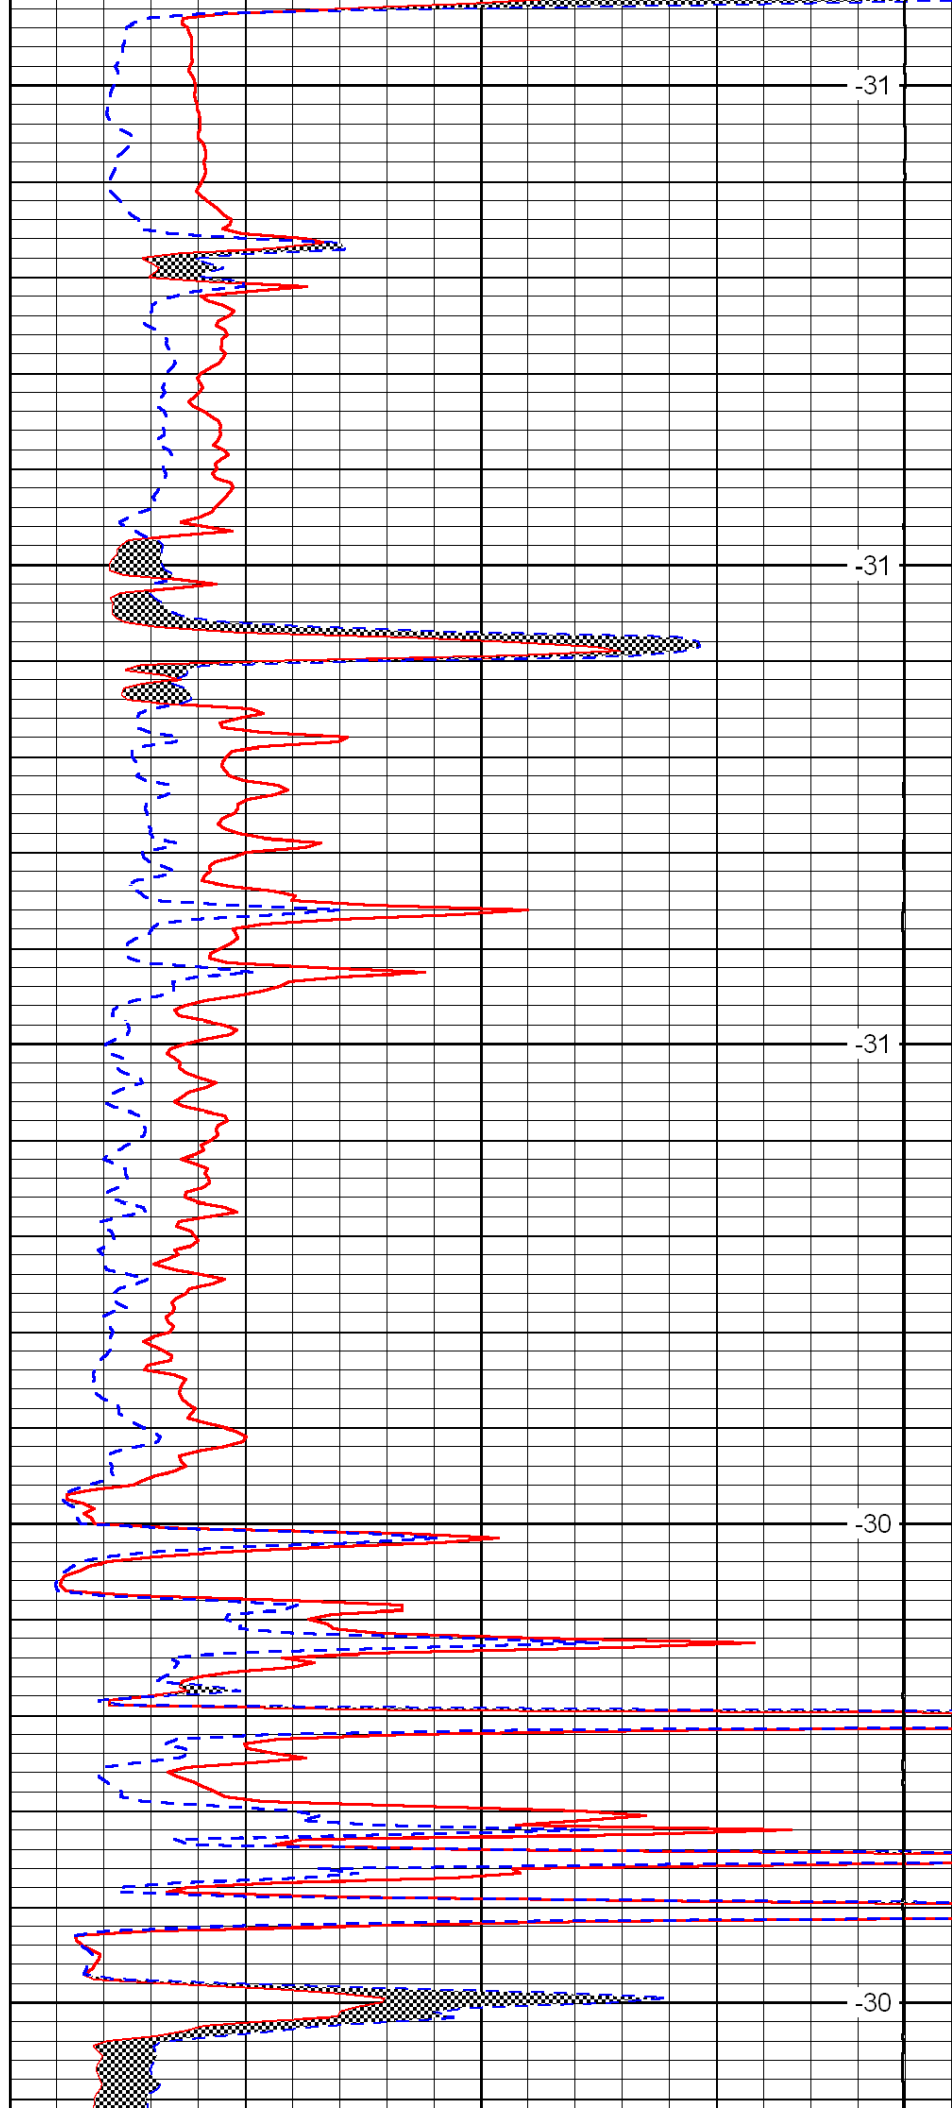


-31

-31

-31

-30

-30

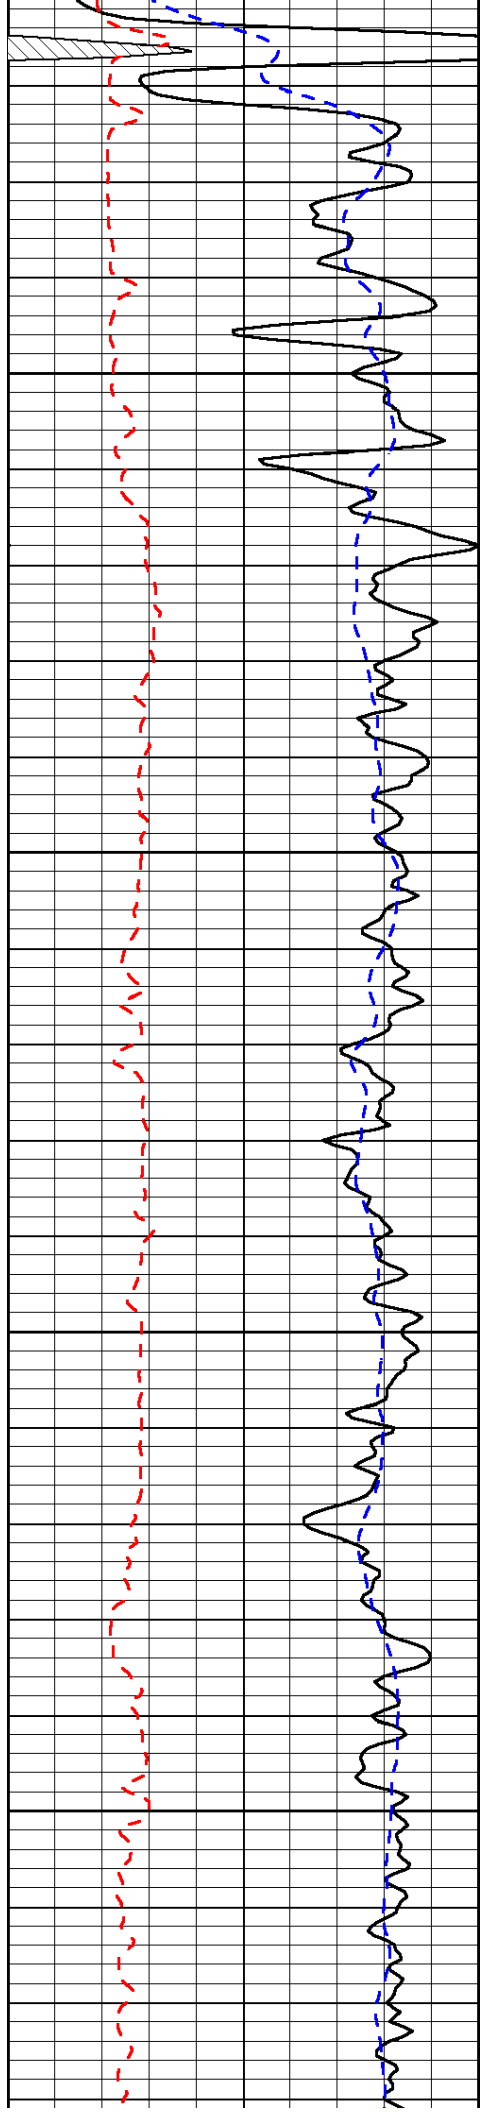


3700

3750

3800

3850


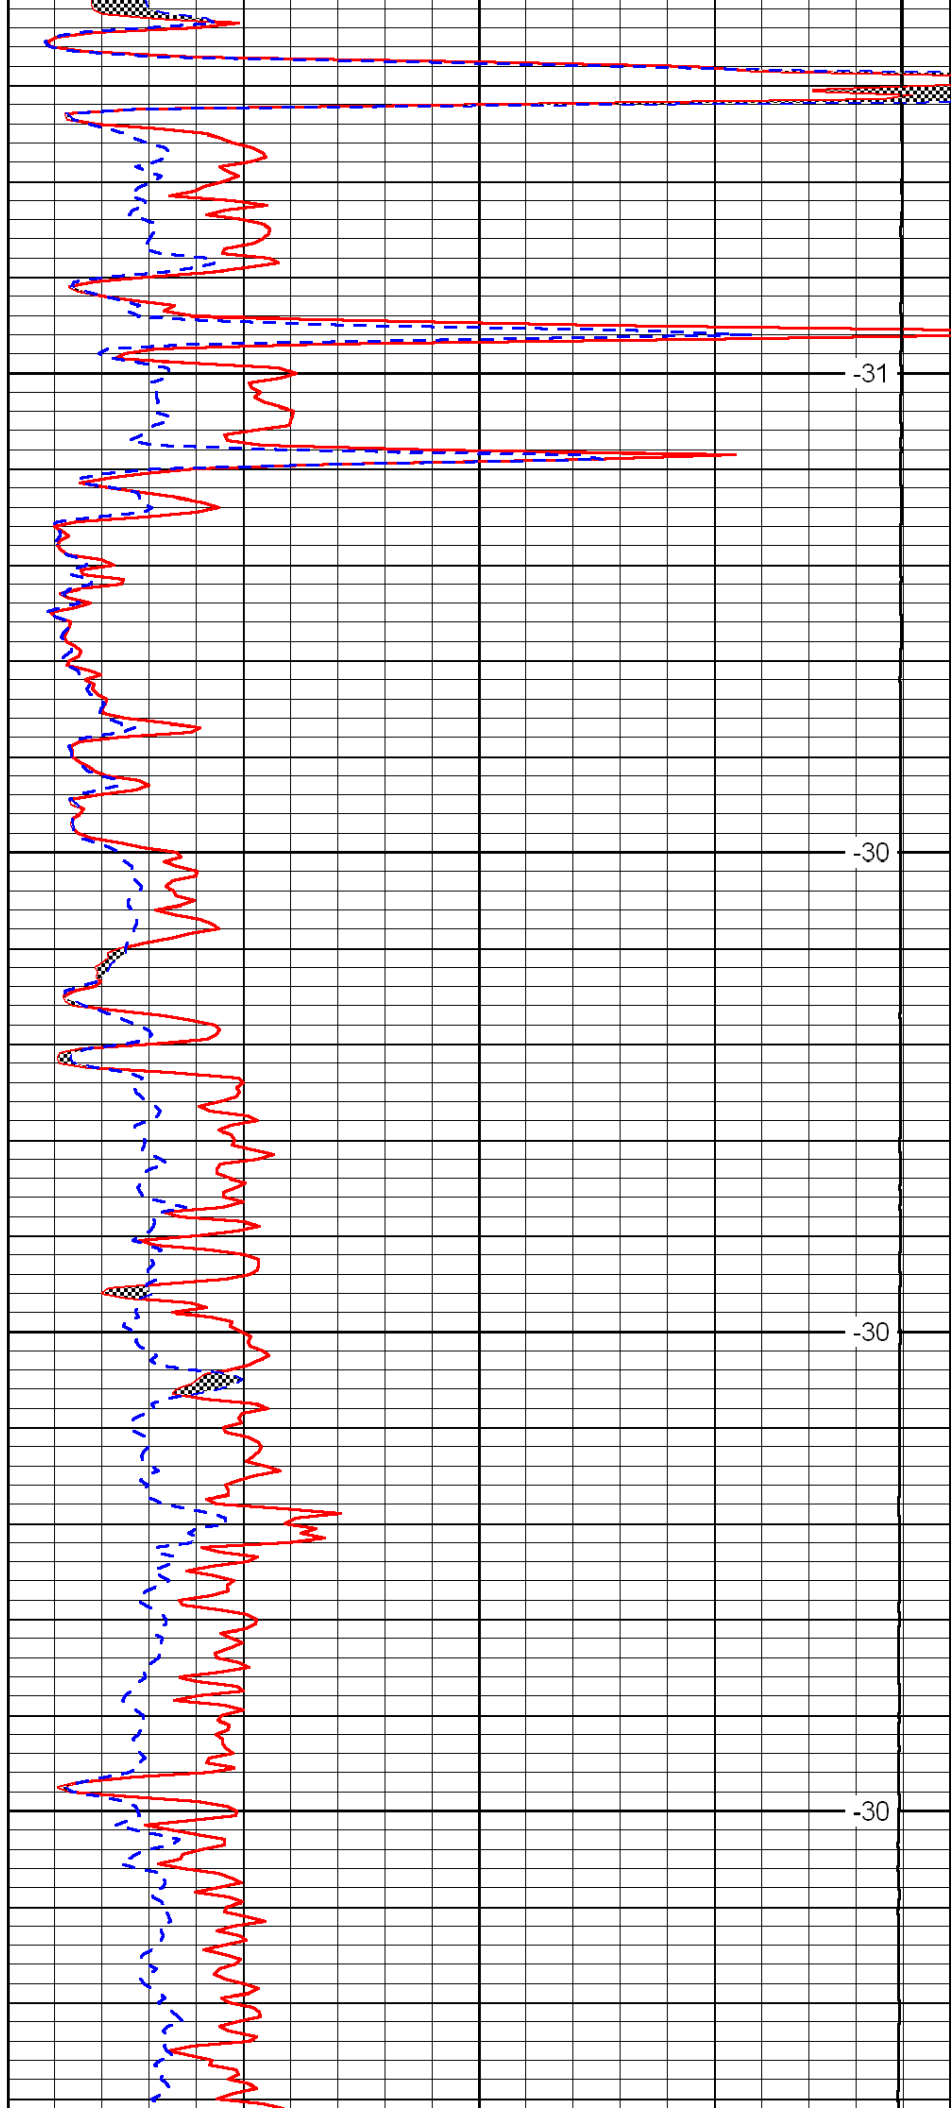



-31

-30

-30

-30

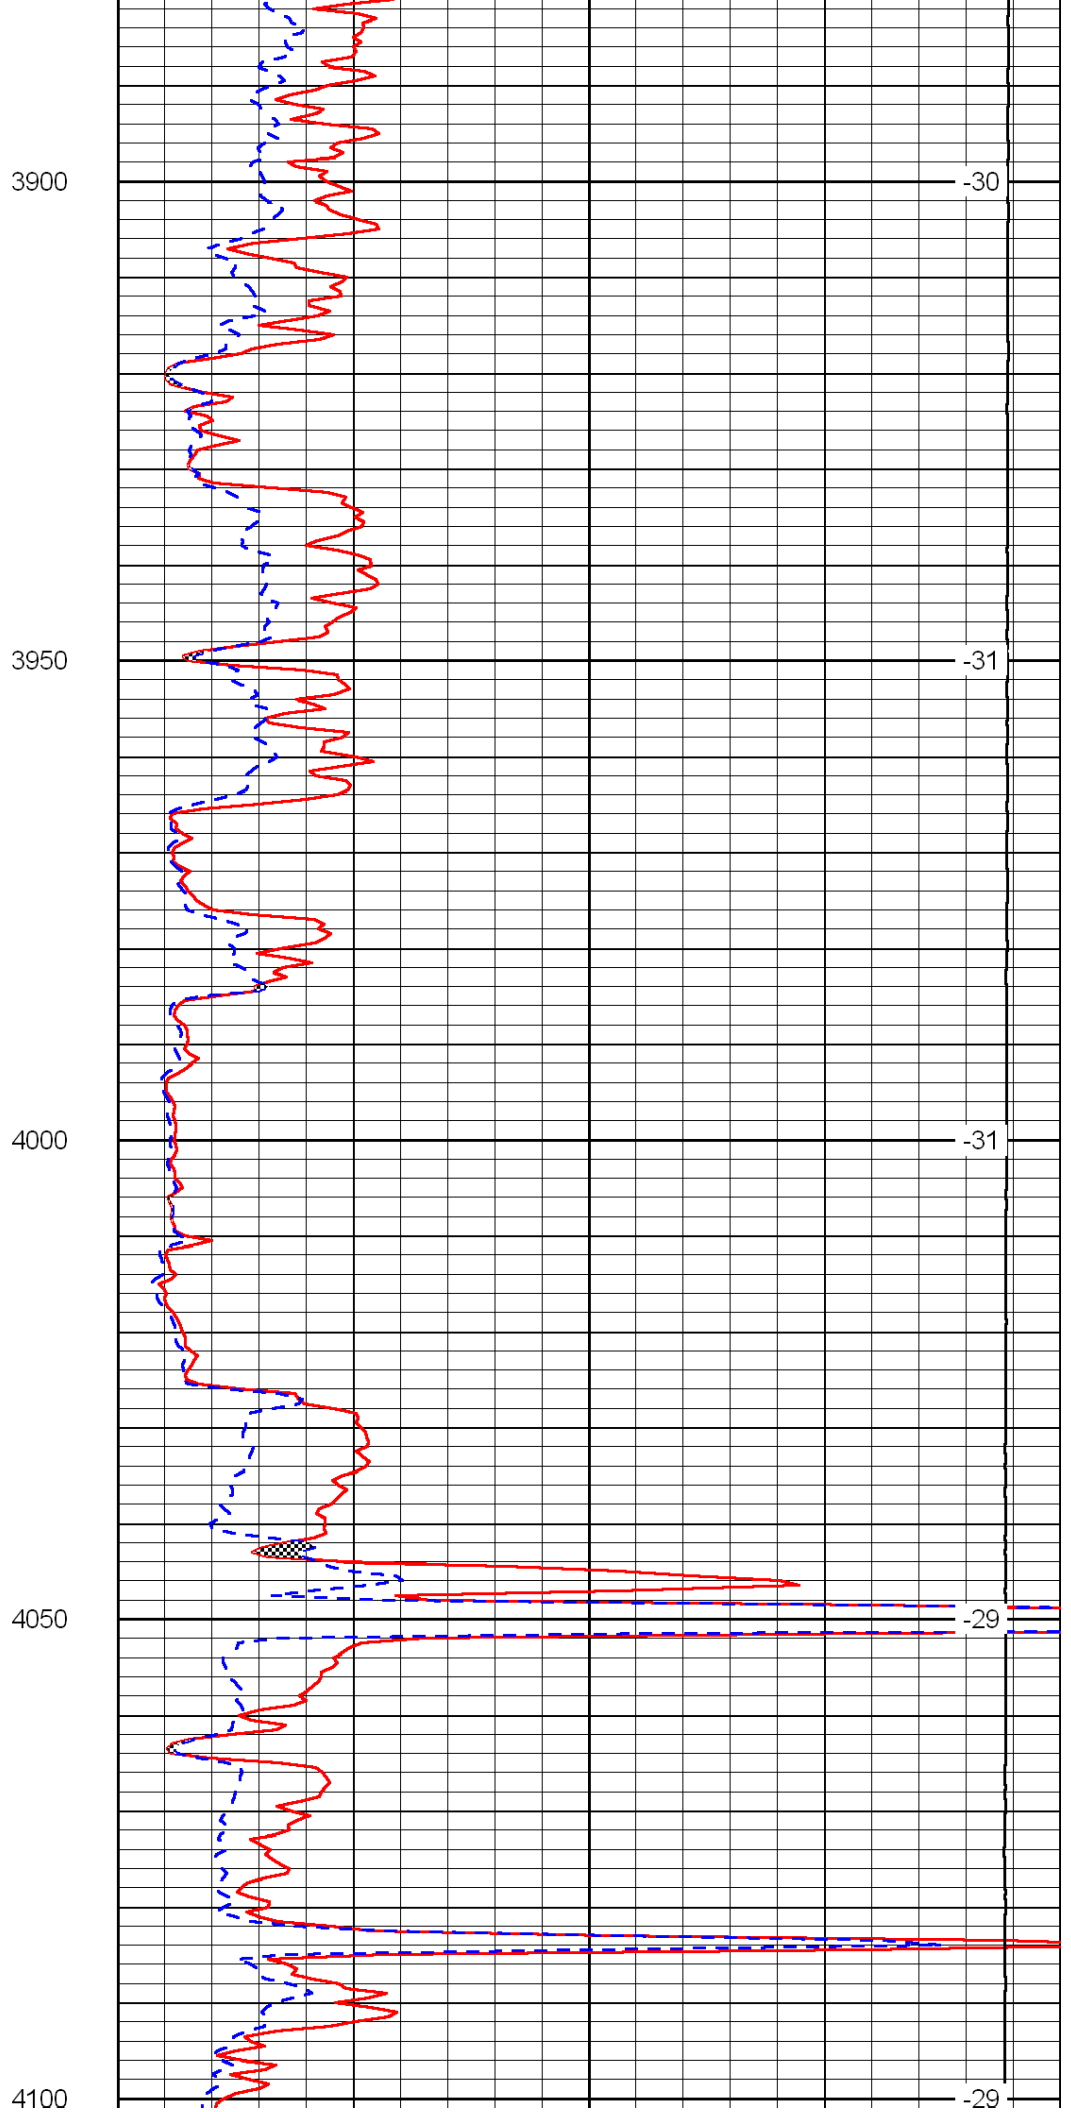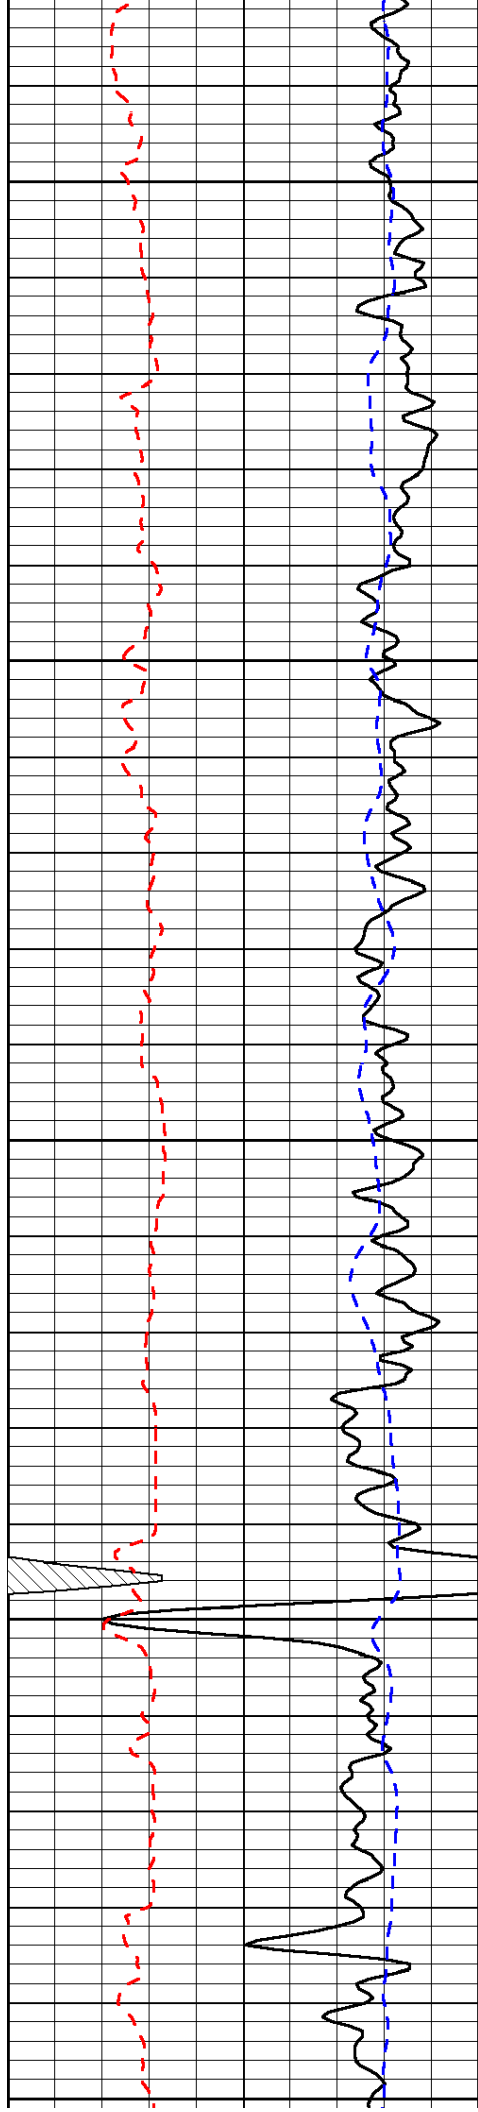

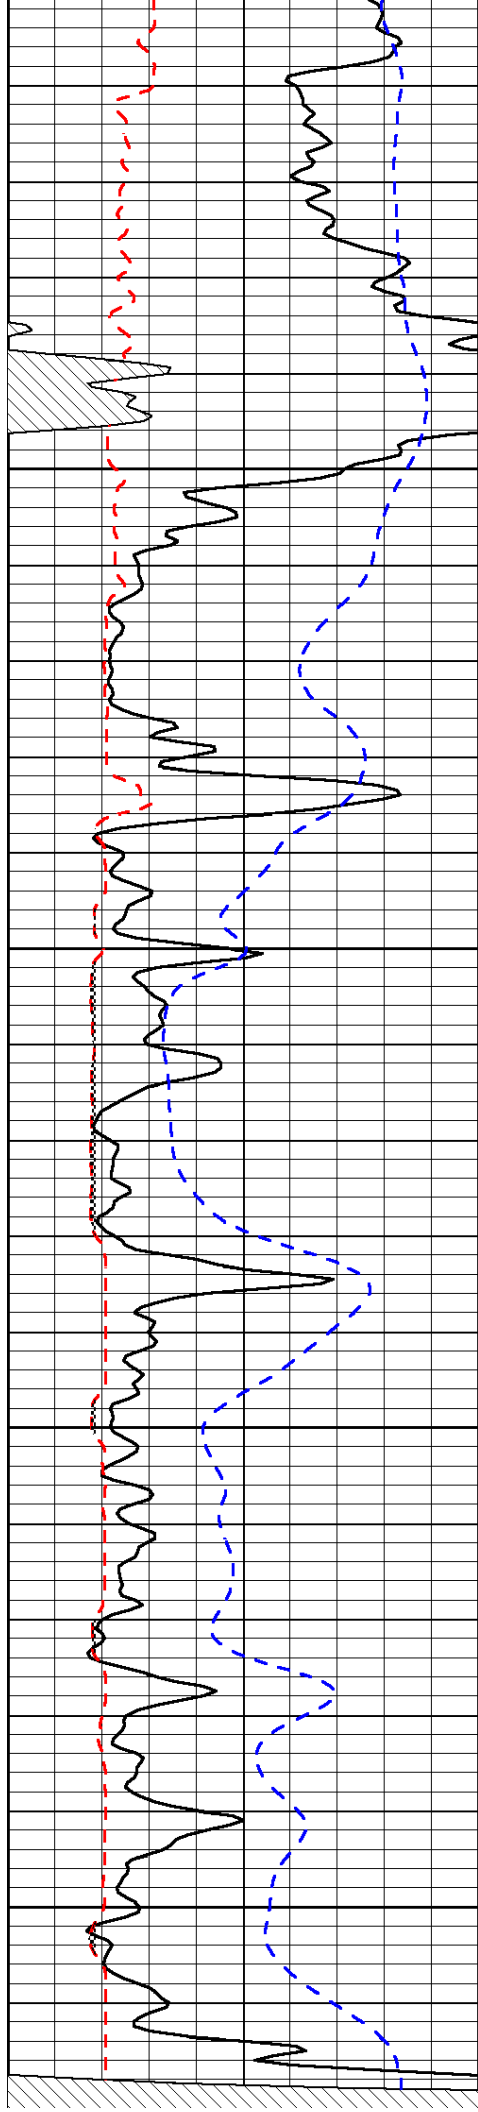



4150

4200

4250

4300

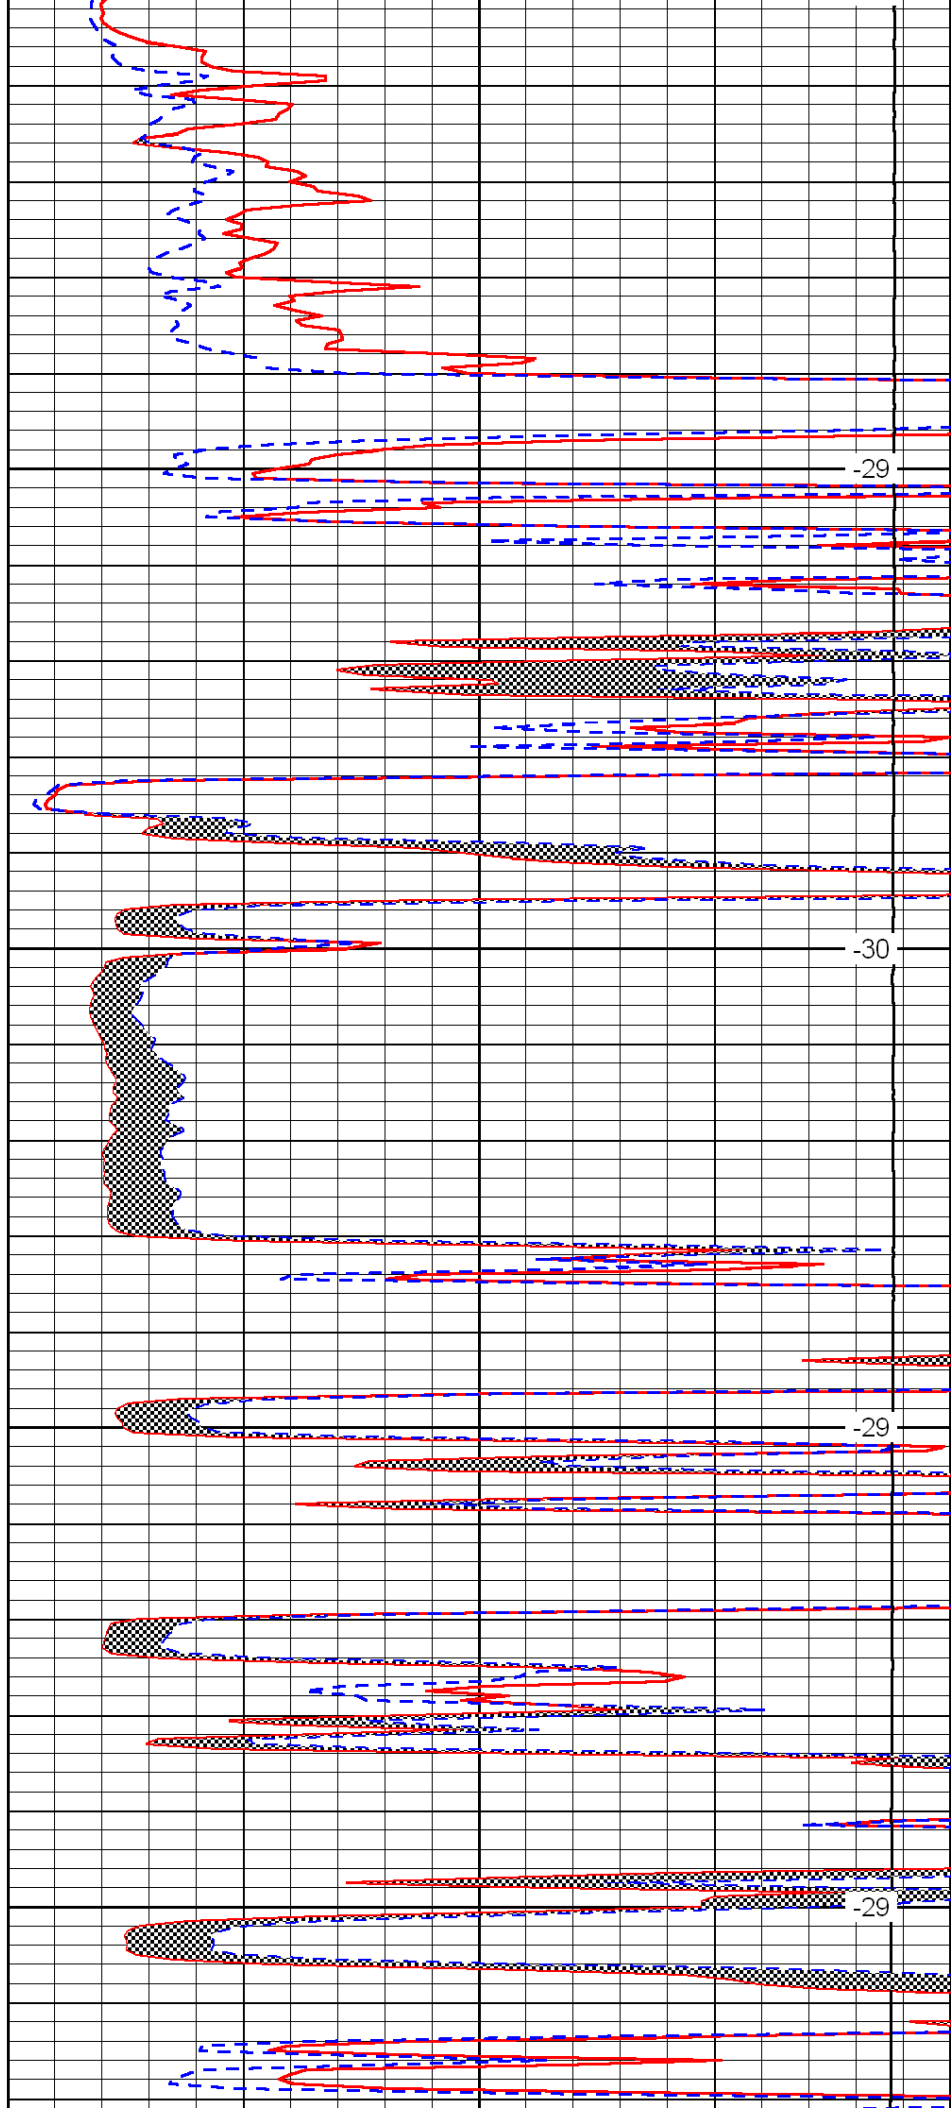

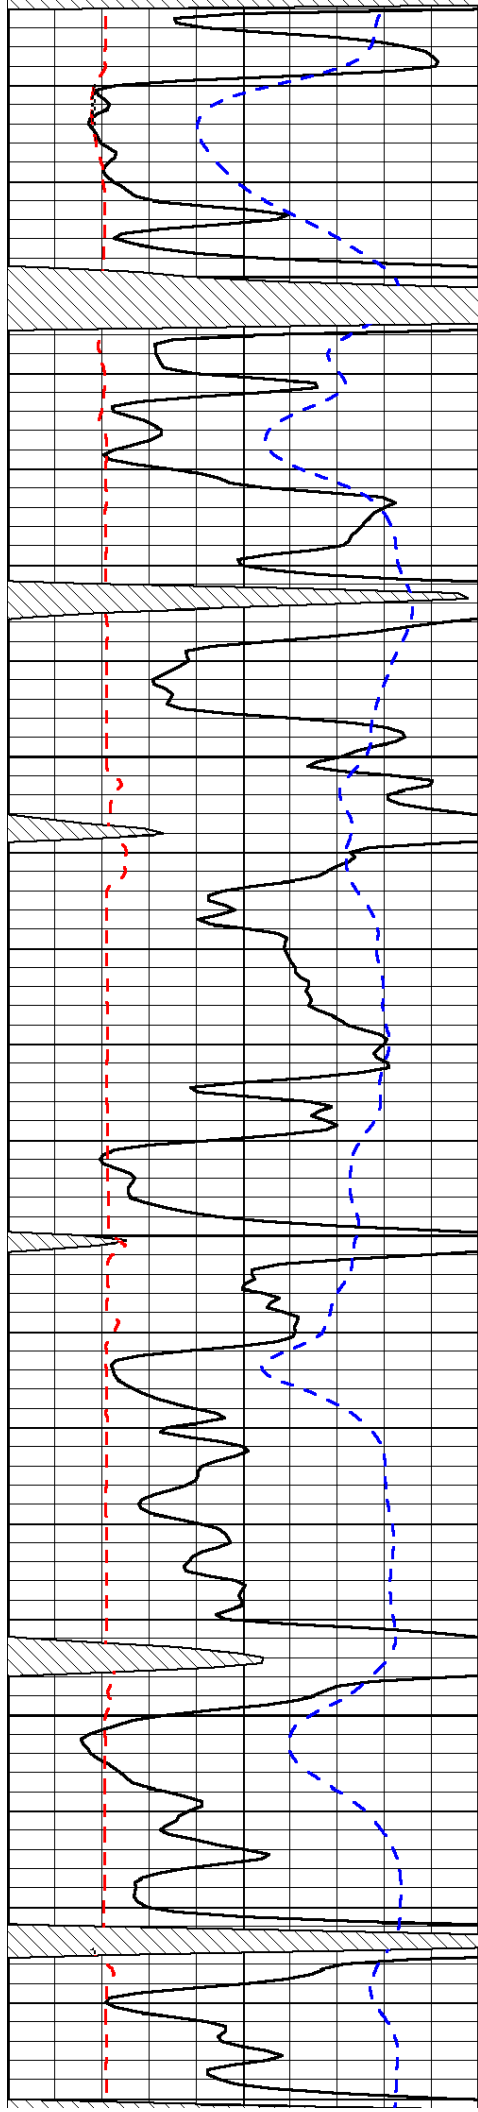

4350

4400

4450

4500

