



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company Berexco LLC		
15-009-25,543-00-00	Well Morgan Z No.1		
	Field Kraft-Prusa		
	County Barton	State	Kansas
	Location SW NW SE NW 1850' FNL & 1490' FWL	Other Services CDL RAG	
	Sec: 22	Twp: 16S	Rge: 12W
Permanent Datum	Ground Level	Elevation 1922	
Log Measured From Kelly Bushing		5 Ft. Above Perm. Datum	
Drilling Measured From Kelly Bushing		K.B. 1927 D.F. 1922 G.L. 1922	
Date	5/31/2011		
Run Number	Two		
Depth Driller	3455		
Depth Logger	3454		
Bottom Logged Interval	3453		
Top Log Interval	2600		
Casing Driller	8.625 @ 436		
Casing Logger	434		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	10,000		
Density / Viscosity	9.3 53		
pH / Fluid Loss	8.5 9.6		
Source of Sample	Flowline		
Rm @ Meas. Temp	.4 @ 81		
Rmf @ Meas. Temp	.3 @ 81		
Rmc @ Meas. Temp	.54 @ 81		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.29 @ 113		
Operating Rig Time	4 1/2 Hours		
Max Rec. Temp. F	113		
Equipment Number	17		
Location	Hays		
Recorded By	C. Desaire		
Witnessed By	Jeff Lawler		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


Thank you for using Log-Tech, Inc.
(785) 625-3858


Beaver KS, 1 E, 3/4 N, E Into

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

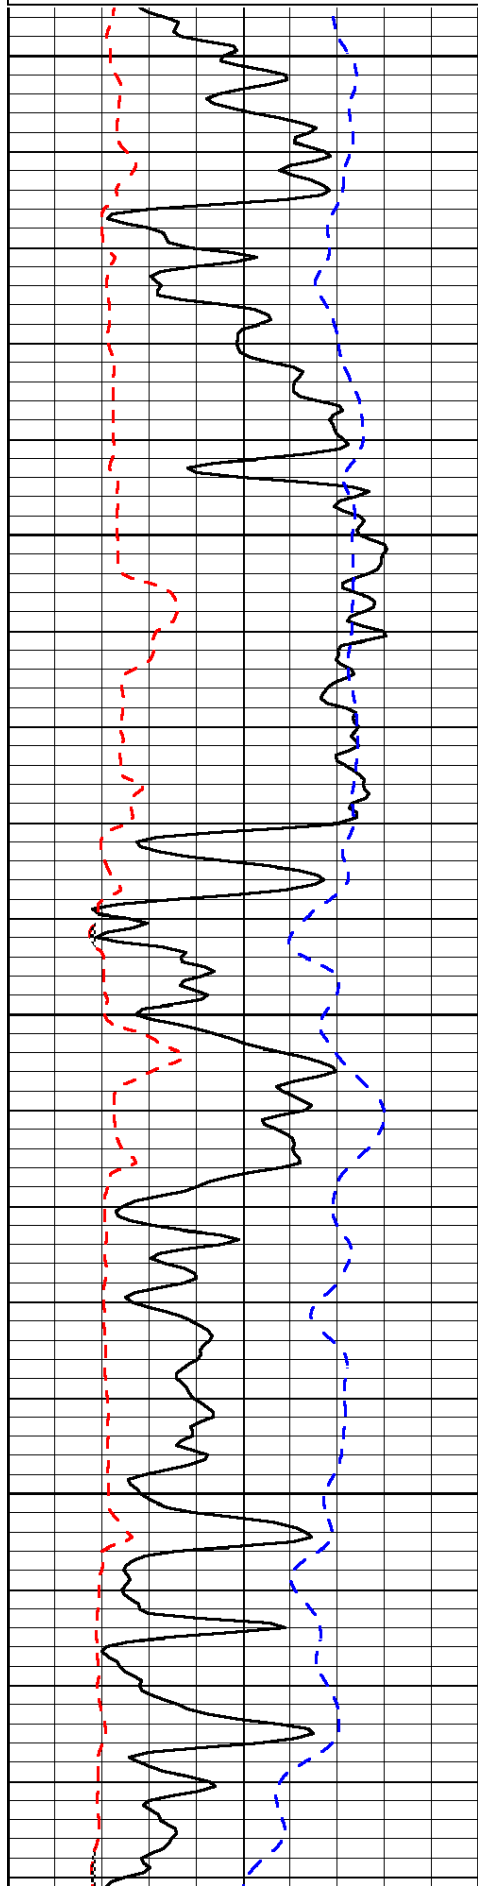

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

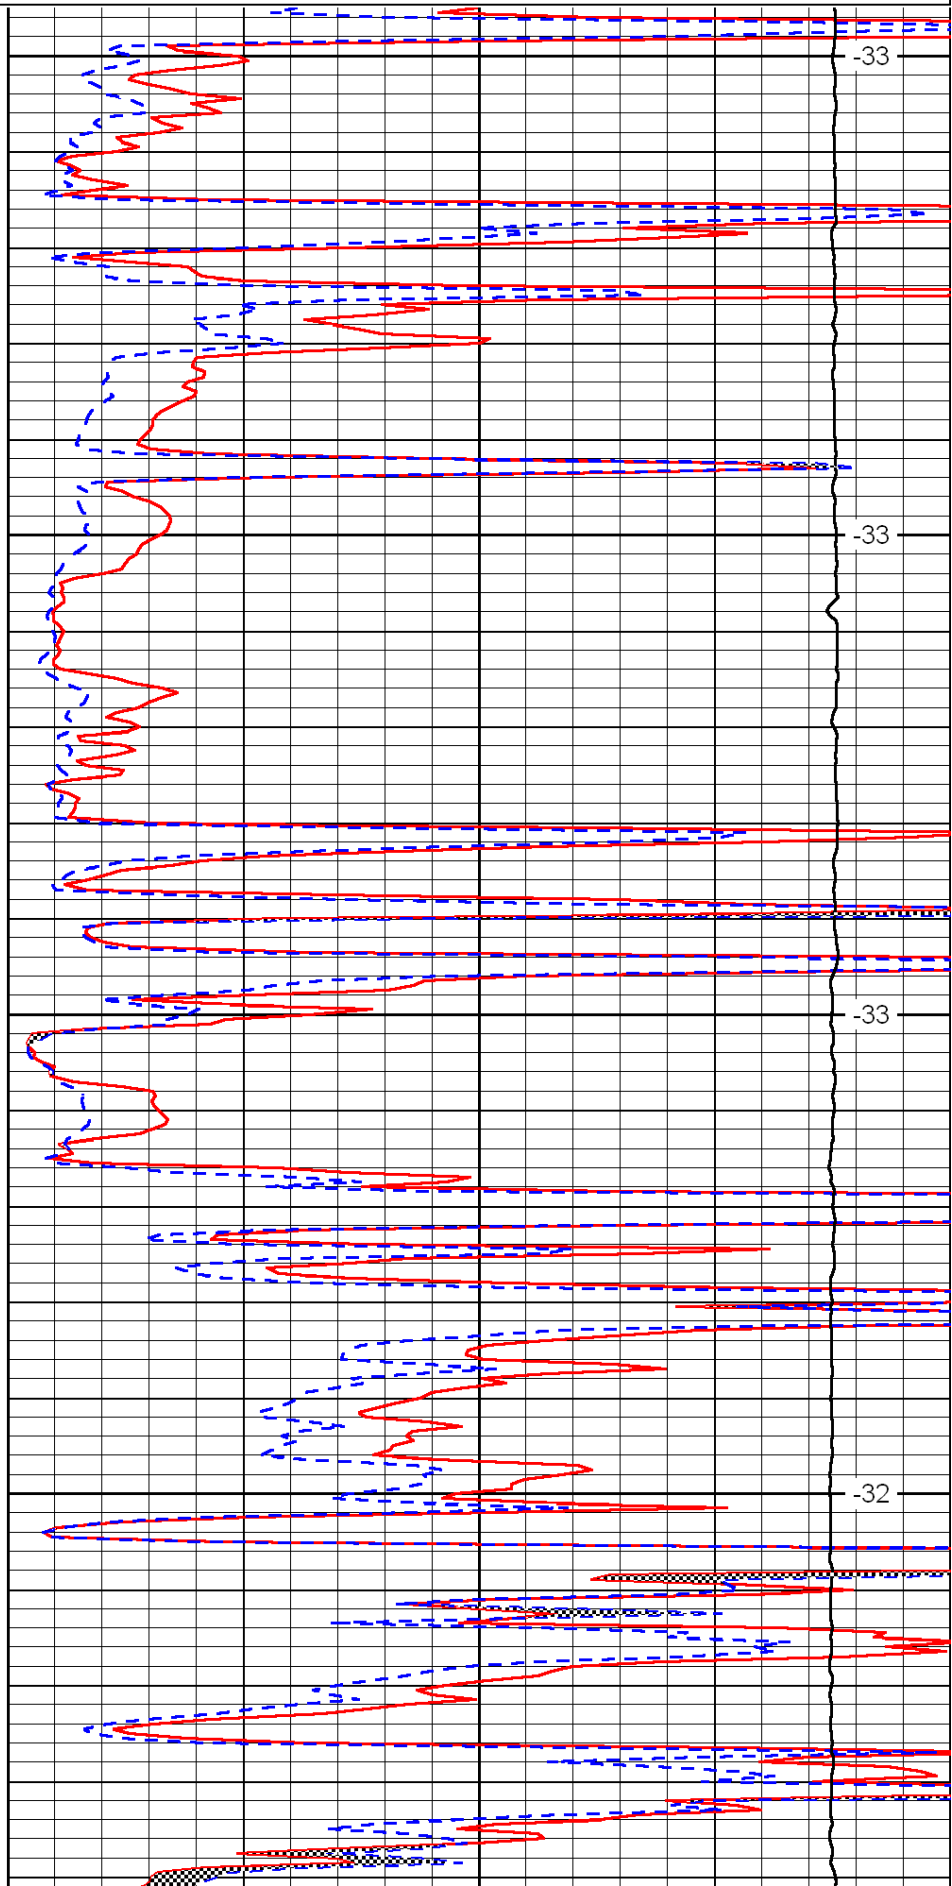

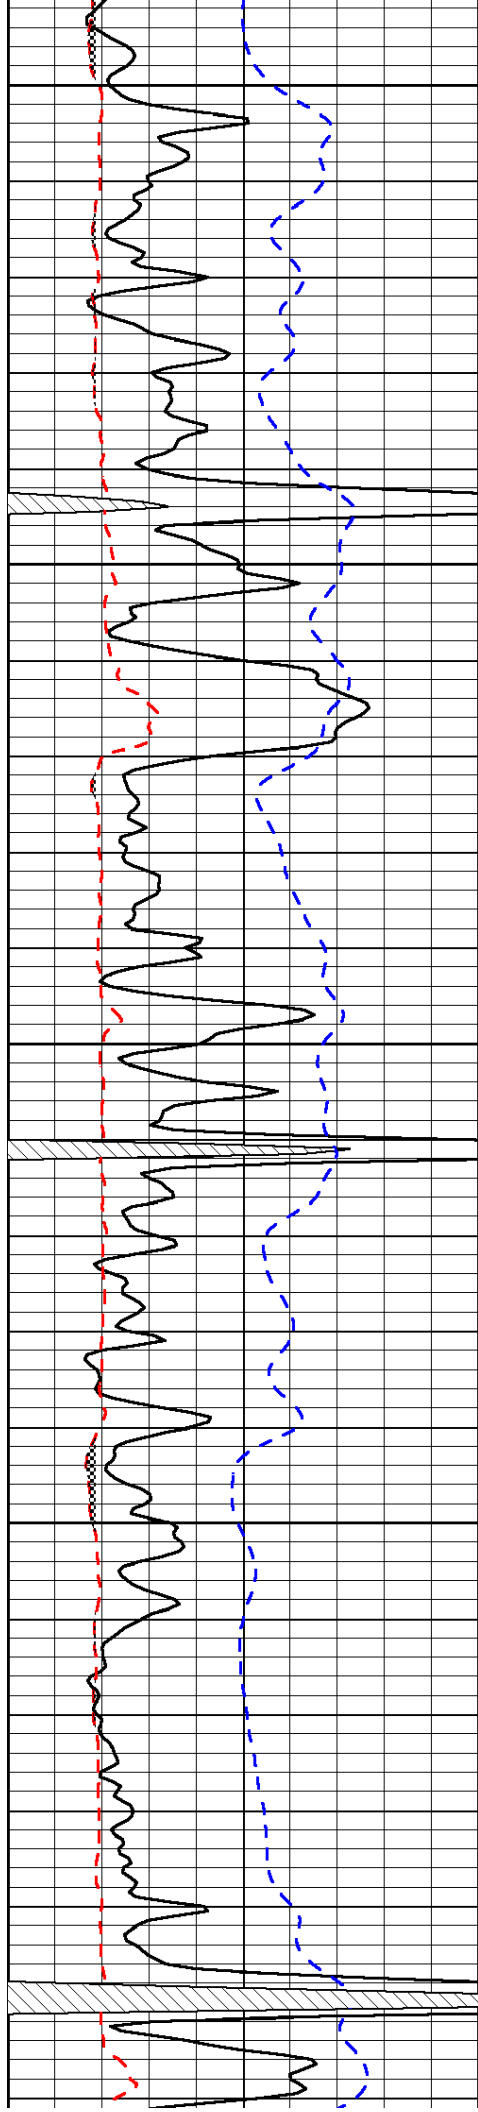


2800

2850

2900

2950

3000

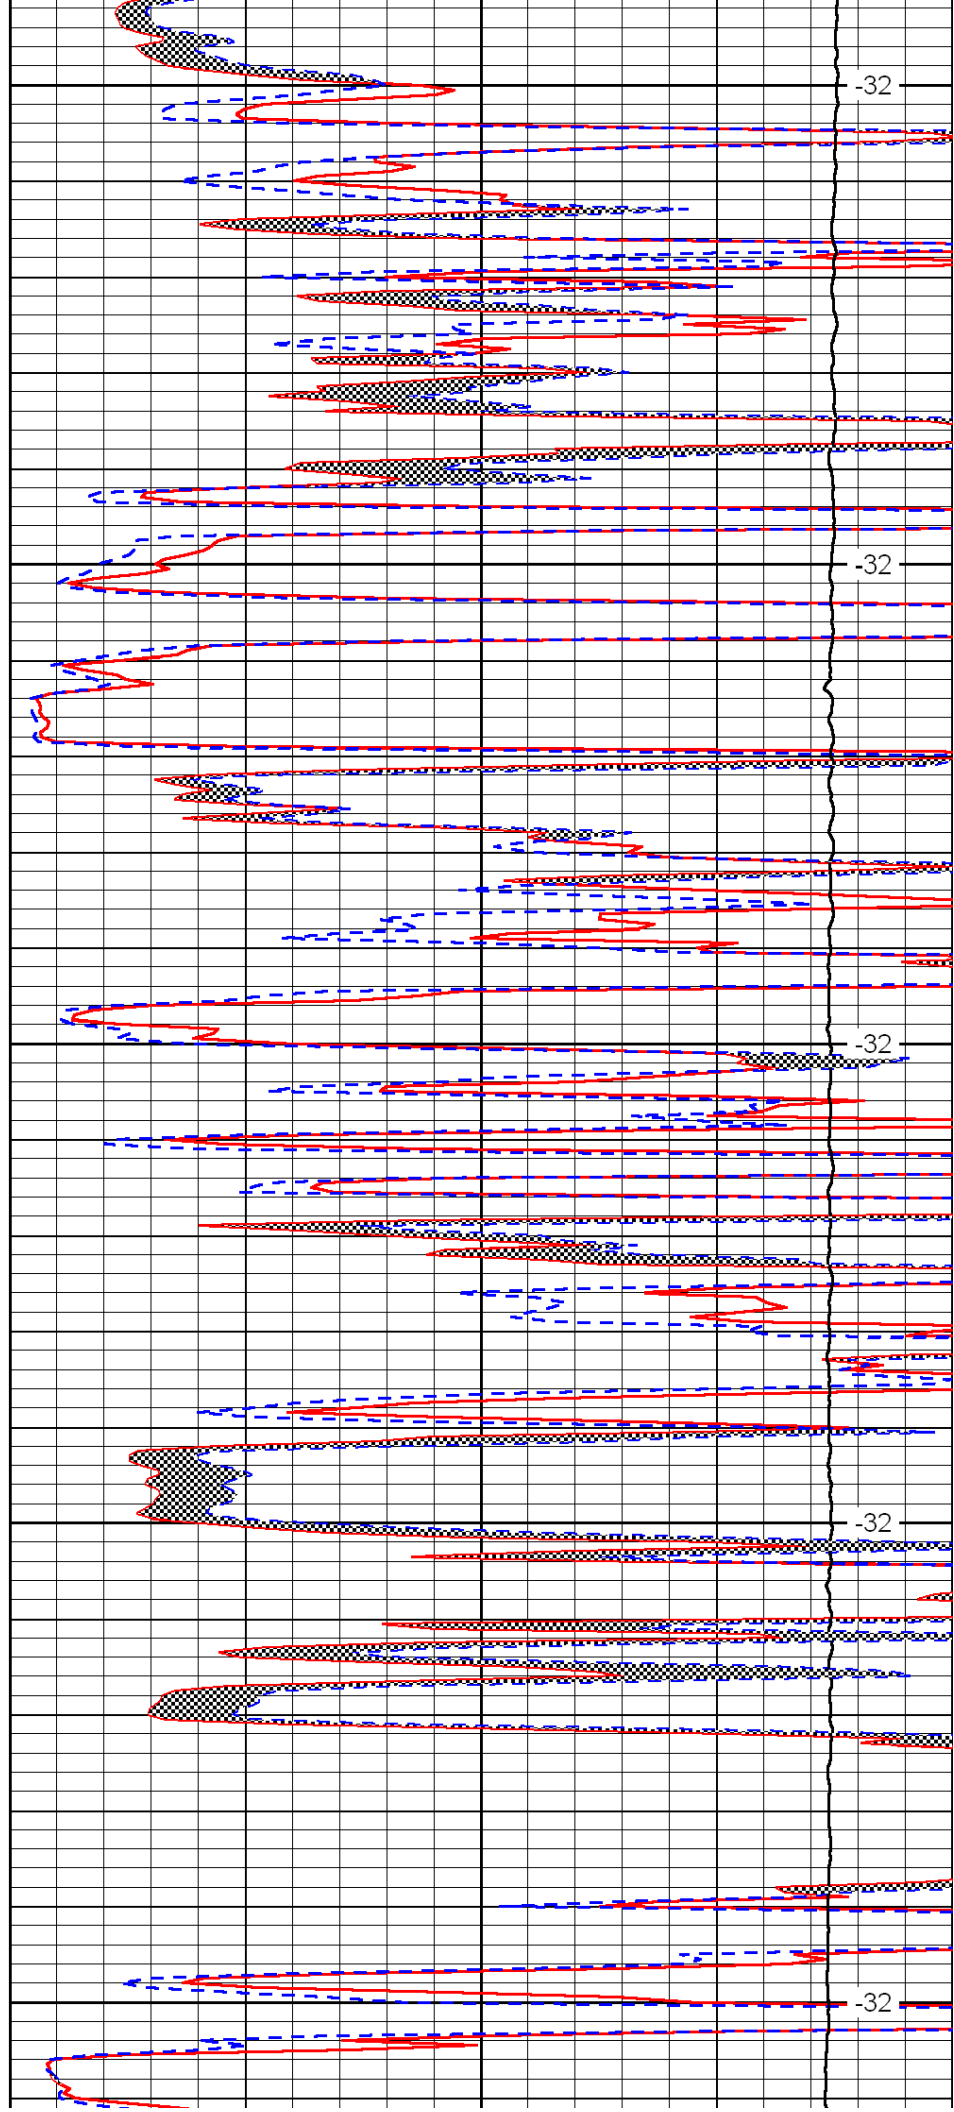


-32

-32

-32

-32

-32

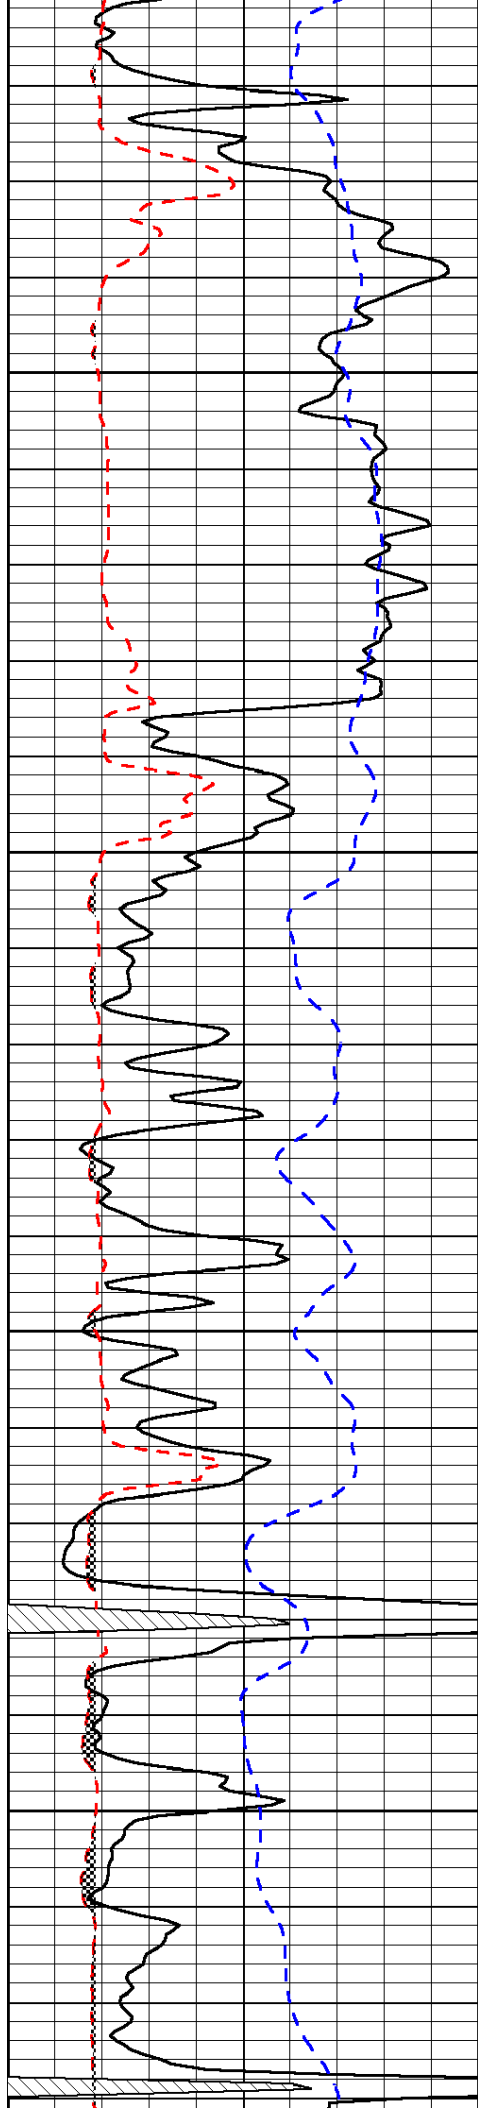


3050

3100

3150

3200

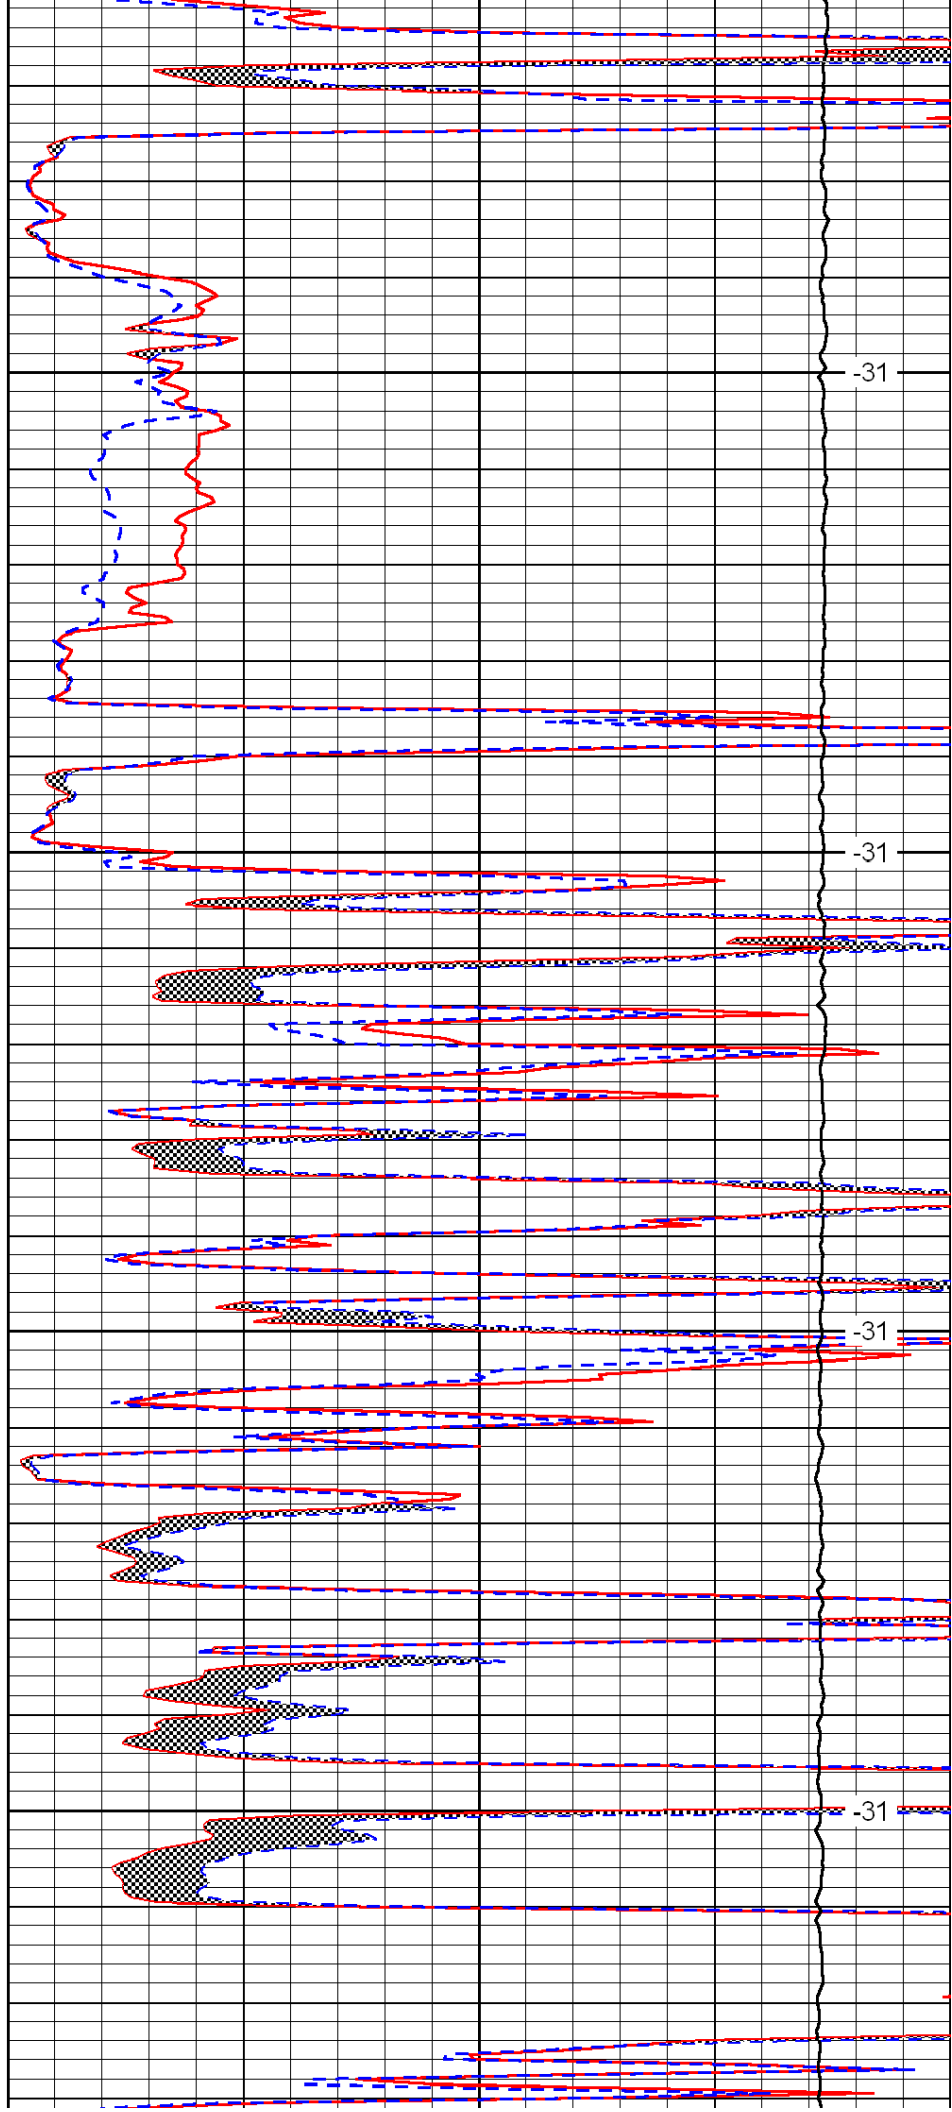


-31

-31

-31

-31

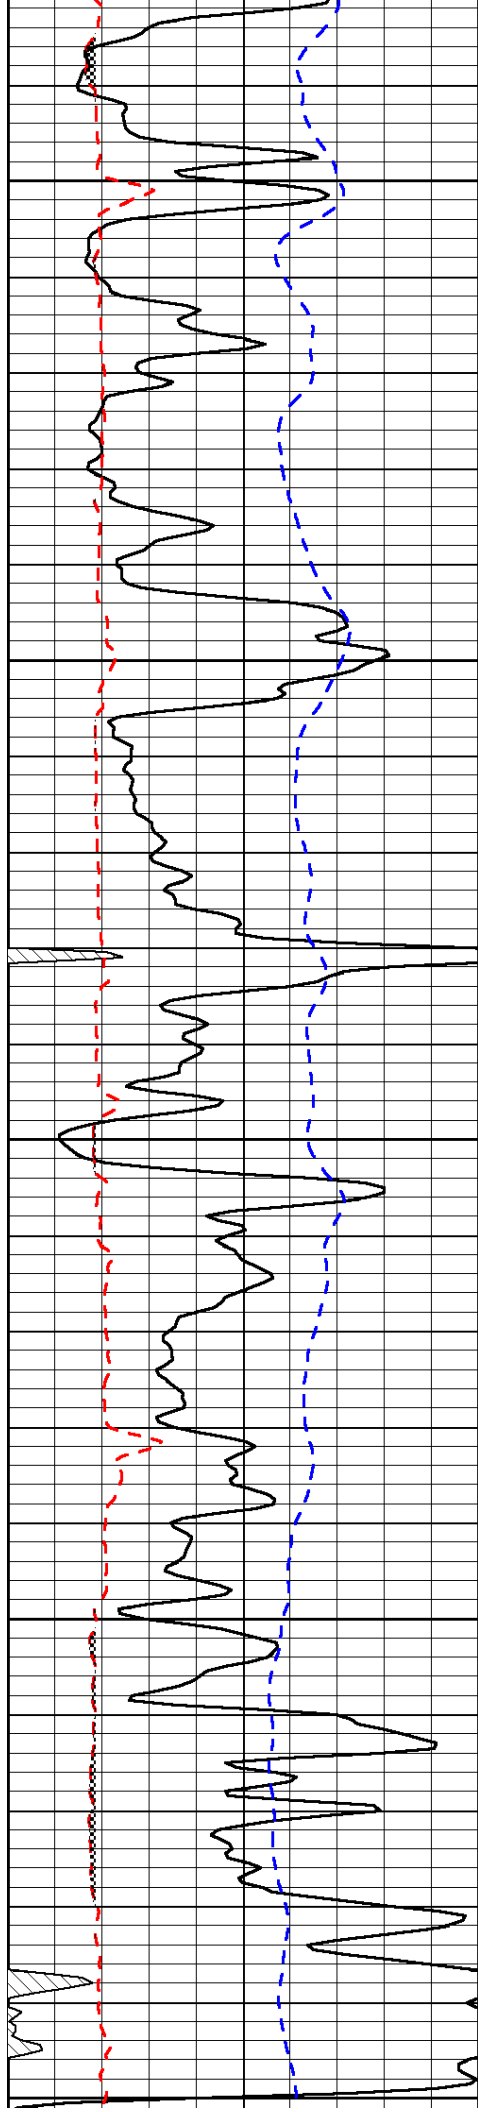

3250

3300

3350

3400

3450

