



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.		Company TDI, Inc.	
15-051-26124-00-00		Well Irvin No. 2	
Location		Field Reichert North	
County Ellis		State Kansas	
Sec: 6	Twp: 15 S	Rge: 19 W	Other Services CNL/CDL DIL
Permanent Datum	Ground Level	Elevation 2053	Elevation
Log Measured From Kelly Bushing	10 Ft. Above Perm. Datum	K.B. 2063	D.F. 2063
Drilling Measured From Kelly Bushing		G.L. 2053	
Date	5/12/2011		
Run Number	Two		
Depth Driller	3739		
Depth Logger	3736		
Bottom Logged Interval	3735		
Top Log Interval	2400		
Casing Driller	8.625 @ 236		
Casing Logger	232		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	4.000		
Density / Viscosity	9.2 50		
pH / Fluid Loss	10.5 7.2		
Source of Sample	Flowline		
Rm @ Meas. Temp	1.35 @ 58		
Rmf @ Meas. Temp	1.01 @ 58		
Rmc @ Meas. Temp	1.82 @ 58		
Source of Rmf / Rmc	Charts		
Rm @ BHT	0.69 @ 113		
Operating Rig Time	3 Hours		
Max Rec. Temp. F	113		
Equipment Number	15		
Location	Hays		
Recorded By	B. Becker		
Witnessed By	Tom Denning	Herb Deines	

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Antonino, Ks; 4-1/2 West;
South Into at Tank Batteries

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

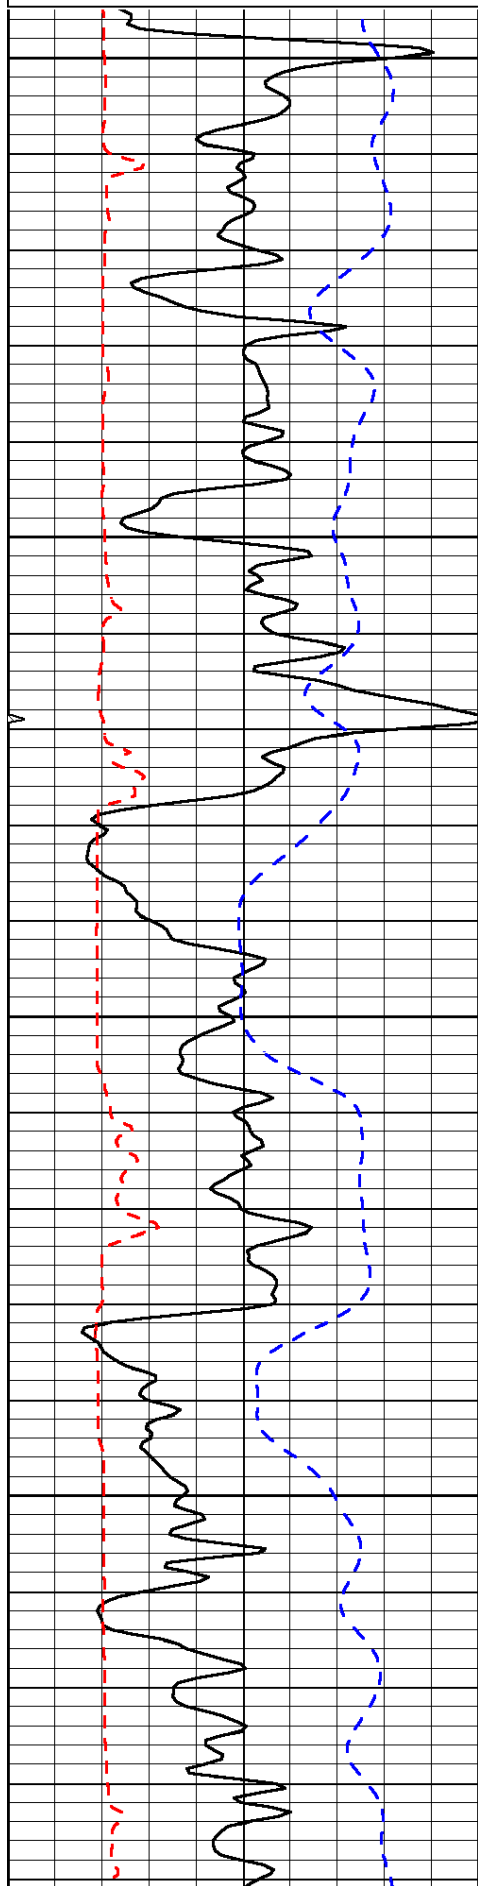


2400



2450


2500

2550

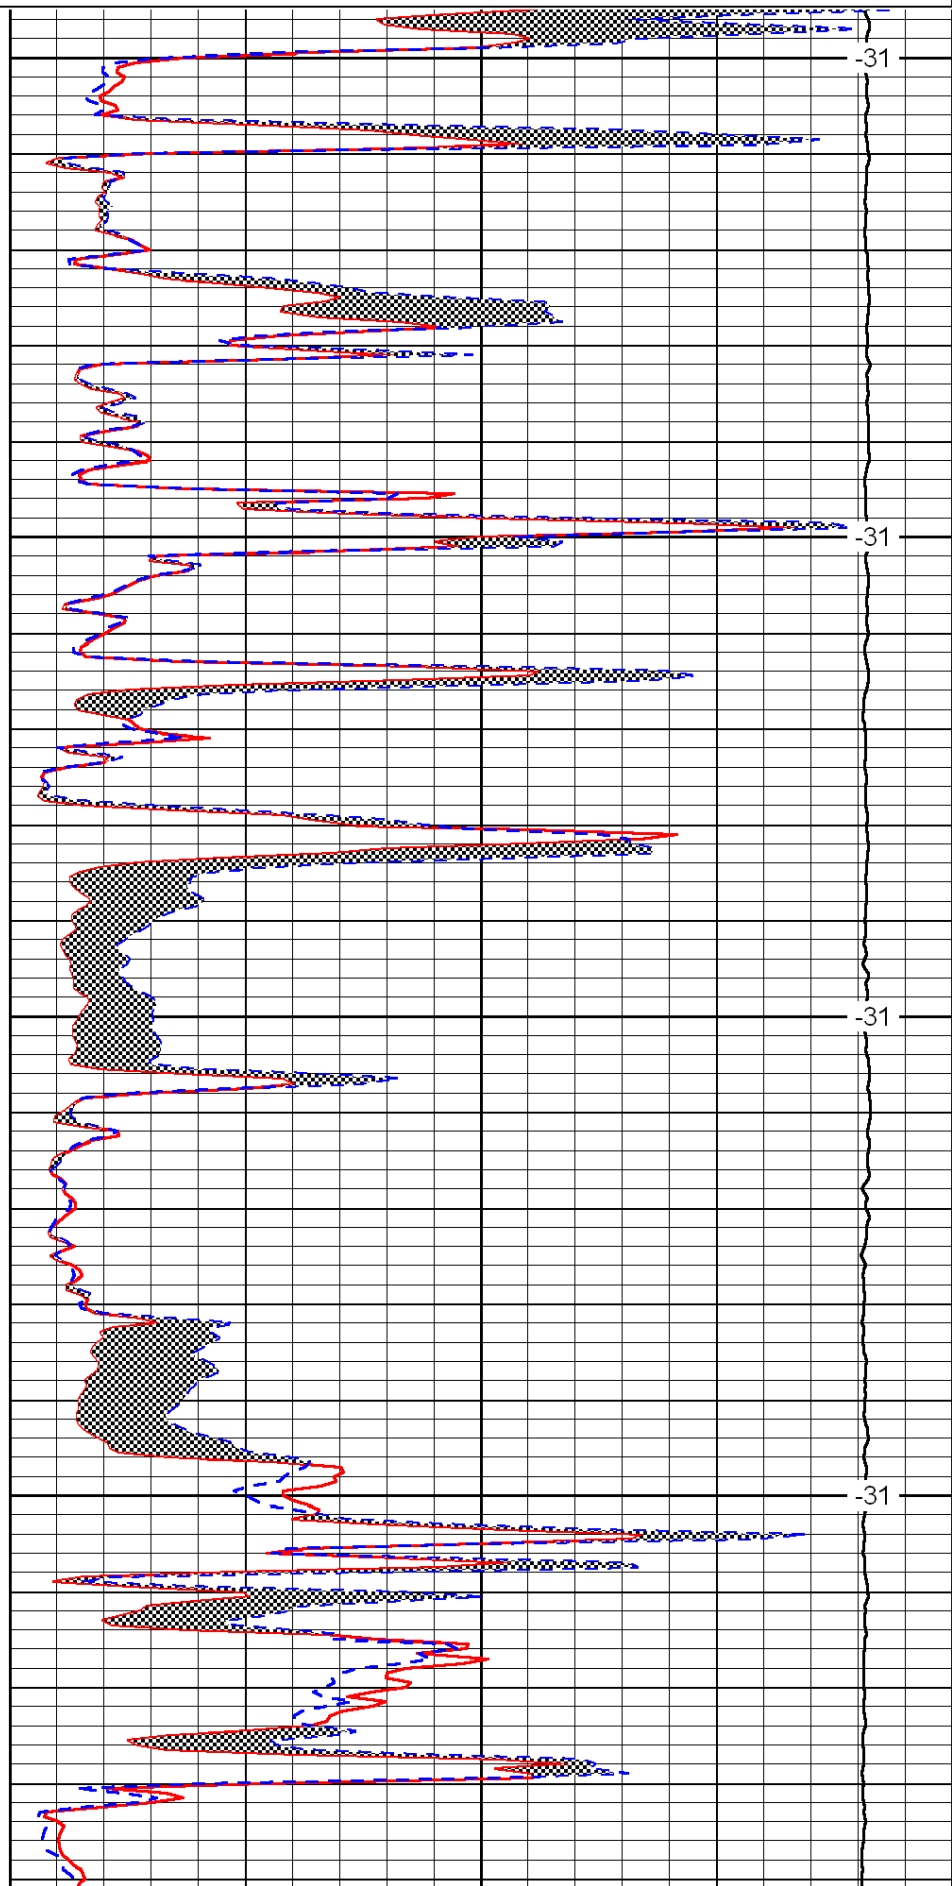

LSPD

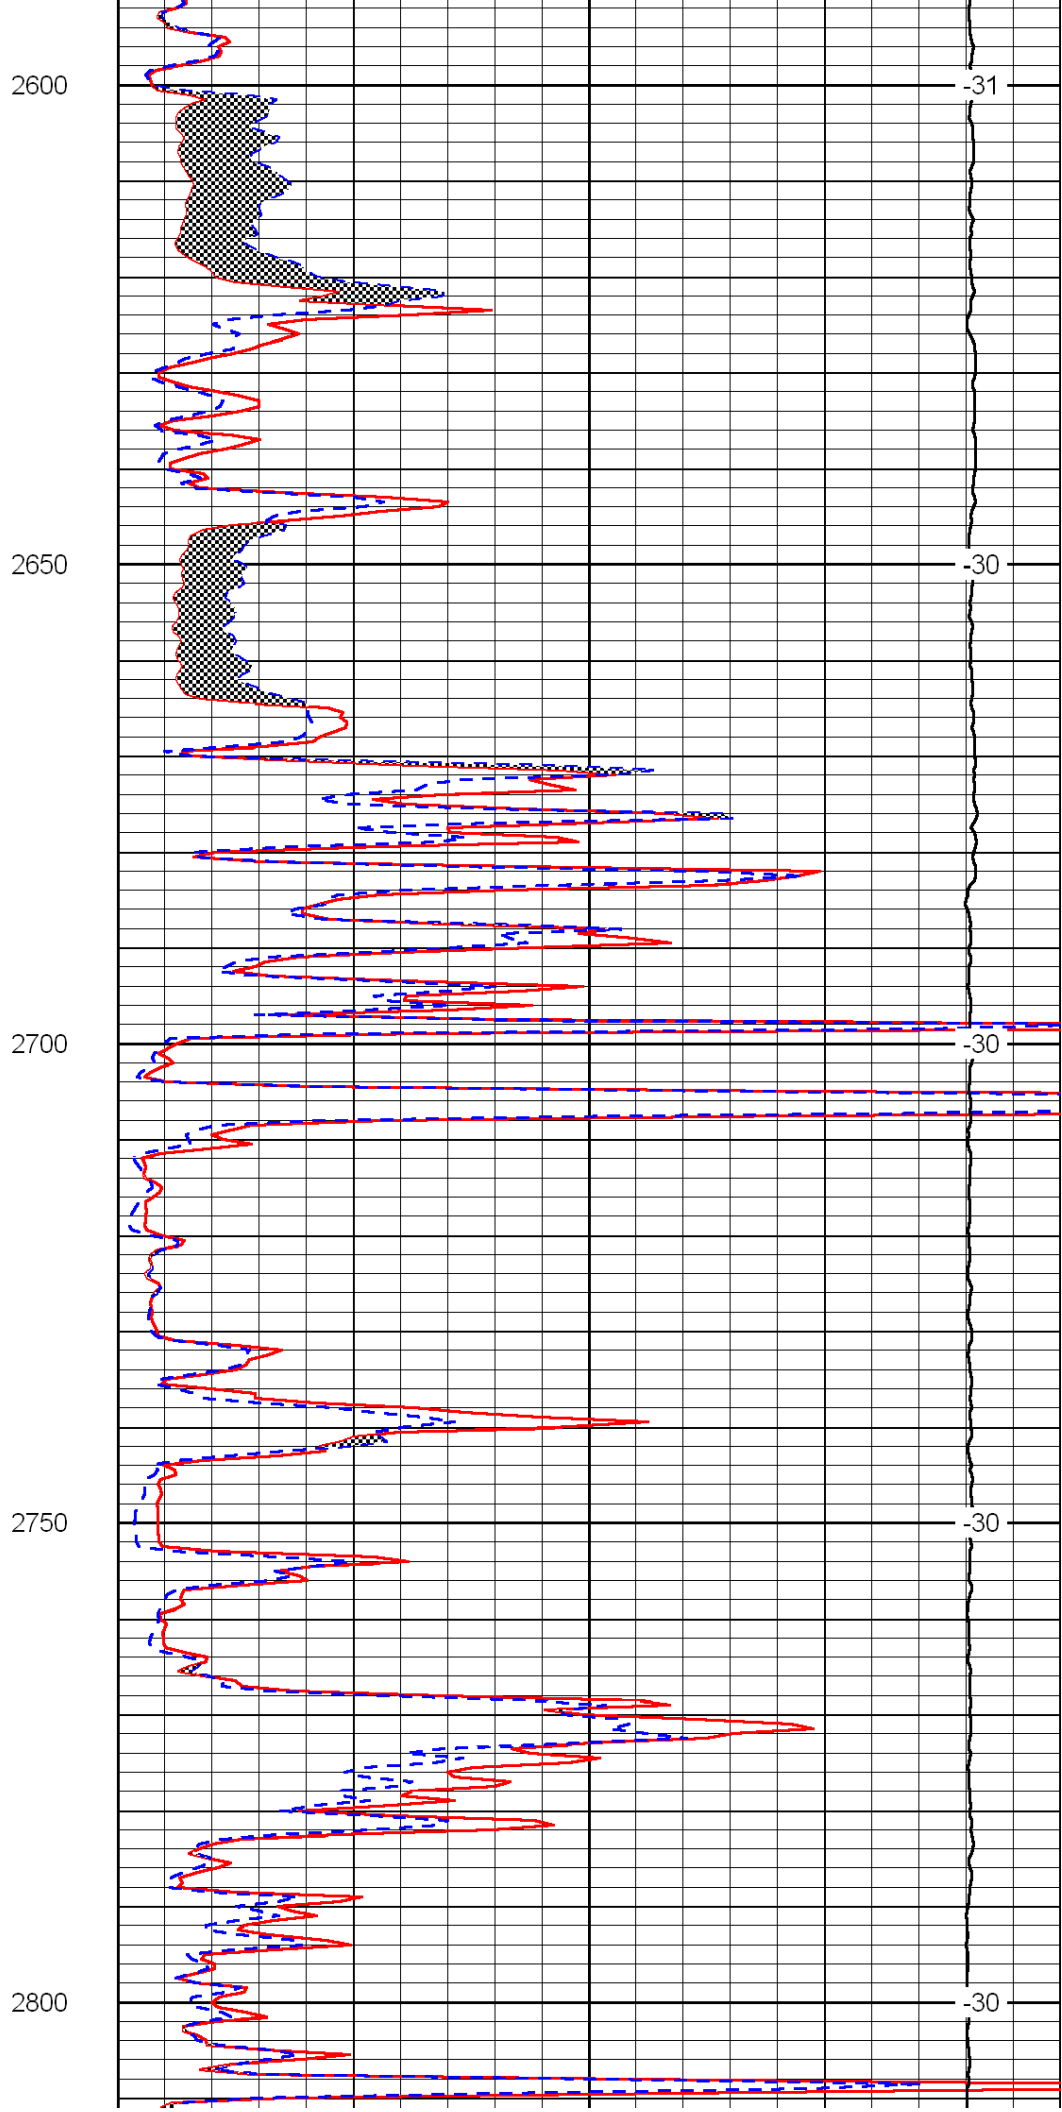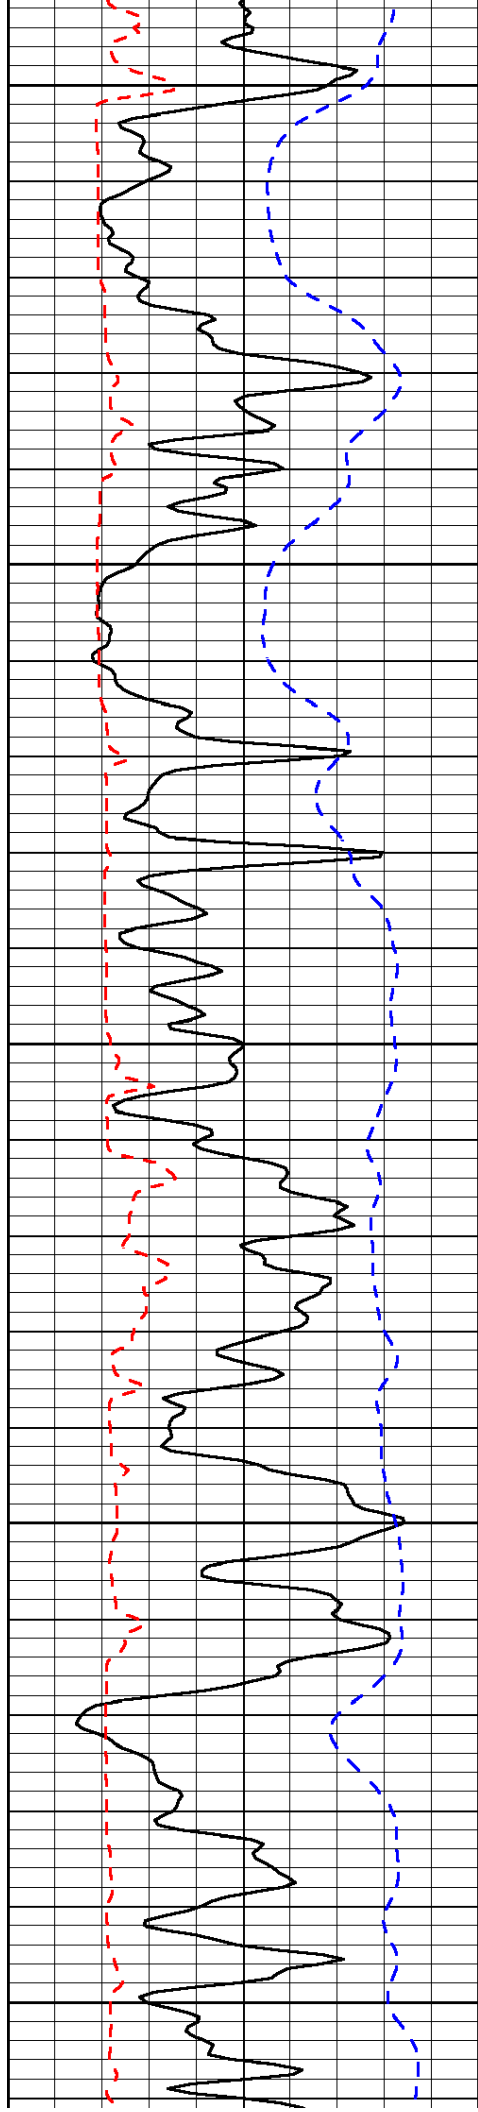

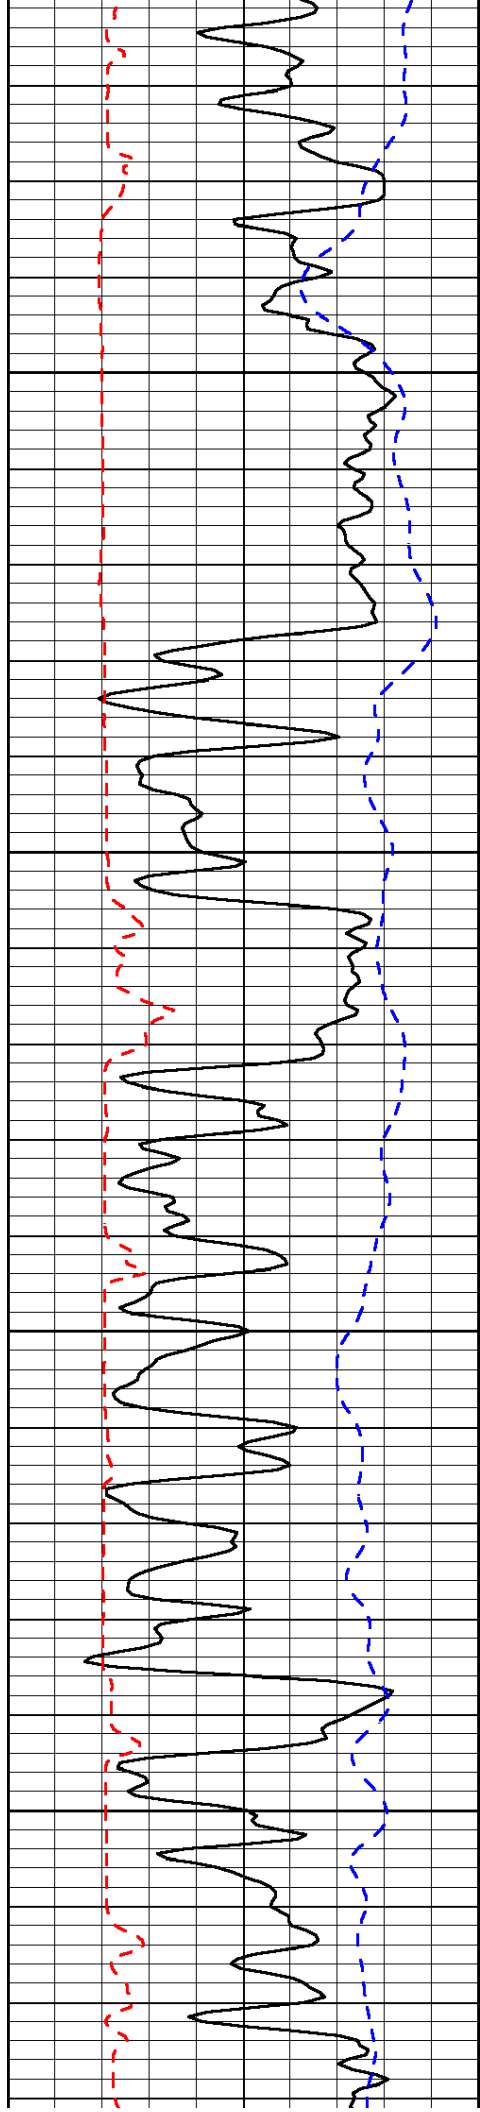


2850

2900

2950

3000

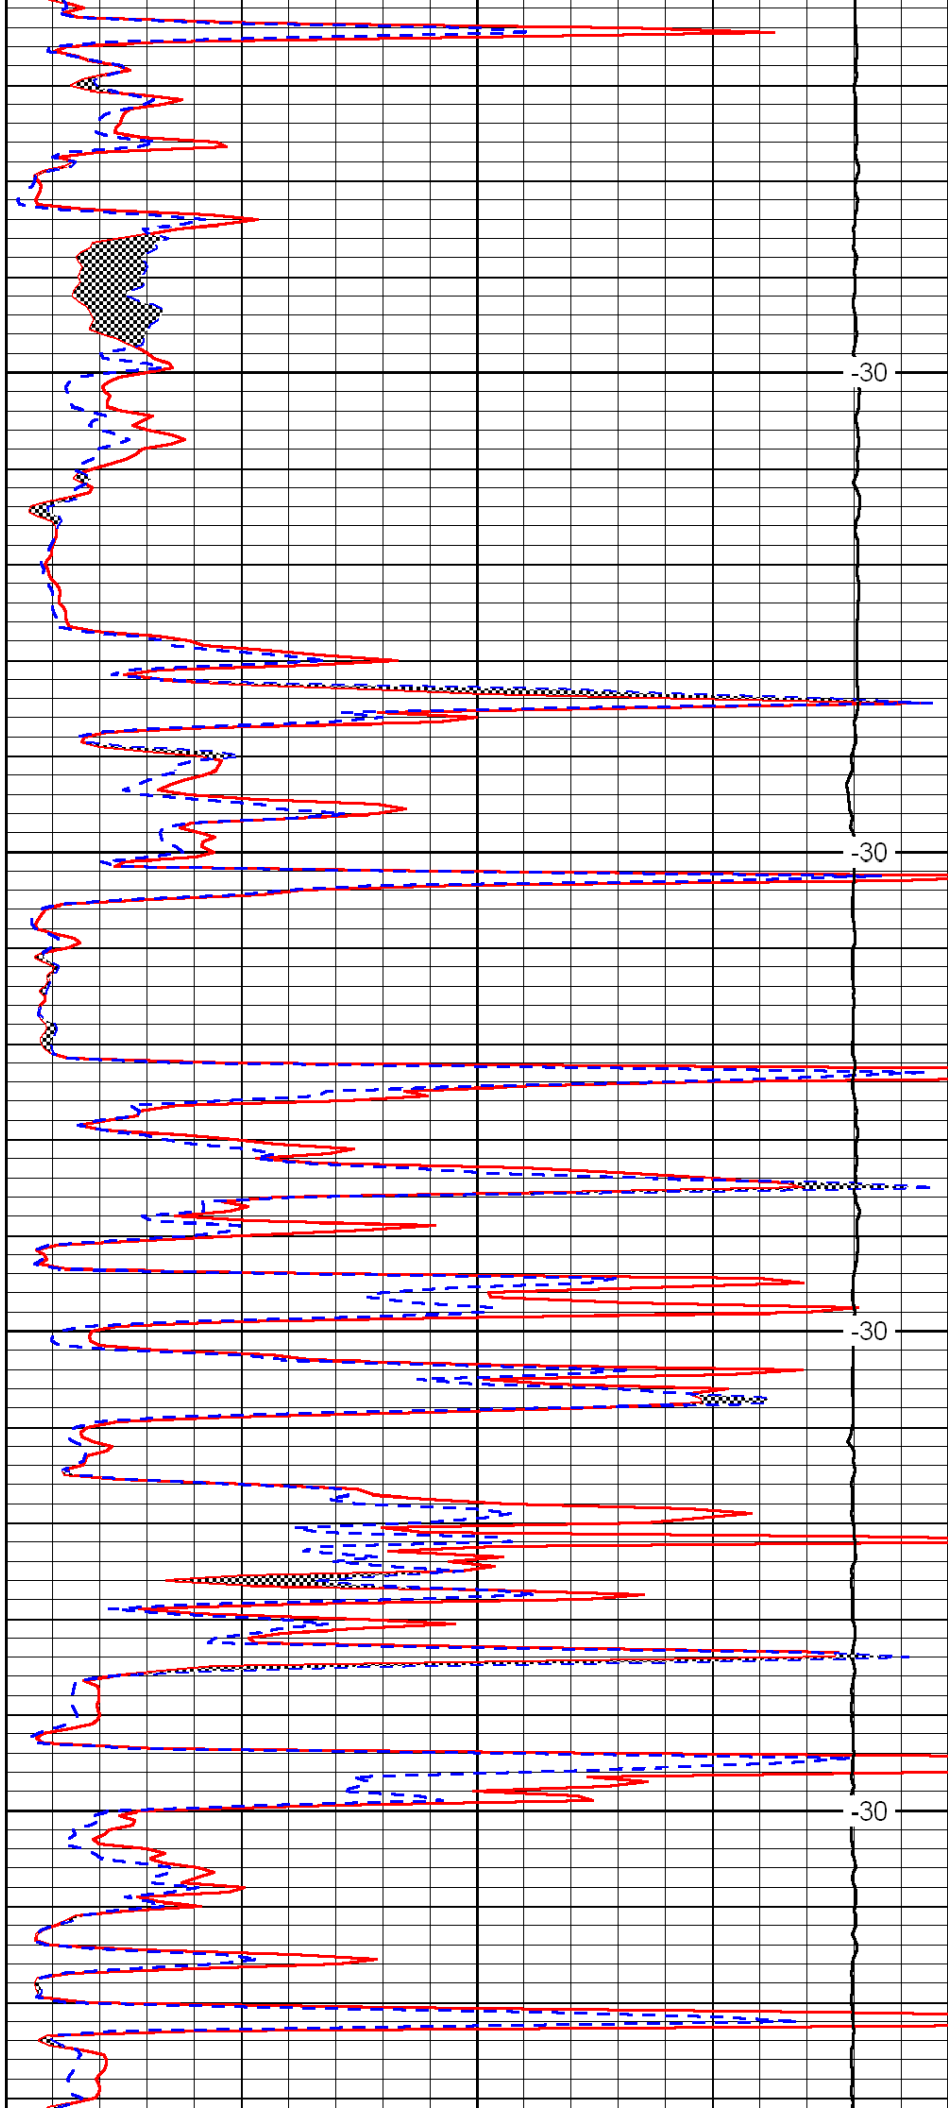


-30

-30

-30

-30

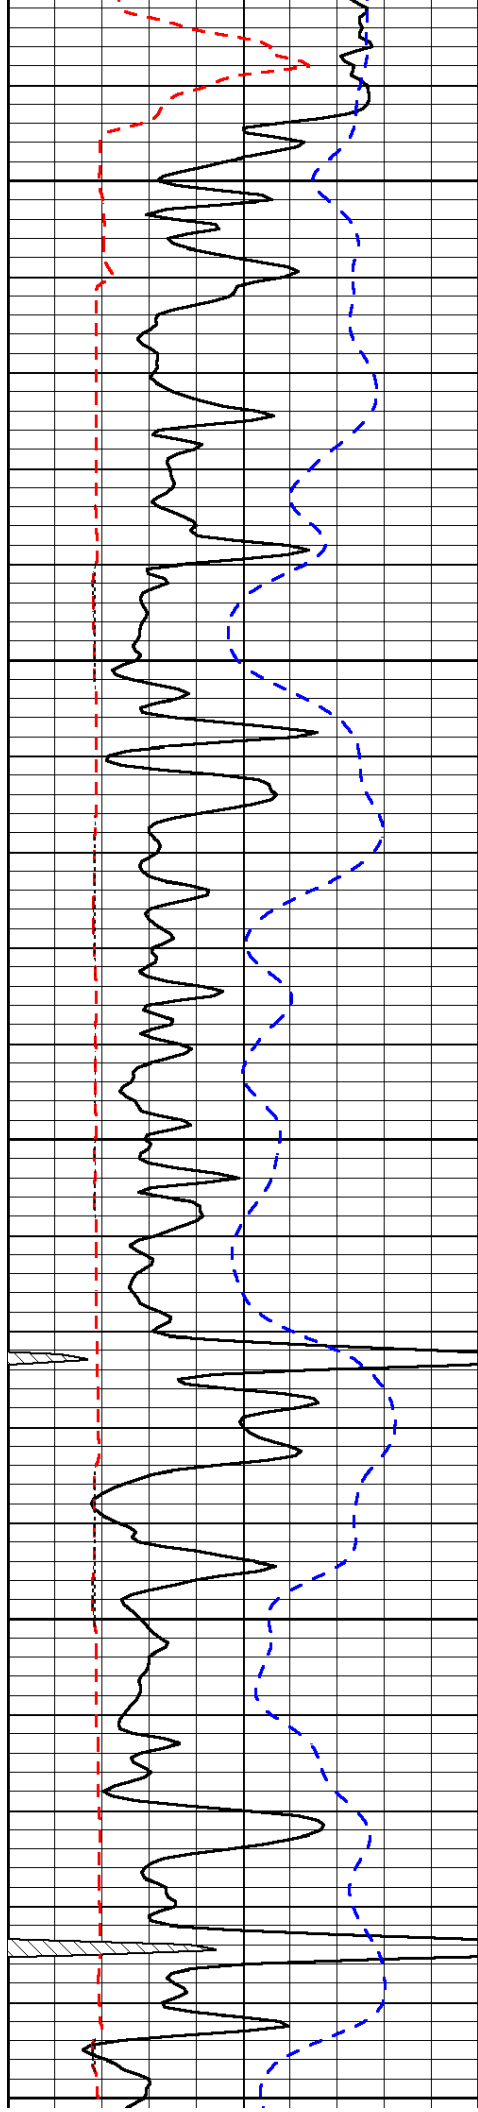


3050

3100

3150

3200

3250

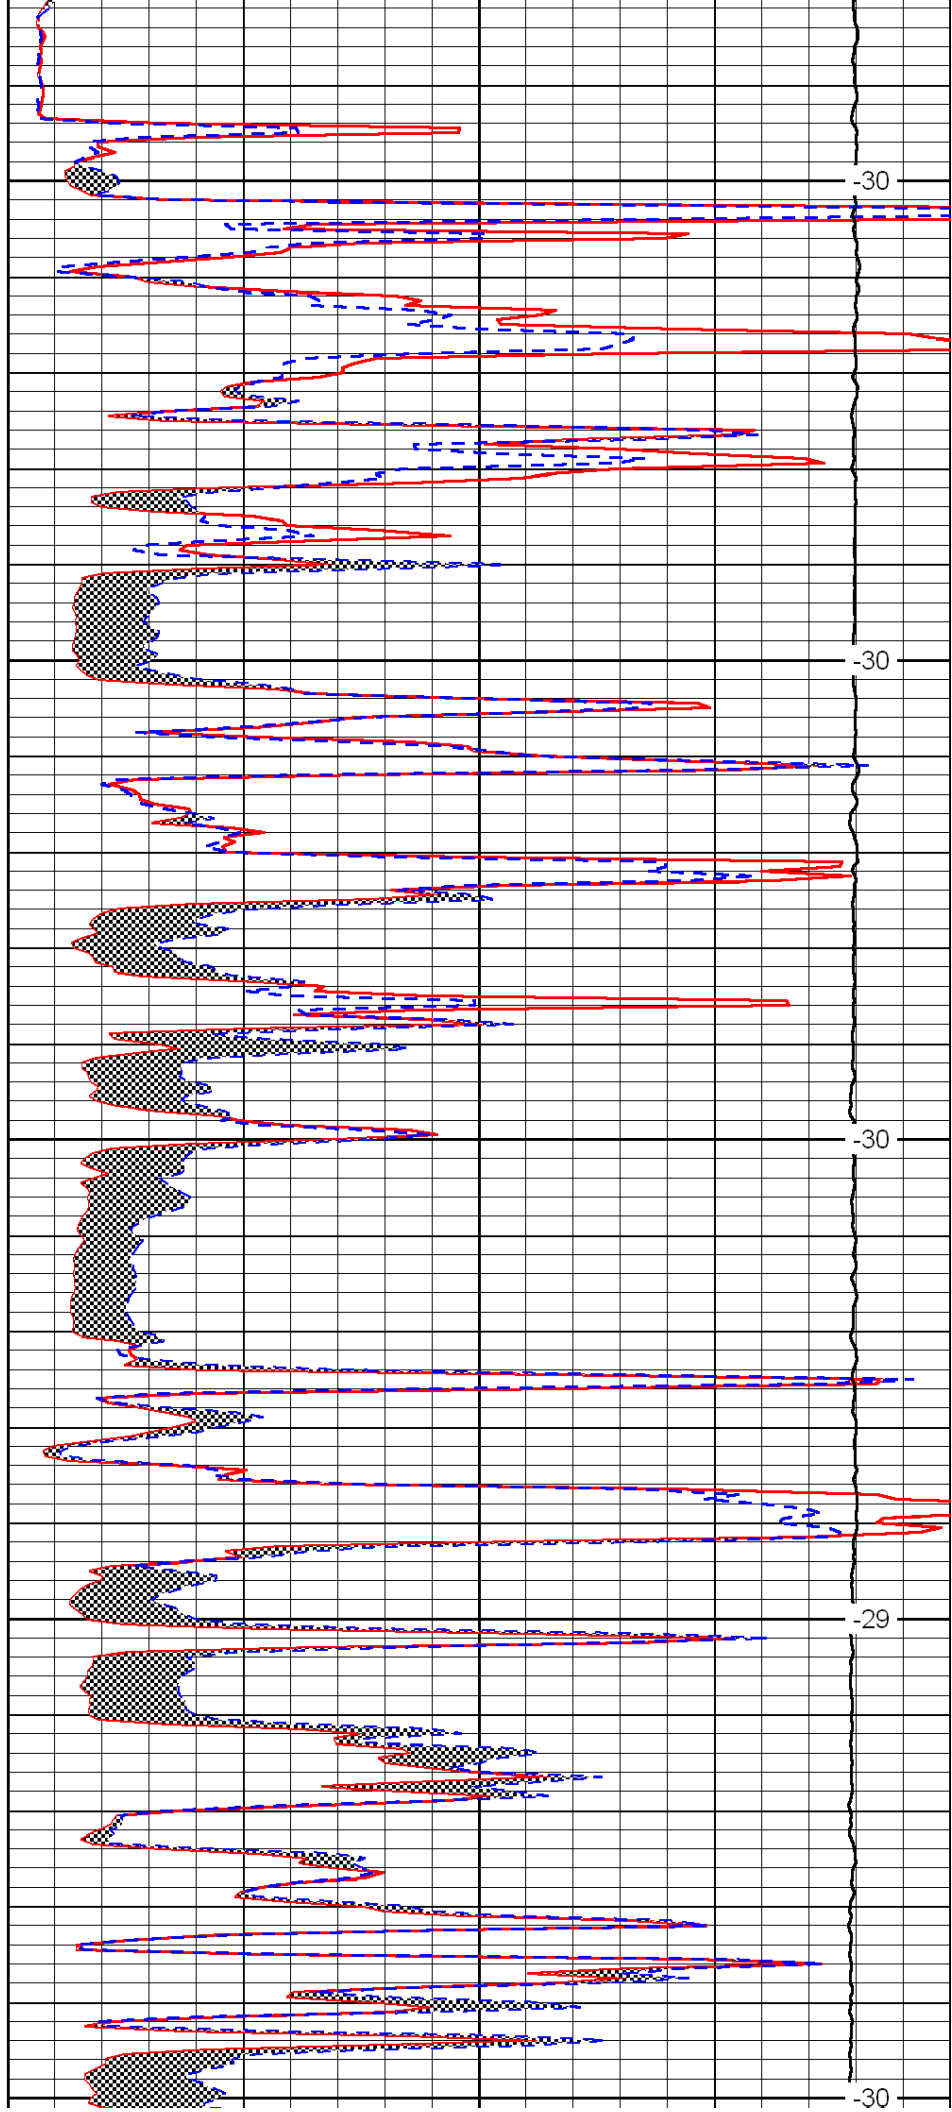


-30

-30

-30

-29

-30

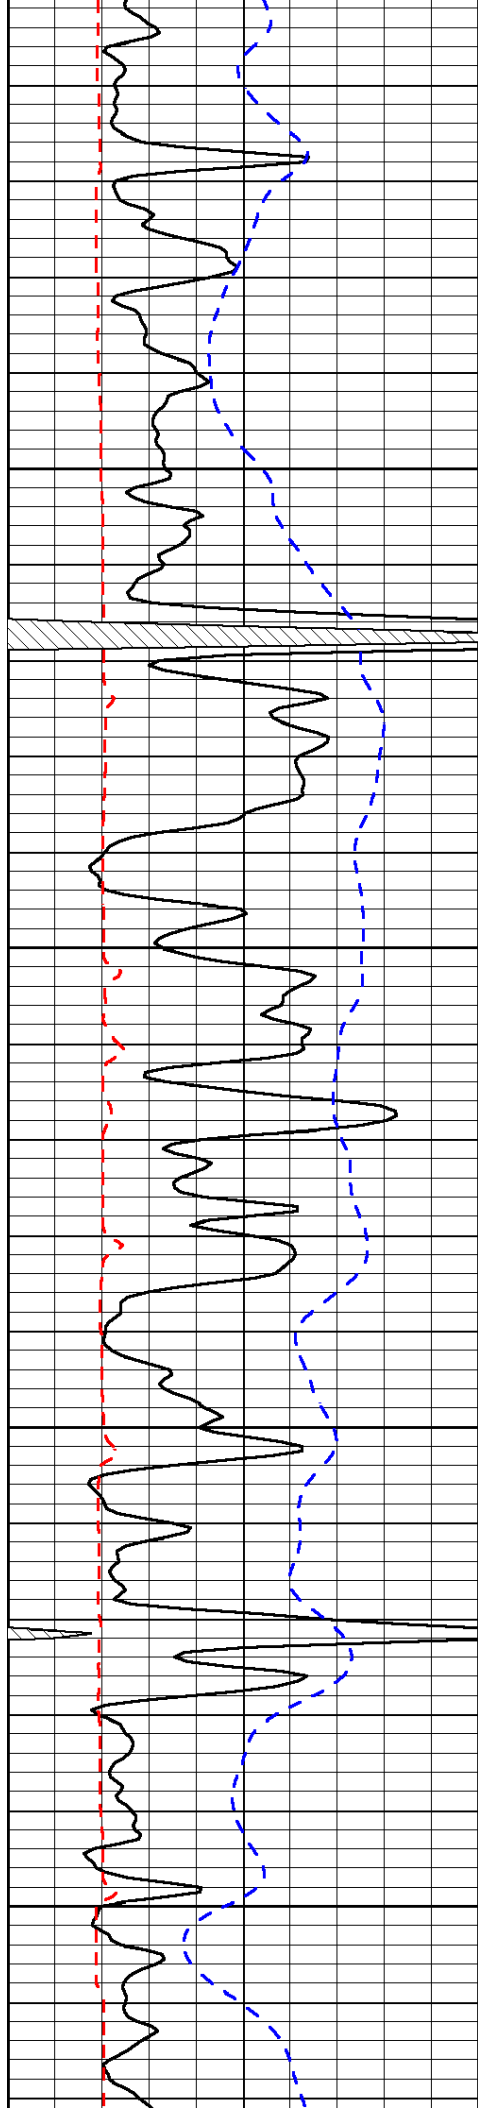



3300

3350

3400

3450

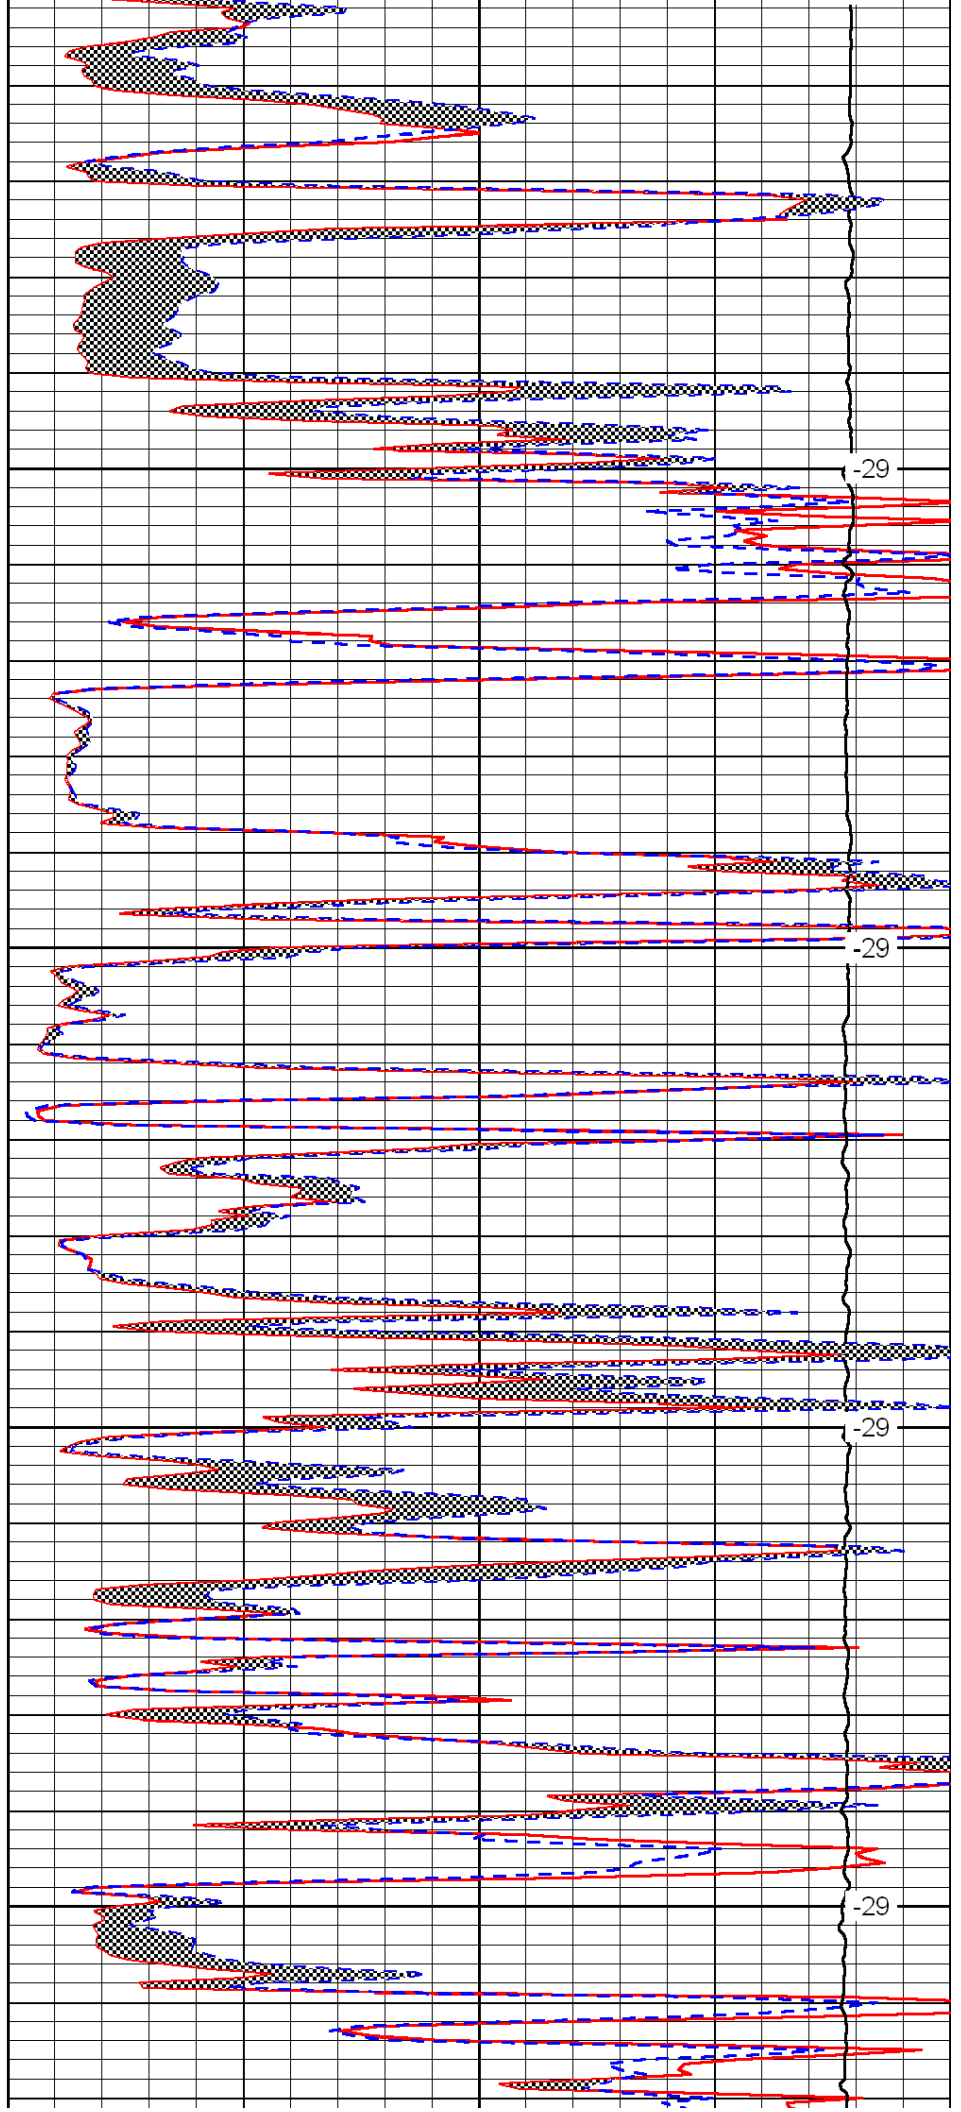

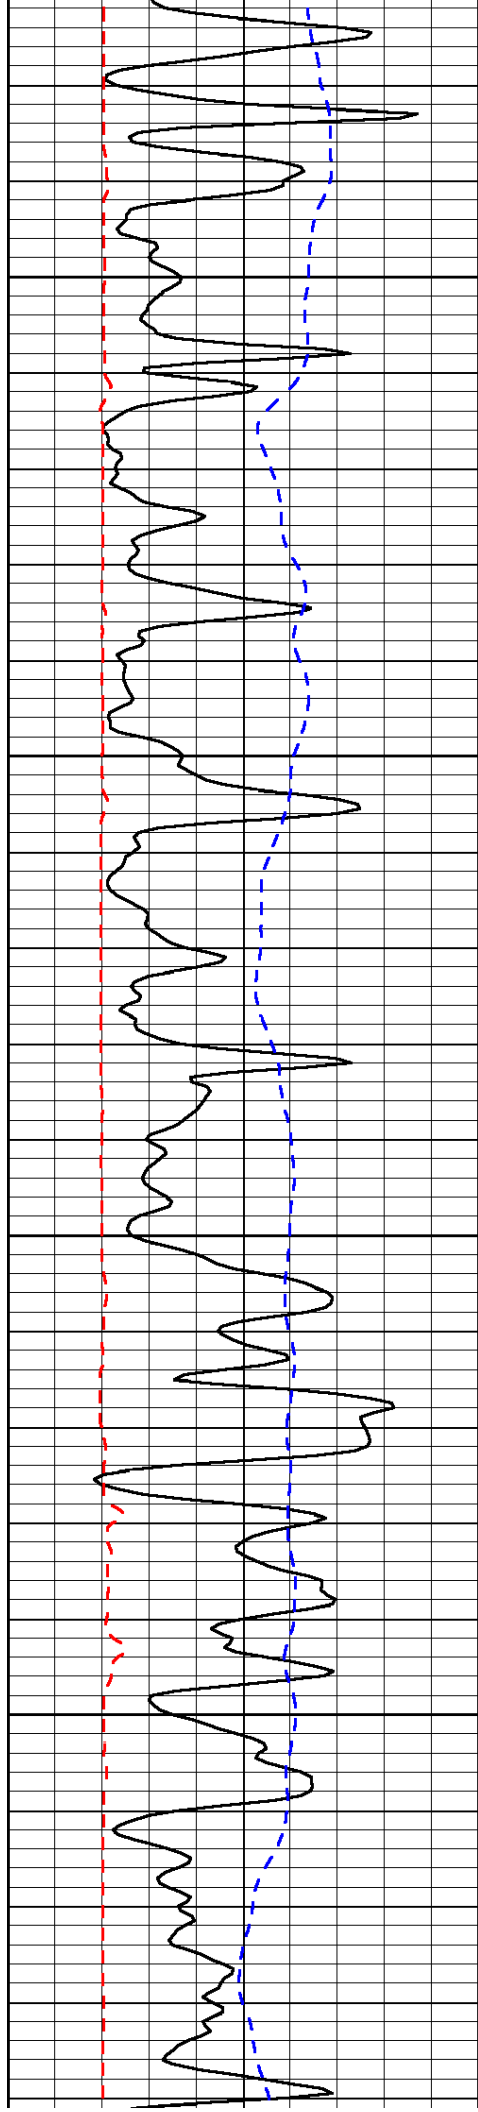




3500

3550

3600

3650

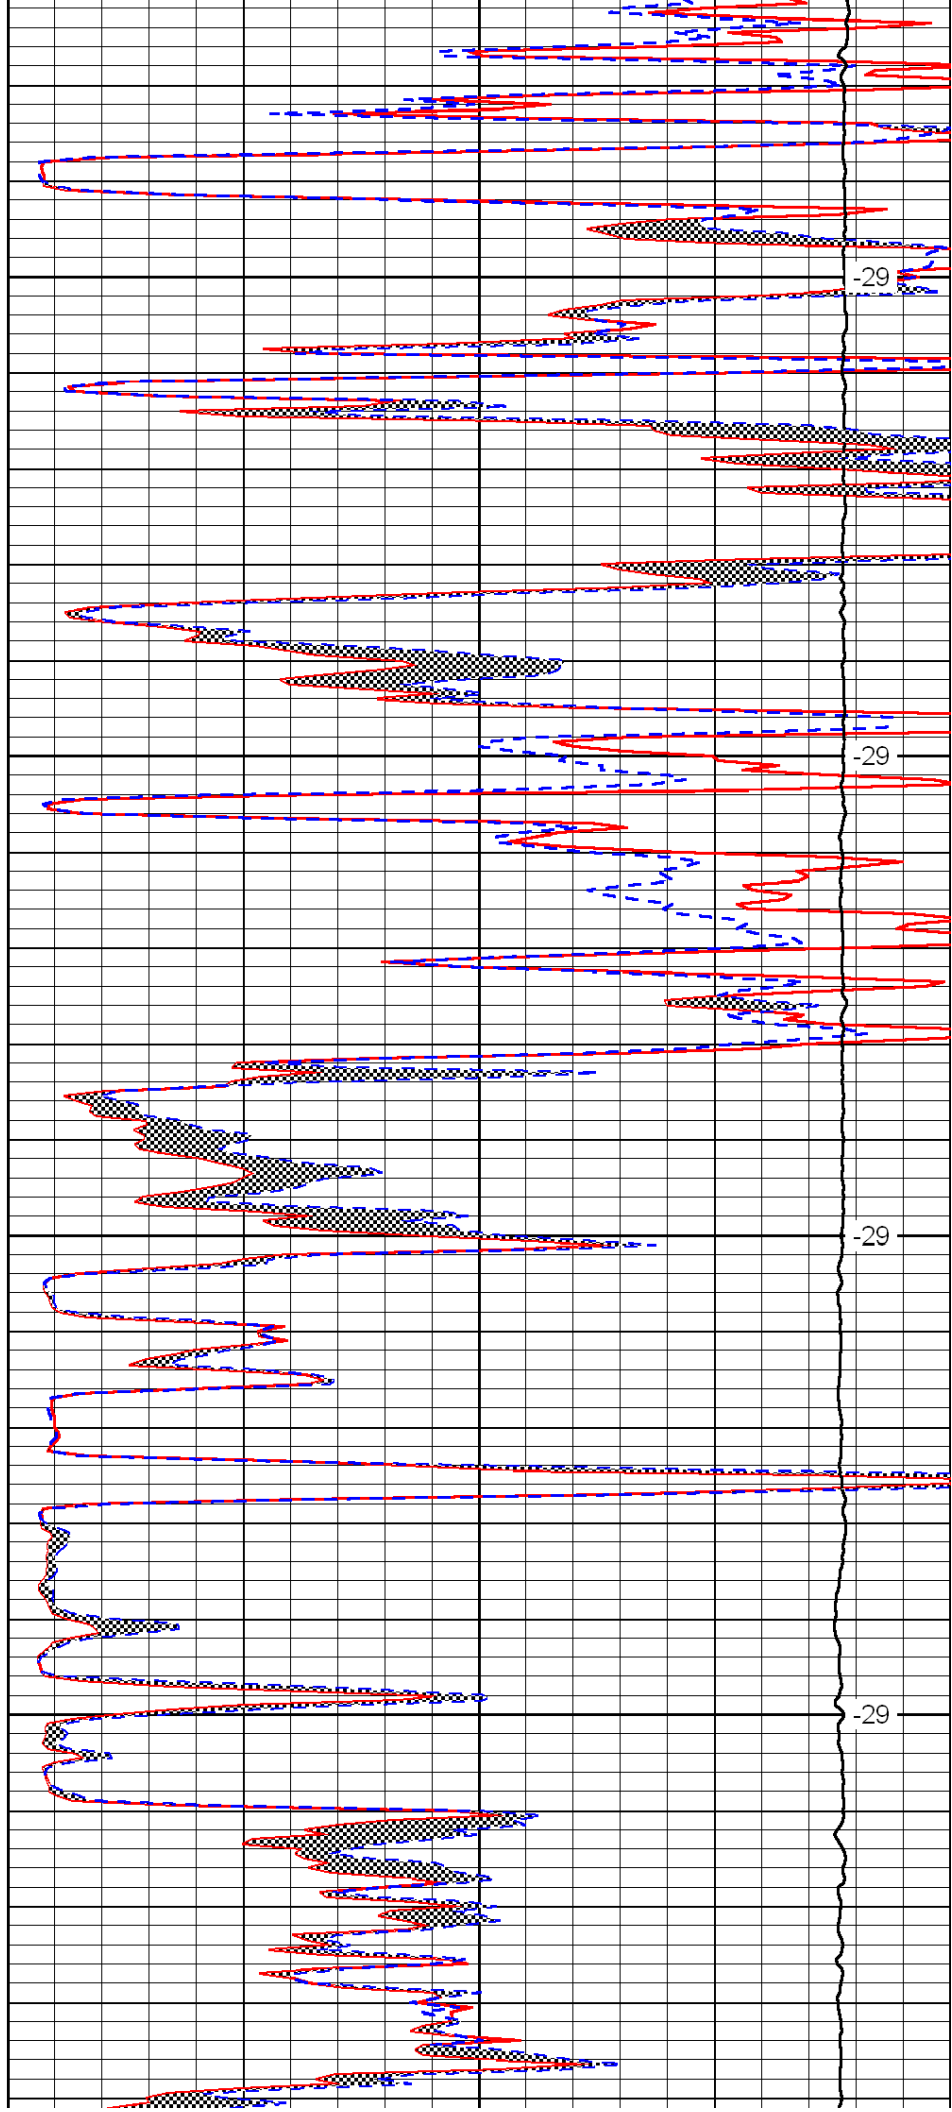

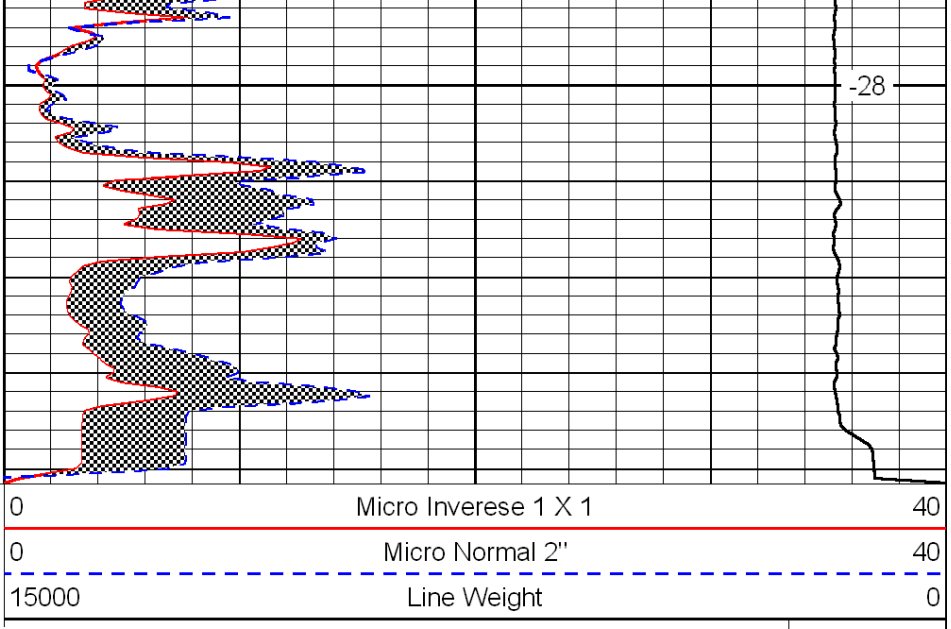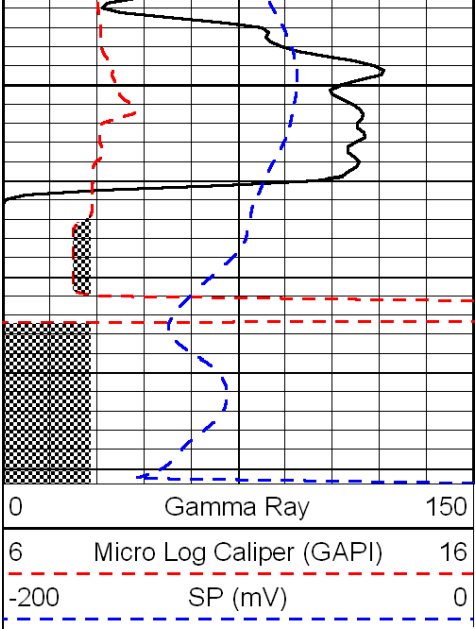

LSPD