

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-185-20615-00-00  
Spot: NESESW Sec/Twnshp/Rge: 22-21S-12W  
990 feet from S Section Line, 2970 feet from E Section Line  
Lease Name: HAMMEKE TWIN Well #: 7-M  
County: STAFFORD Total Vertical Depth: 3675 feet

Operator License No.: 5430  
Op Name: ENERGY THREE, INC.  
Address: 1437 OLD SQUARE RD #201A  
JACKSON, MS 39211

PROD Size: 5.5 feet: 3675 WITH 125 SX CMT  
SURF Size: 8.625 feet: 265 WITH 150 SX CMT

#119 44

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 03/08/2005 12:30 PM  
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.  
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: SAND TO 3180' & 5 SX CMT. PLUG AT 650' WITH 10 SX GEL & 50 SX CMT. PLUG AT 300' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 03/08/2005 1:58 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

ANHYDRITE @ 650'. SANDED TO 3180' & 5 SX CMT WITH BAILER. SPOTTED PLUGS THROUGH CASING WHILE PULLING. 1ST PLUG AT 650' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 300' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT.

Perfs:


Top	Bot	Thru	Comments
3454	3460		
3407	3410		
3384	3388		

RECEIVED  
MAR 15 2005  
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. RECOVERED 1540' OF 5 1/2" CASING.

Plugged through: CSG

District: 01

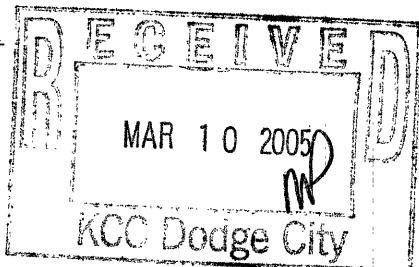

Signed

*Richard W. Lacey*

(TECHNICIAN)

INVOICED

DATE

3-15-05

INV. NO.

2005061285

Form CP-2/3