



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company Larson Engineering, Inc.		
	Well Joann No. 1-32		
	Field Wildcat		
	County Lane	State	Kansas
15-101-22,292-00-00	Location	1,800' FSL & 2,475' FEL	
	Sec: 32	Twp: 17S	Rge: 28W
	Permanent Datum	Ground Level	Elevation 2762
	Log Measured From	Kelly Bushing	7 Ft. Above Perm. Datum
	Drilling Measured From	Kelly Bushing	
Date		6/1/2011	
Run Number		Two	
Depth Driller		4650	
Depth Logger		4653	
Bottom Logged Interval		4652	
Top Log Interval		3600	
Casing Driller		8.625 @ 240	
Casing Logger		260	
Bit Size		7.875	
Type Fluid in Hole		Chemical	
Salinity, ppm CL		2200	
Density / Viscosity		9.3 50	
pH / Fluid Loss		10.0 8.0	
Source of Sample		Flowline	
Rm @ Meas. Temp		.80 @ 65	
Rmf @ Meas. Temp		.60 @ 65	
Rmc @ Meas. Temp		1.08 @ 65	
Source of Rmf / Rmc		Charts	
Rm @ BHT		.42 @ 123	
Operating Rig Time		4 Hours	
Max Rec. Temp. F		123	
Equipment Number		10	
Location		Hays	
Recorded By		J. Long	
Witnessed By		Bob Lewellyn	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858



Dighton, 4 North to 190 Road, 1 1/2 East, South Into


Charted by: Depth in Feet scaled 1:2.15

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

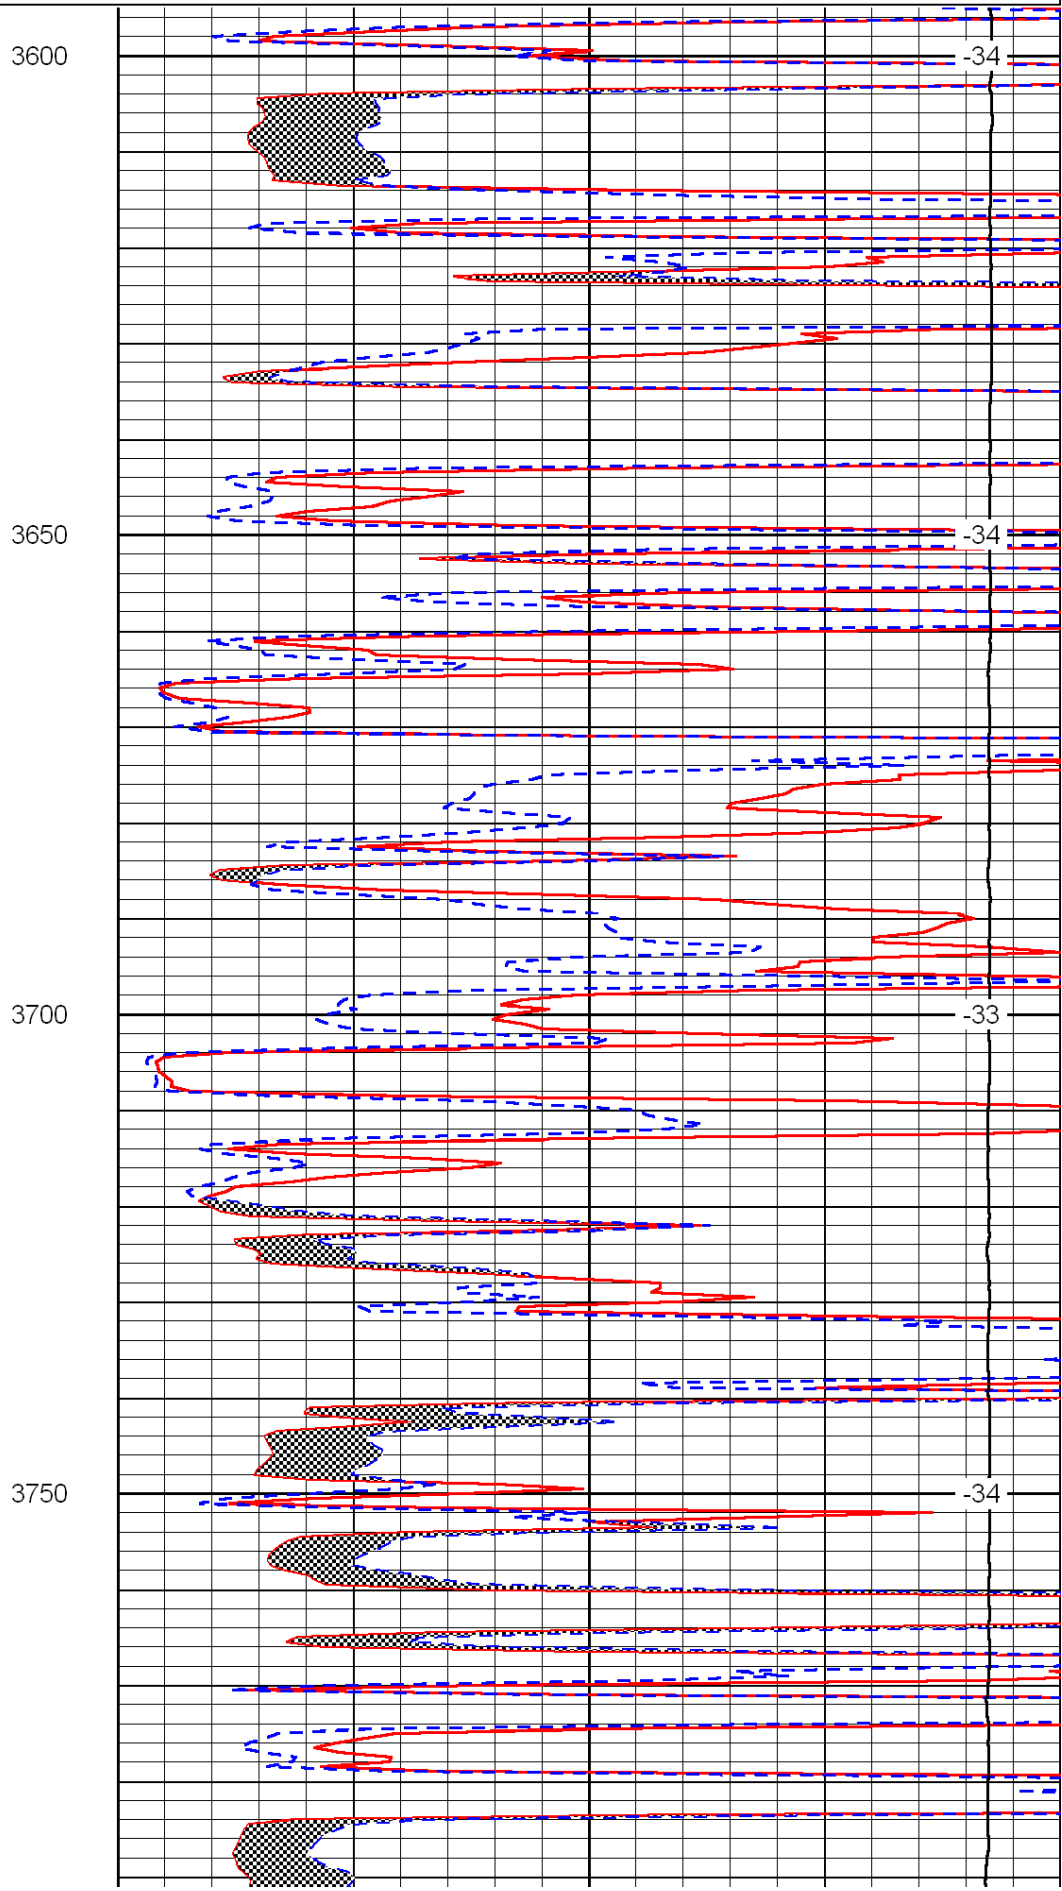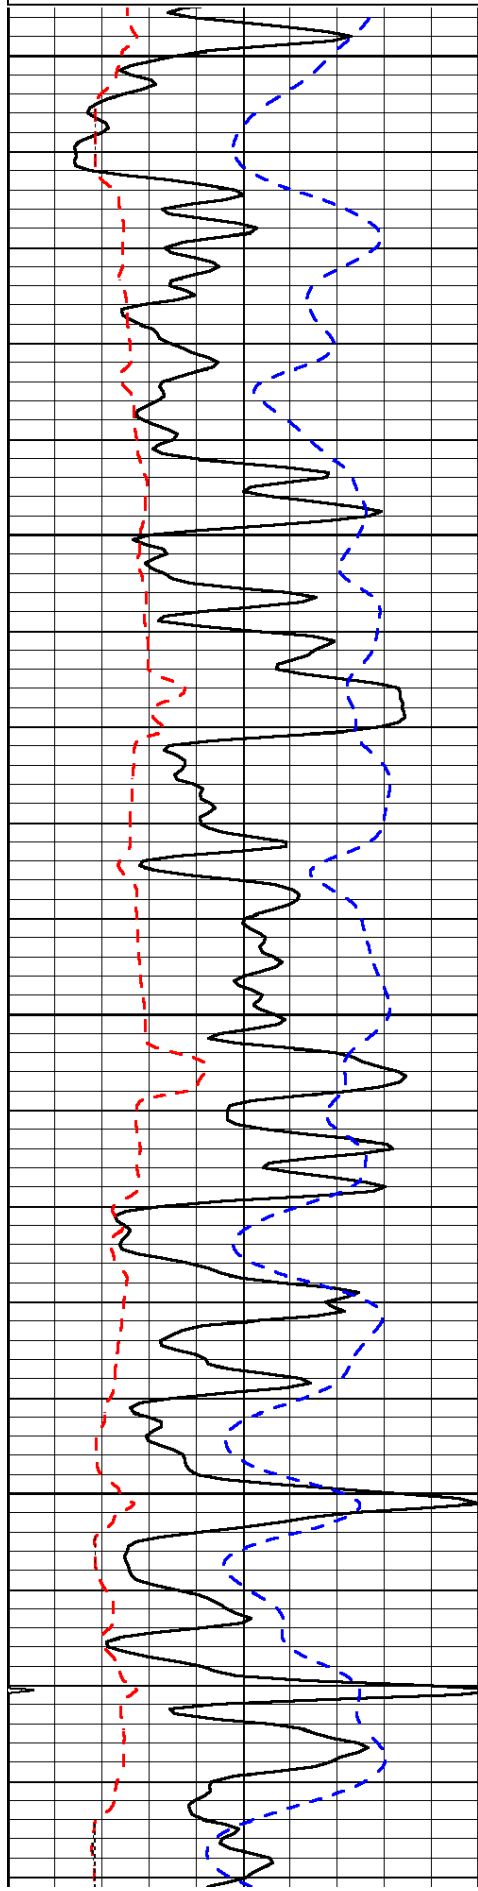

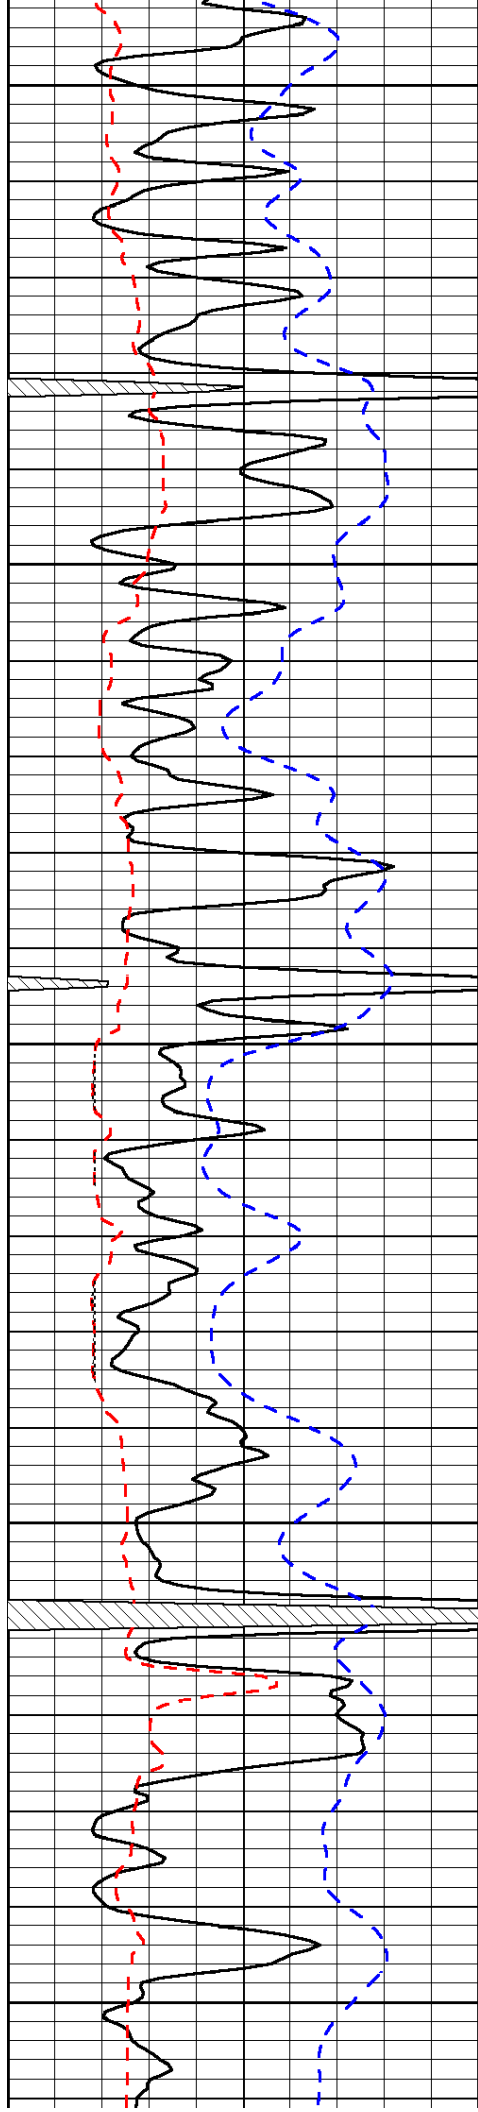


3800

3850

3900

3950

4000

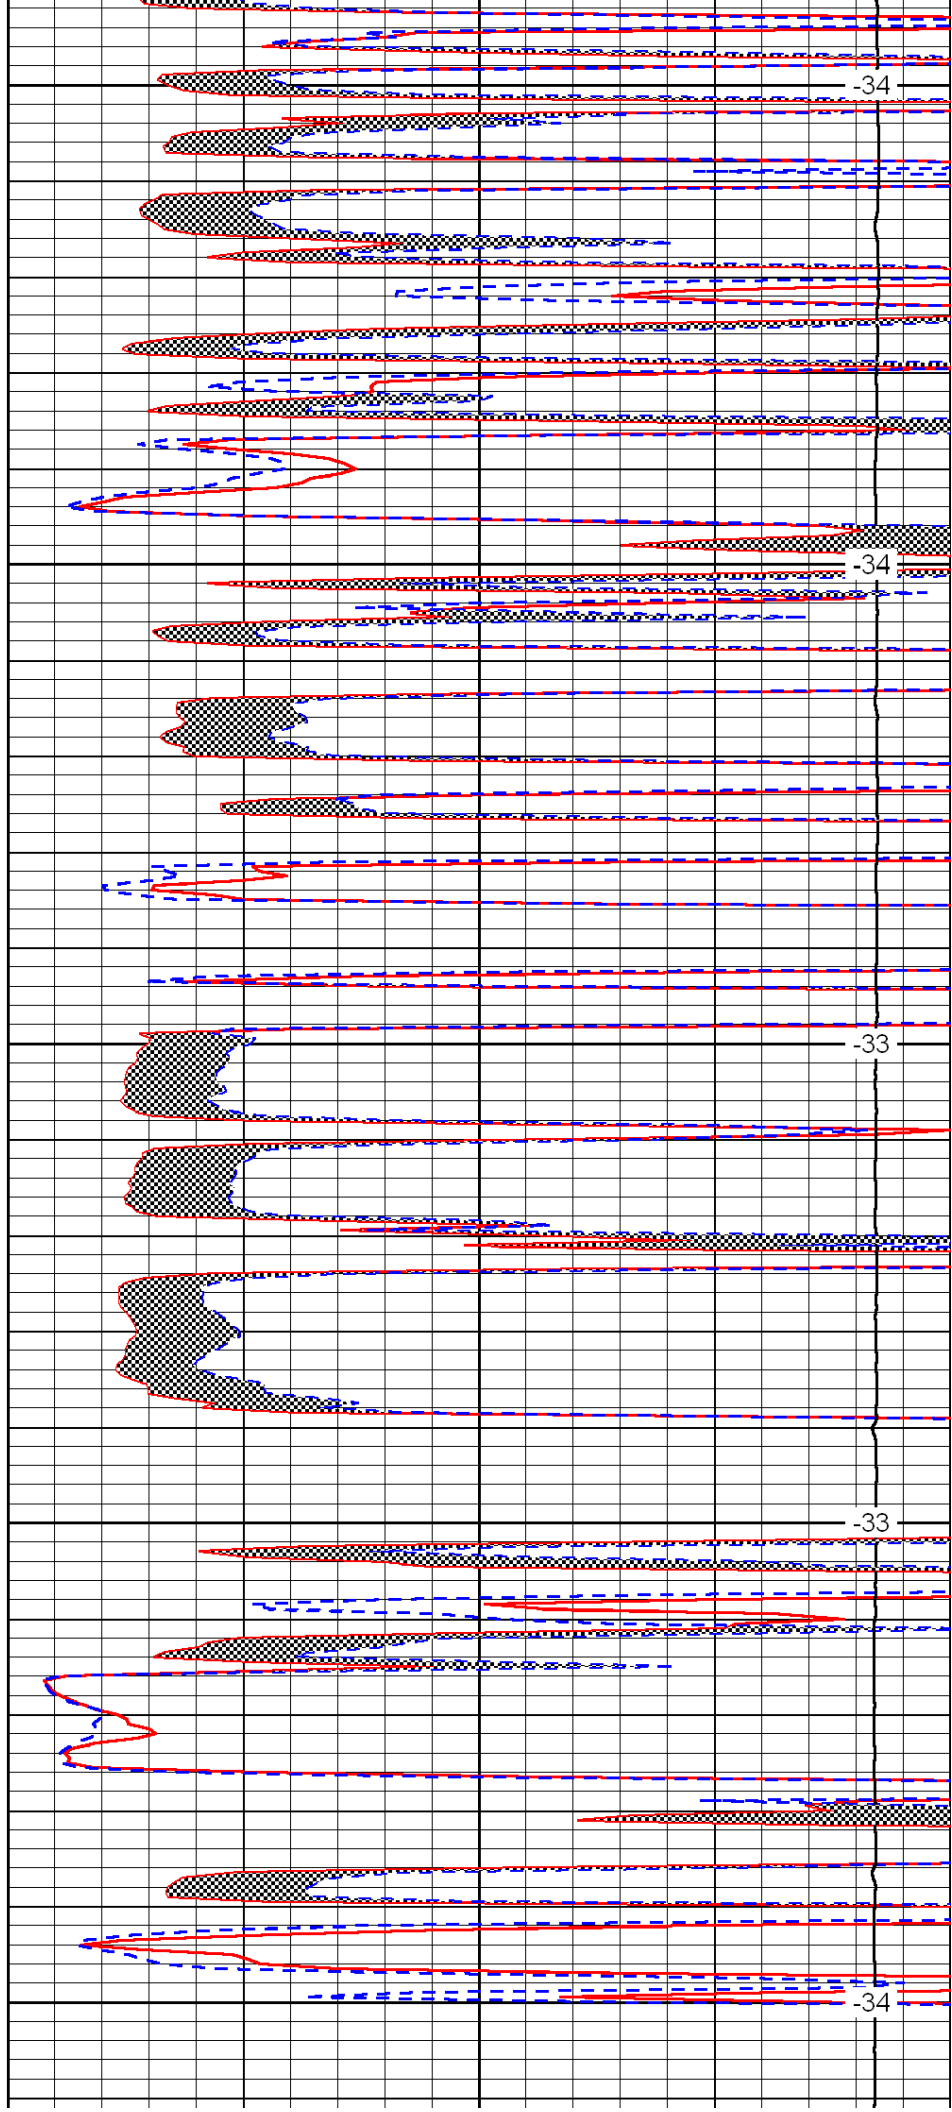


-34

-34

-33

-33

-34

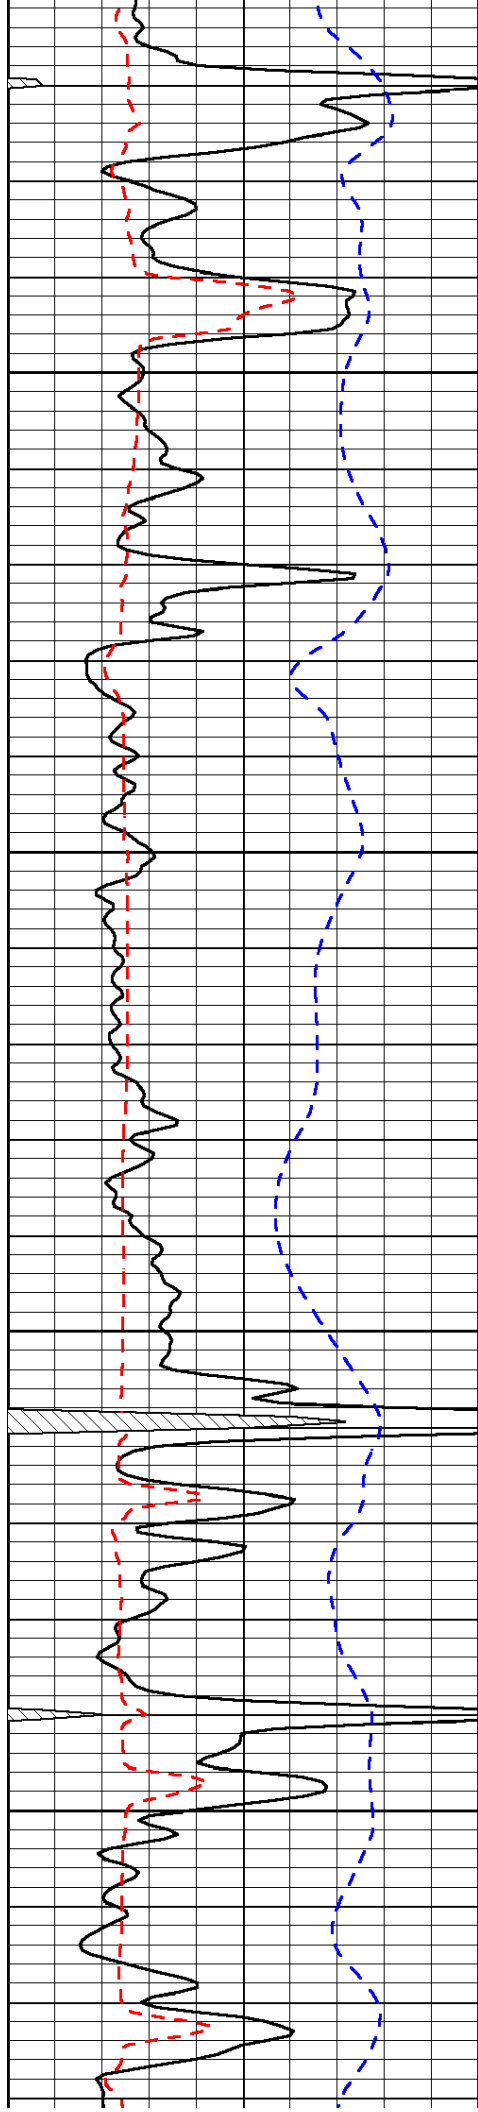


4050

4100

4150

4200

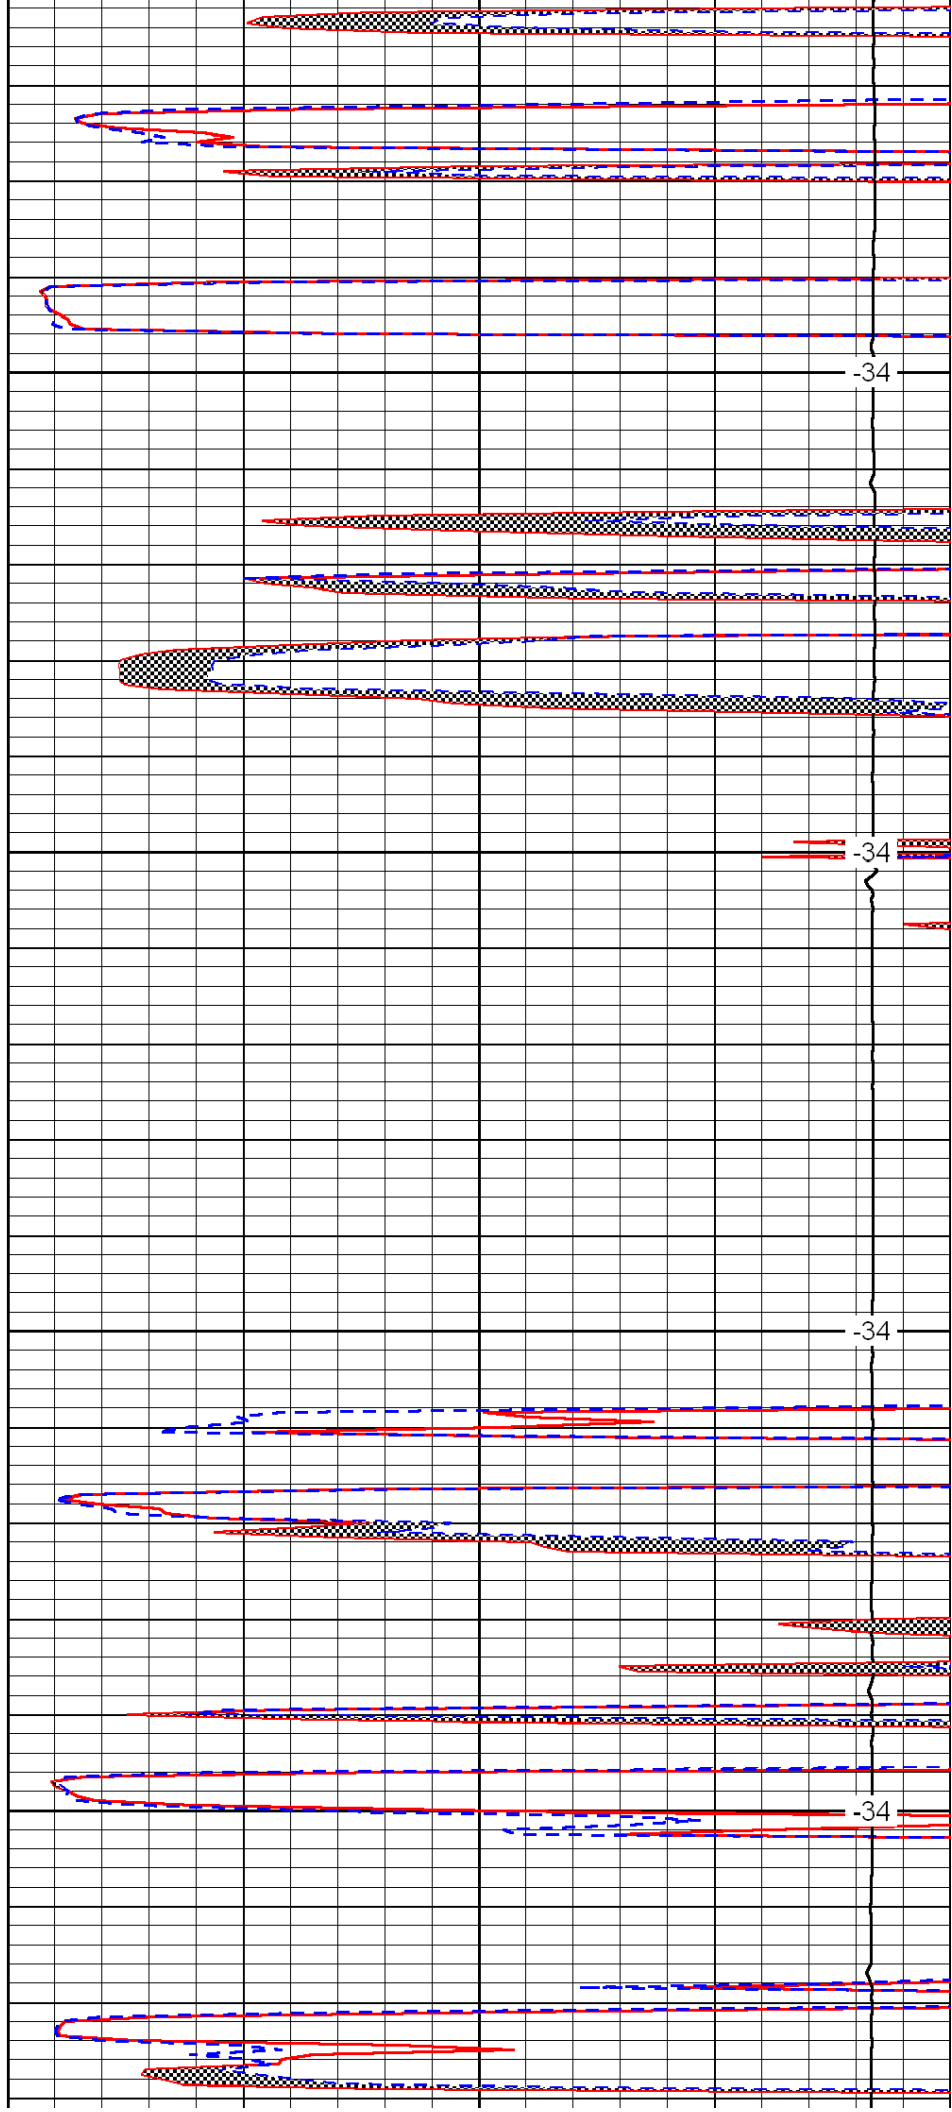


-34

-34

-34

-34

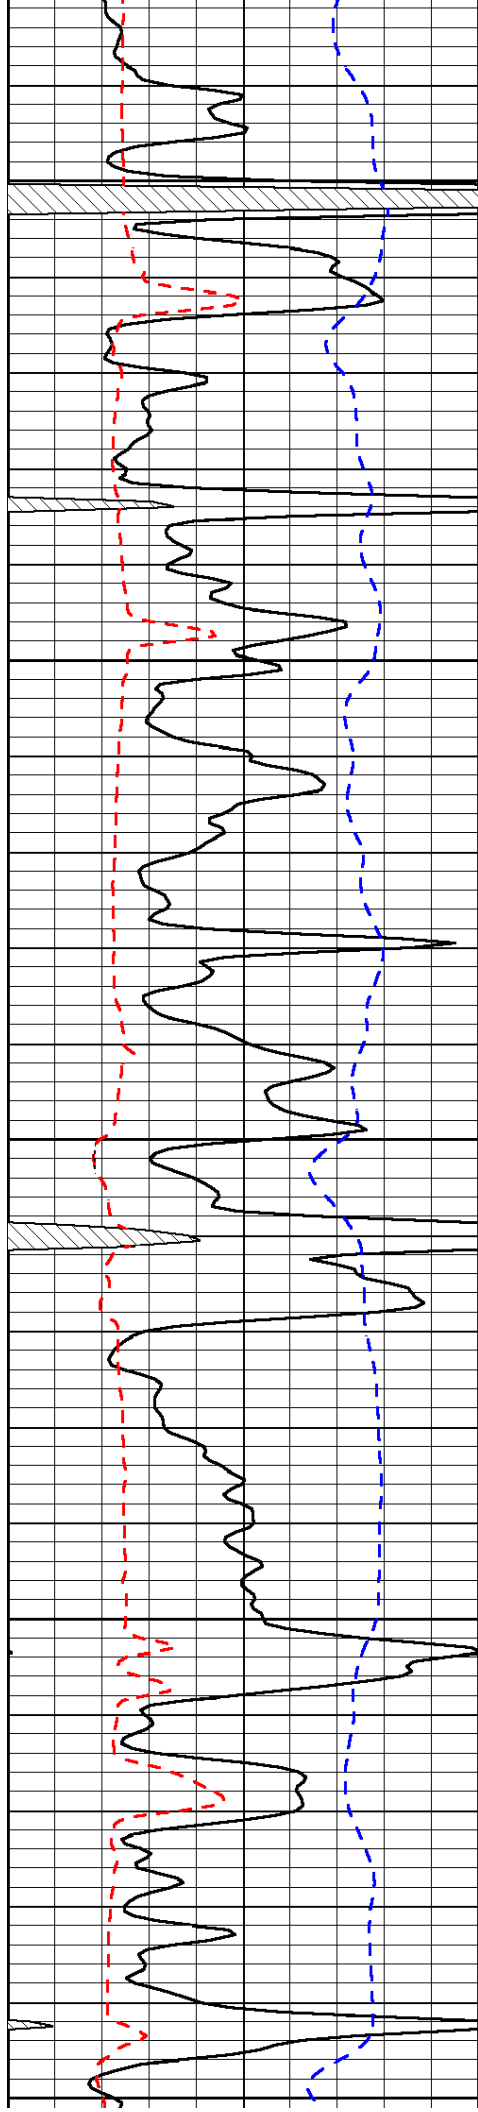


4250



4300

4350

4400

4450

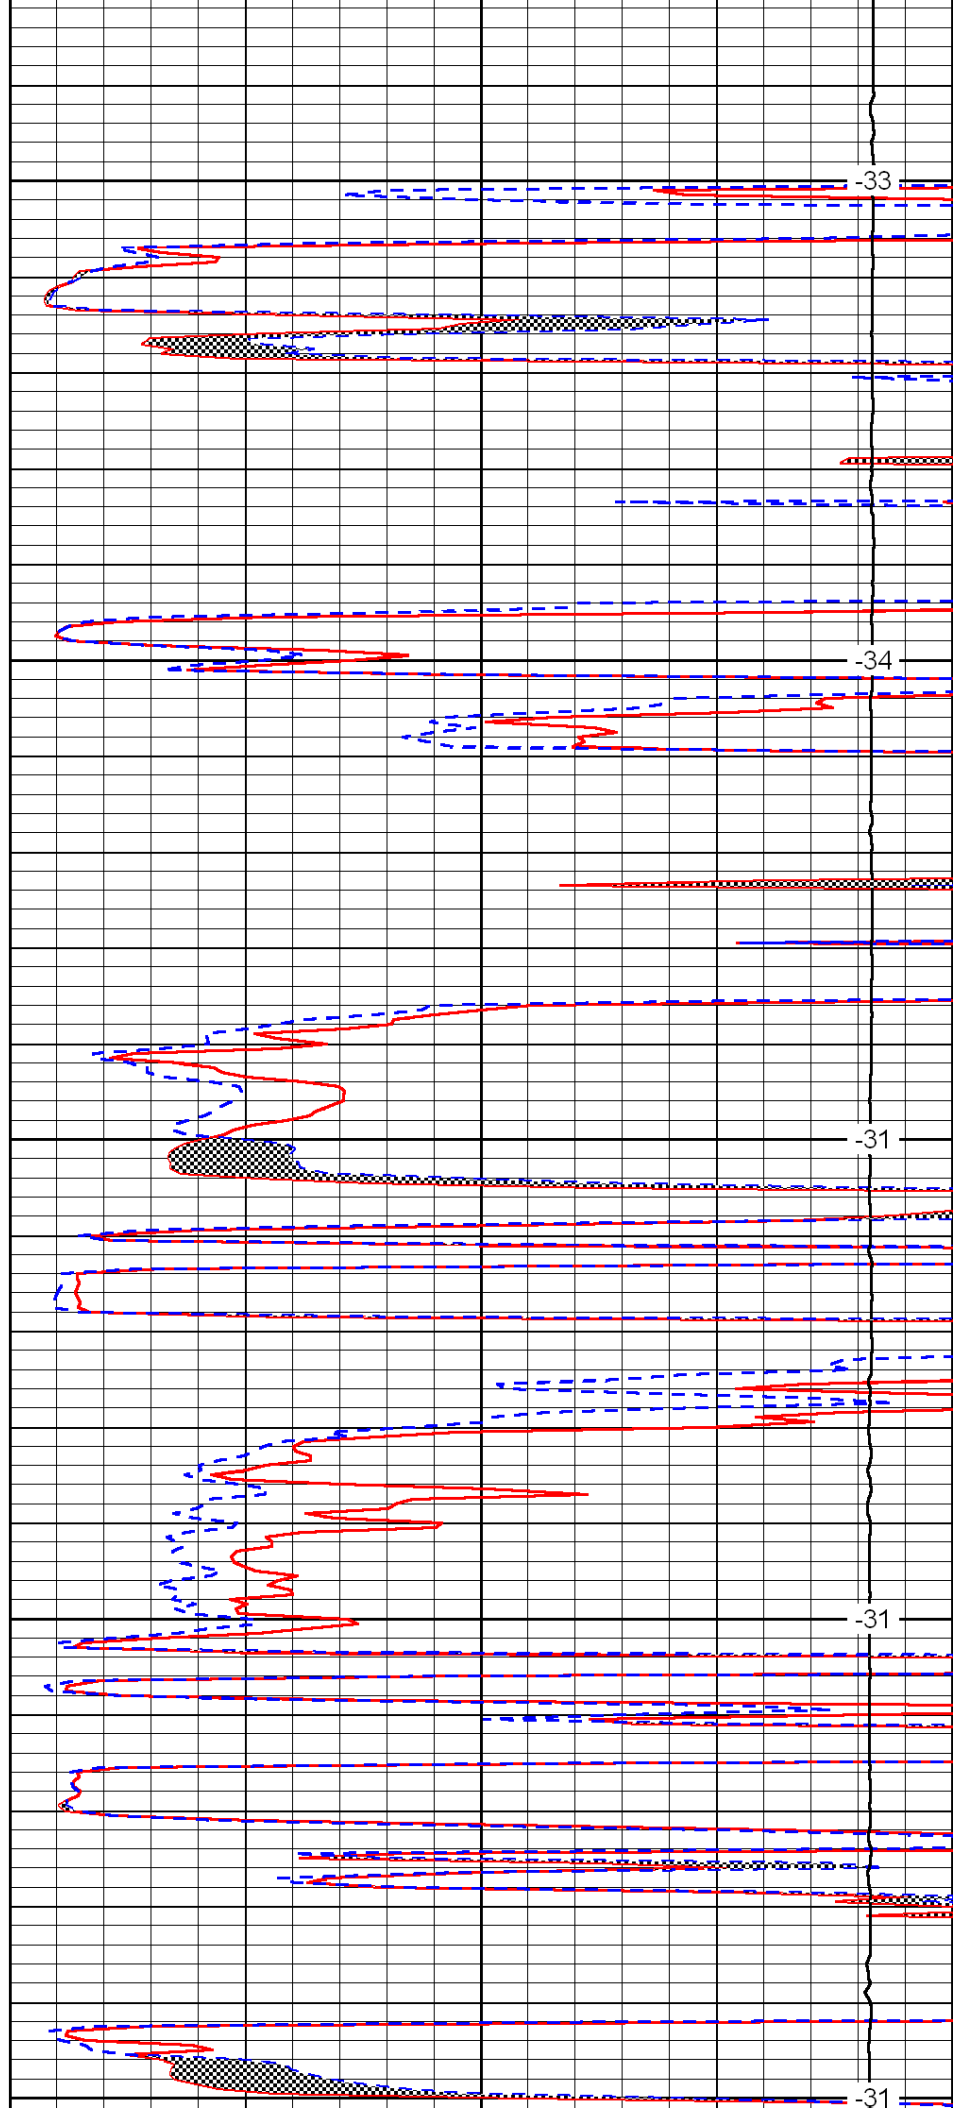

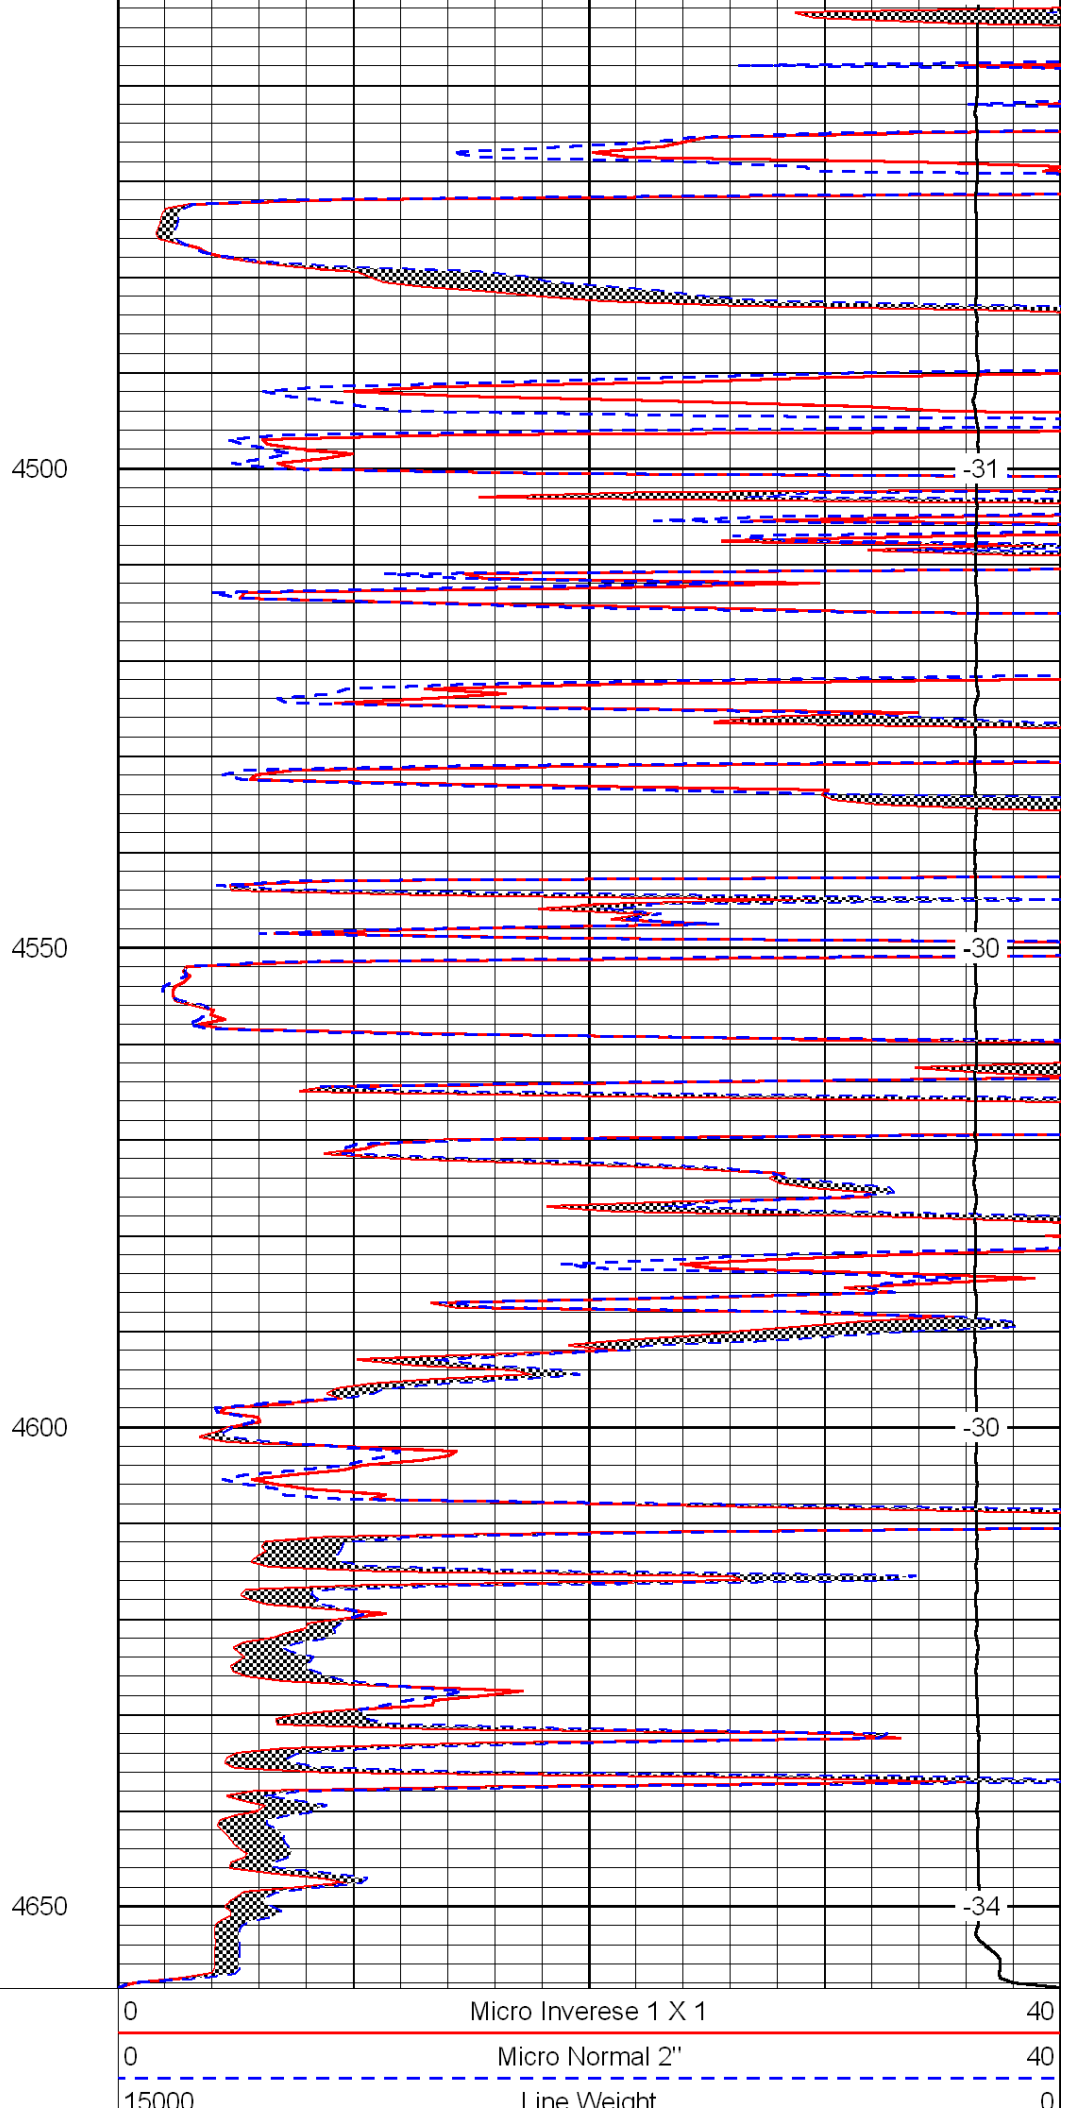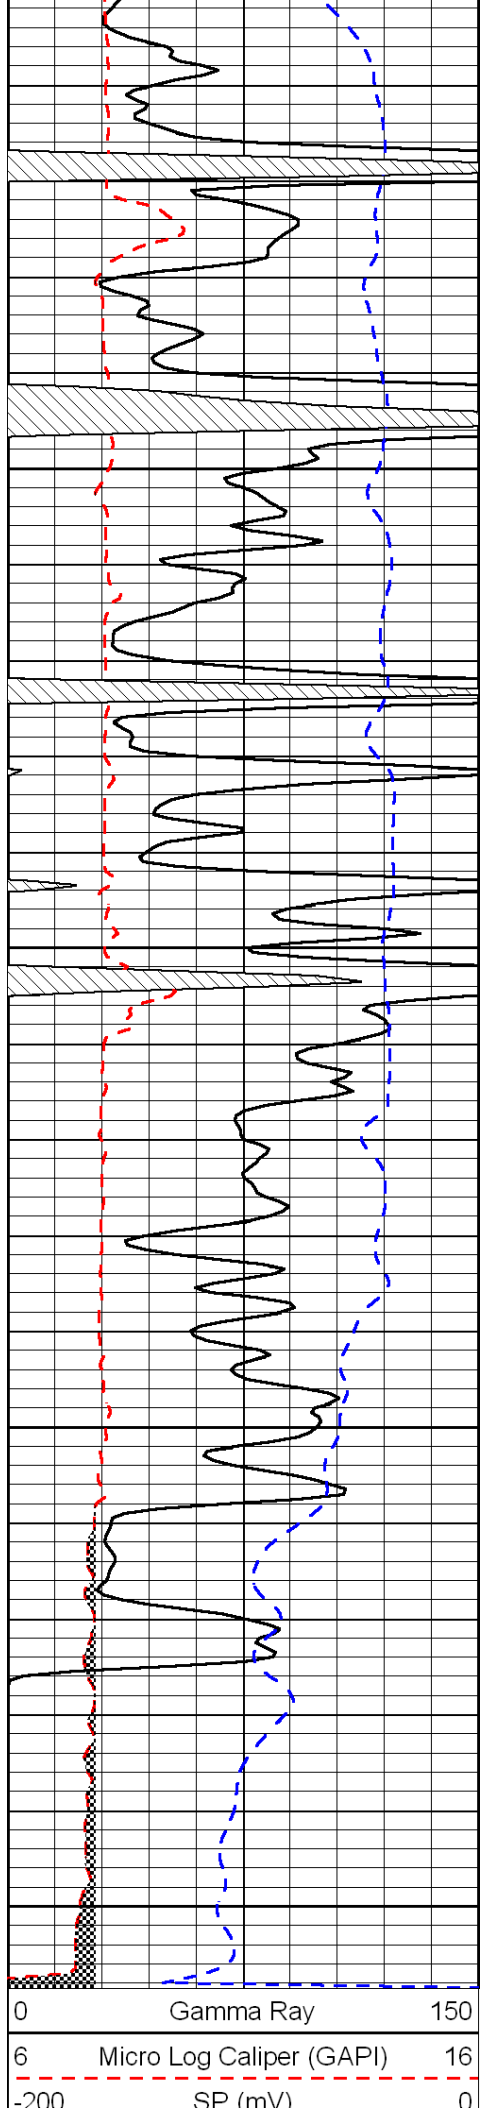

			LSPD
--	--	--	------