



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company TexKan Exploration, LLC		
	Well Sauer #A 3		
	Field Bollig		
	County Graham	State	Kansas
15- 065-23752-00-00	Location	C E/2 NW SE 1980' FSL / 1650' FEL	
	Sec: 28	Twp: 9S	Rge: 25W
Permanent Datum Ground Level		Elevation 2579	Other Services RAG
Log Measured From Kelly Bushing		9 Ft. Above Perm. Datum	
Drilling Measured From Kelly Bushing			Elevation K.B. 2988 D.F. 2979 G.L. 2979
Date	7/14/2011		
Run Number	Two		
Depth Driller	4170		
Depth Logger	4137		
Bottom Logged Interval	4136		
Top Log Interval	3500		
Casing Driller	8.625 @ 228		
Casing Logger	222		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	2000		
Density / Viscosity	9.3 67		
pH / Fluid Loss	10.5 6.8		
Source of Sample	Flowline		
Rm @ Meas. Temp	1.40 @ 80		
Rmf @ Meas. Temp	1.05 @ 80		
Rmc @ Meas. Temp	1.89 @ 80		
Source of Rmf / Rmc	Charts		
Rm @ BHT	0.95 @ 118		
Operating Rig Time	3 Hours		
Max Rec. Temp. F	118		
Equipment Number	15		
Location	Hays		
Recorded By	R. Barnhart		
Witnessed By	Bill Robinson		Jeff Lawler

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Wakeeney, KS:
N to Redline Rd., 13 1/2W, N into

Database File: c:\warrior\data\texkan_sauer #a 3\texkanhd.db
Dataset Pathname: rag\texkrag
Presentation Format: micro
Dataset Creation: Thu Jul 14 11:46:43 2011
Charted by: Depth in Feet scaled 1:240

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

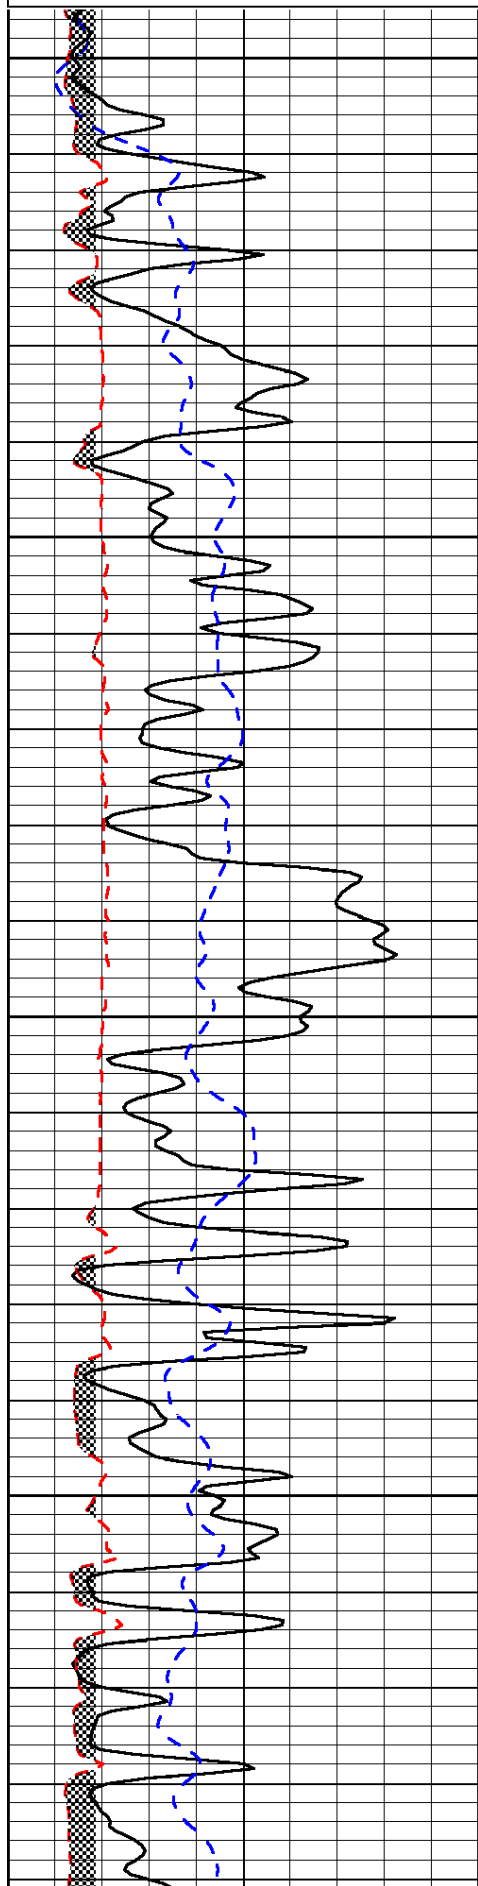


3500

3550

3600

3650

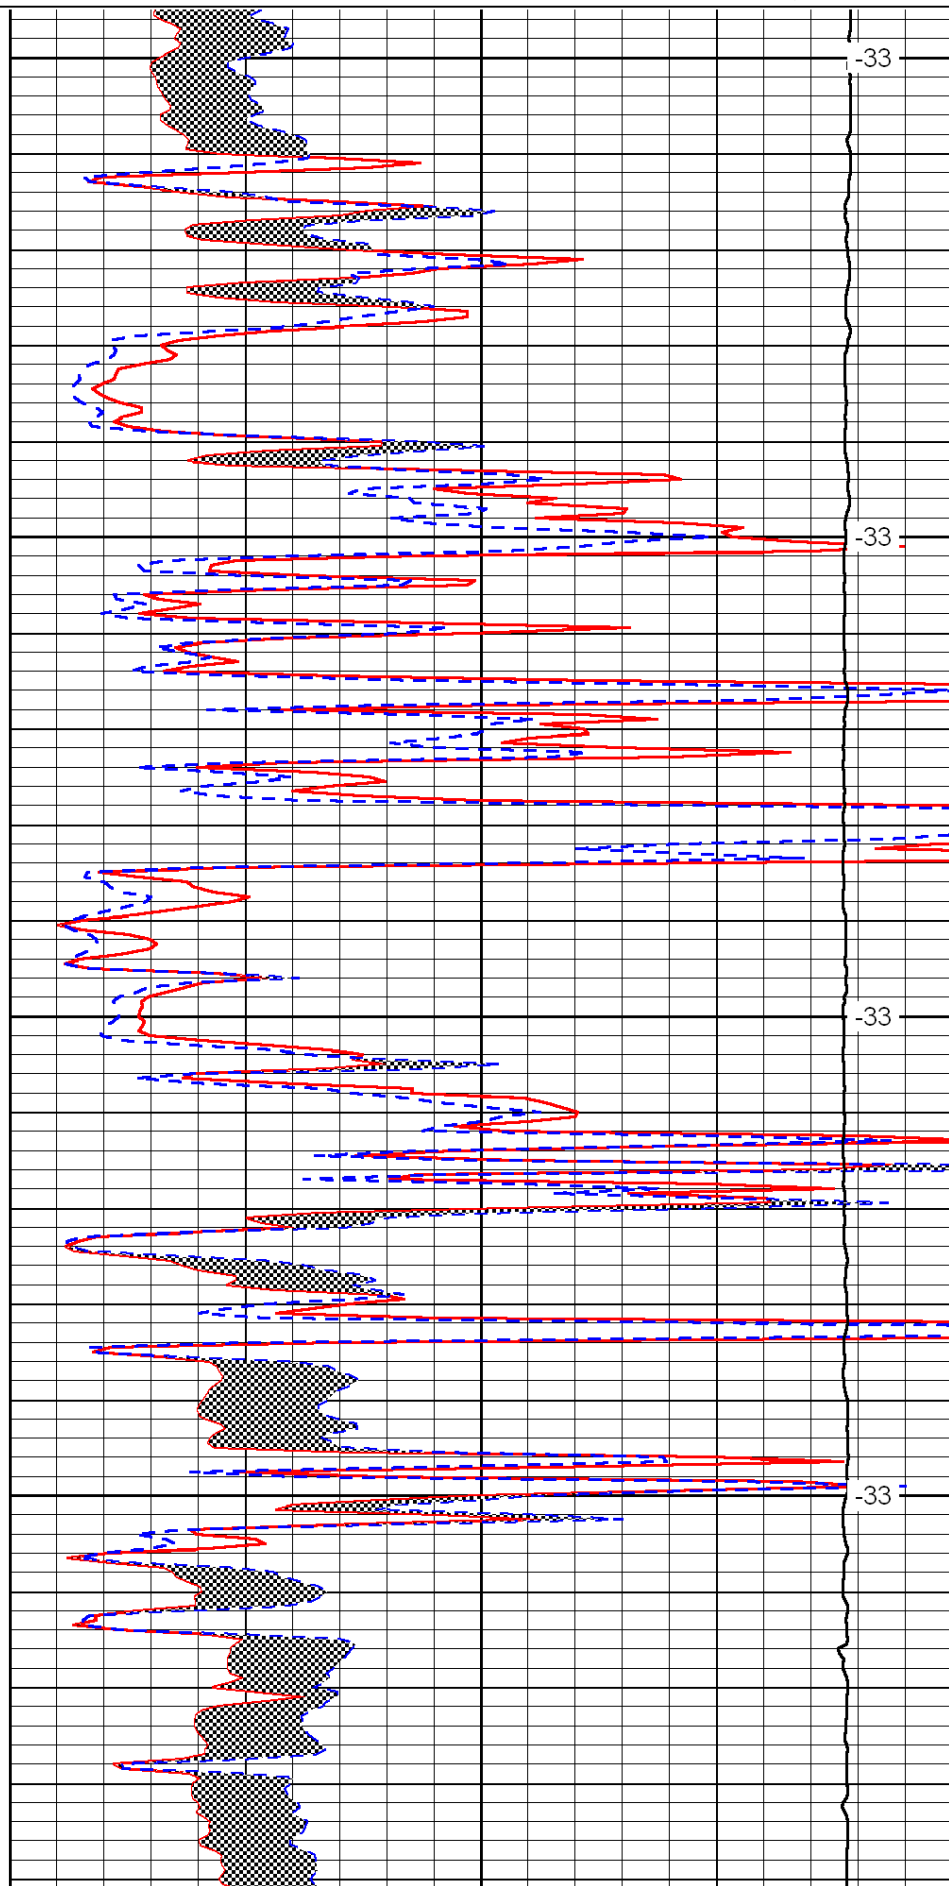


-33

-33

-33

-33

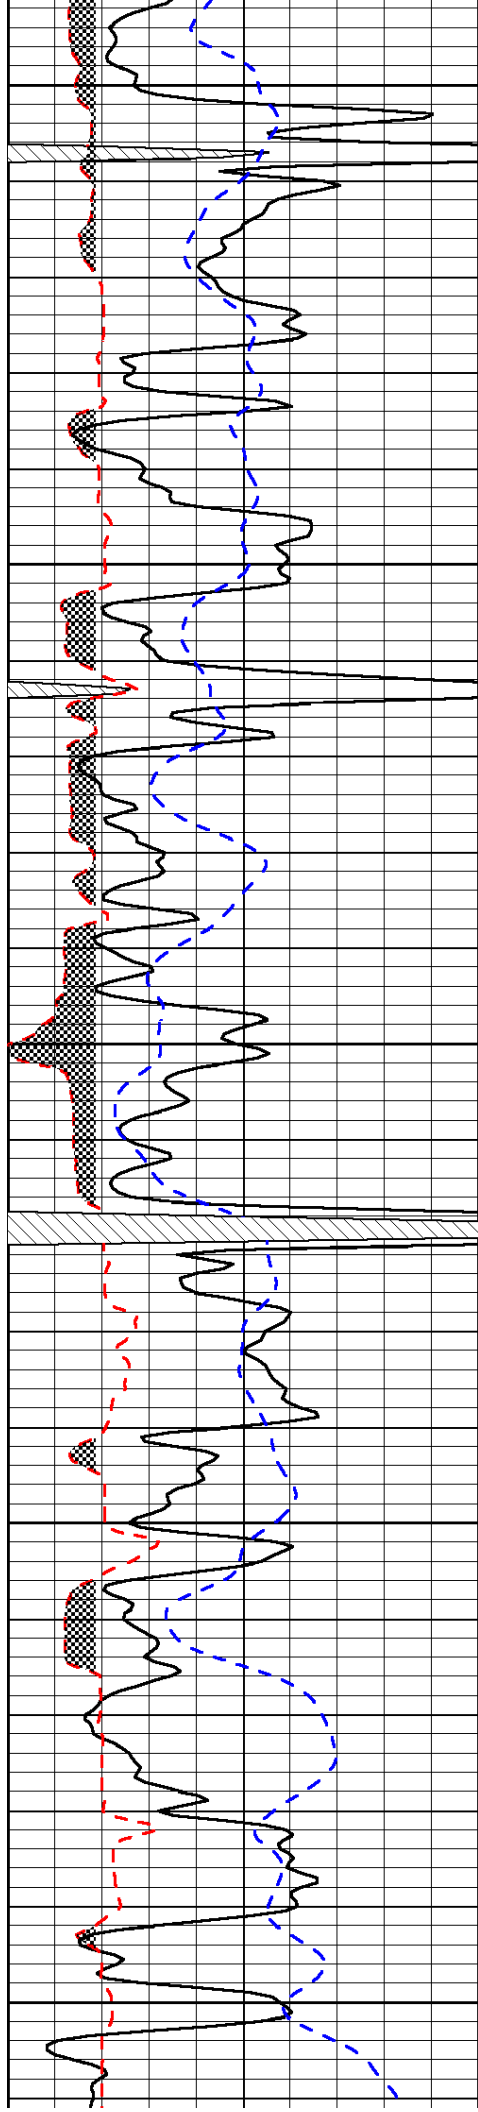


3700

3750

3800

3850

3900

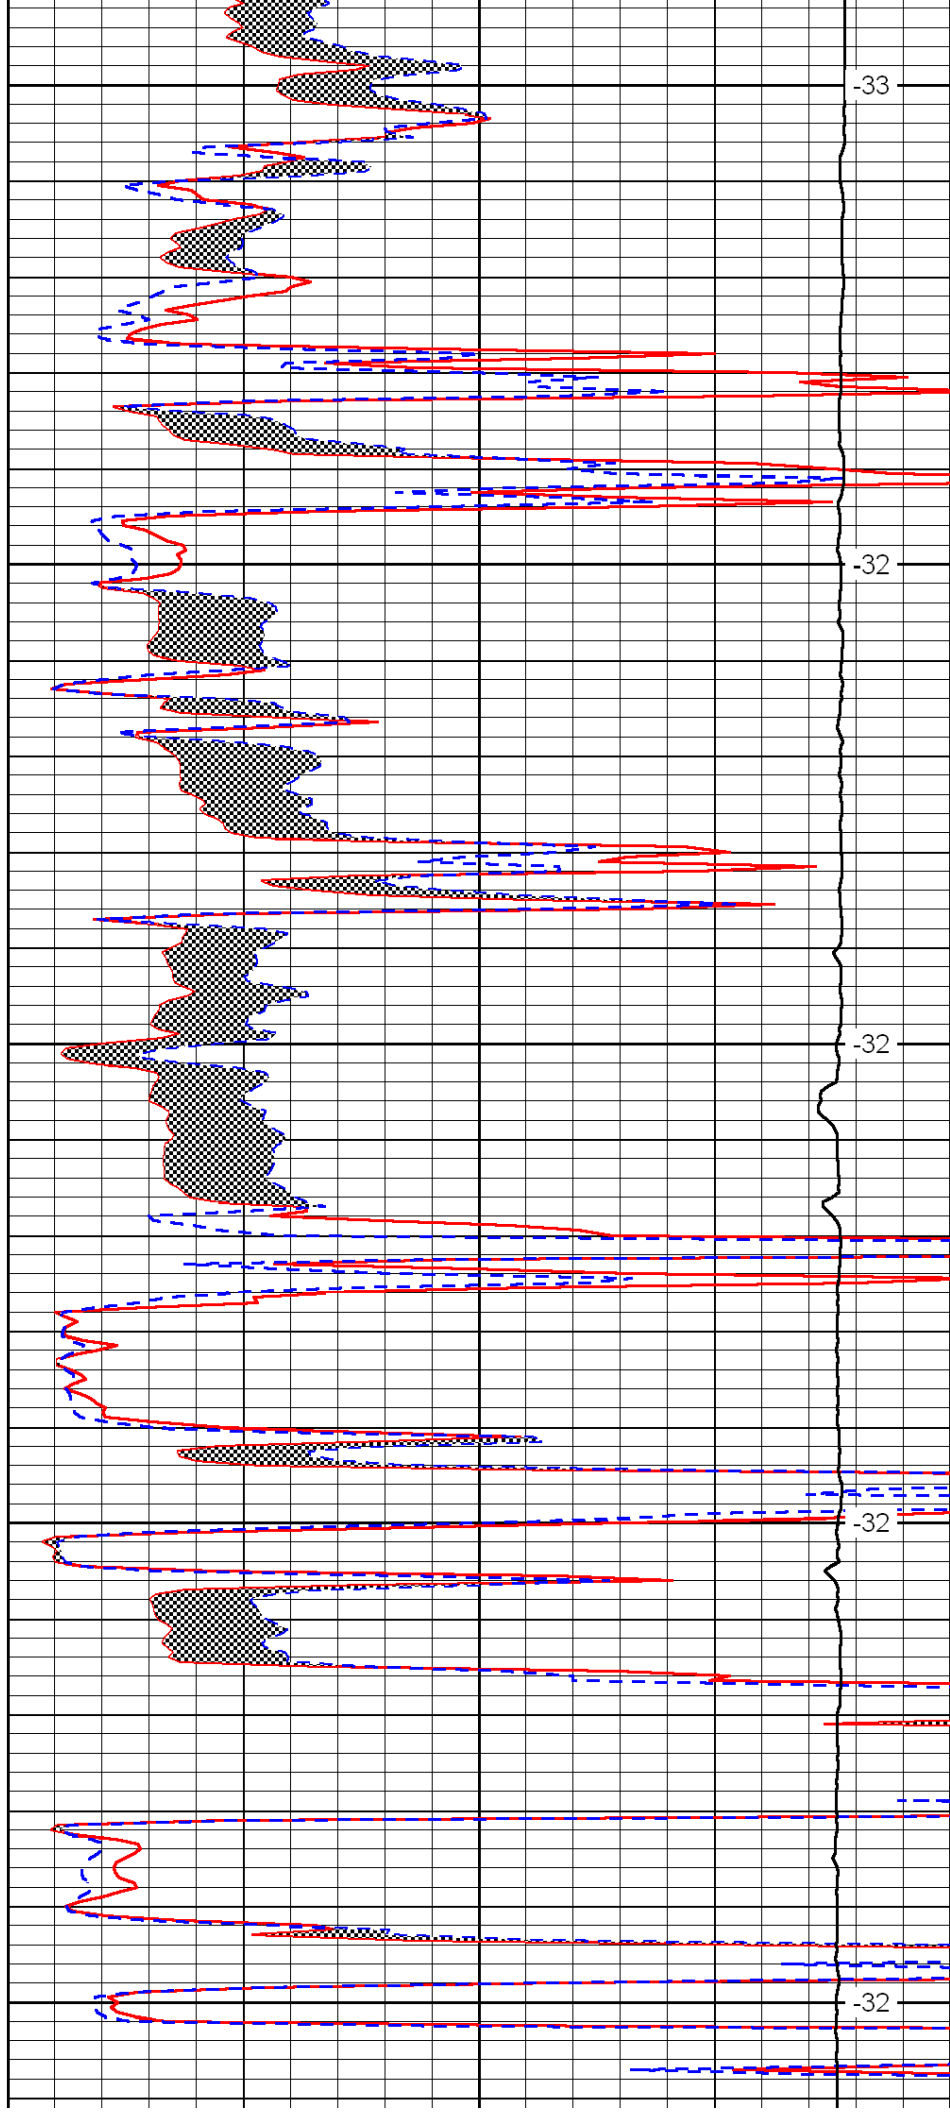


-33

-32

-32

-32

-32

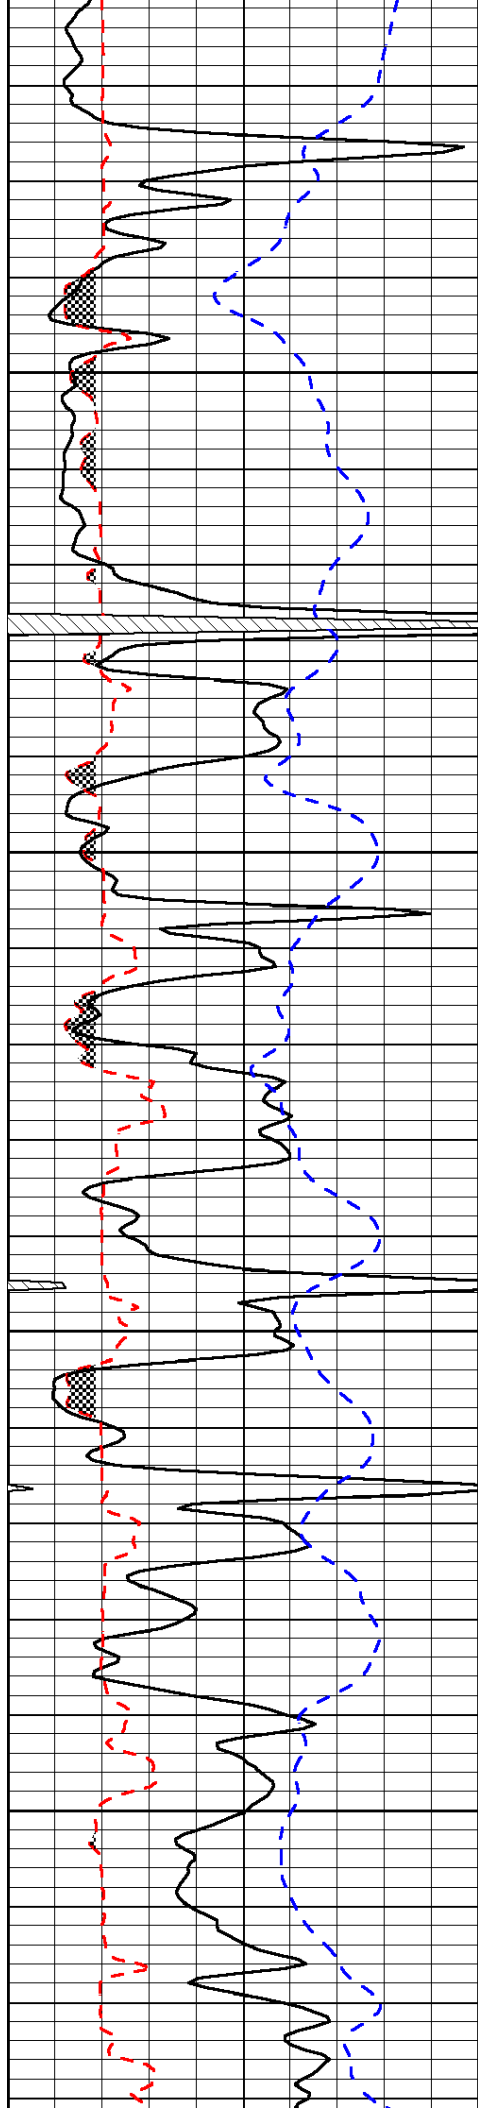


3950

4000

4050

4100


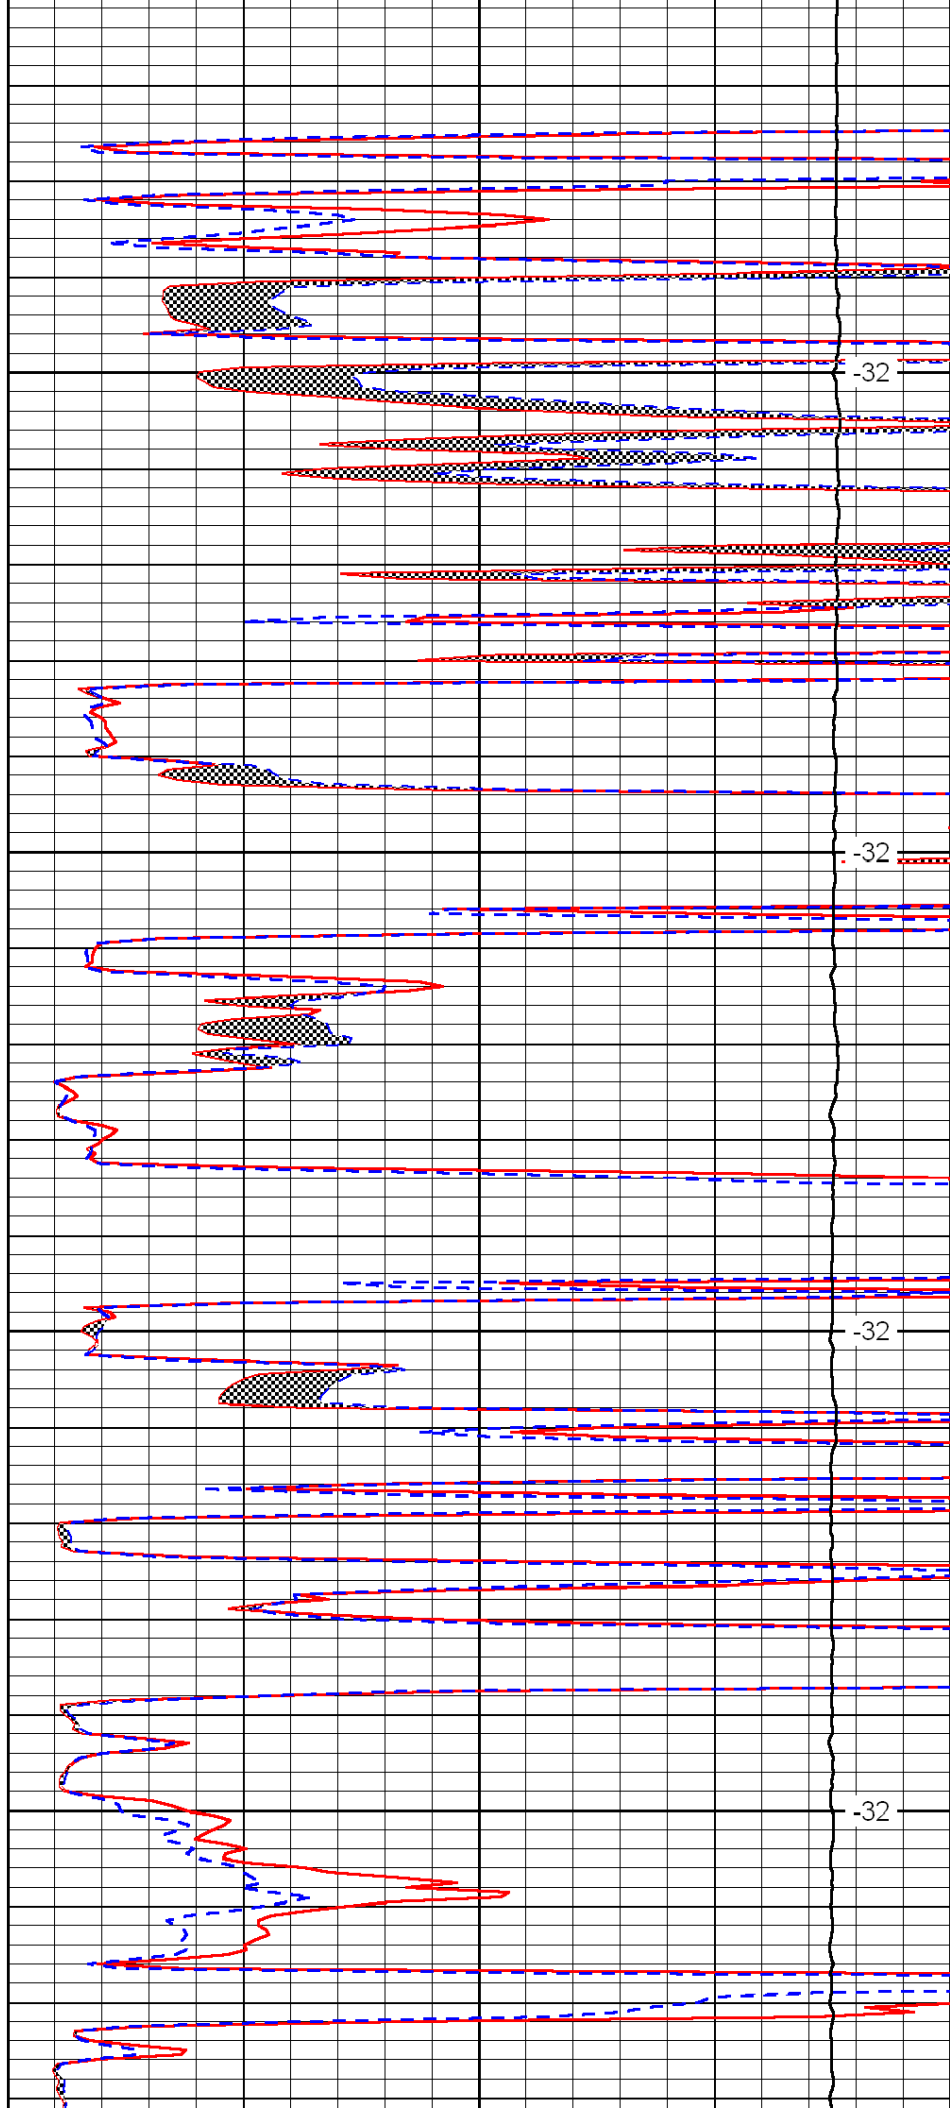


-32

-32

-32

-32

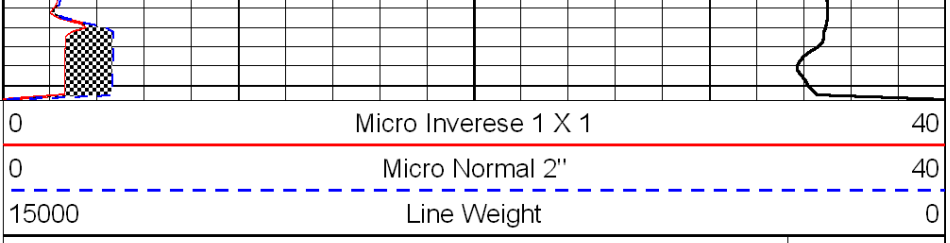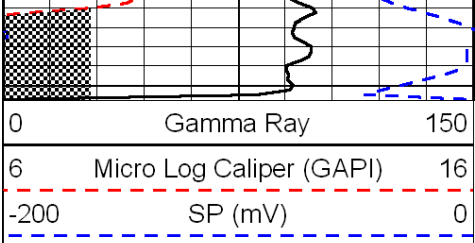

LSPD