



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-009-25,567-00-00

Company American Warrior, Inc.

Well Tempero #5-23

Field Sandford

County Barton State

Kansas

Location

SW NE NE SE
2060' FSL & 335' FEL

Other Services
CNL/CDL
DIL/BHCS

Sec: 23

Twp: 17 S

Rge: 14 W

Elevation

Permanent Datum Ground Level
Log Measured From Kelly Bushing
Drilling Measured From Kelly Bushing

Elevation
K.B. 1898
D.F. 1890
G.L. 1890

Date

6/15/2011

Run Number

Two

Depth Driller

3475

Depth Logger

3473

Bottom Logged Interval

3472

Top Log Interval

2900

Casing Driller

8.625 @ 983

Casing Logger

978

Bit Size

7.875

Type Fluid in Hole

Chemical

Salinity, ppm CL

4.000

Density / Viscosity

9.2 59

pH / Fluid Loss

10.0 7.2

Source of Sample

Flowline

Rm @ Meas. Temp

1.1 @ 70

Rmf @ Meas. Temp

.83 @ 70

Rmc @ Meas. Temp

1.5 @ 70

Source of Rmf / Rmc

Charts

Rm @ BHT

.7 @ 110

Operating Rig Time

4 Hours

Max Rec. Temp. F

110

Equipment Number

15

Location

Hays

Recorded By

T. Martin

Witnessed By

Josh Austin

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Hwy 281 and Hwy 4, 1 N, 1 E,
1/2 N, W into

Database File: c:\warrior\data\amwar_tempero #5-23\awhd.db
Dataset Pathname: dil\awstk
Presentation Format: micro
Dataset Creation: Wed Jun 15 15:14:54 2011
Charted by: Depth in Feet scaled 1:240

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

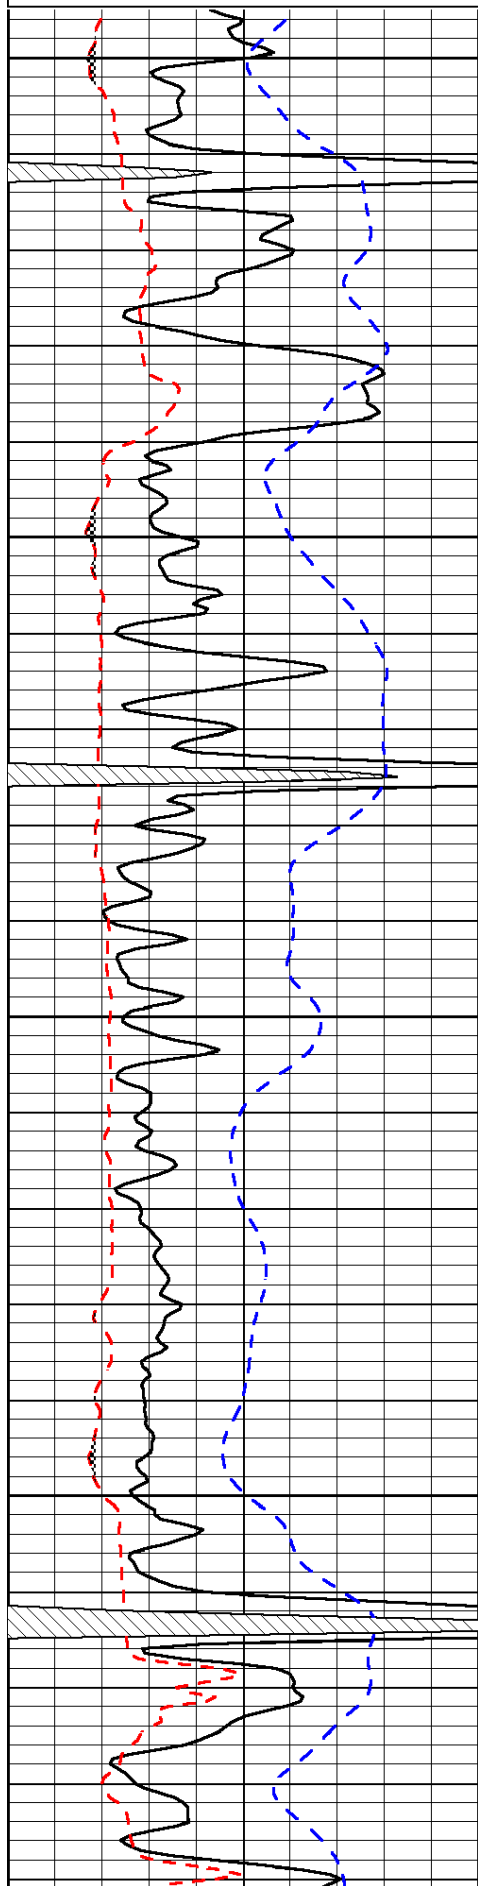

2900


2950



3000



3050

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

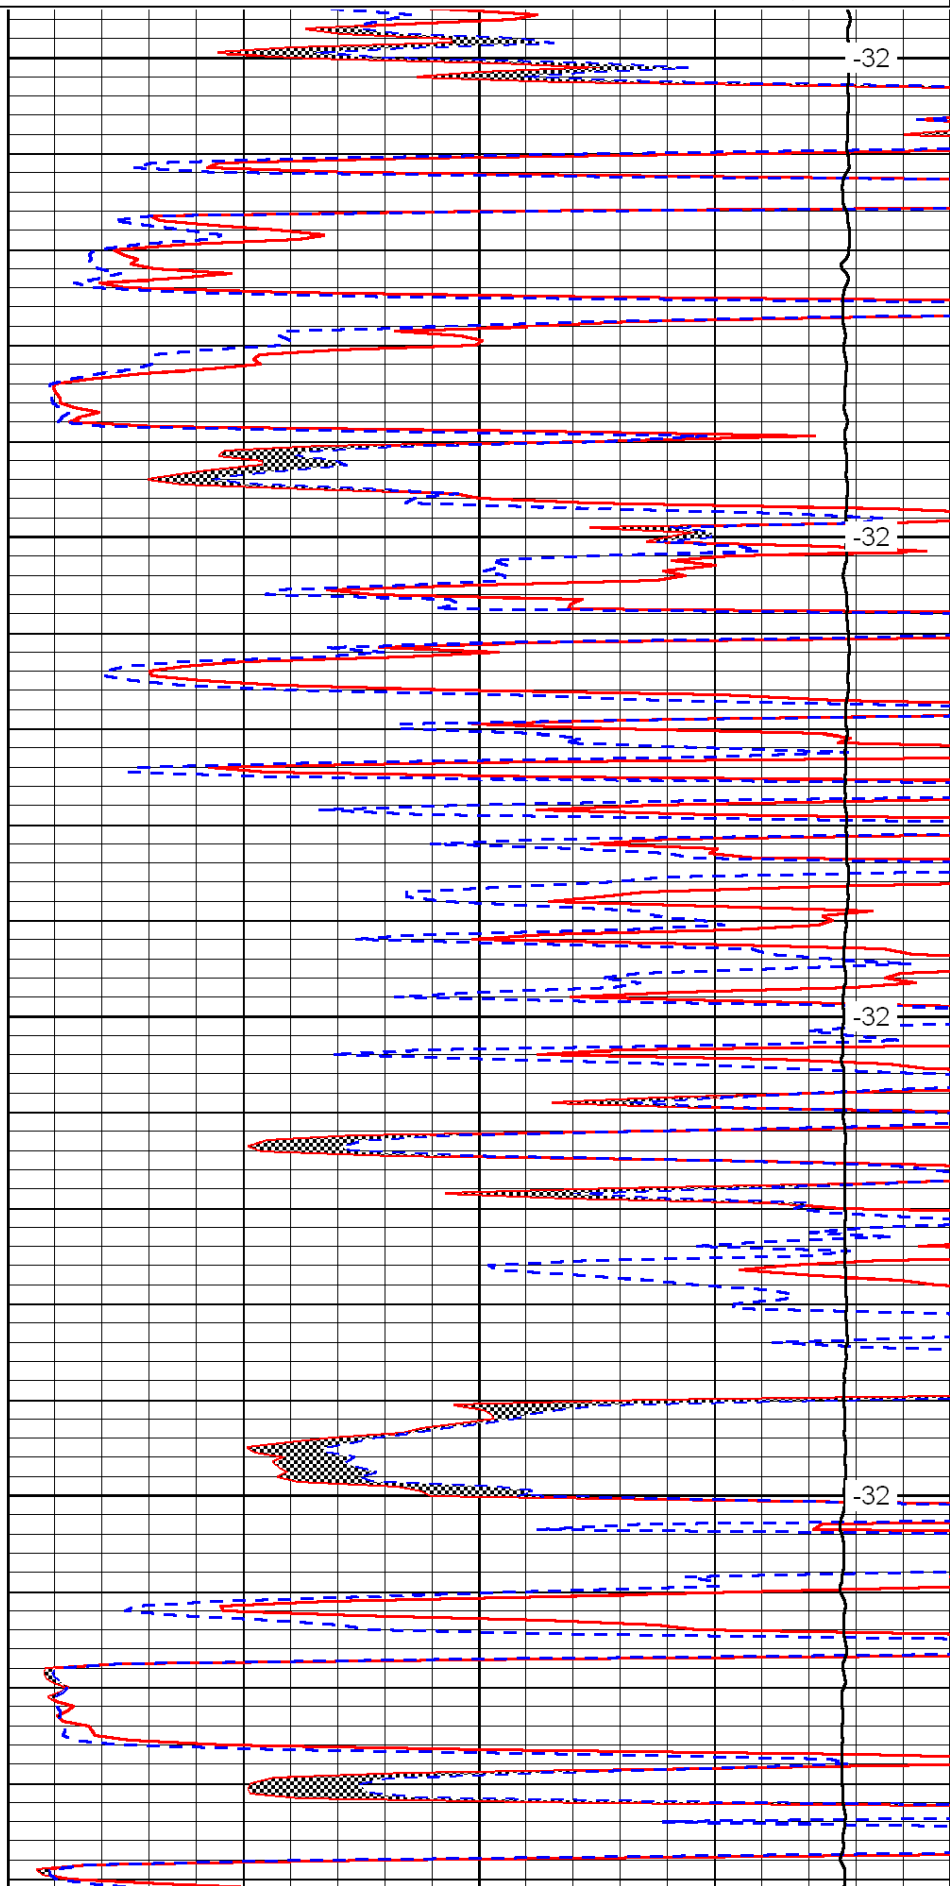

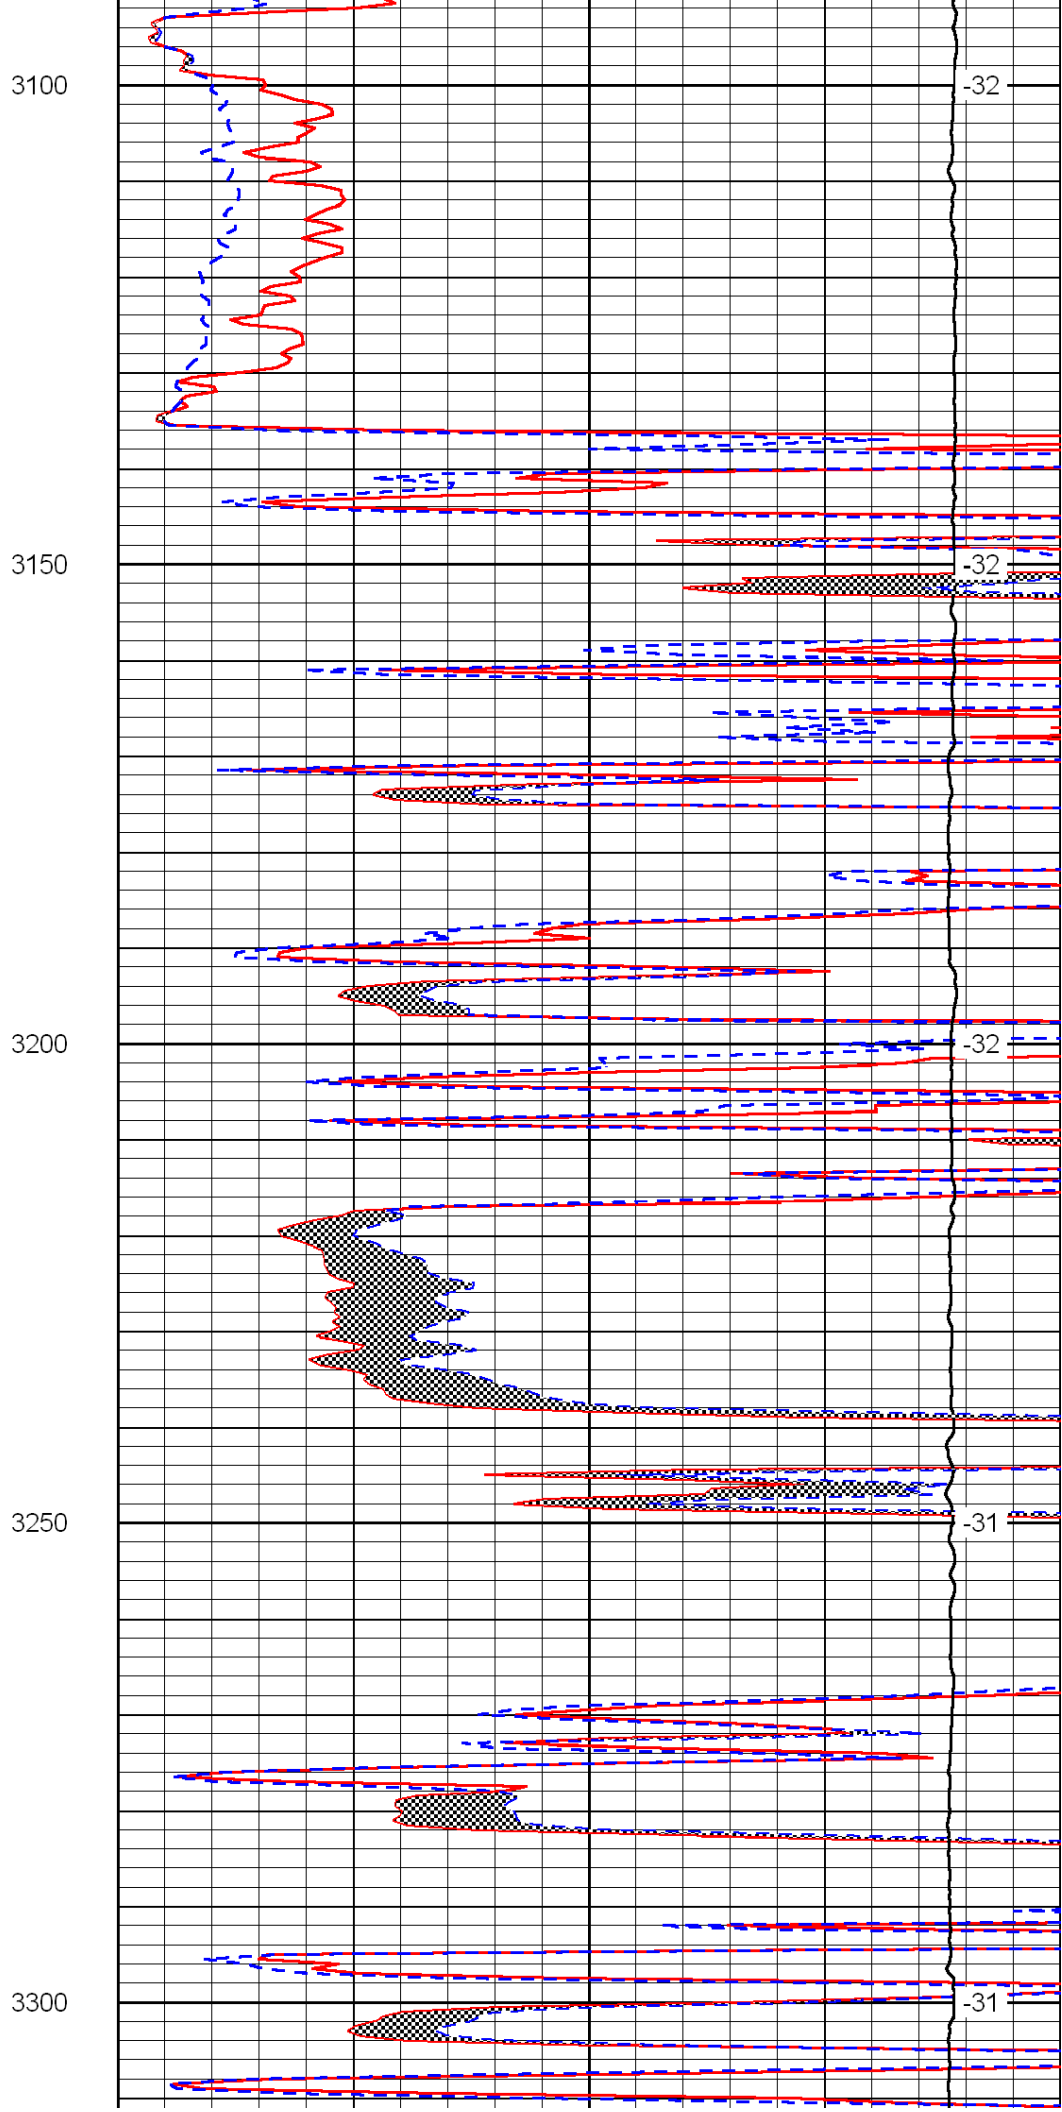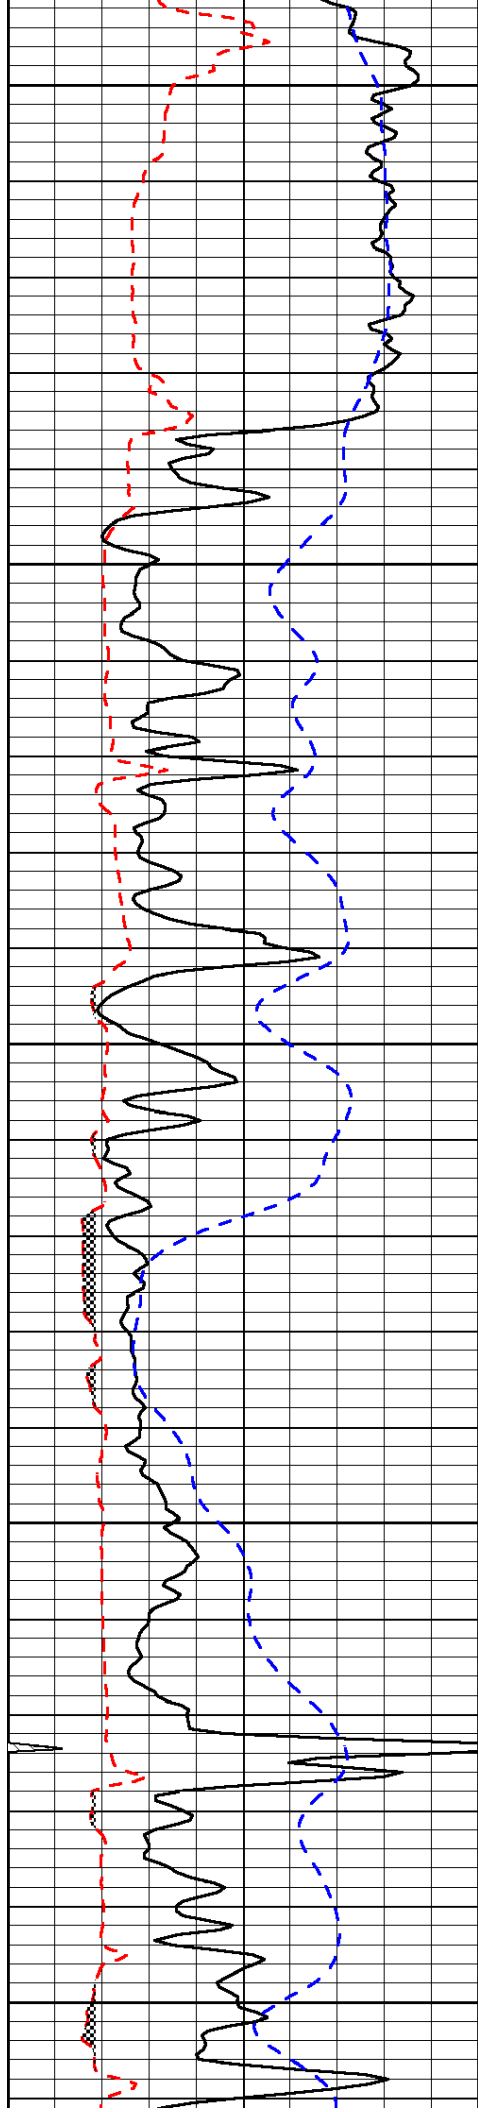

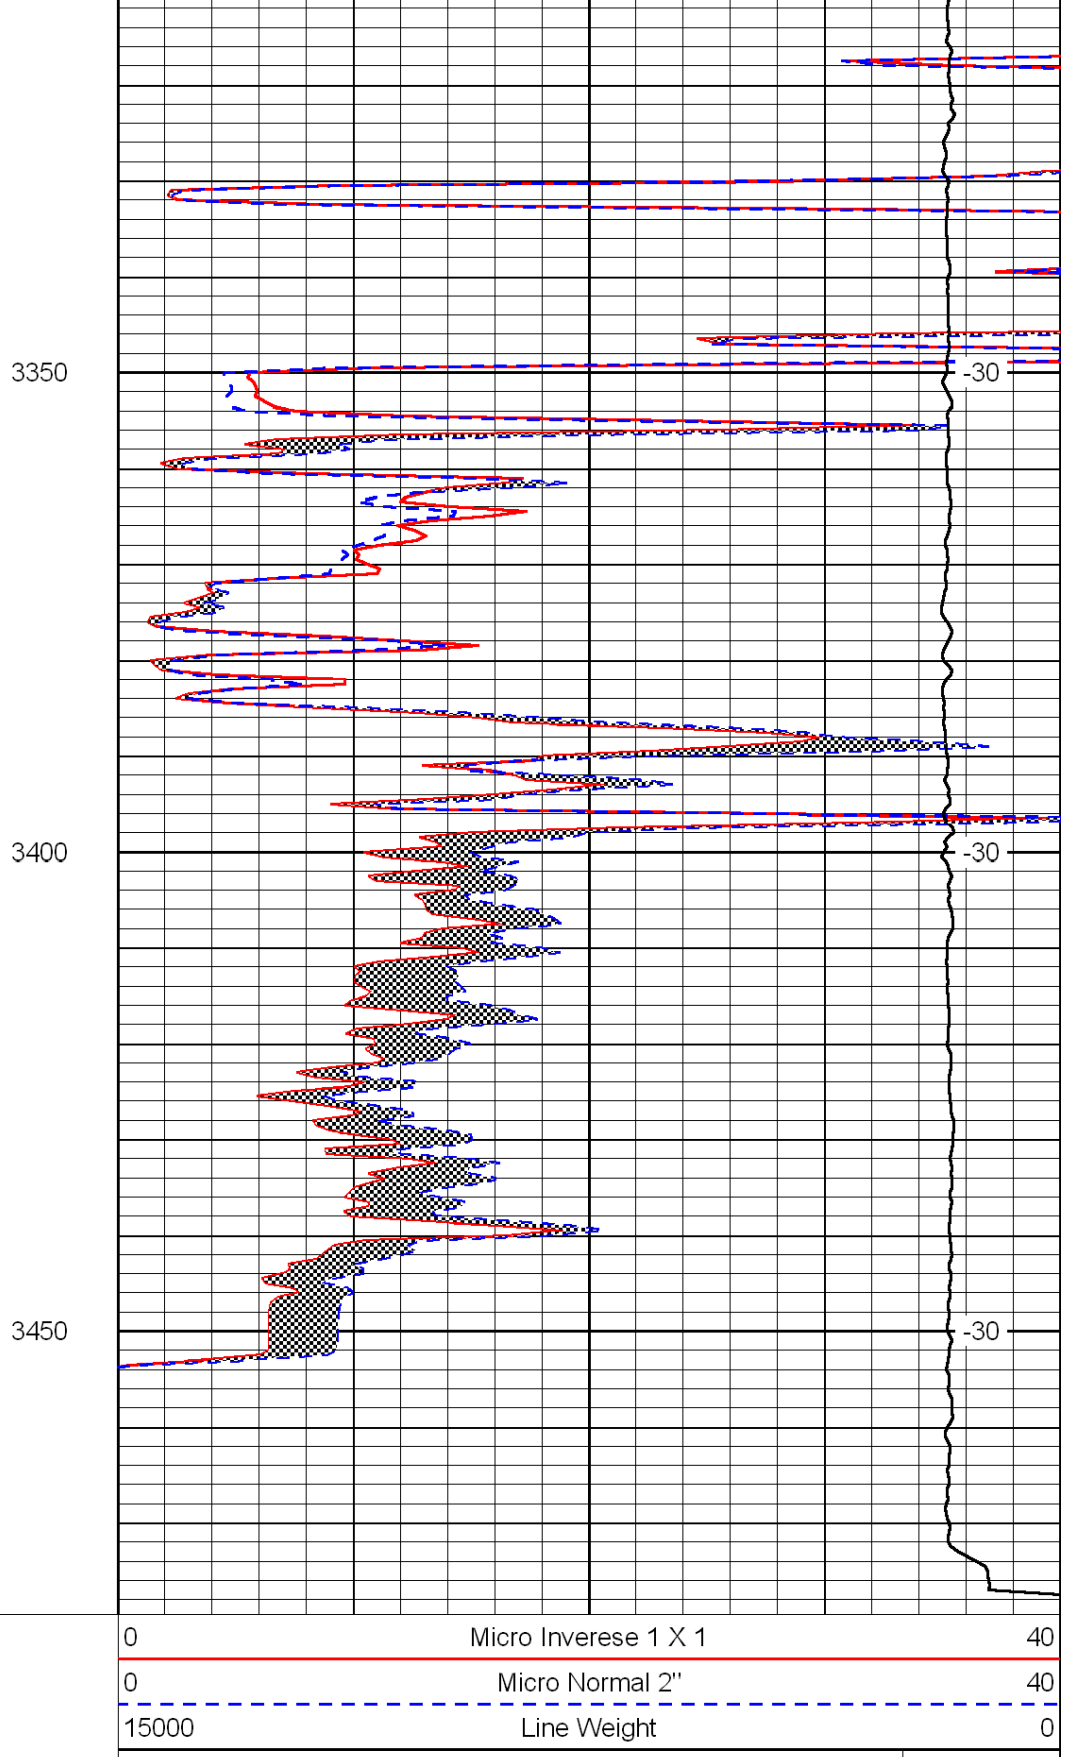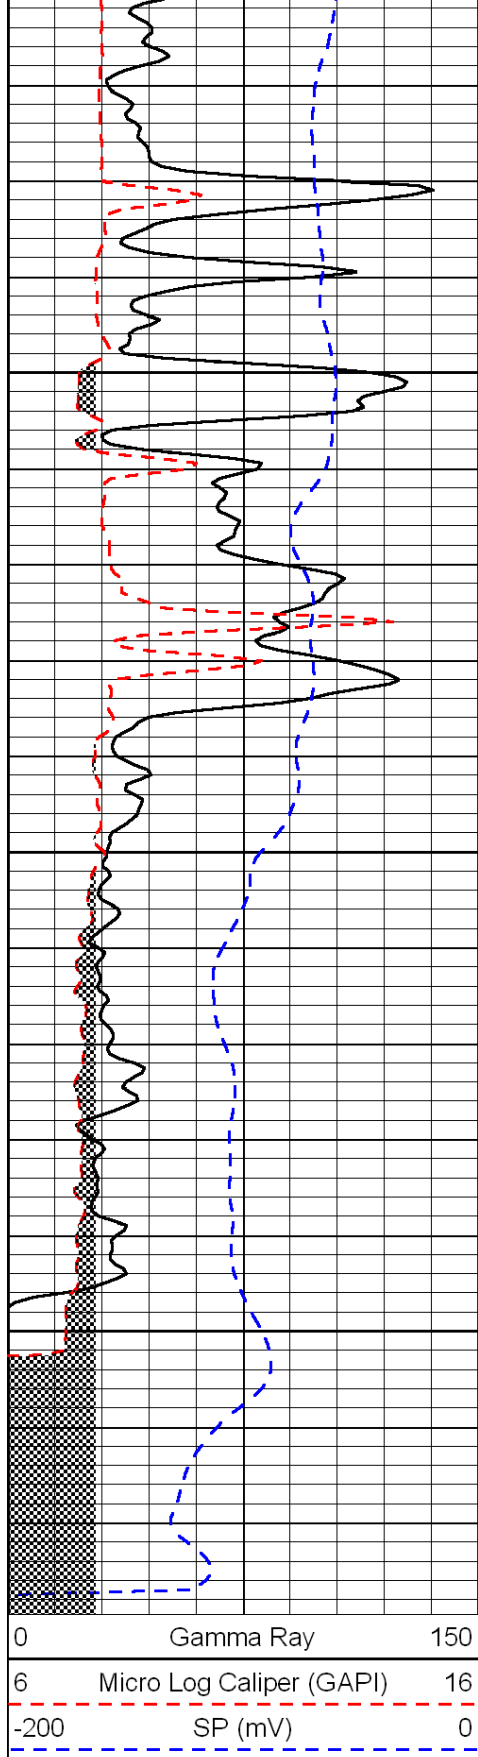

LSPD