



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company Prolific Resources, LLC		
	Well Kowalsky No. 1		
	Field Chase-Silica		
	County Barton	State	Kansas
	Location NW NE SW SE 1,211' FSL & 1,660' FEL	Other Services CNL/CDL DIL	
	Sec: 26	Twp: 19 S	Rge: 11 W
Permanent Datum	Ground Level	Elevation 1767	
Log Measured From	Kelly Bushing	7 Ft. Above Perm. Datum	
Drilling Measured From	Kelly Bushing	K.B. 1774 D.F. 1767 G.L. 1767	
Date	12/31/2010		
Run Number	Two		
Depth Driller	3365		
Depth Logger	3364		
Bottom Logged Interval	3363		
Top Log Interval	2500		
Casing Driller	8.625 @ 312		
Casing Logger	312		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	8600		
Density / Viscosity	9.4 51		
pH / Fluid Loss	9.5 10.4		
Source of Sample	Flowline		
Rm @ Meas. Temp	.44 @ 45		
Rmf @ Meas. Temp	.33 @ 45		
Rmc @ Meas. Temp	.59 @ 45		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.18 @ 110		
Operating Rig Time	4 Hours		
Max Rec. Temp. F	110		
Equipment Number	10		
Location	Hays		
Recorded By	J Schuler	J Long	
Witnessed By	Jeff Burk	Darrell Willinger	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Ellenwood, East to SE 150 Ave, North 1 Mile, West 1/4, North Into

Database File: c:\warrior\data\prolific_kowalsky no. 1\prolific_kowalsky_1hd1.db
Dataset Pathname: dil/prostk
Presentation Format: micro
Dataset Creation: Sat Jan 01 01:20:04 2011
Charted by: Depth in Feet scaled 1:240

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

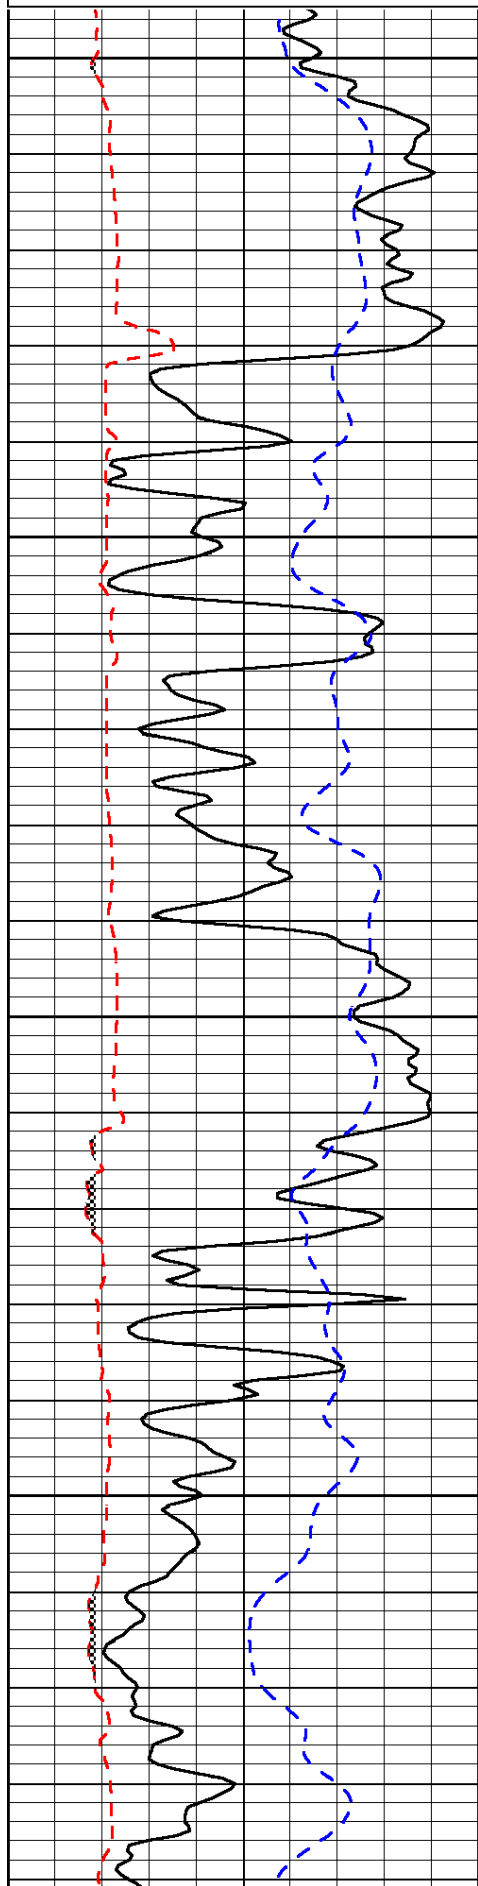


2500

2550

2600

2650

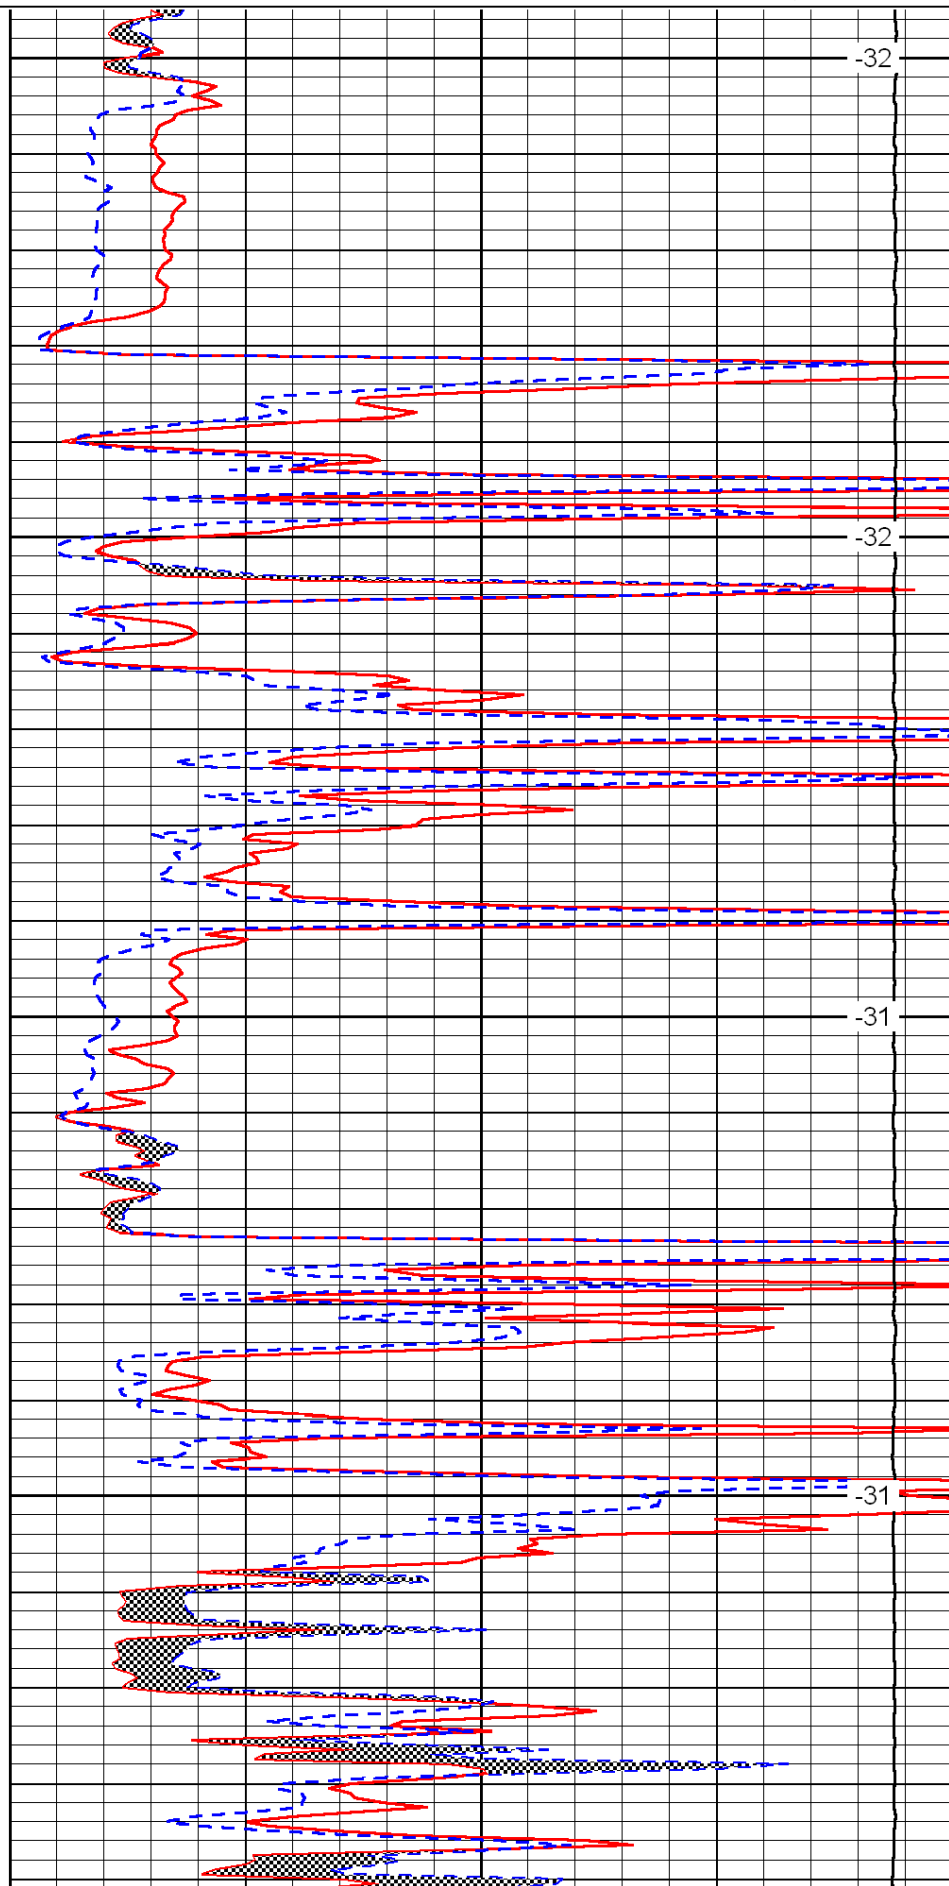


-32

-32

-31

-31

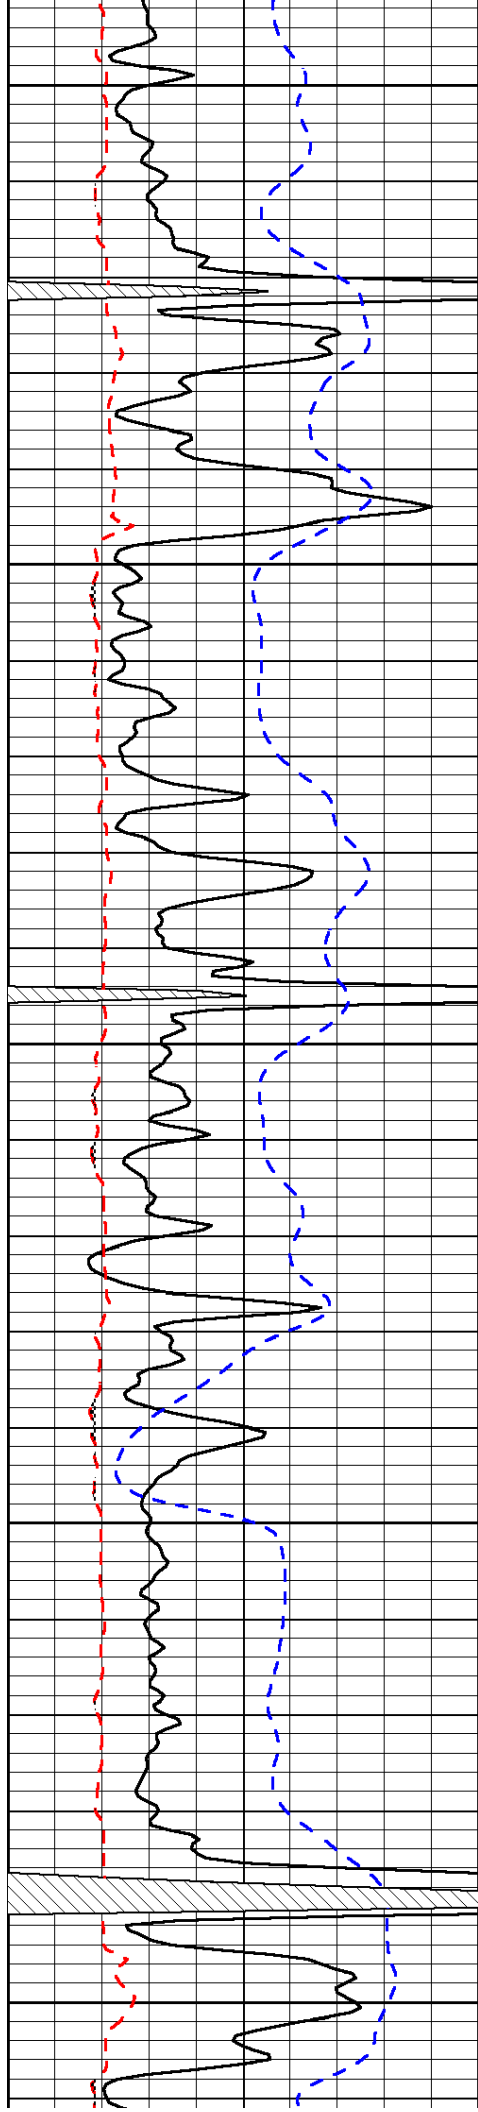


2700


2750

2800

2850

2900

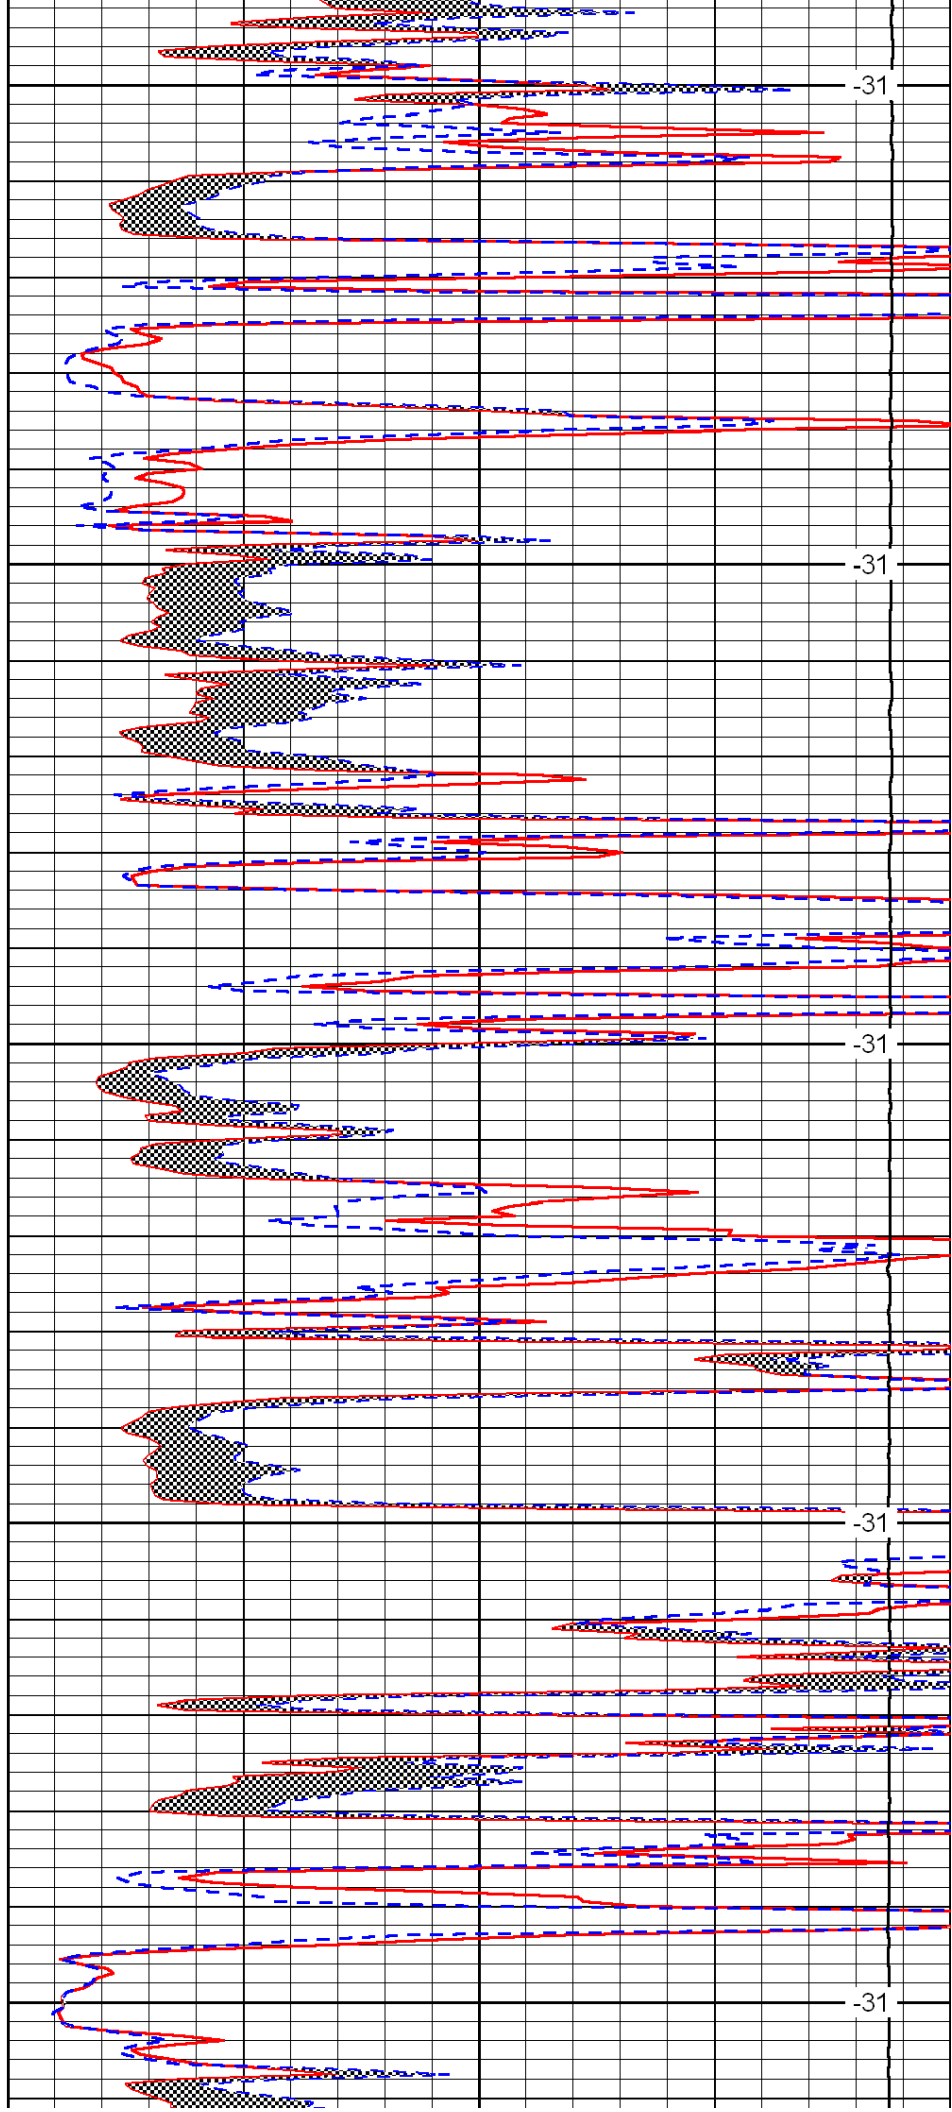

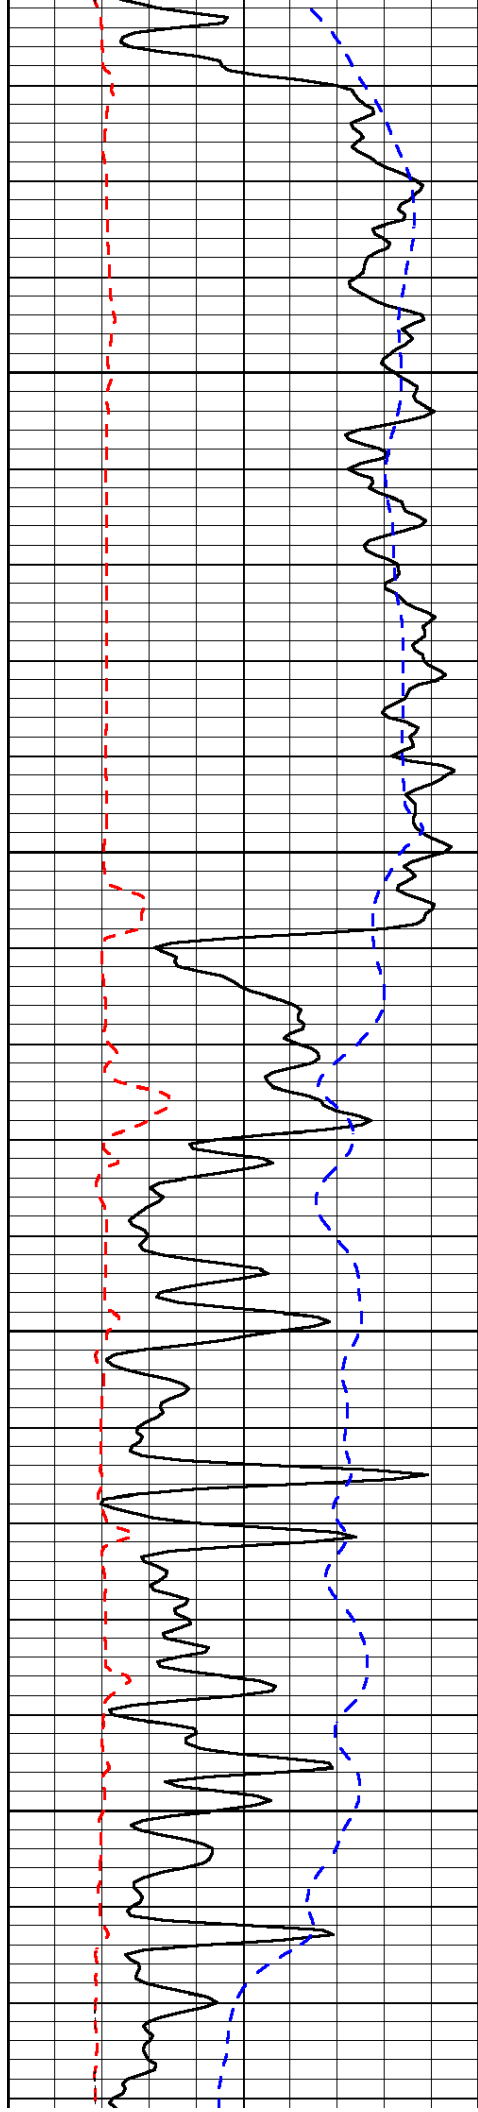


2950

3000

3050

3100

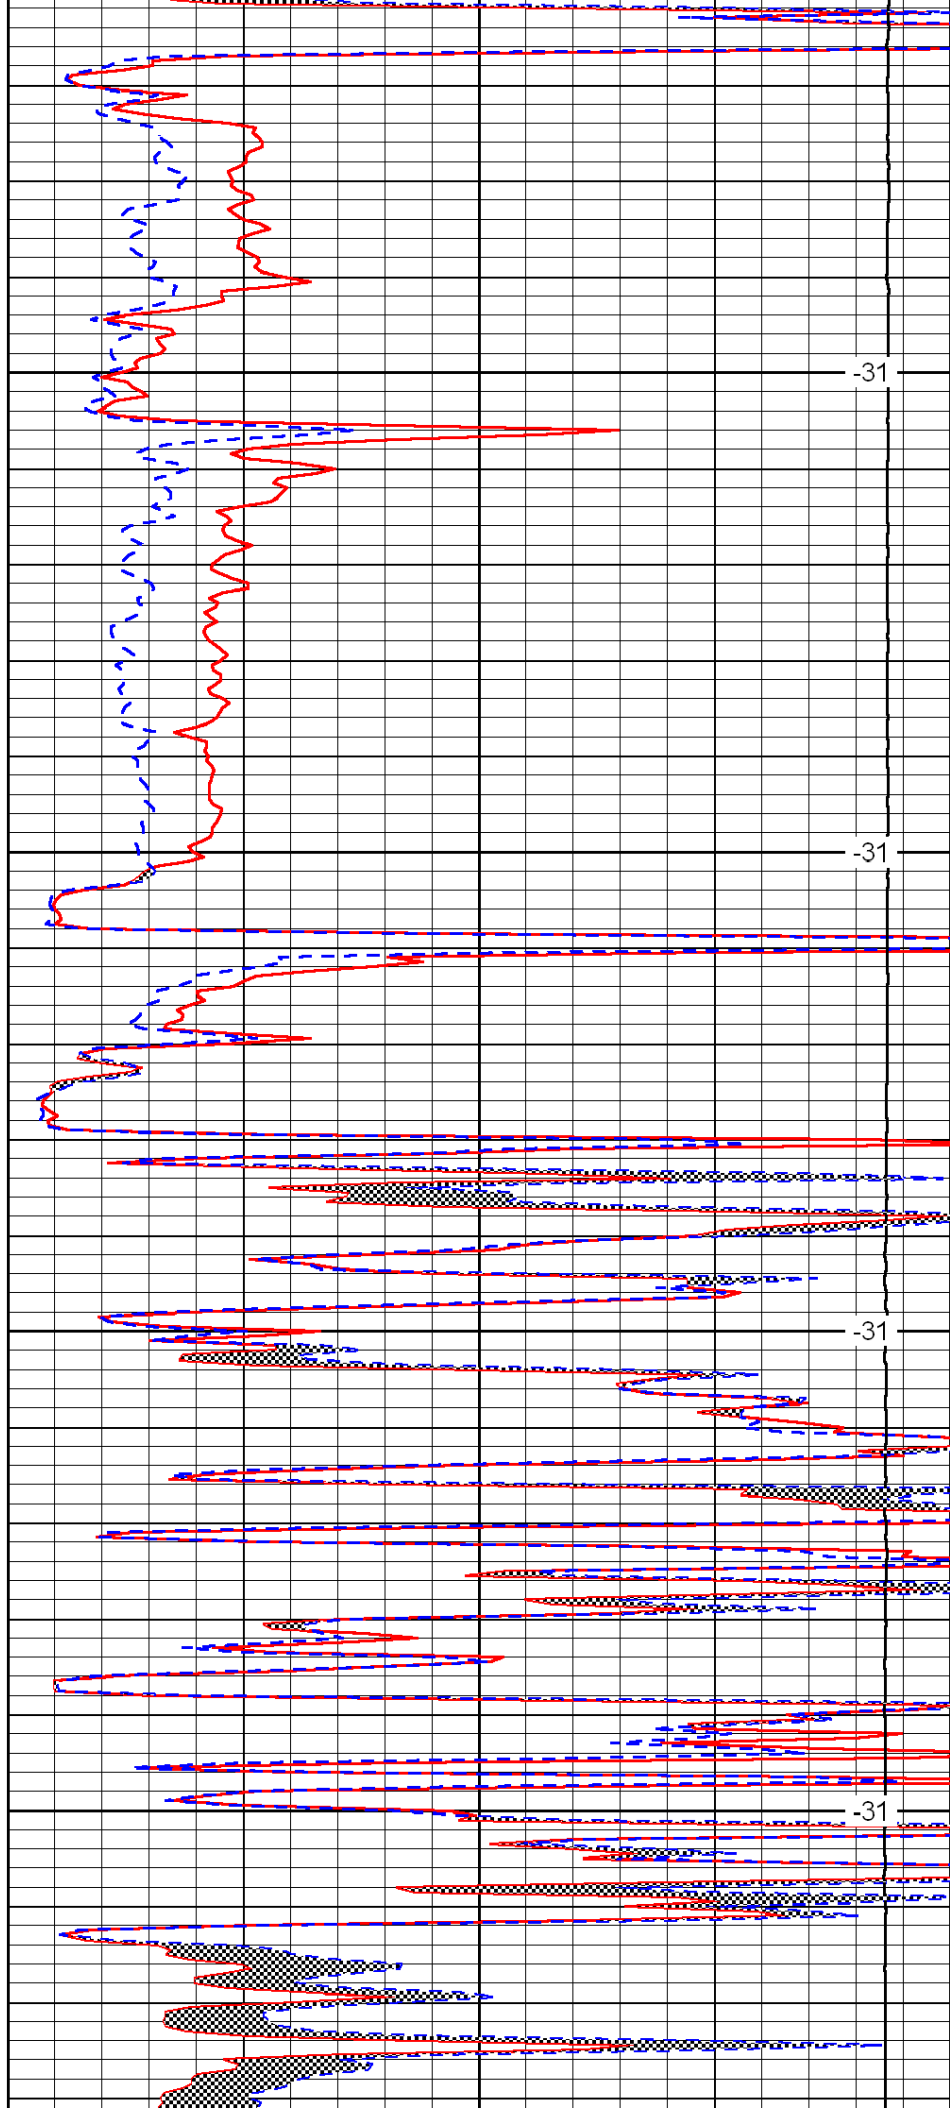


-31

-31

-31

-31

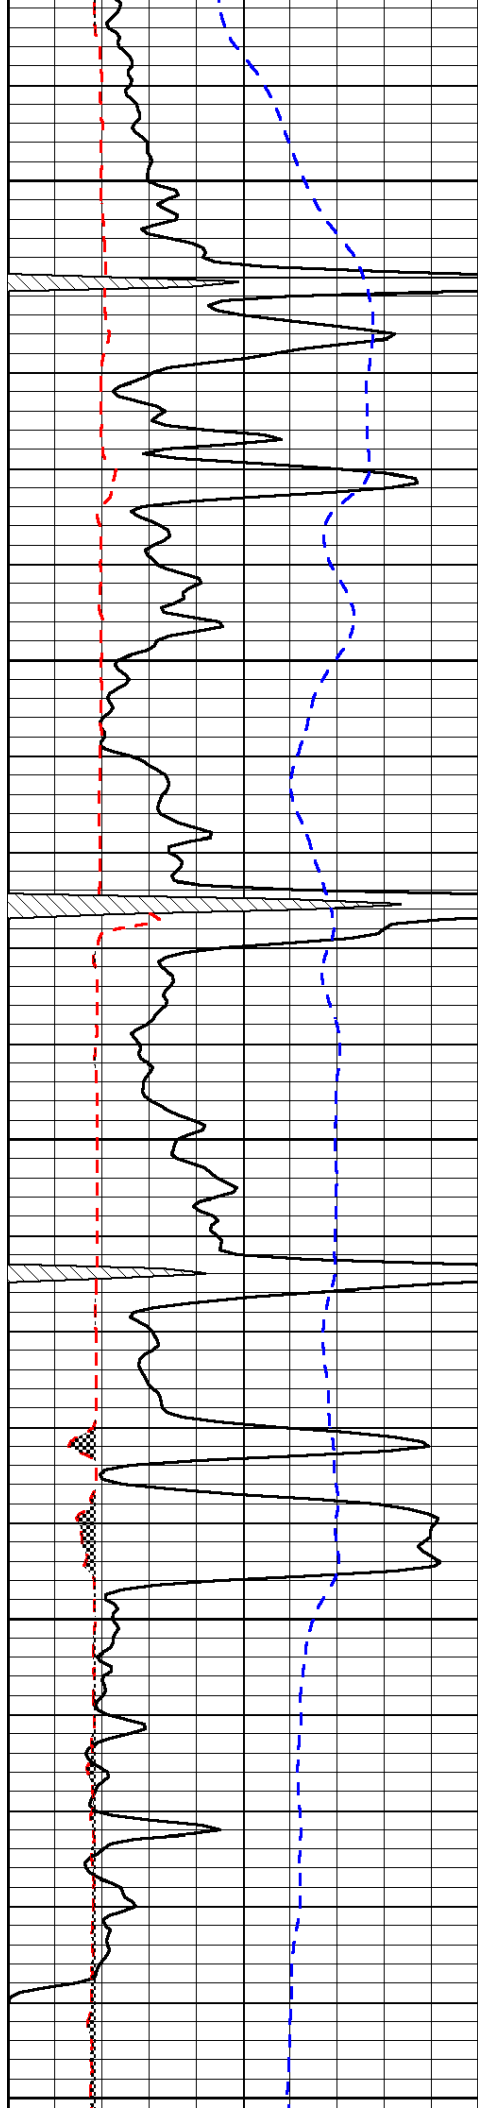


3150

3200

3250

3300

3350

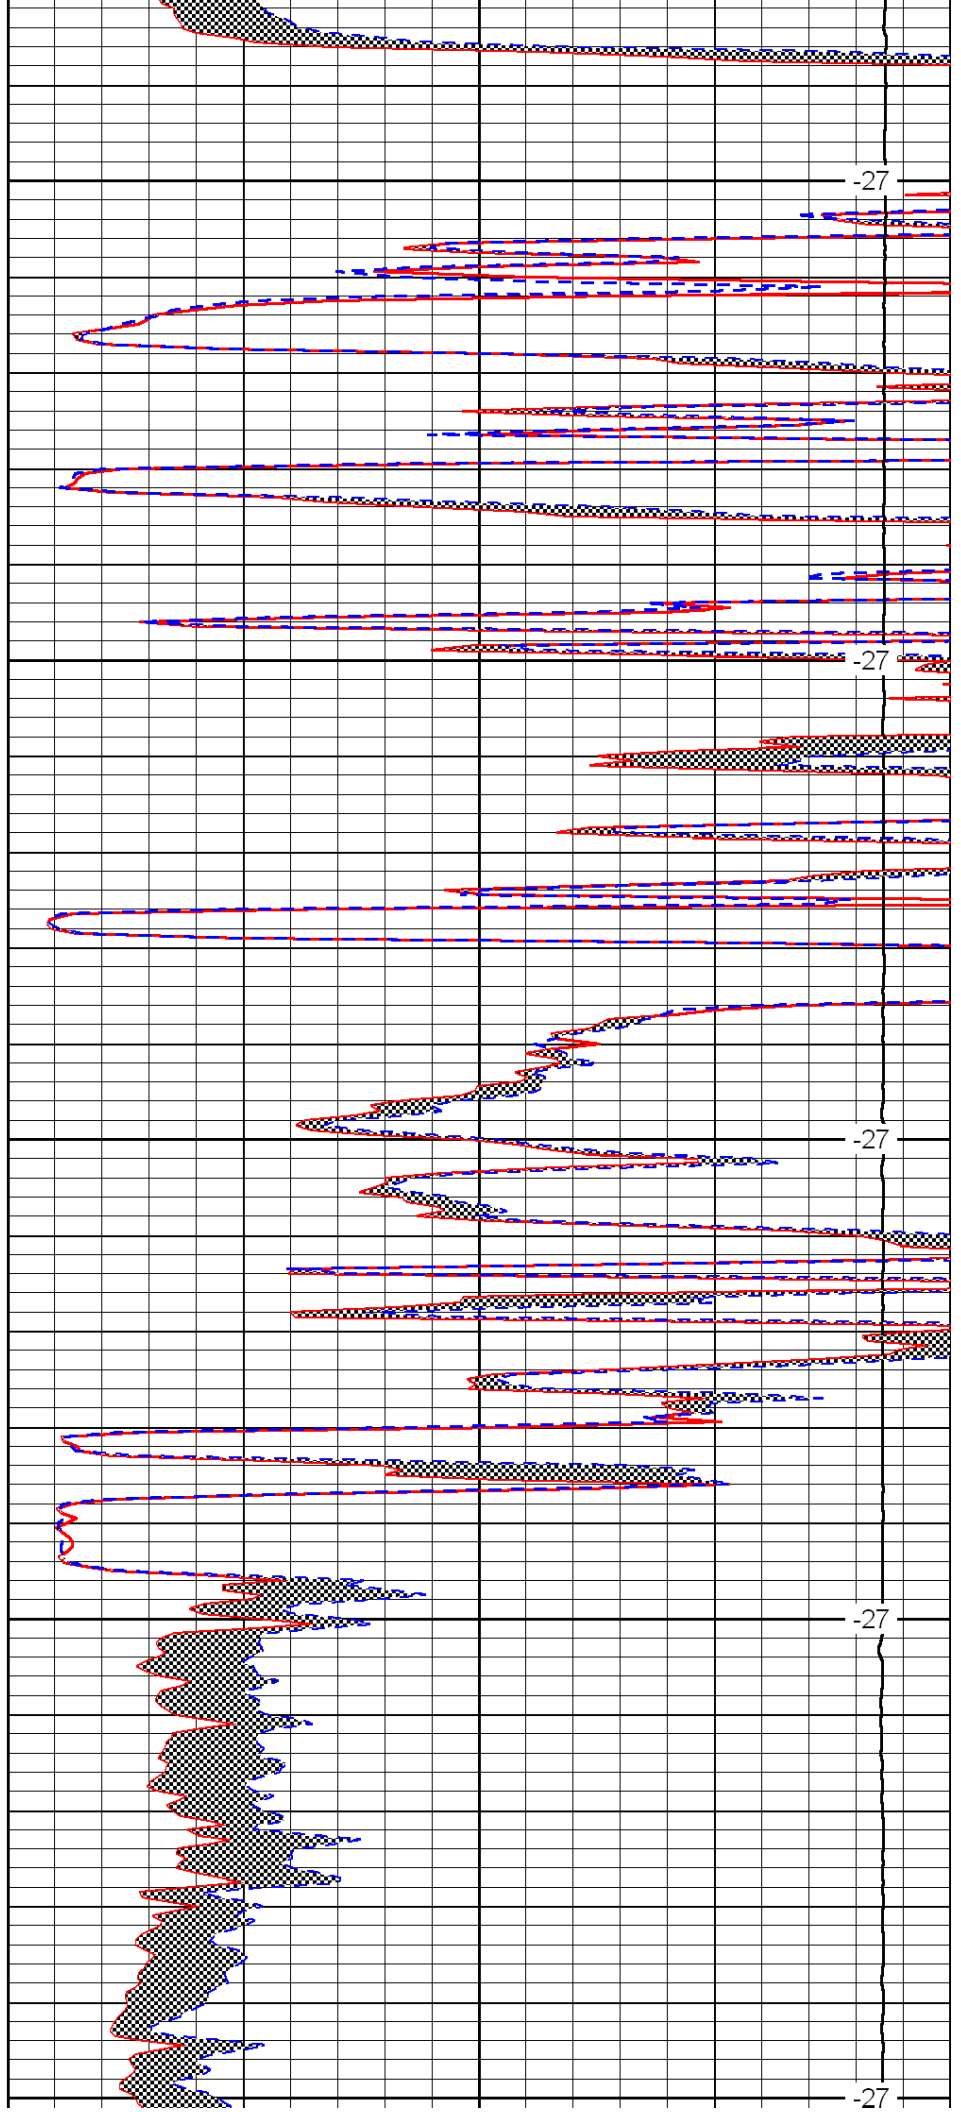



-27

-27

-27

-27

-27

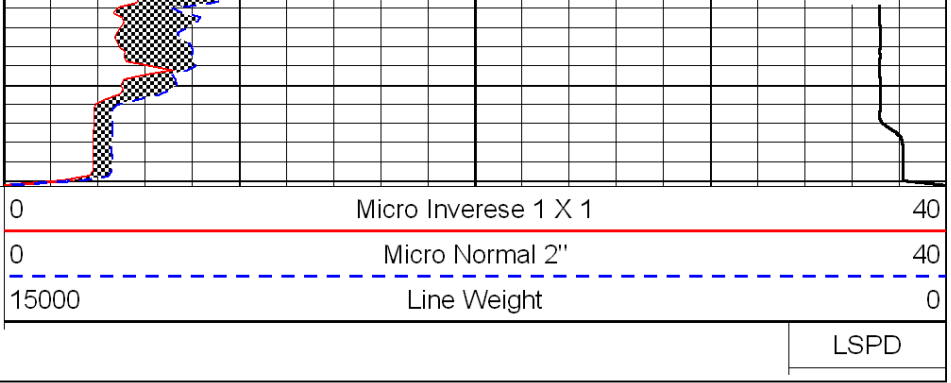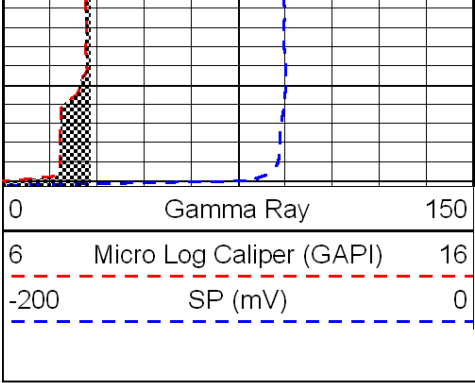

LSPD