



Green Country Wireline

GAMMA RAY
CEMENT BOND
CCL VDL

Company JONES & BUCK DEVELOPEMENT	
Well THOMPSON # JBD 36-8	
Field SEDAN-PERU	
County CHAUTAUQUA	
State KANSAS	
Company JONES & BUCK DEVELOPEMENT	
Well THOMPSON # JBD 36-8	
Field SEDAN-PERU	
County CHAUTAUQUA	
State KANSAS	
Location: NW SE NE NE 4470 FSL & 435 FEL SEC 36 TWP 33S RGE 10E	
Permanent Datum G.L.	Elevation 875'
Log Measured From G.L.	D.F. ---
Drilling Measured From G.L.	E.L. 875'
API #: 15-019-27071	
Other Services	

Date	10-10-11
Run Number	1
Depth Driller	1340'
Depth Logger	1322'
Bottom Logged Interval	1316'
Top Log Interval	SURFACE
Open Hole Size	---
Type Fluid	WATER
Density / Viscosity	---
Max. Recorded Temp.	---
Estimated Cement Top	SURFACE
Time Well Ready	---
Time Logger on Bottom	---
Equipment Number	3
Location	DEWEY
Recorded By	HERRIN
Witnessed By	MR JONES
Borehole Record	
Run Number	---
Bit	From
Size	---
Wgt/Ft	---
Top	---
Bottom	---
Surface	---
TD	---

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.



Comments



GAMMA RAY CEMENT BOND

Database File: thom368.dti
Dataset Pathname: thom368/run1/pass1
Presentation Format: cbl_dr
Dataset Creation: Mon Oct 10 08:31:06 2011 by Log Std Casedhole 09061
Charted by: Depth in Feet scaled 1:240

9	Collar Locator	-1	Amplitude (mV)	60	200	Variable Density	12
0	Gamma Ray (GAPI) (GAPI)	60	1000	Travel Time (usec)	300		



Collar Locator

-1

-1

Amplitude (mV)

60

200

Variable Density

120


Gamma Ray (GAPI) (GAPI)

60

1000

Travel Time (usec)

300

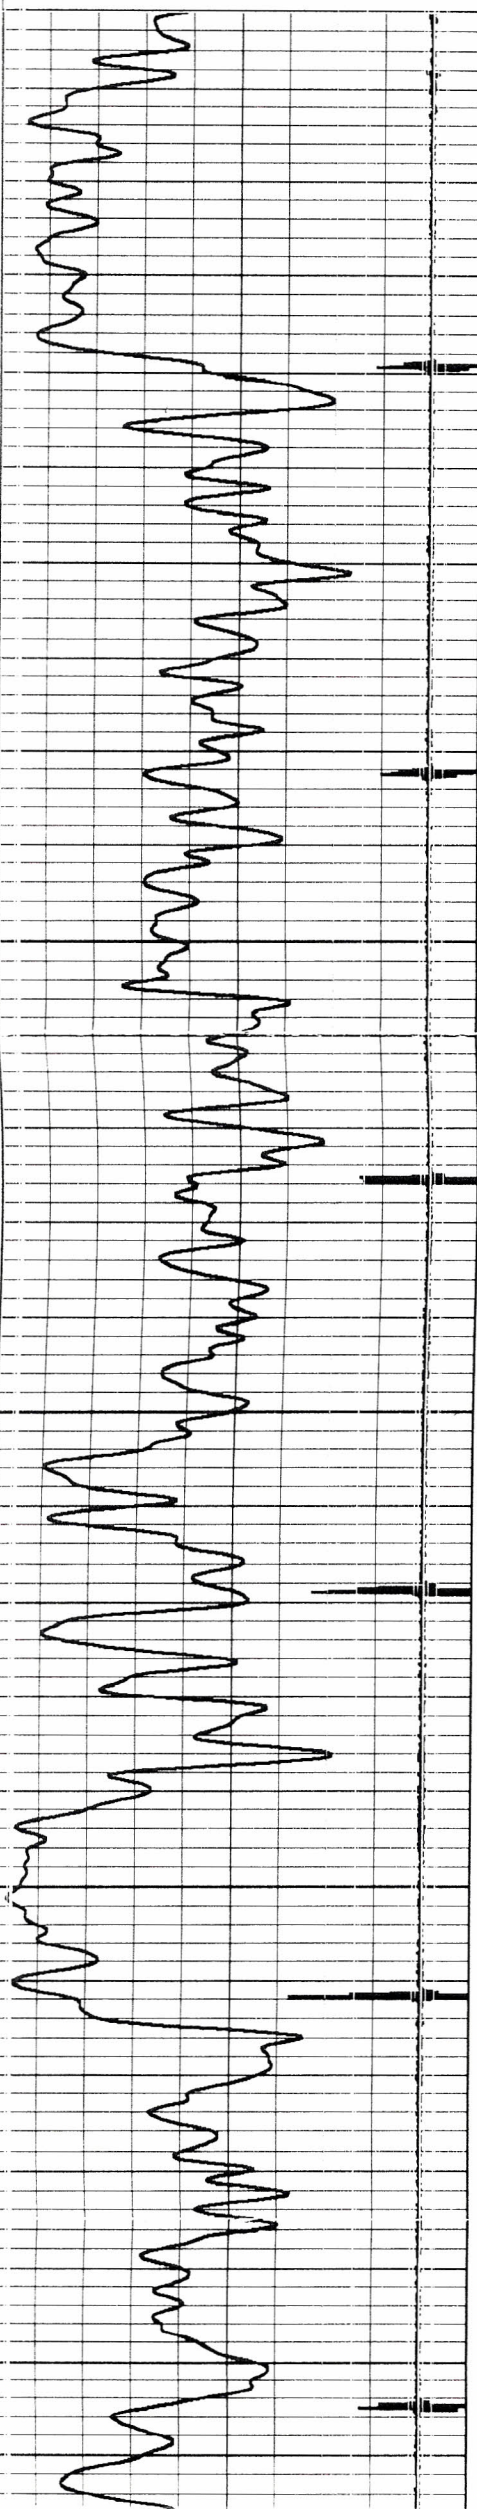



50


100

150

200

250

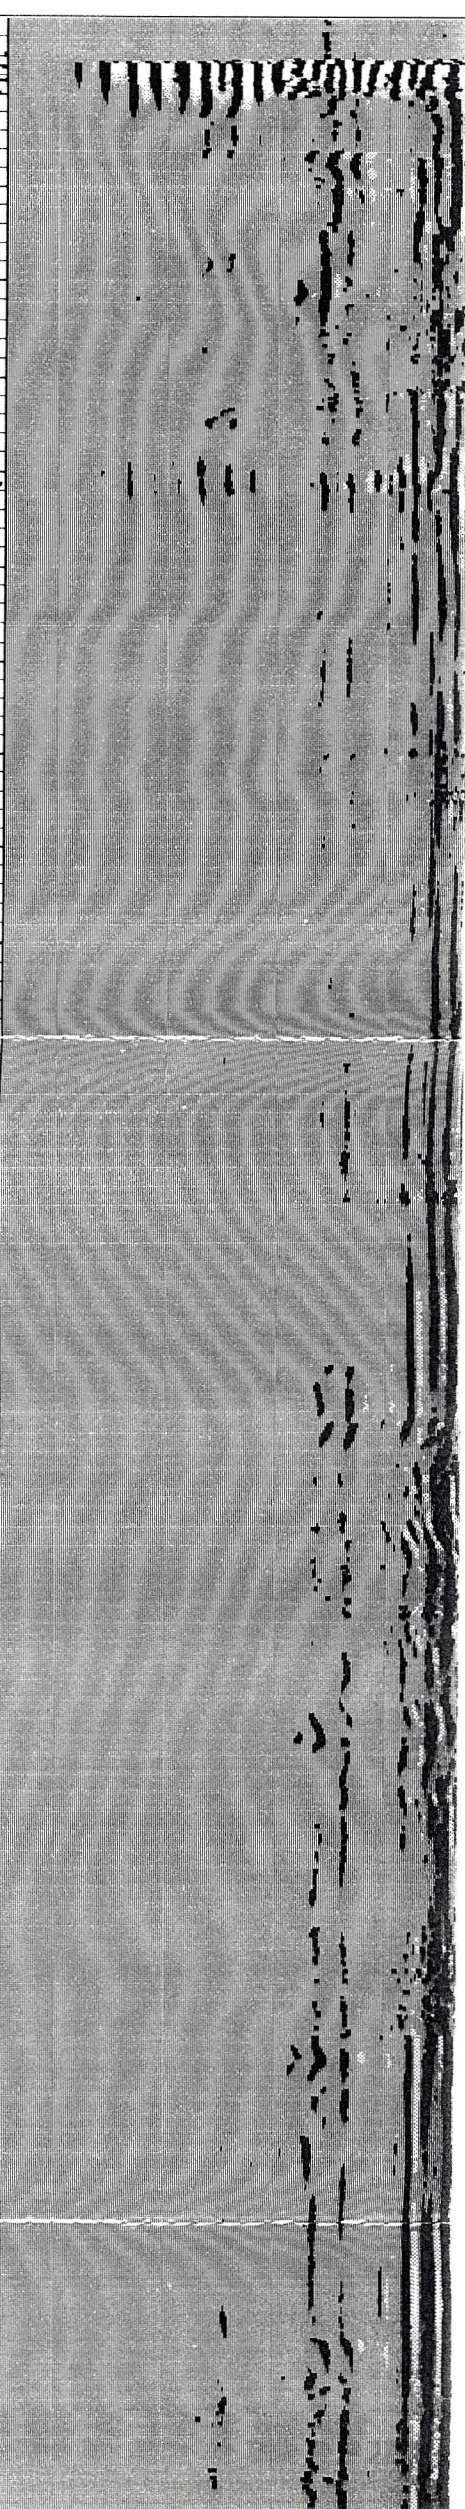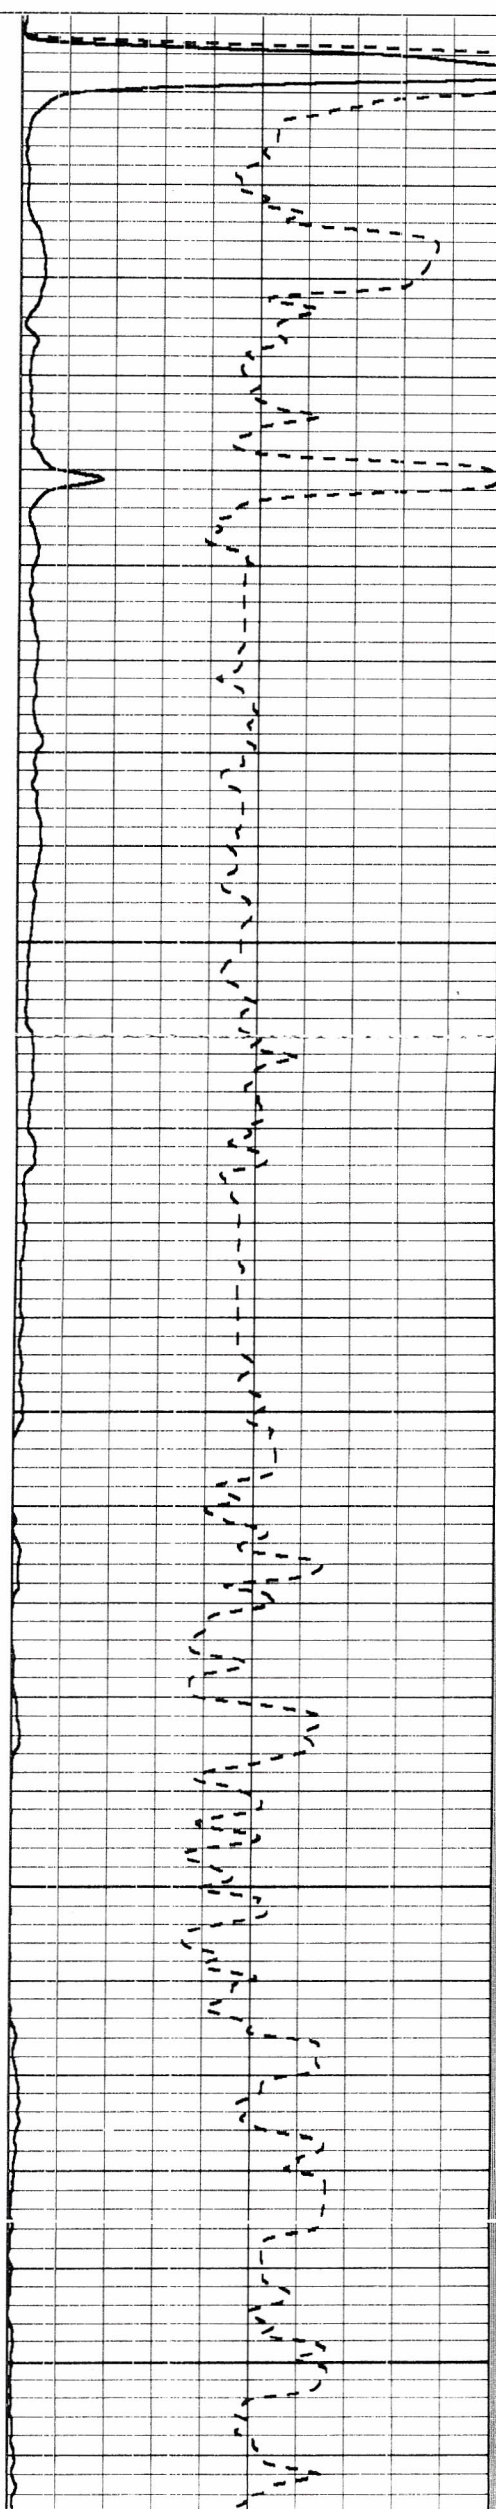

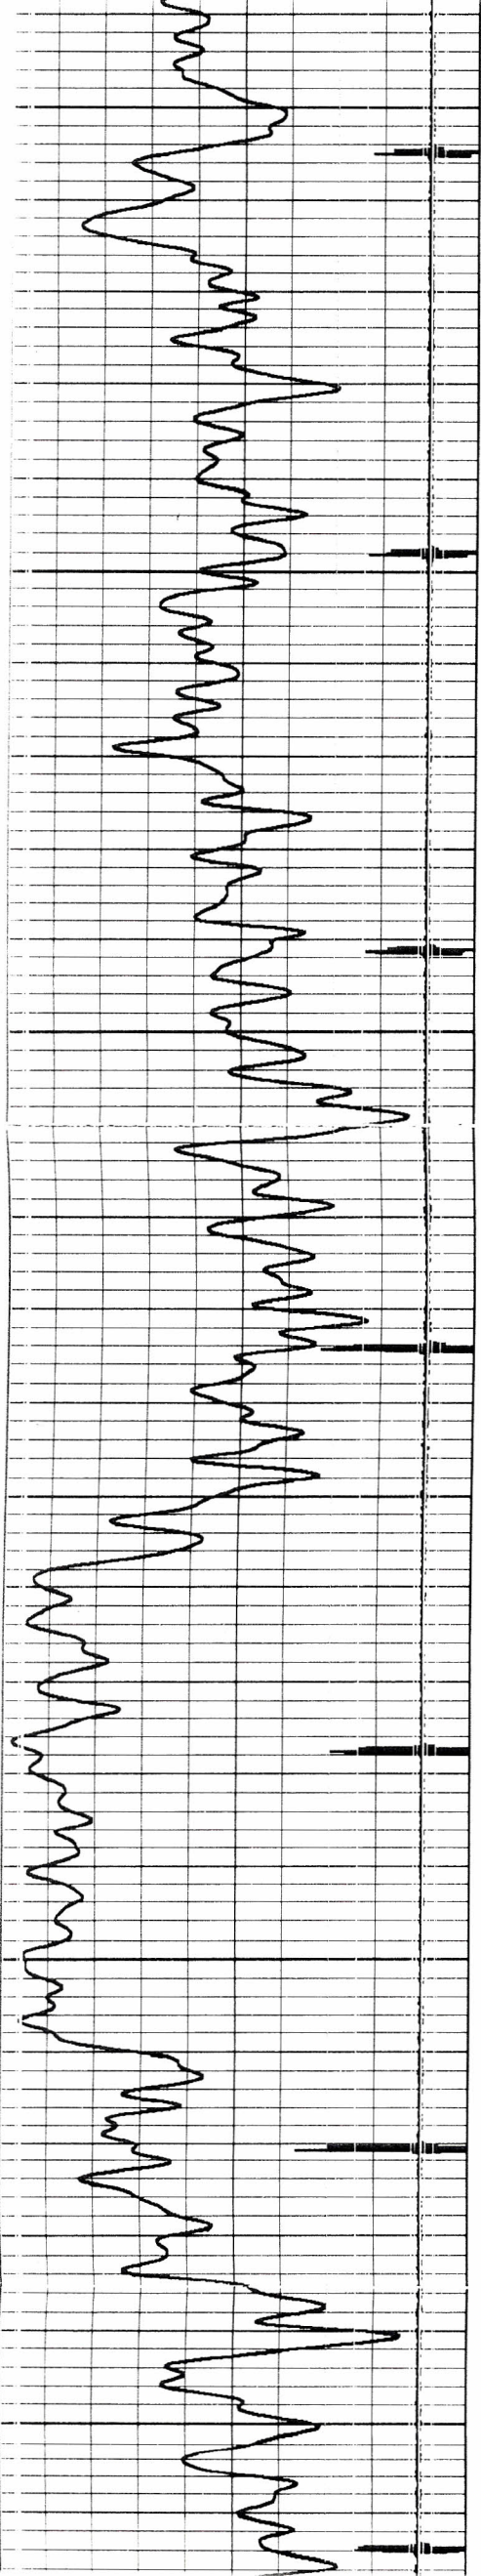

250



300


350

400



450


500

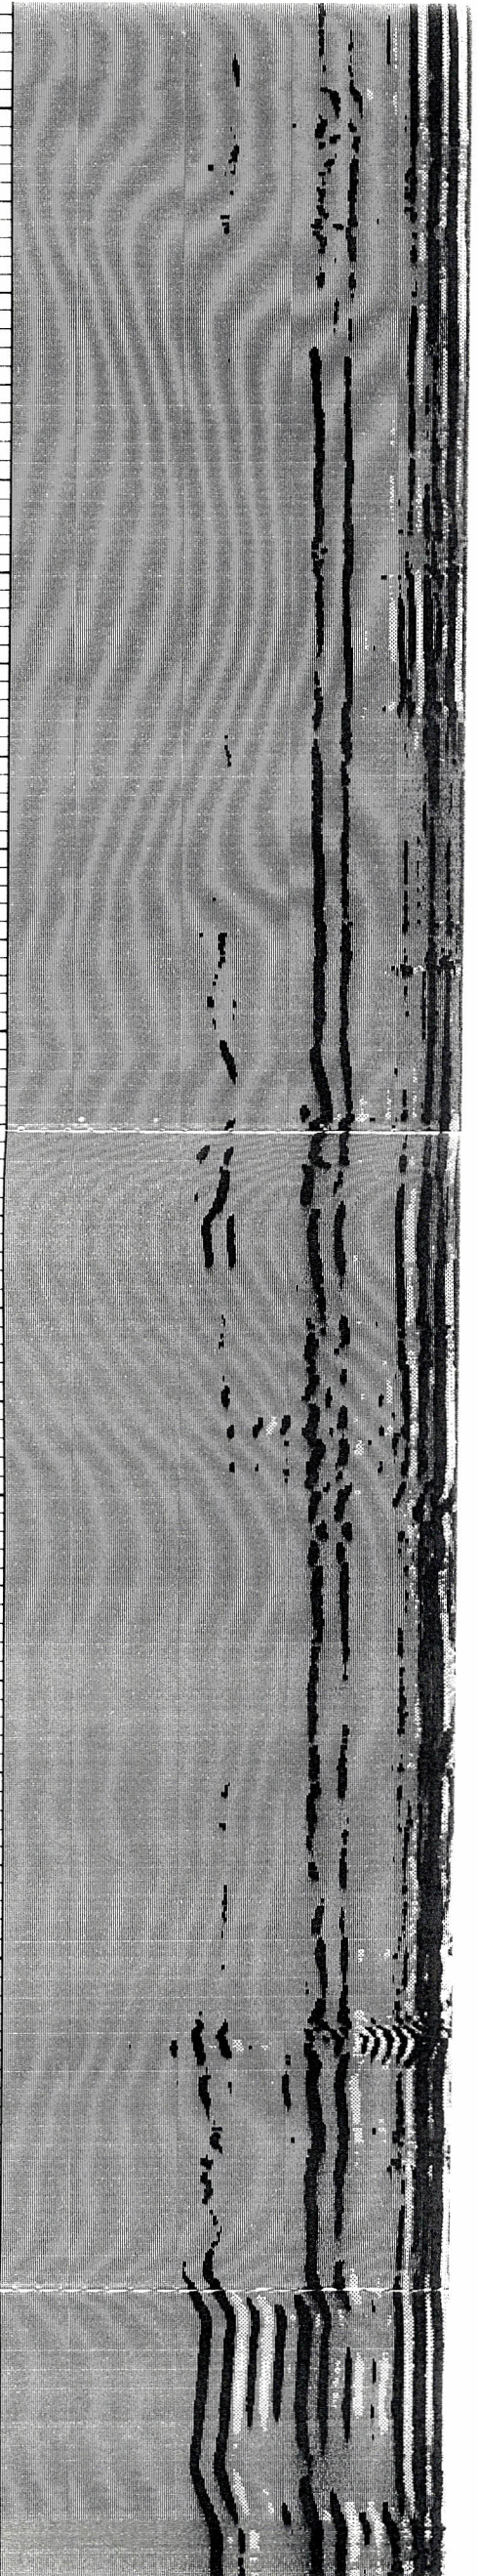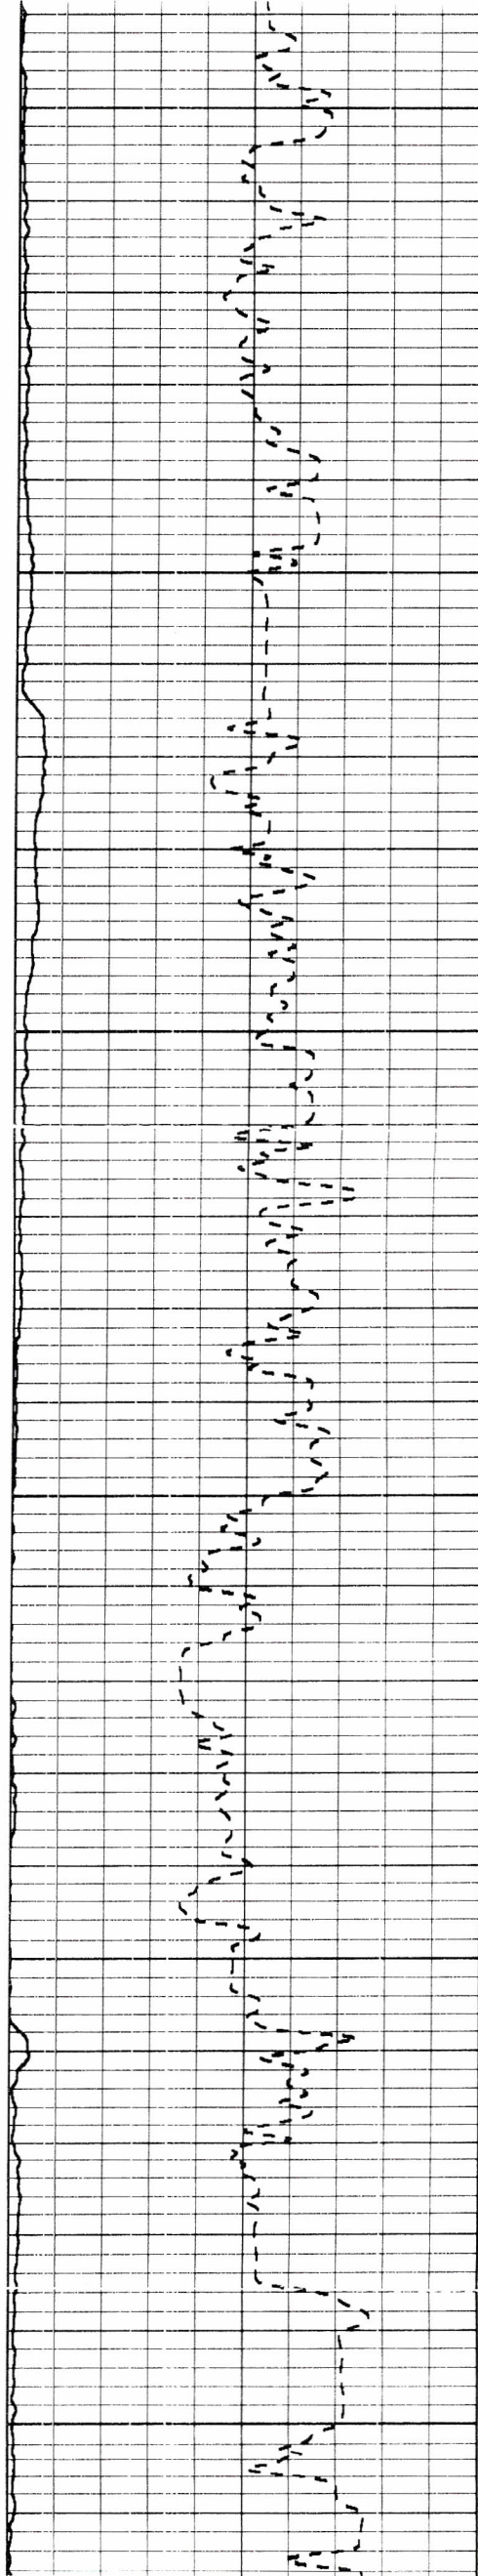

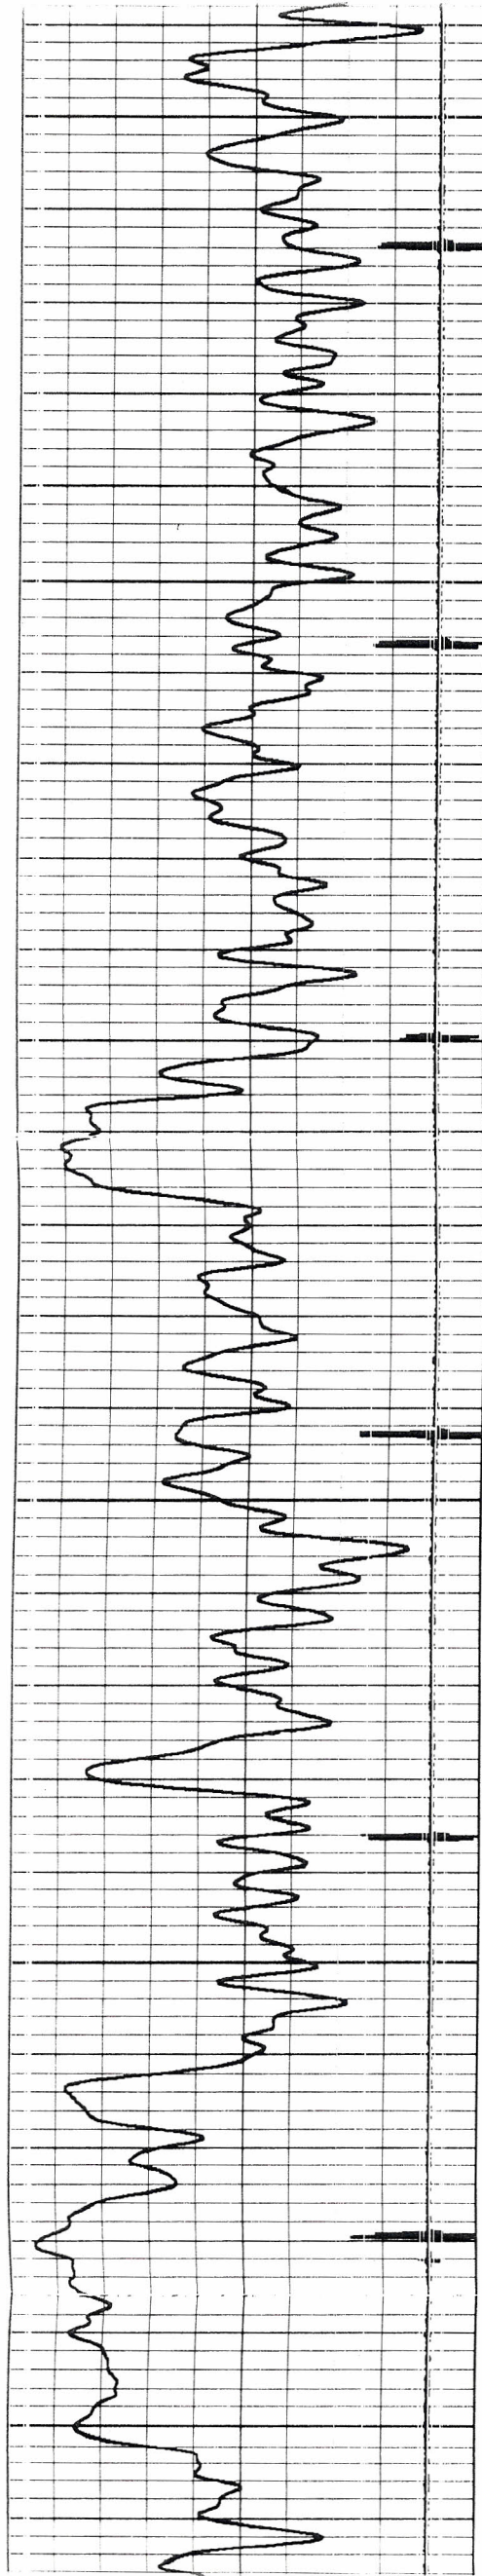

500
550
600
650
700
750

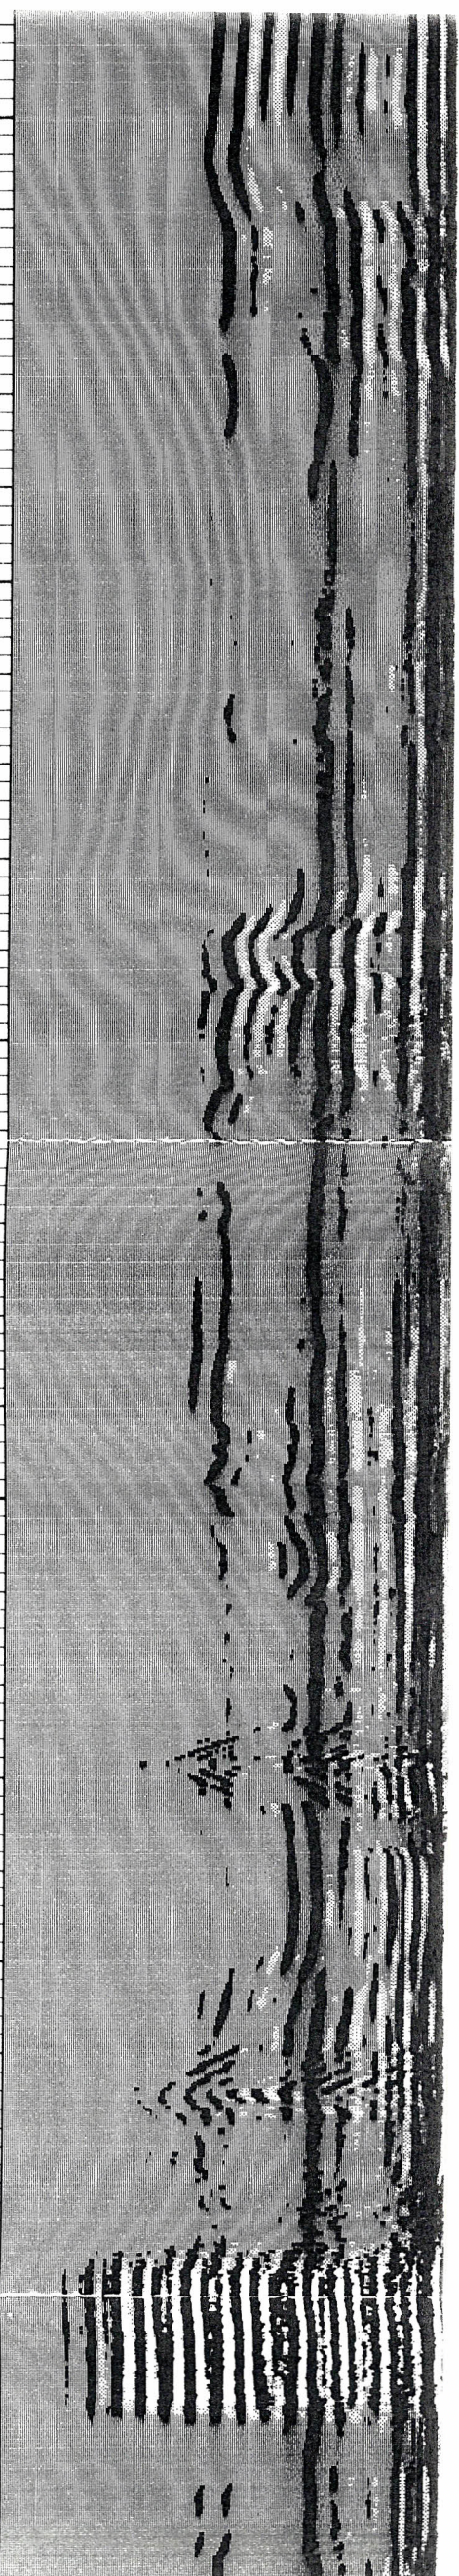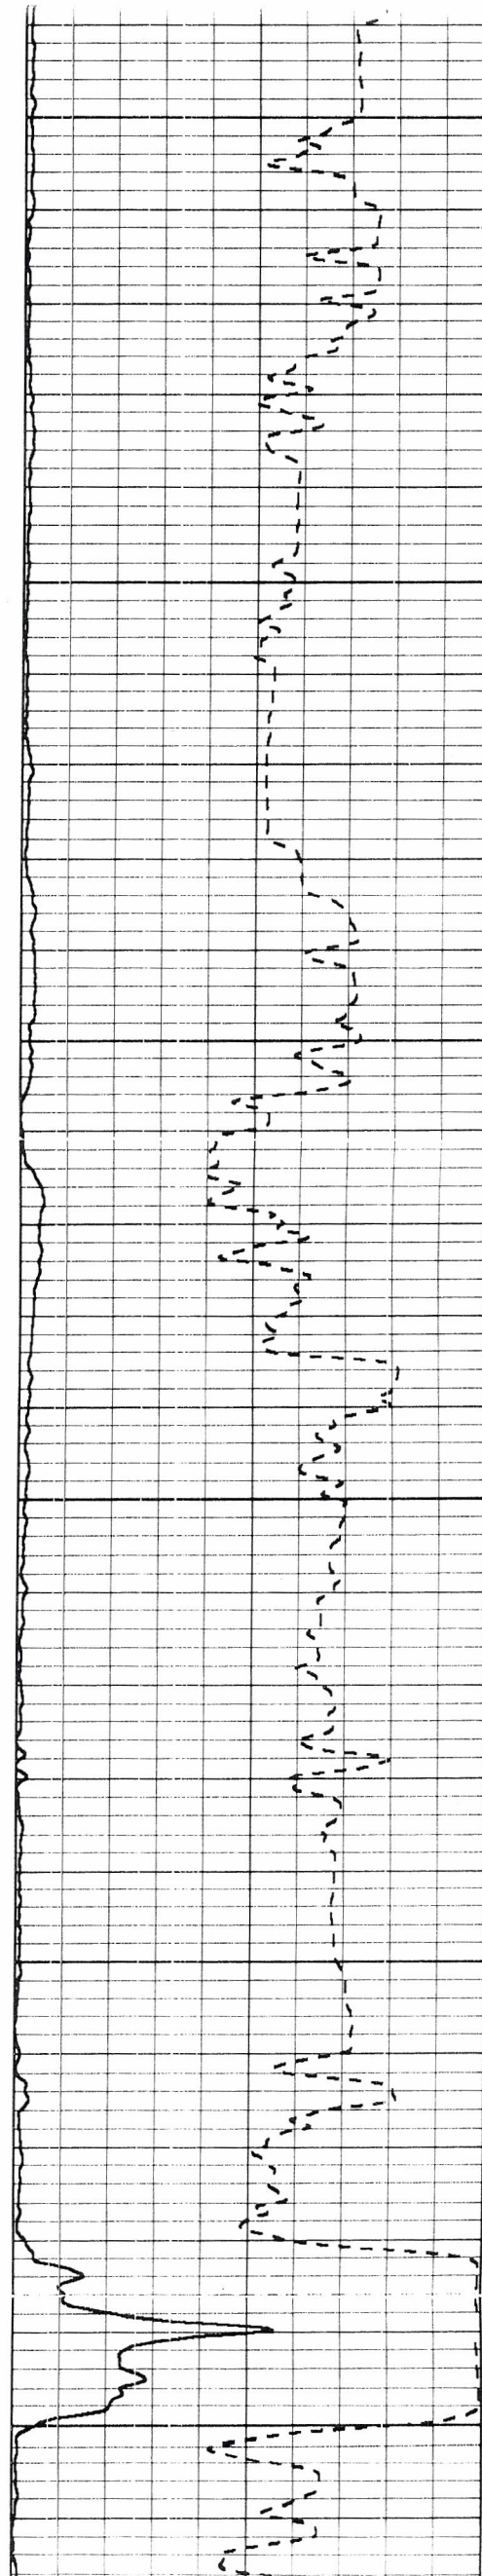

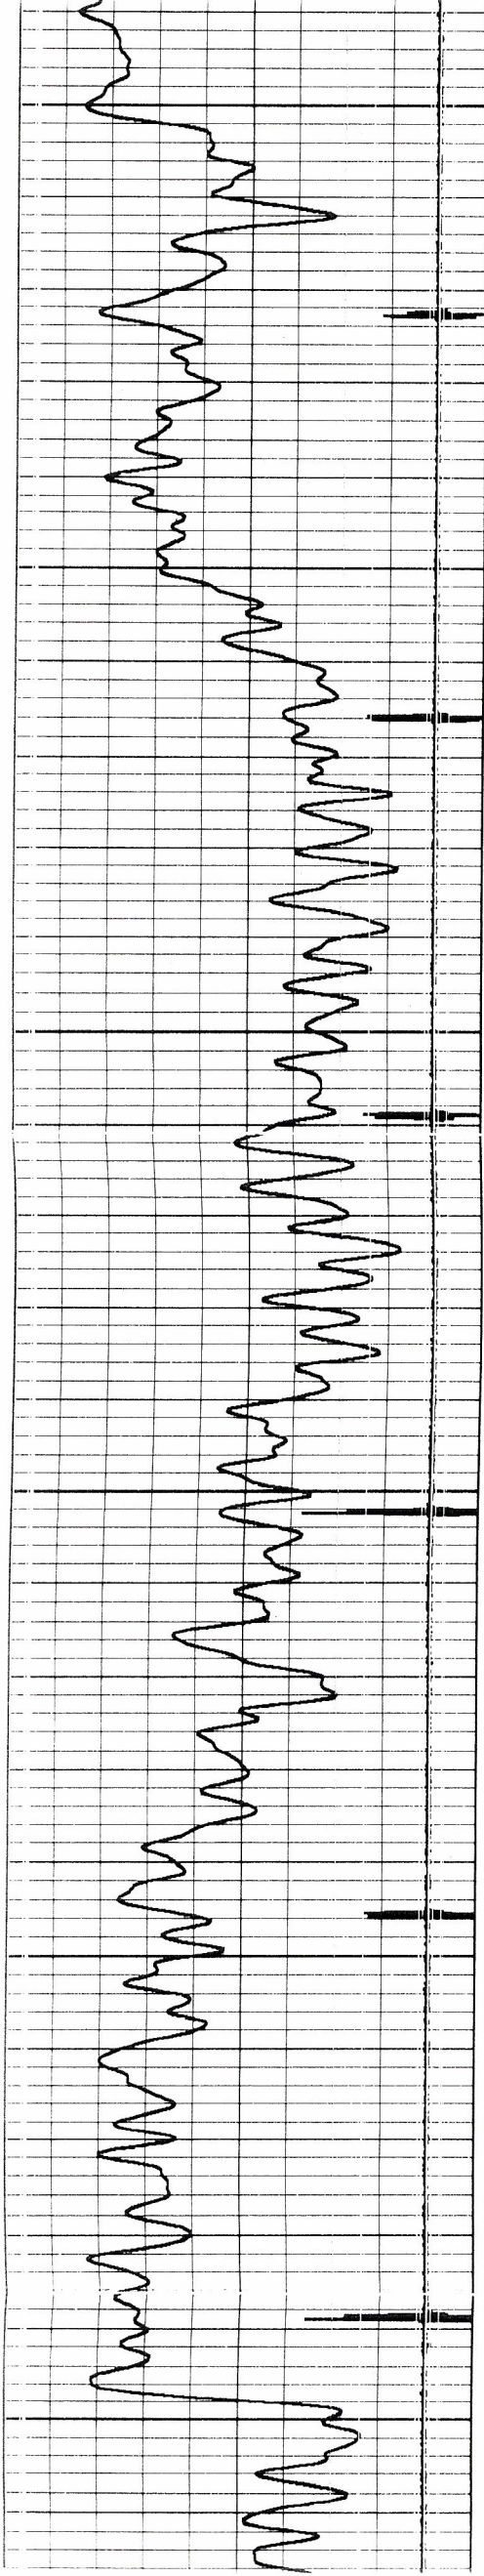

750



800


850

900

950

1000

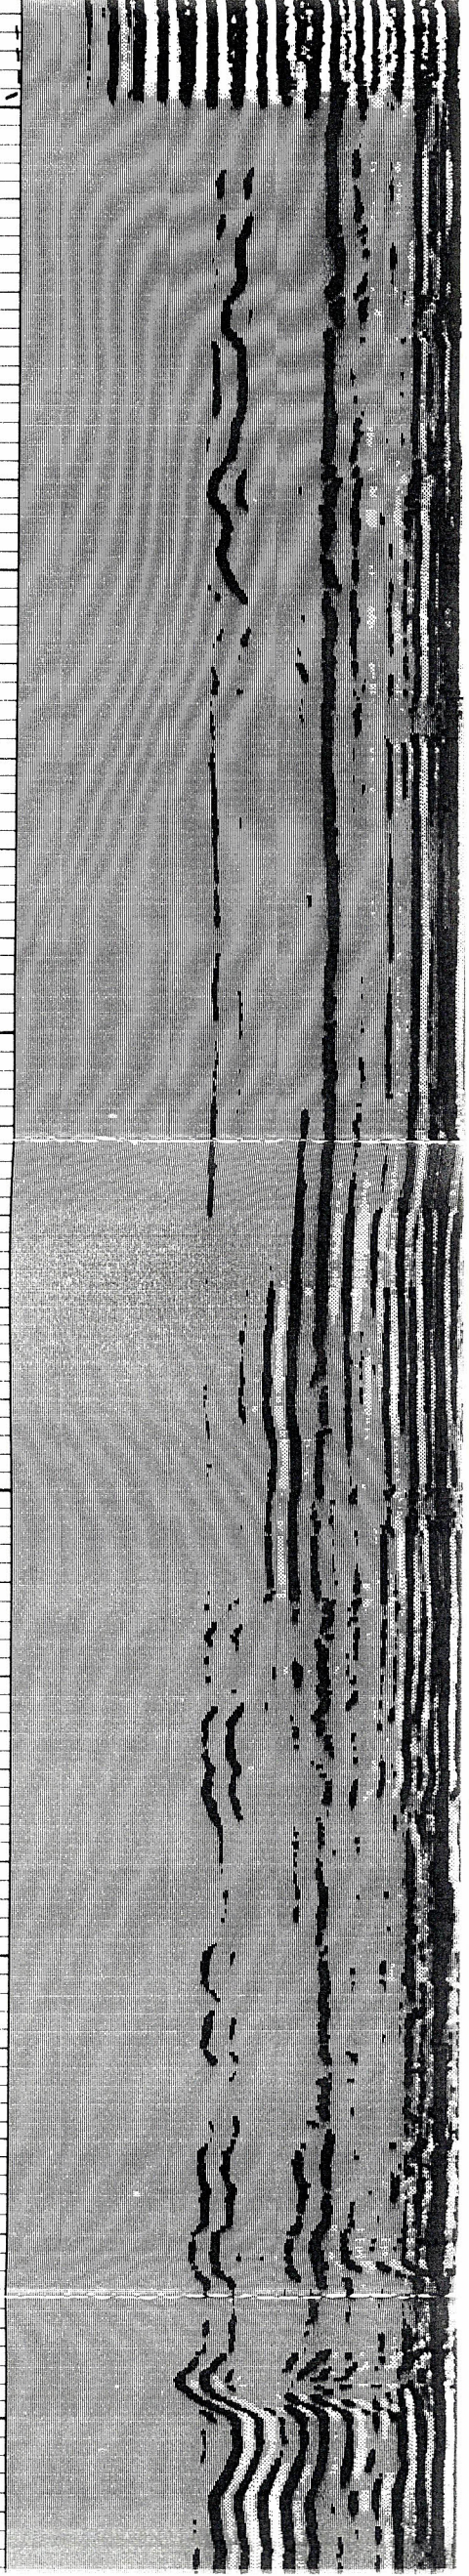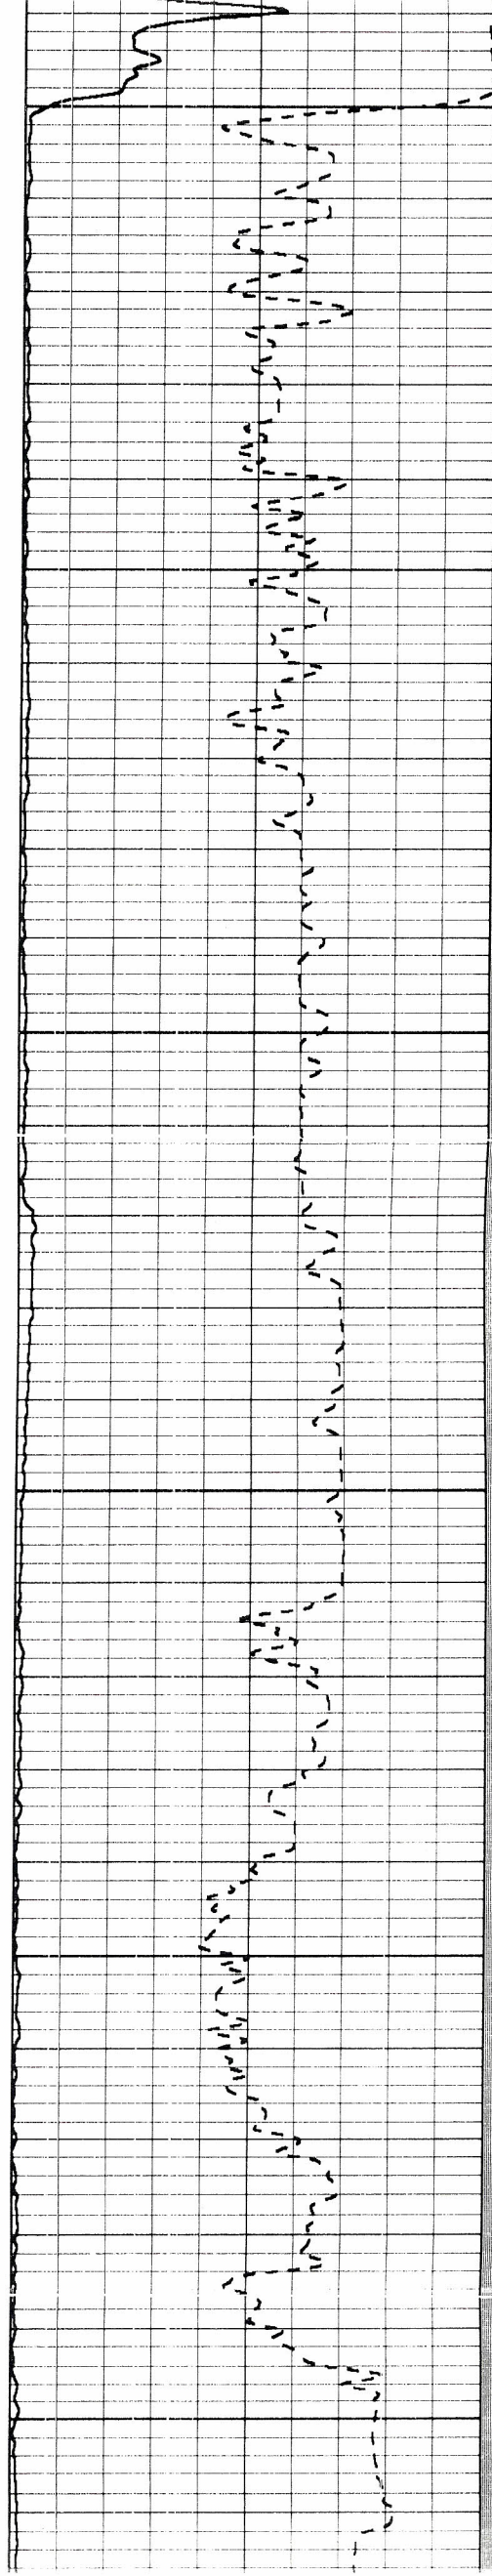

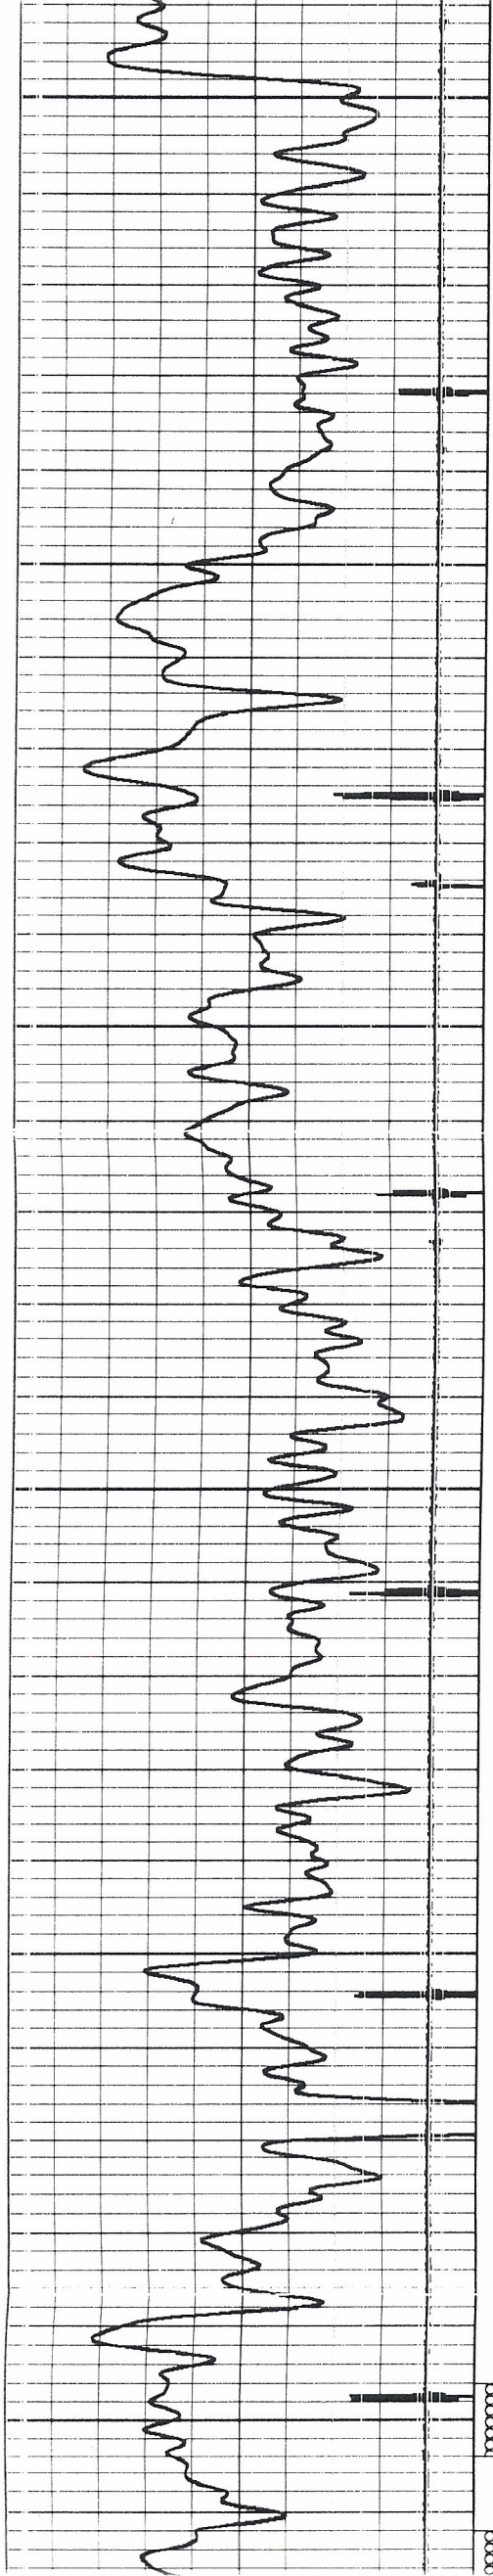

1000

1050

1100



1150



1200

1246'-1254'

1250

1262'-1272'

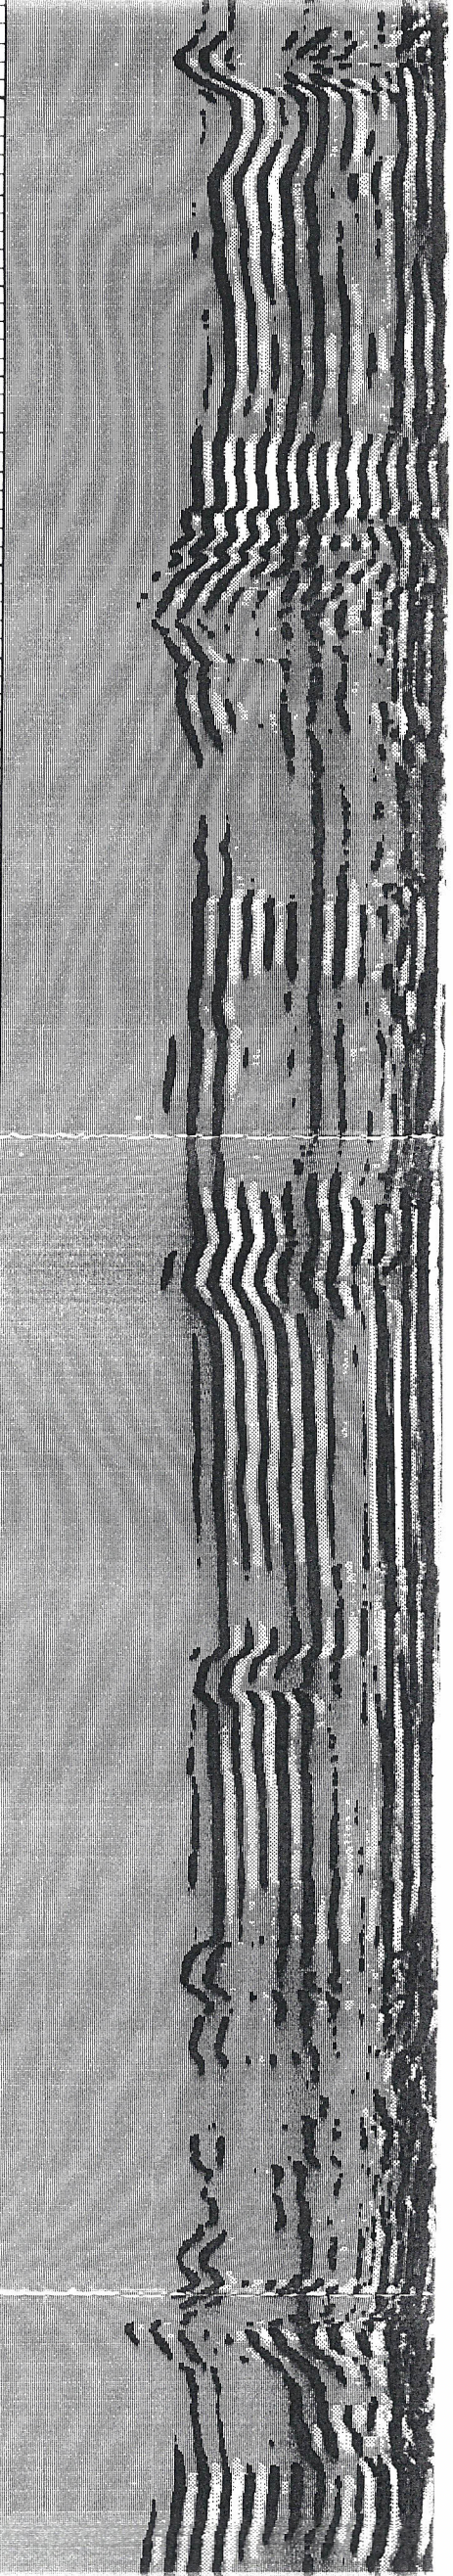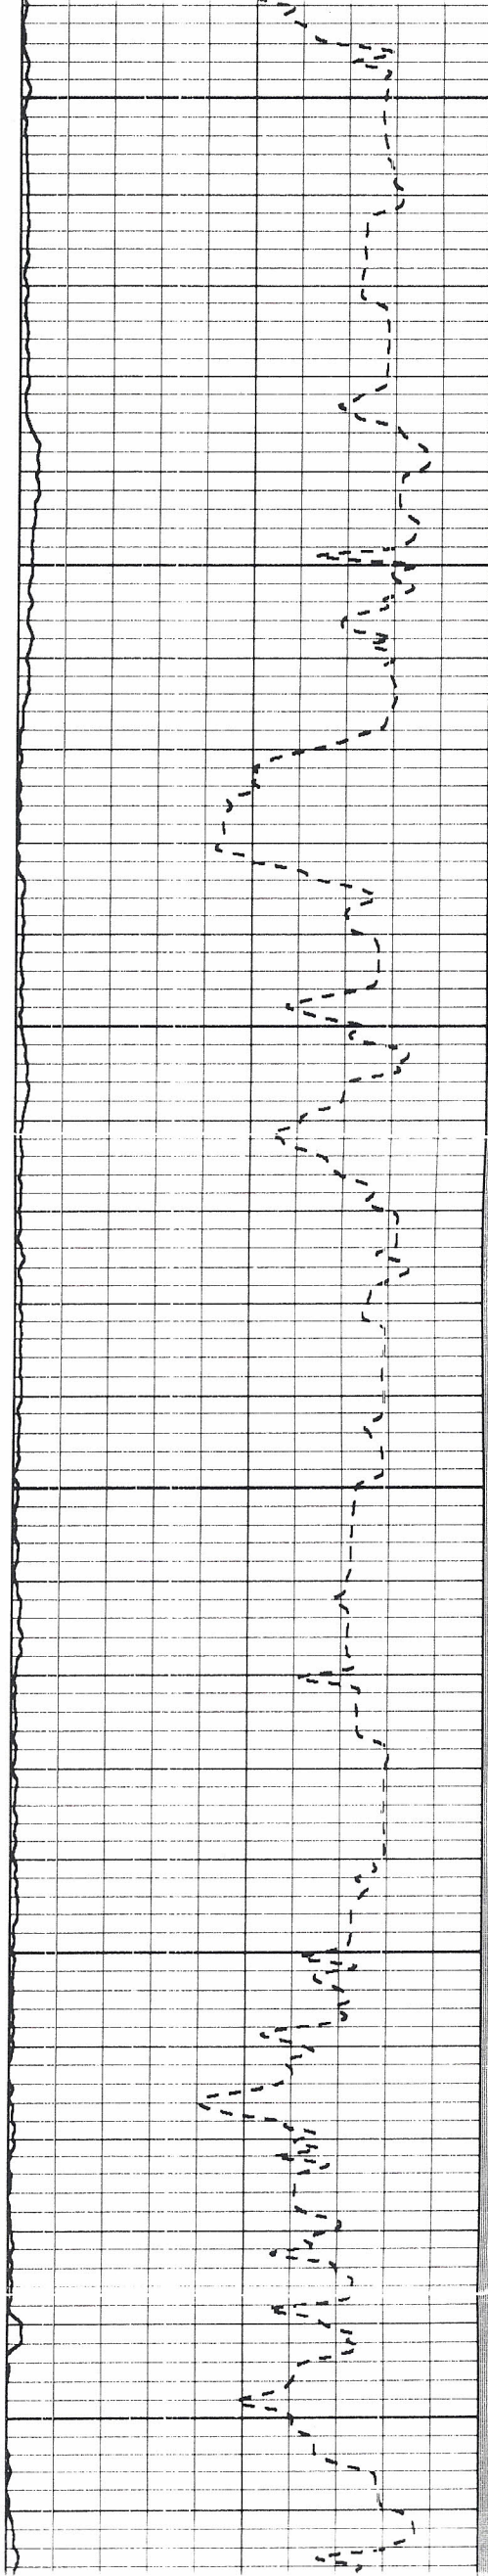

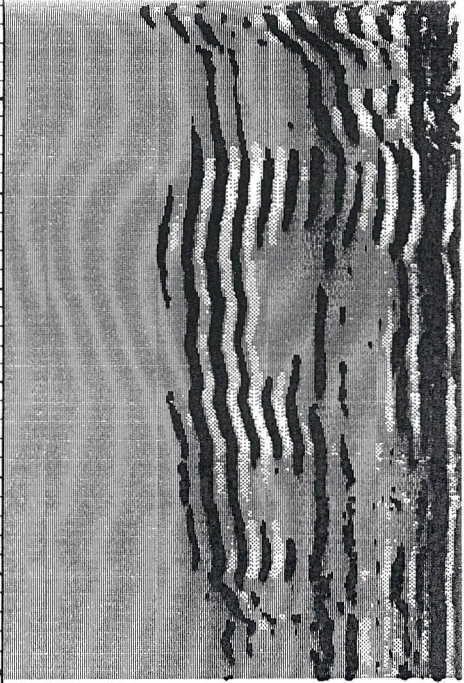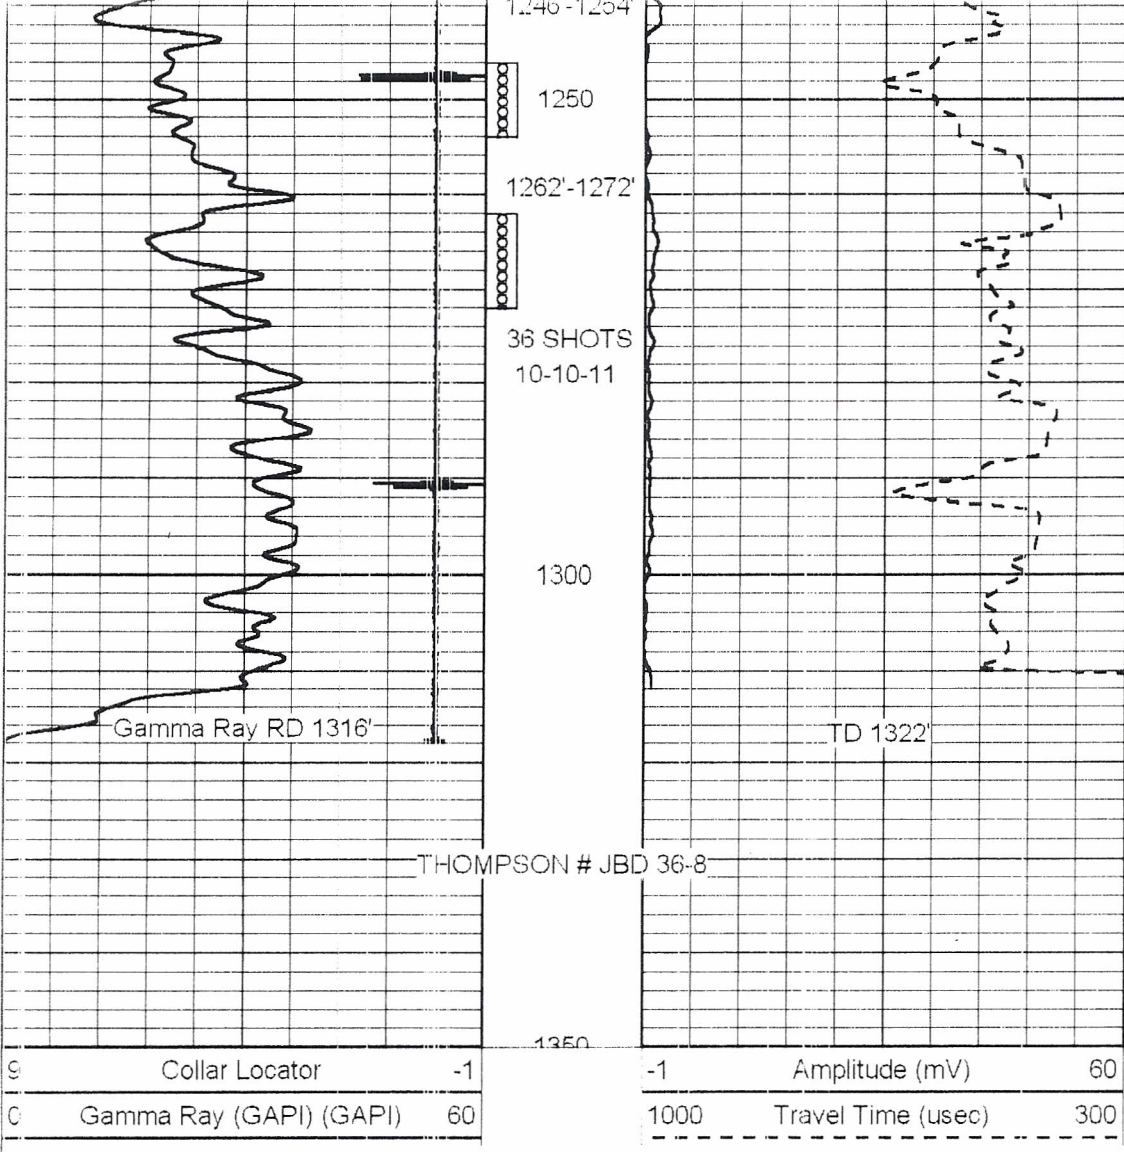

CBL RD 1310'

