


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Rooks County. Sec. 18 Twp. 6 Rge. 19 (E) (W)
Location as "NE/CNW/SW" or footage from lines SW SW SE
Lease Owner National Associated Petroleum Company
Lease Name Brobst Well No. 1
Office Address Ritz Building, Tulsa, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed March 12 1955
Application for plugging filed March 12 1955
Application for plugging approved March 12 1955
Plugging commenced March 12 1955
Plugging completed March 13 1955
Reason for abandonment of well or producing formation Dry hole

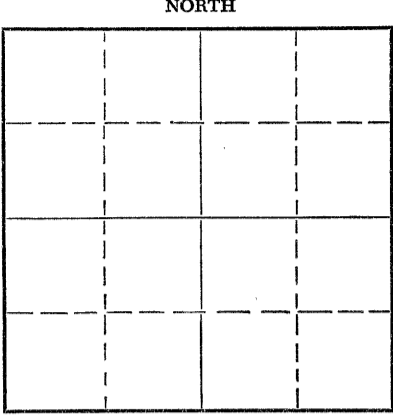

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3656' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	203	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy drilling mud to 200';
pushed cementers plug to 200'; set plug with
1/2 sack hulls and 15 sacks Portland cement;
filled hole to 40' with heavy mud; set second
plug at 40' with 1/2 sack hulls and 10 sacks
Portland cement. Hole cemented through drill
pipe. Cemented to bottom of cellar.

03-26-1955

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Nye & Snell Drilling Company
Address Drawer 30, Hays, Kansas


STATE OF Kansas, COUNTY OF Ellis, ss.
Earl Quattlebaum (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Earl Quattlebaum
Hays, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 23 day of March, 19 55

My commission expires May 9, 1957

John L. Spiess
Notary Public.



Company: National Associated Petroleum Co.
 Contractor: Nye & Snell Drilling Company
 Commenced: March 3, 1955
 Completed: March 13, 1955
 Elevation: 2165' D.F.

Farm: Brobst
 Location: SW SW SE Sec. 18-68-19W,
 Rooks County, Kansas
 Casing Record: 8 5/8" set at 203'
 Dry and abandoned.

15-163-00830-00-00

(figures below indicate bottoms)

sand	70
shells & blue shale	203
chalky shale	190
sand & blue shale	1205
shale, sand & redbed	1730
anhydrite	1765
shale & shells	1770
shale	2050
shale	2315
shale & lime	2460
shale & lime	2635
shale & lime	2711
shale & lime	2910
shale & lime	3075
shale & lime	3095
shale & lime	3105
shale & lime	3210
shale & lime	3285
shale & lime	3315
shale and lime	3360
shale and lime	3401
shale and lime	3405
shale and lime	3420
shale and lime	3485
shale and lime	3510
shale and lime	3550
shale and lime	3582
shale and lime	3610
shale and lime	3615
shale and lime	3619
weathered granite	3654
granite	3657 T.D.

I hereby certify that this is a true and correct log of the above described well as shown by the drilling reports.

NYE & SNELL DRILLING COMPANY

BY Carl Justhauer

STATE OF KANSAS)
) SS
 ELLIS COUNTY)

Subscribed and sworn to before me, a Notary Public, in and for said County and State this 18 day of March, 1955.

John L. Spies
 Notary Public

My Commission Expires May 9, 1957.

PLUGGING
 FILE SEC 18-6-19W
 PAGE 105 OF 22