

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGIN
130 SOUTH MARKET, SUITE 207
WICHITA, KANSAS 6720

API Well Number: 15-119-21012-00-00
Spot: E2W2 Sec/Twnshp/Rge: 18-34S-28W
2640 feet from S Section Line, 1980 feet from W Section Line
Lease Name: FELDMAN Well #: 1-18
County: MEADE Total Vertical Depth: 6335 feet

Operator License No.: 30129
Op Name: EAGLE CREEK CORPORATION
Address: 150 N. MAIN, STE 905
WICHITA, KS 67202

PROD Size: 4.5 feet: 5965 WITH 150 SX CMT
SURF Size: 8.625 feet: 1560 WITH 500 SX CMT

205-89

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 03/11/2005 9:00 AM

Plug Co. License No.: 32833 Plug Co. Name: SARGENT LILLARD CASING PULLING, INC.

Proposal Rcvd. from: KIRBY LILLARD Company: SARGENT LILLARD CASING PUL Phone: (580) 254-1881

Proposed Pumping Method: PUMP 200# HULLS WITH 25 SX CMT & 15 SX CMT. PLUG AT 1600' WITH 50 SX CMT. PLUG AT 500' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: JIM HOLLAND
Date/Time Plugging Completed: 03/11/2005 12:30 PM

Witness Type: COMPLETE (100%)
KCC Agent: STEVE DURRANT

Actual Plugging Report:

1ST PLUG PUMP 200# HULLS & 25 SX CMT. DISPLACE TO 5800' WITH 15 SX GEL.
2ND PLUG LOAD HOLE WITH MUD. PUMP 50 SX CMT AT 1600'. 3RD PLUG LOAD
HOLE WITH MUD. PUMP 50 SX CMT AT 500'. 4TH PLUG LOAD HOLE WITH MUD.
PUMP 10 SX CMT AT 40-0'.

Perfs:


Top	Bot	Thru	Comments
5896	5899		

RECEIVED
KANSAS CORPORATION COMMISSION
MAR 21 2005
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED COMMON CEMENT BY SARGENT & LILLARD. RECOVERED 3220' OF 4 1/2" CASING.

Plugged through: CSG *EP 37.0993 N*
100.40942 W

District: 01

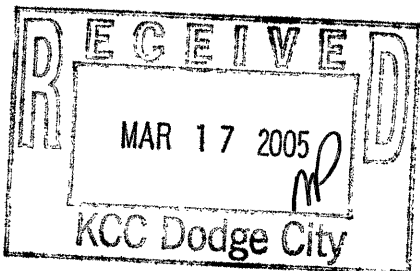

Signed Steve Durrant
(TECHNICIAN)

INVOICED
DATE 3-22-05
INV. NO. 2005061309