



Green Country Wireline

GAMMA RAY
CEMENT BOND LOG
CCL / VDL

Company		JONES AND BUCK	
Well		BUCK # 18	
Field		ELGIN	
County		CHAUTAUQUA	
State		KANSAS	
Location:		API #: 15-019-27038	
Permanent Datum		GL	
Log Measured From		GL	
Drilling Measured From		GL	
SEC 27 TWP 34S RGE 10E		SW NW SW SW 730' FSL & 5115 FEL	
Elevation		1004'	
Other Services			
Run Number		8-1-11	
Depth Driller		ONE	
Depth Logger		1525'	
Bottom Logged Interval		1524'	
Top Log Interval		1523'	
Open Hole Size		SURFACE	
Type Fluid		WATER	
Density / Viscosity		---	
Max. Recorded Temp.		---	
Estimated Cement Top		SURFACE	
Time Well Ready		---	
Time Logger on Bottom		---	
Equipment Number		THREE	
Location		DEWEY	
Recorded By		HERREN	
Witnessed By		MR BUCK	
Borehole Record		Tubing Record	
Run Number		Bit	
From		To	
Size		Weight	
From		To	
Casing Record		Size	
Surface String		8-5/8"	
Prot. String		Wgt/Ft	
Production String		4.5"	
Liner		Top	
		Bottom	
		40	
		SURFACE	
		TD	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.




Comments



GAMMA RAY CEMENT BOND

Database File: jbed.db
Dataset Pathname: jbed/run1/pass1
Presentation Format: cbl_dr
Dataset Creation: Mon Aug 01 07:47:15 2011 by Log Std Casedhole 09061
Charted by: Depth in Feet scaled 1:240




Collar Locator	-1	-1	Amplitude (mV)	90	200	Variable Density	1200
Gamma Ray (GAPI) (GAPI)	60	1000	Travel Time (usec)	250			




9	Collar Locator	-1
0	Gamma Ray (GAPI) (GAPI)	60

-1	Amplitude (mV)	90
1000	Travel Time (usec)	250

200	Variable Density	120
-----	------------------	-----

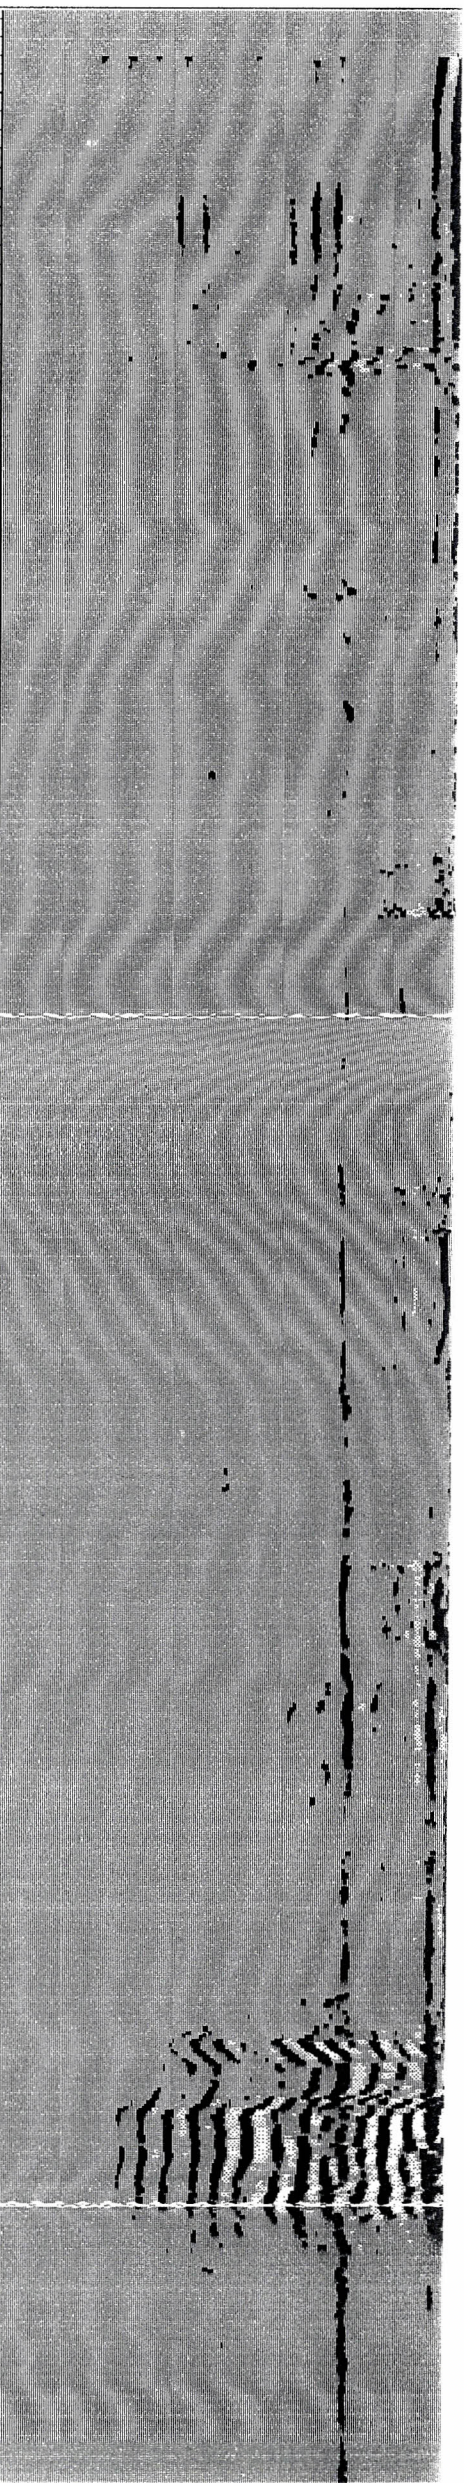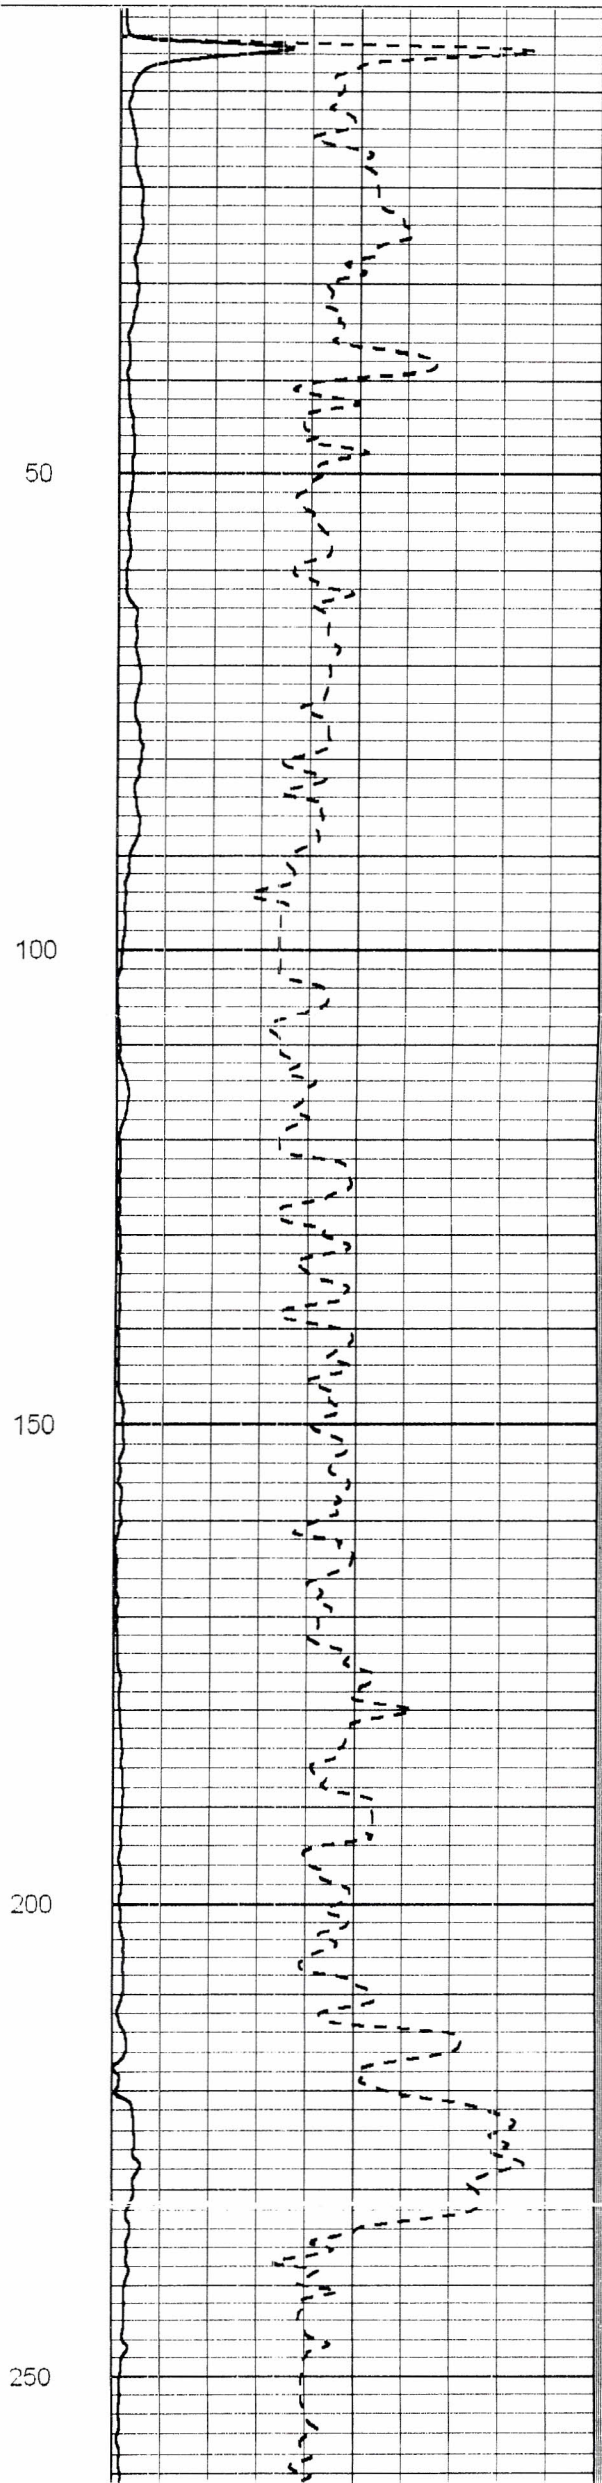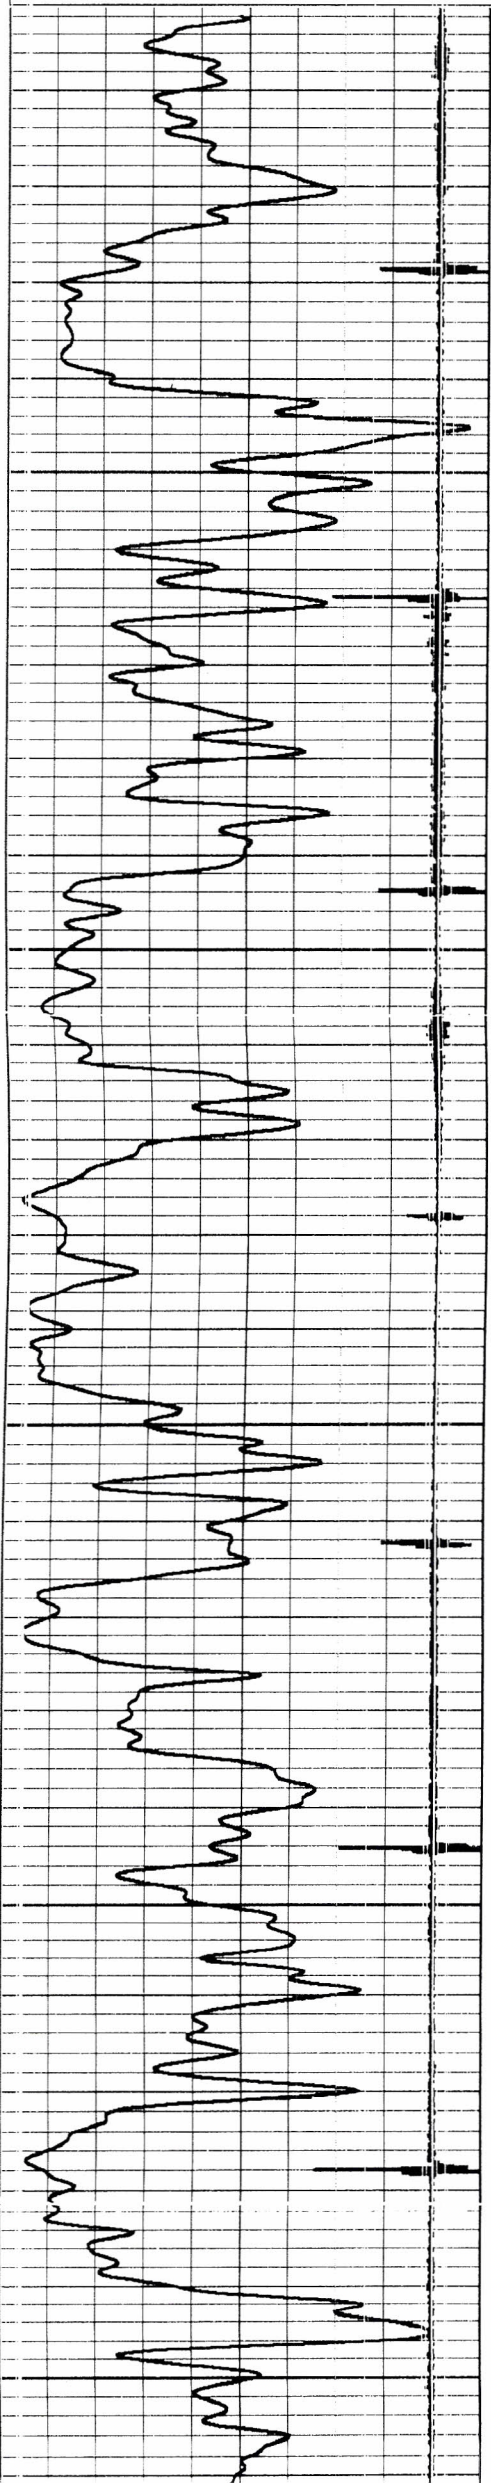

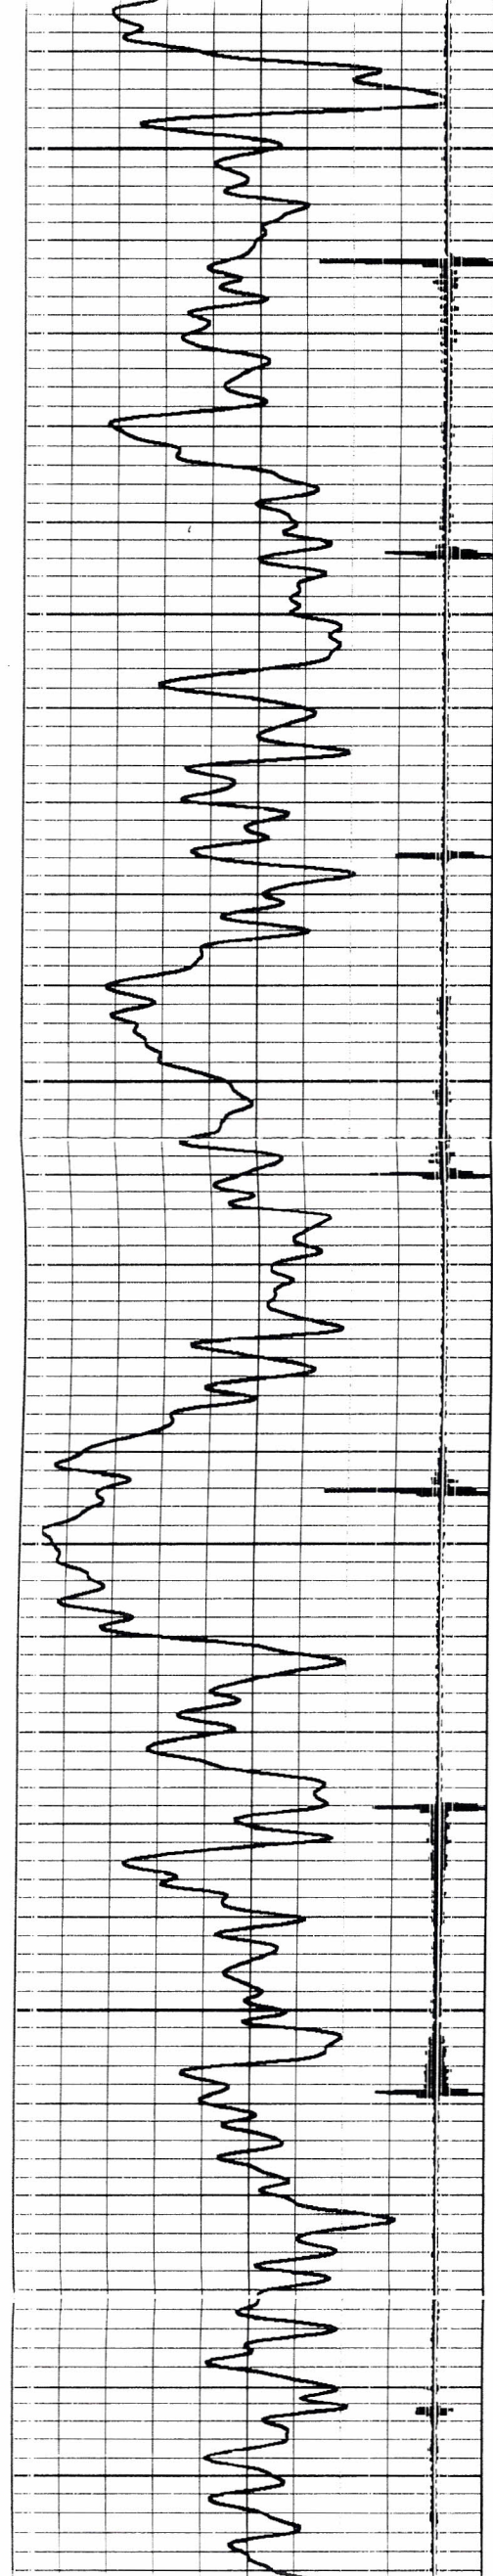

250



300


350

400

450

500

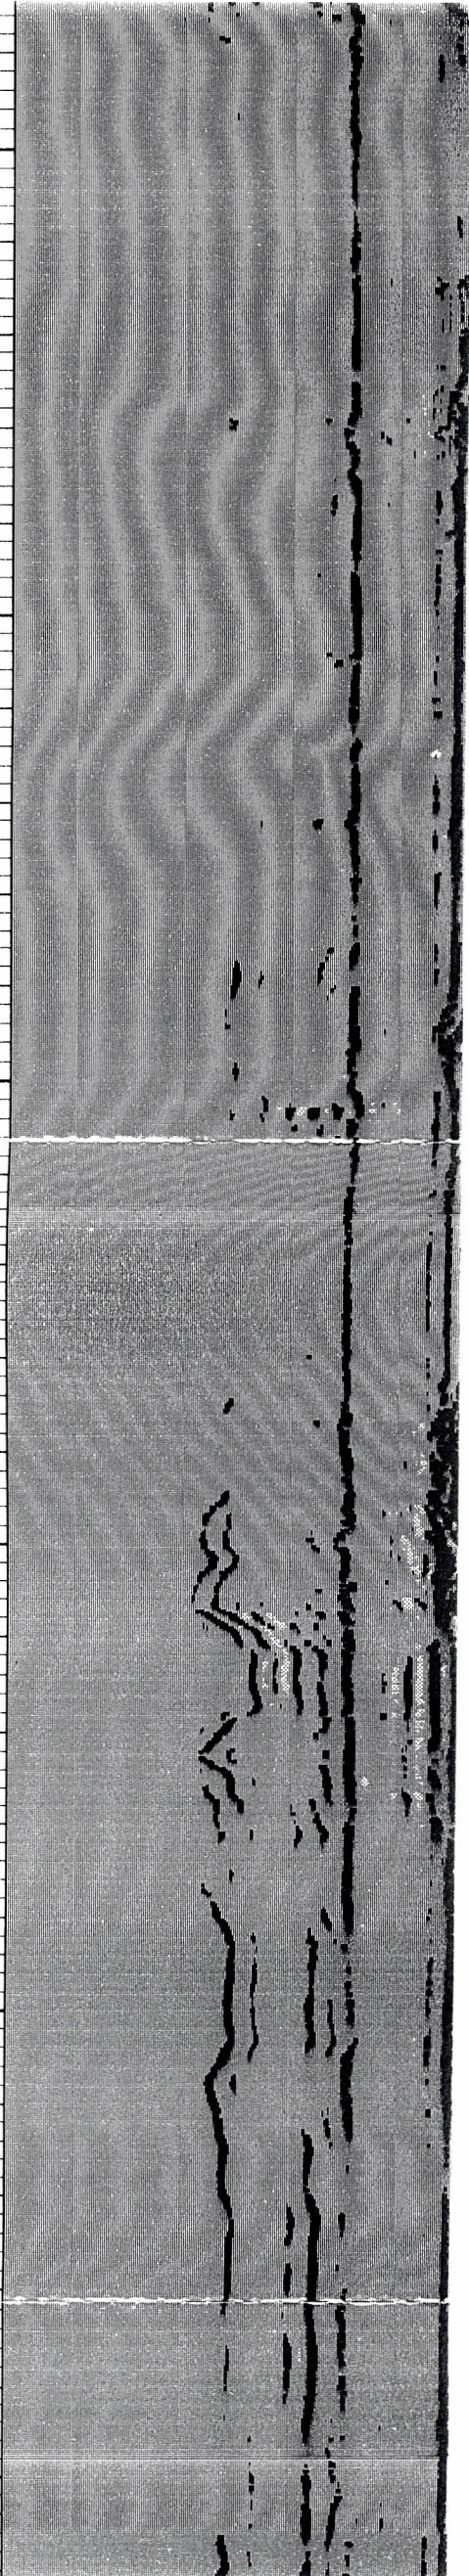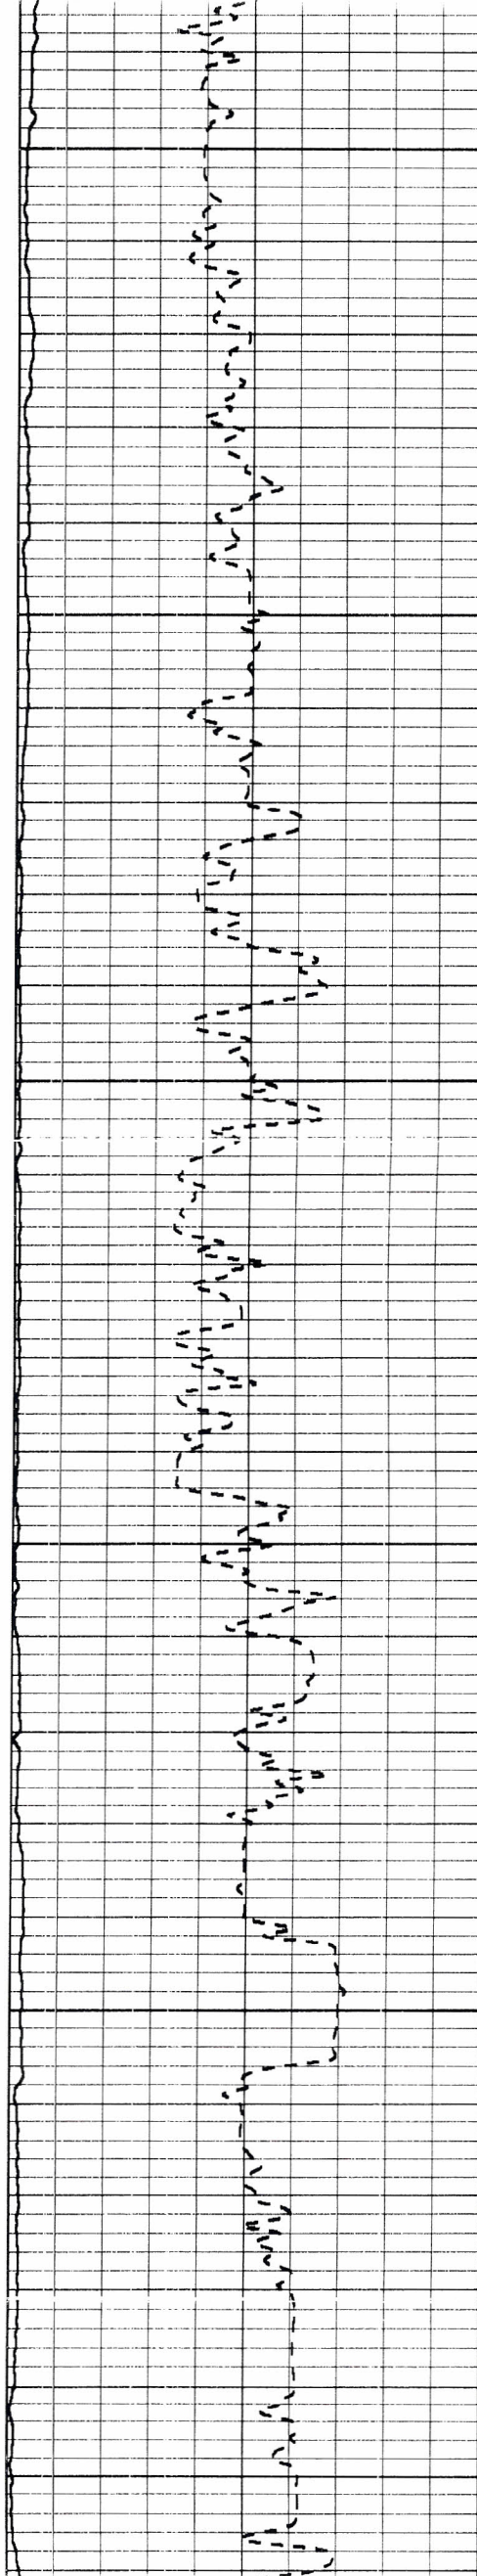

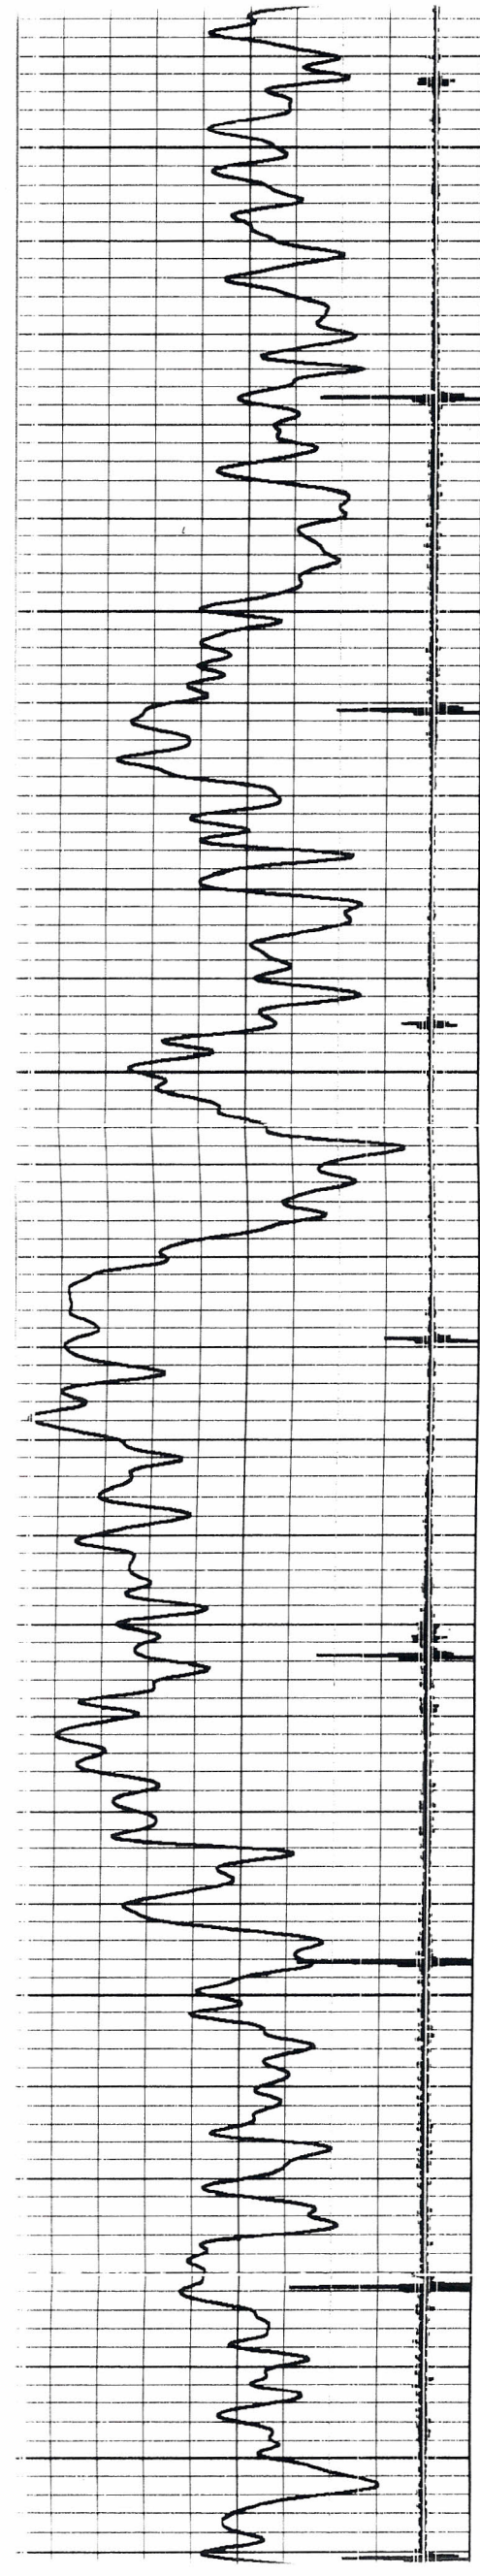

500



550


600

650



700


750

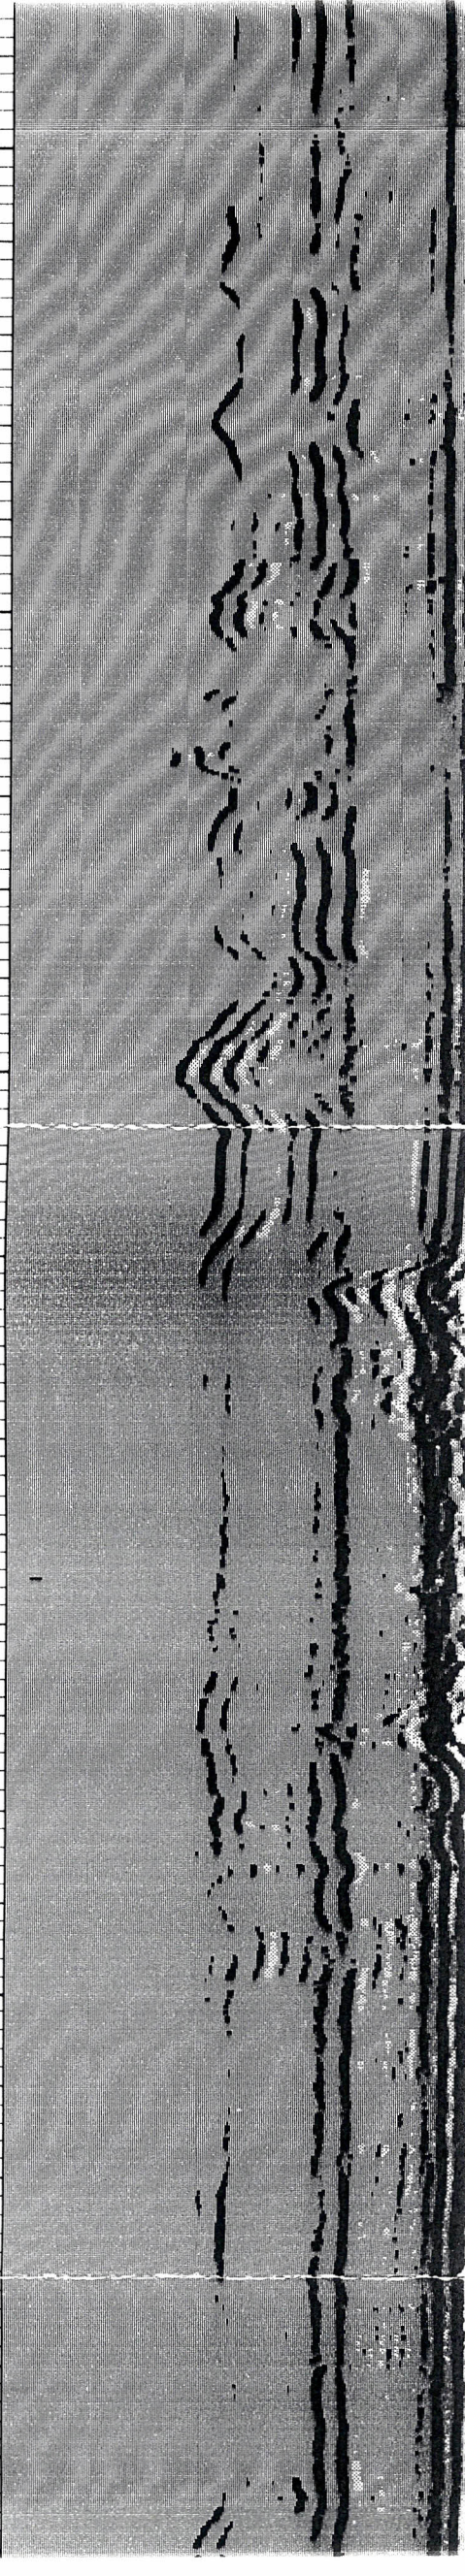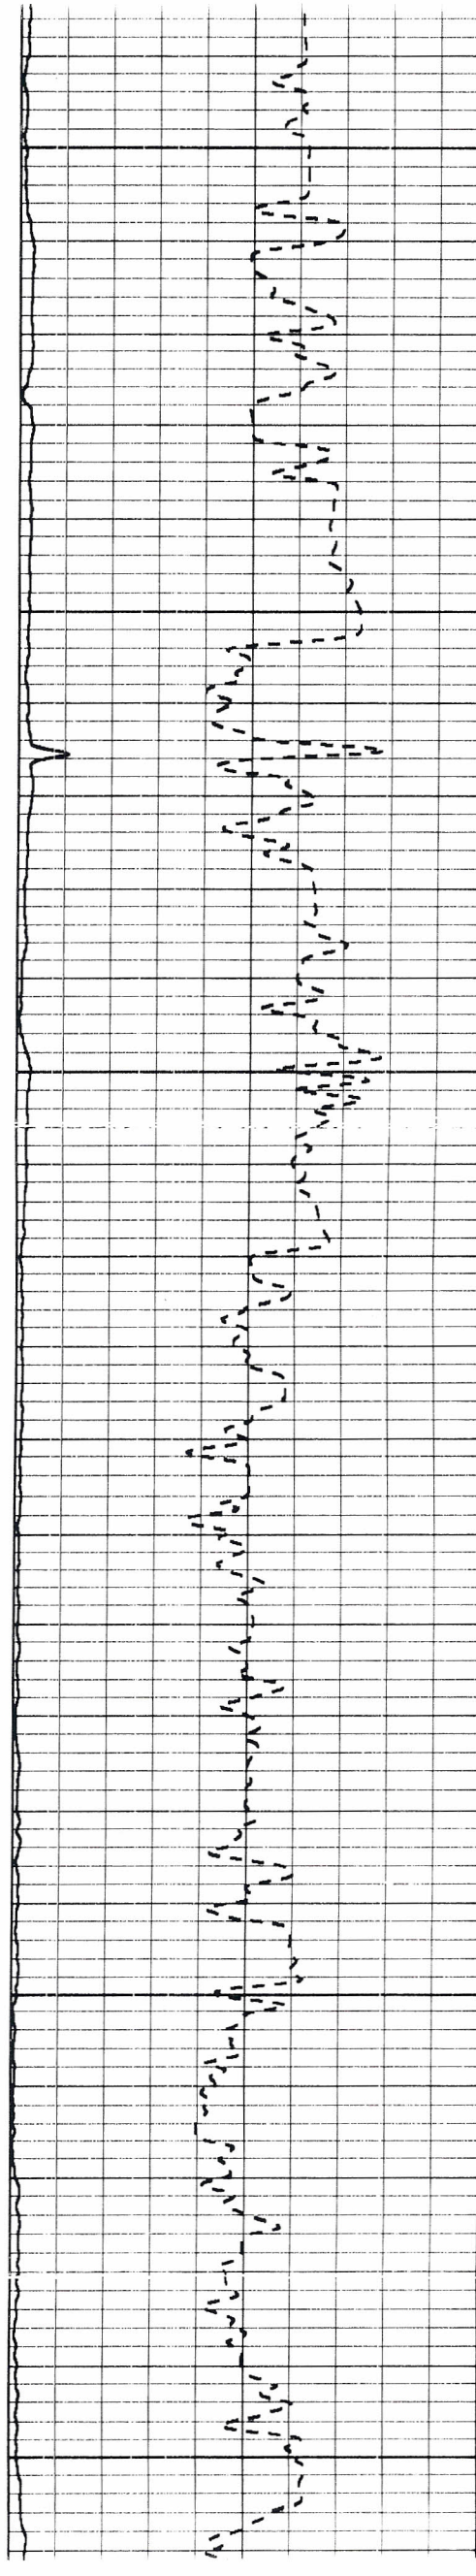

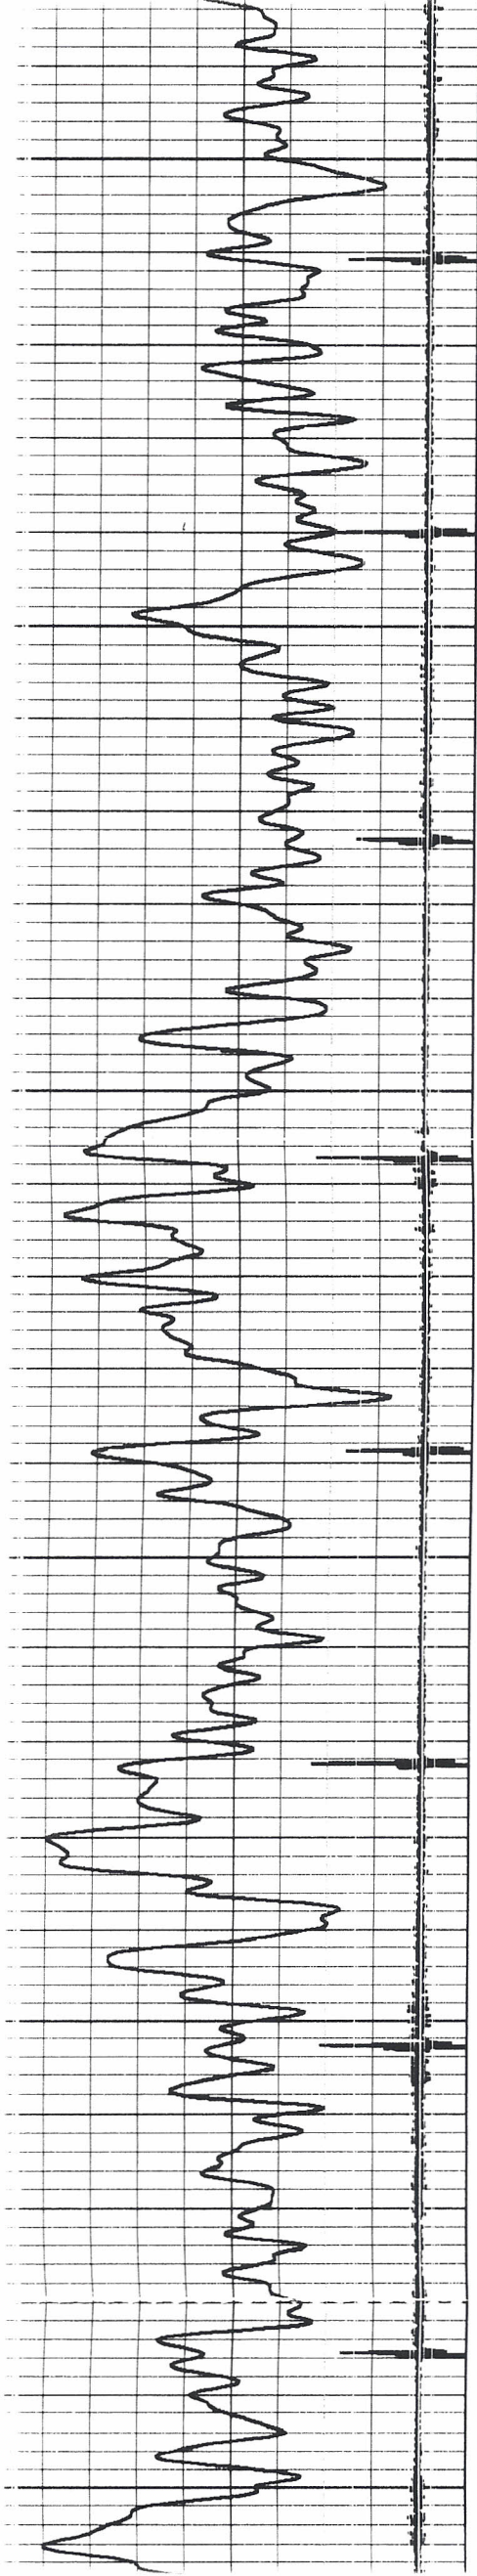

750
800
850
900
950
1000

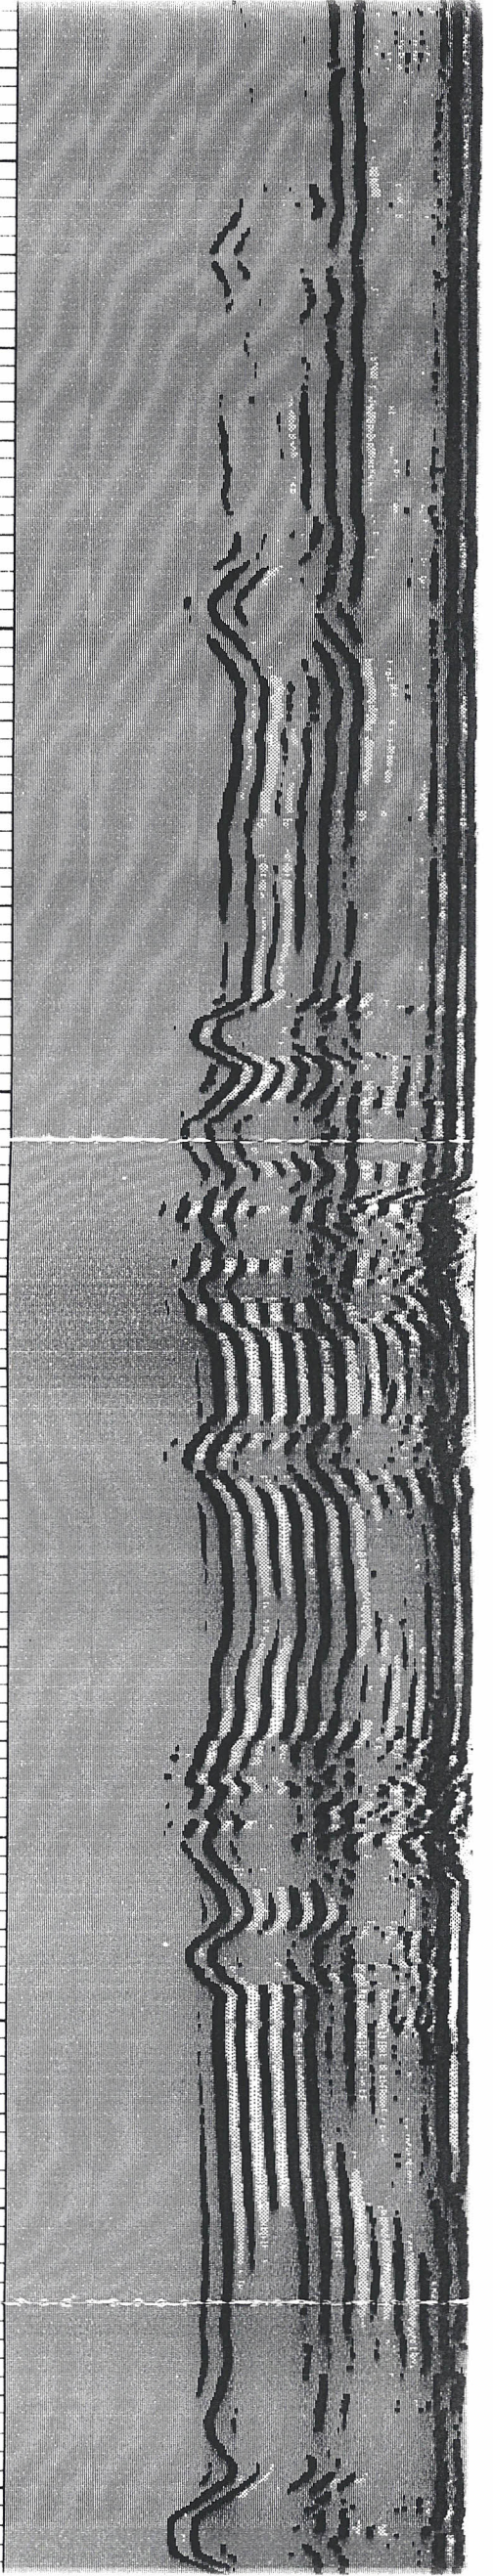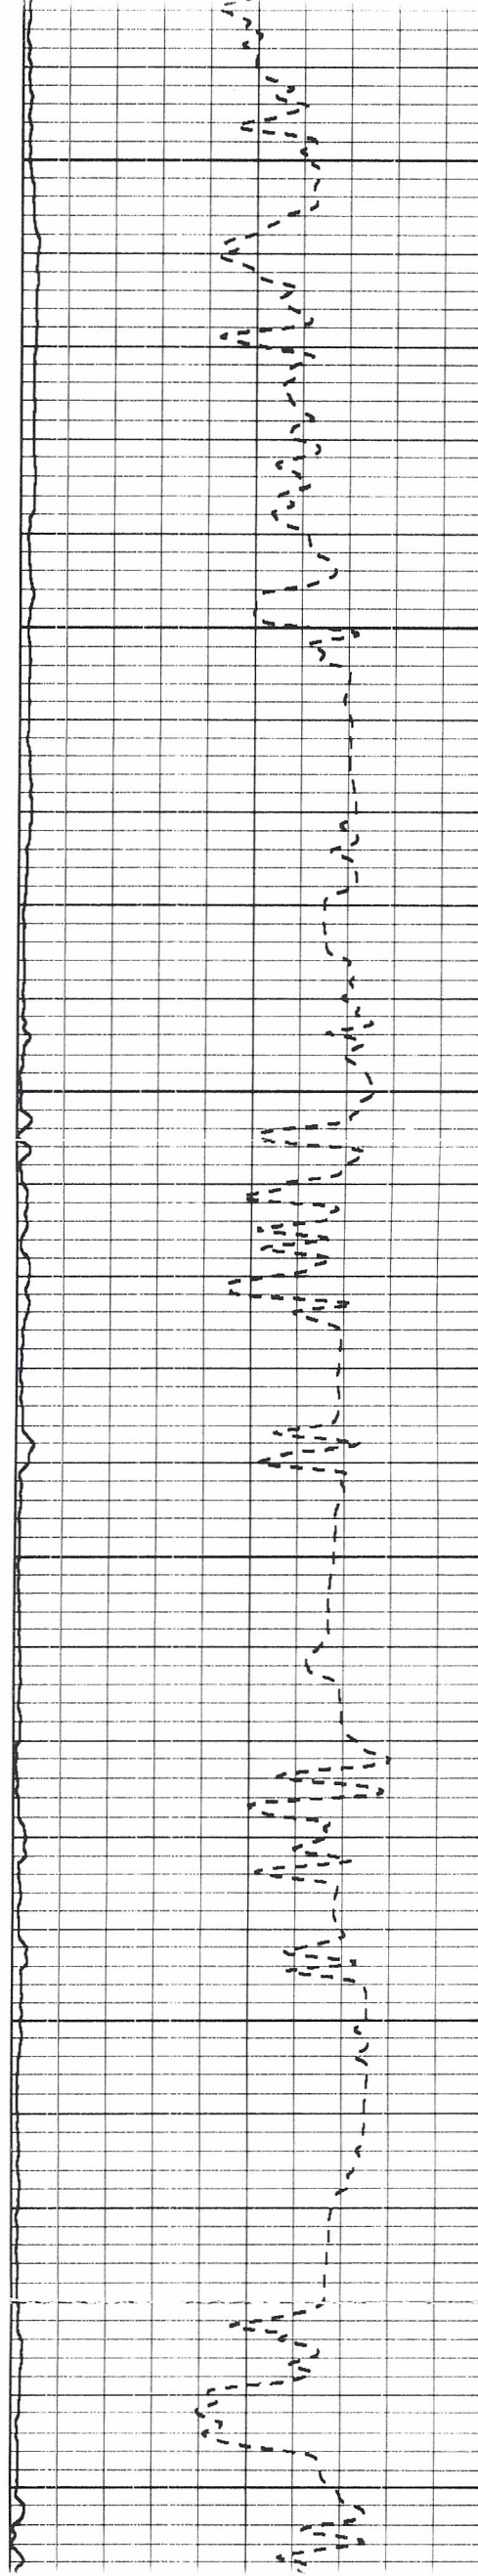

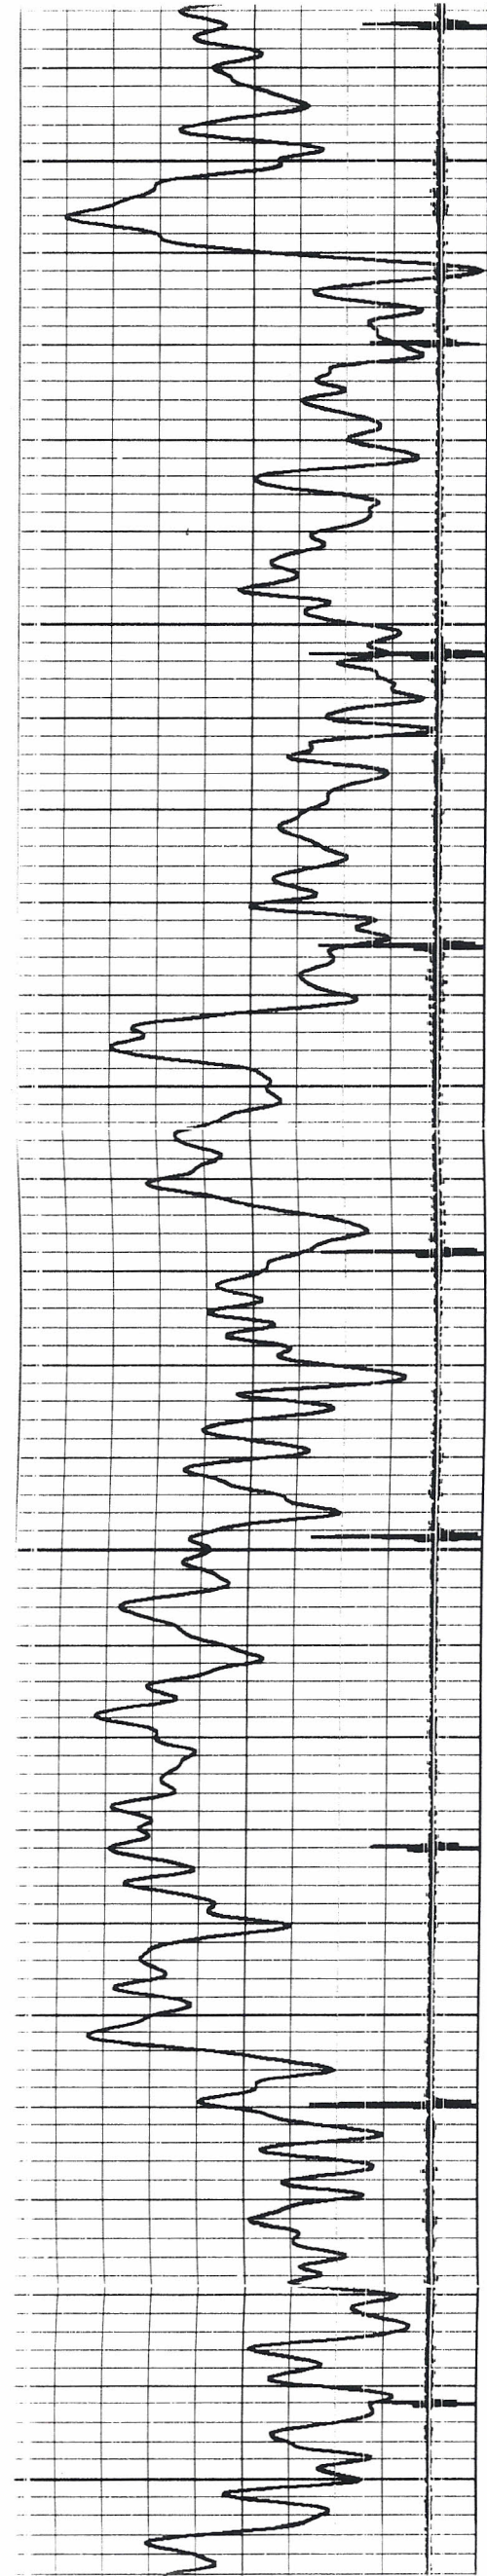

1000



1050


1100

1150

1200

1250

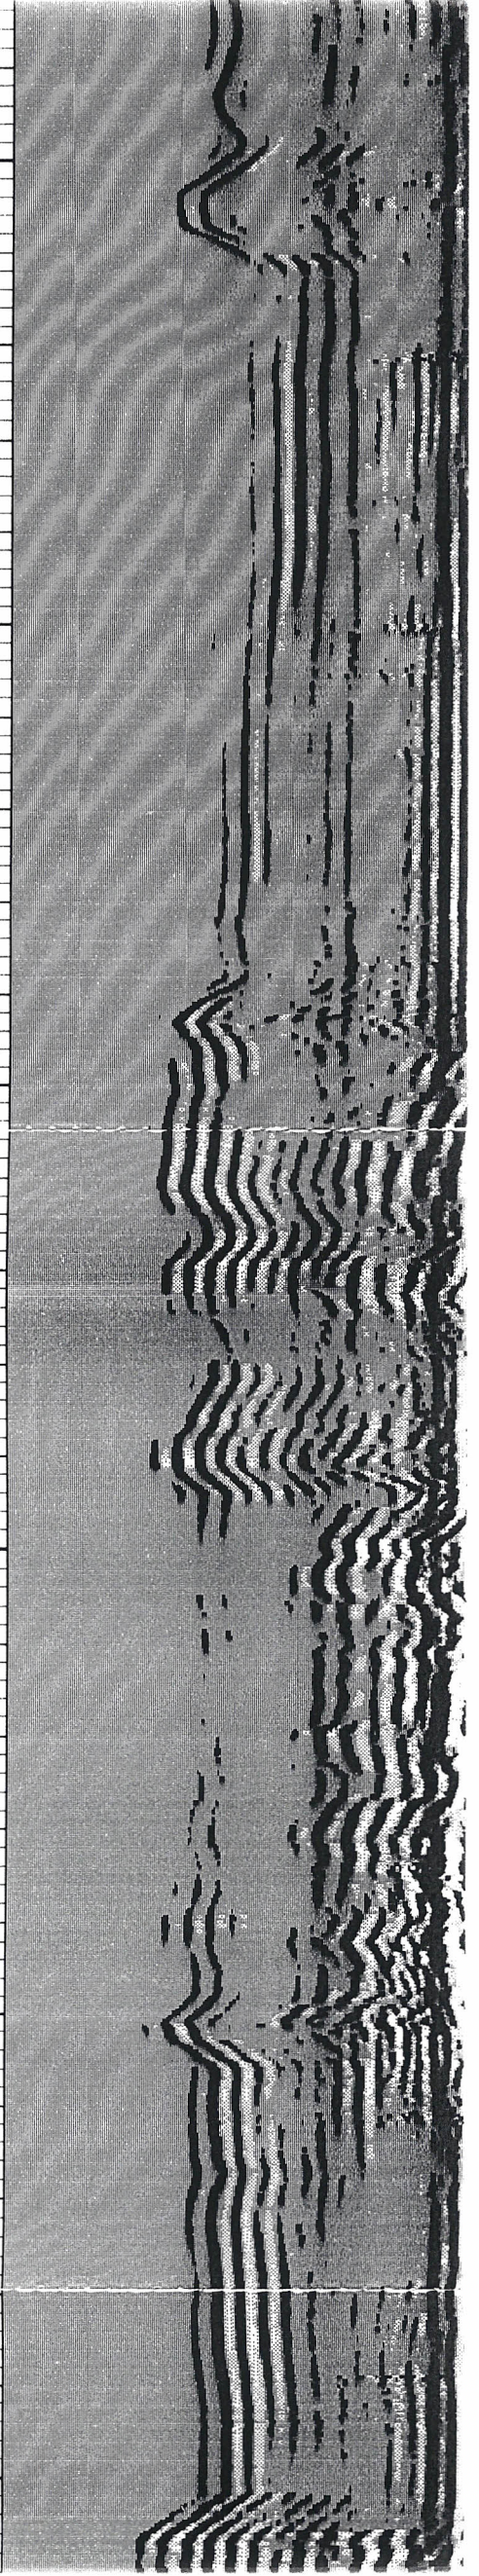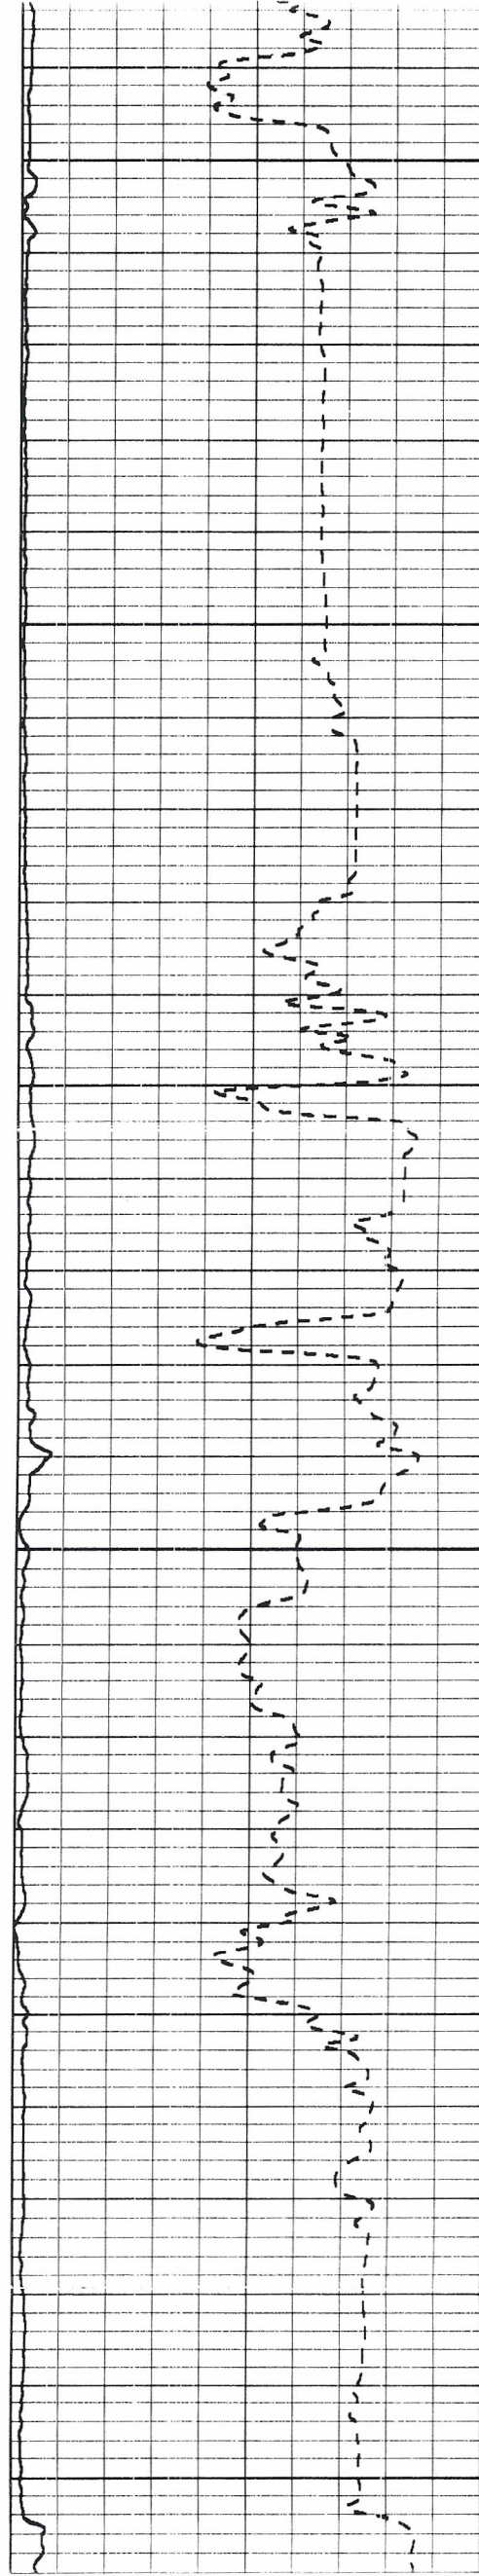

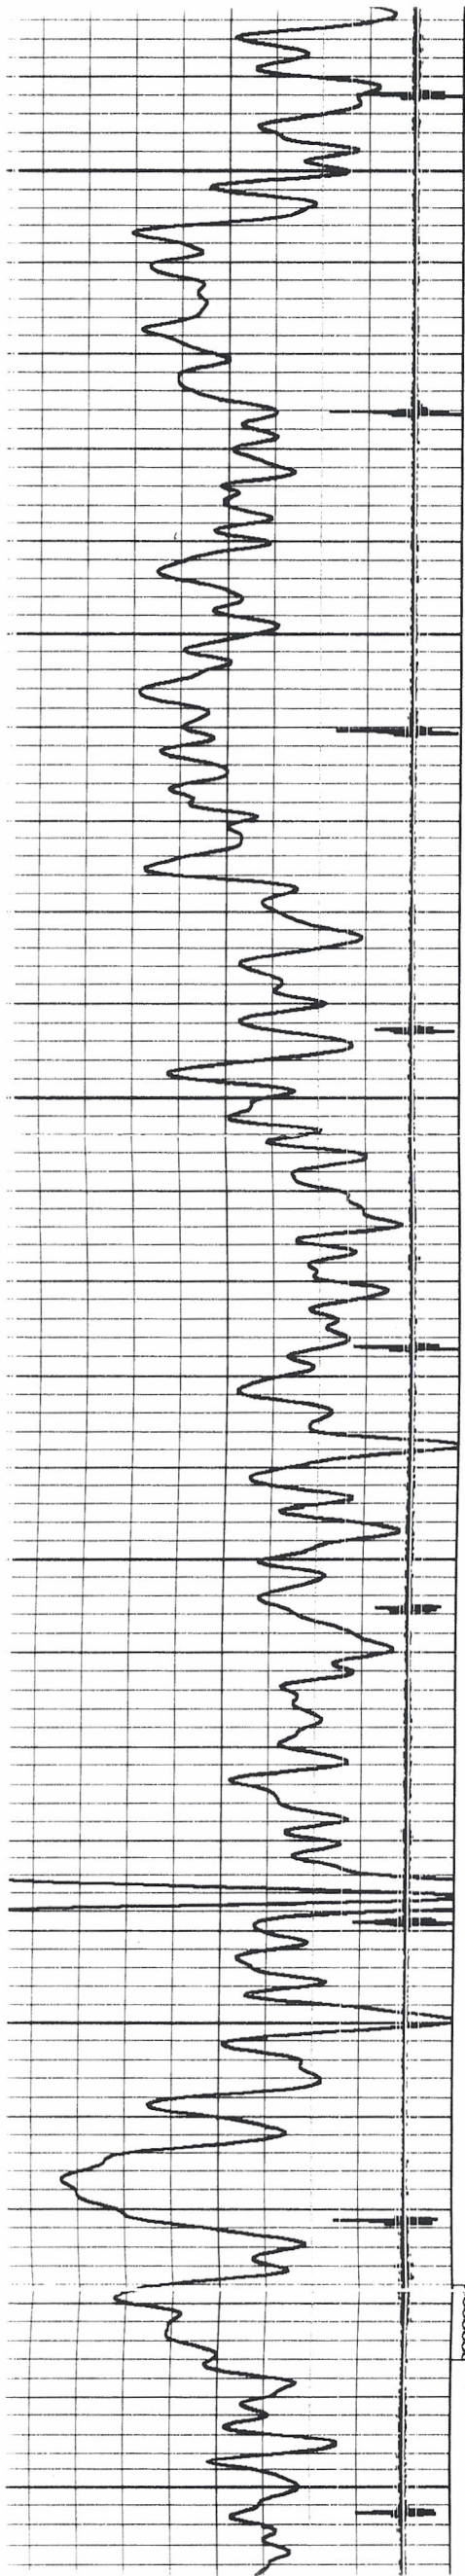

1250

1300

1350

1400

1450

1578'-1586'

16 SHOTS

8-1-11

1500

