

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: ~~15-057-19000-00-01~~ <sup>00</sup>  
Spot: SWSWNW Sec/Twnshp/Rge: 32-26S-21W  
2750 feet from S Section Line, 5165 feet from E Section Line  
Lease Name: PEINTNER Well #: 2  
County: FORD Total Vertical Depth: 1350 feet

Operator License No.: 4058  
Op Name: AMERICAN WARRIOR, INC.  
Address: PO BOX 399  
GARDEN CITY, KS 67846

PROD Size: 5.5 feet: 1331 WITH 275 SX CMT

#43<sup>88</sup>

Well Type: SWD UIC Docket No: D19068.0 Date/Time to Plug: 03/03/2005 2:00 PM  
Plug Co. License No.: 32382 Plug Co. Name: SWIFT SERVICES, INC.  
Proposal Rcvd. from: TED FUCHS Company: SWIFT SERVICES, INC. Phone: (785) 798-2300

Proposed Plugging Method: PUMP DOWN TUBING WITH 120 SX CMT W/300# HULLS. PRESSURE CHECK.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 03/03/2005 2:47 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

PBTD 1331'. 01/25/05: 5 1/2" WAS CUT OPEN REVEALING 2 3/8" TUBING WAS CEMENTED IN FROM 0-675'. WITNESSED BY STEVE DURRANT. 03/03/05: PUMPED DOWN 2 3/8" TUBING WITH 120 SX CMT W/300# HULLS MIXED IN LEAD CMT. STAGED LAST 20 SX CMT. MAXIMUM PPRESSURE 600 PSIG. SHUT IN PRESSURE 200 PSIG.

Perfs:


Top	Bot	Thru	Comments
922	982		
701	711		

RECEIVED  
MAR 09 2005  
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY SWIFT SERVICES. NO CASING RECOVERED.

Plugged through: TBG

District: 01

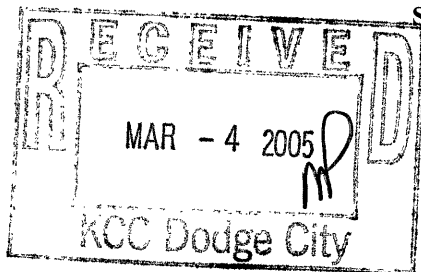

Signed

Richard W. Lacey

(TECHNICIAN)

INVOICED

DATE 3-10-05

INV. NO. 2005061260

Form CP-23