



Green Country Wireline

GAMMA RAY
CEMENT BOND
CCL VDL

Company JONES & BUCK DEVELOPEMENT
Well THOMPSON # JBD 36-1
Field SEDAN-PERU
County CHAUTAUQUA
State KANSAS

Company JONES & BUCK DEVELOPEMENT
Well THOMPSON # JBD 36-1
Field SEDAN-PERU
County CHAUTAUQUA State KANSAS

Location: API #: 15-019-27045
SEC 36 TWP 33S RGE 10E
SW SW NE NE
4050' FSL & 1150' FEL
Permanent Datum G.L. Elevation 882'
Log Measured From G.L.
Drilling Measured From G.L.
Other Services
K.B. ---
D.F. ---
G.L. 882'

Date	7-14-11
Run Number	1
Depth Driller	1355'
Depth Logger	1340'
Bottom Logged Interval	1339'
Top Log Interval	SURFACE
Open Hole Size	WATER
Type Fluid	---
Density / Viscosity	---
Max. Recorded Temp.	---
Estimated Cement Top	SURFACE
Time Well Ready	---
Time Logger on Bottom	---
Equipment Number	3
Location	DEWEY
Recorded By	HERREN
Witnessed By	M.JONES
Borehole Record	
Run Number	Bit From To Size Weight From To
Casing Record	Size ~ Wgt/Ft Top Bottom
Surface String	8 5/8" SURFACE 40'
Prot String	
Production String	4.5" SURFACE TD
Liner	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. The interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments




Green Country Wireline

GAMMA RAY CEMENT BOND


Database File: jbd361.db
Dataset Pathname: jbd361/run1/pass1
Presentation Format: cbl_dr
Dataset Creation: Thu Jul 14 10:50:33 2011 by Log Std Casedhole 09061
Charted by: Depth in Feet scaled 1'240

9	Collar Locator	-1
0	Gamma Ray (GAPI) (GAPI)	60


-1	Amplitude (mV)	150	200	Variable Density	12
1000	Travel Time (usec)	250			




0 Gamma Ray (GAPI) (GAPI) 60

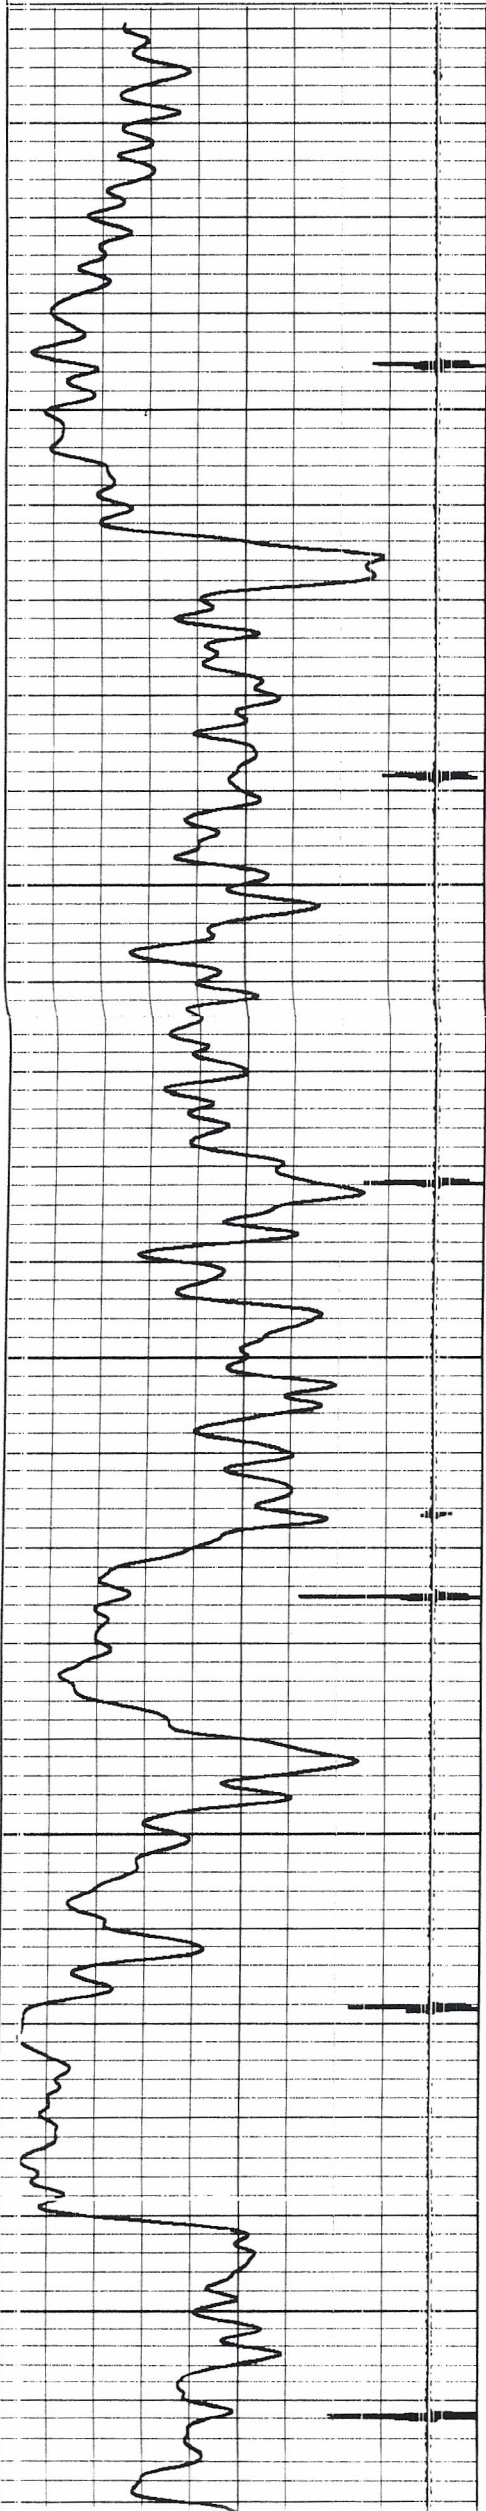


1000 Travel Time (usec) 250

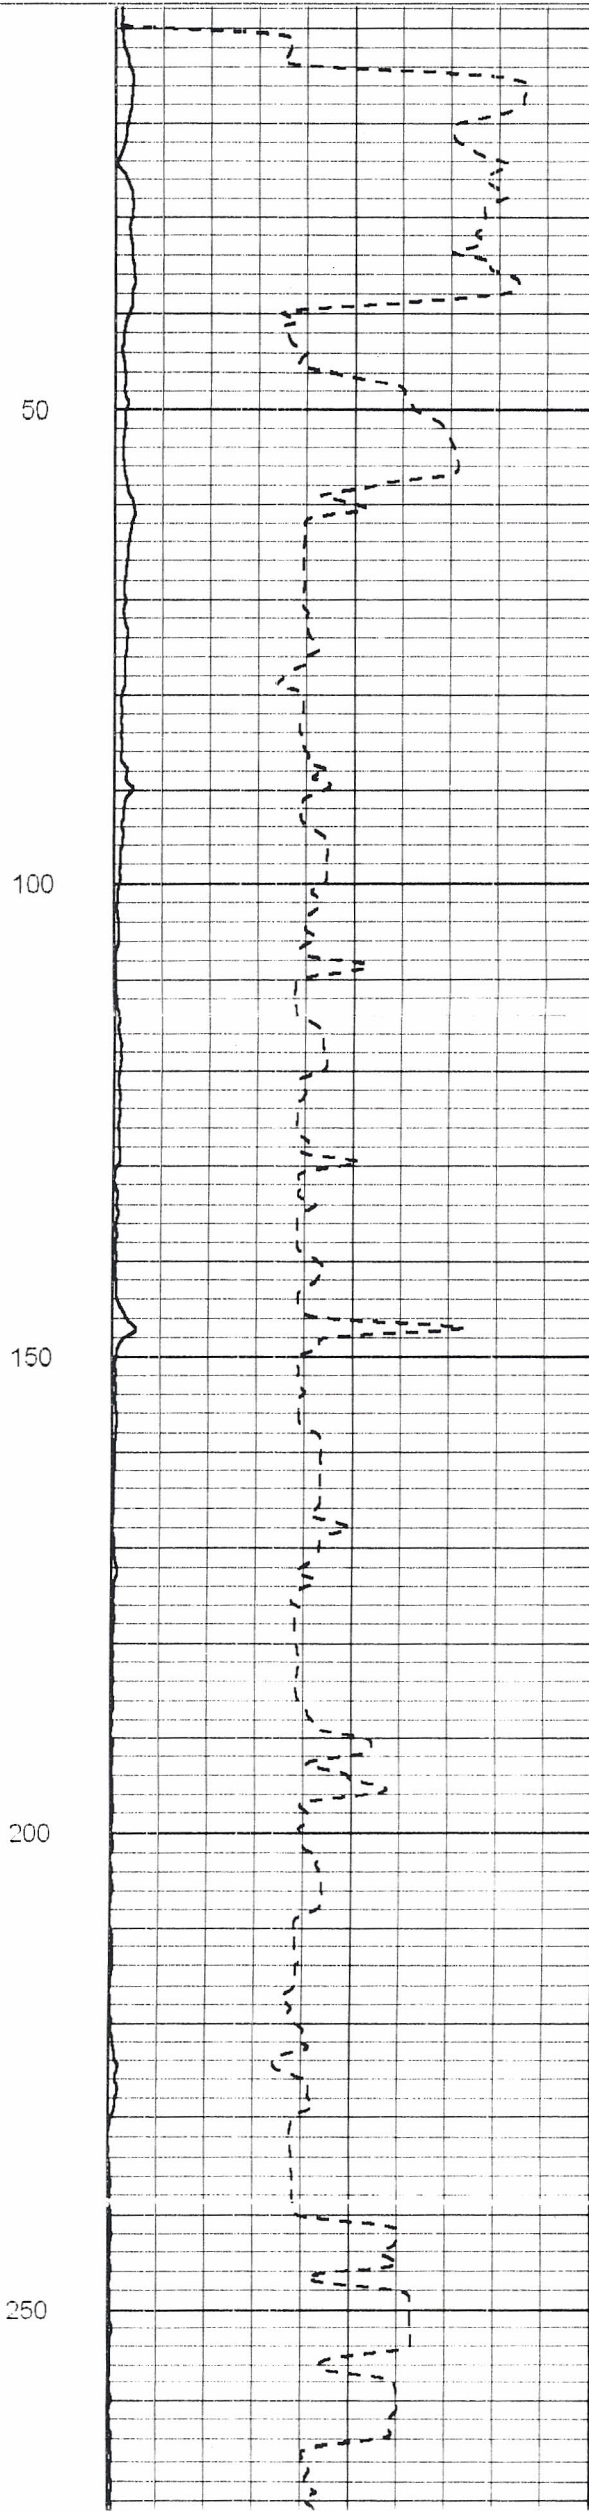

variable Density

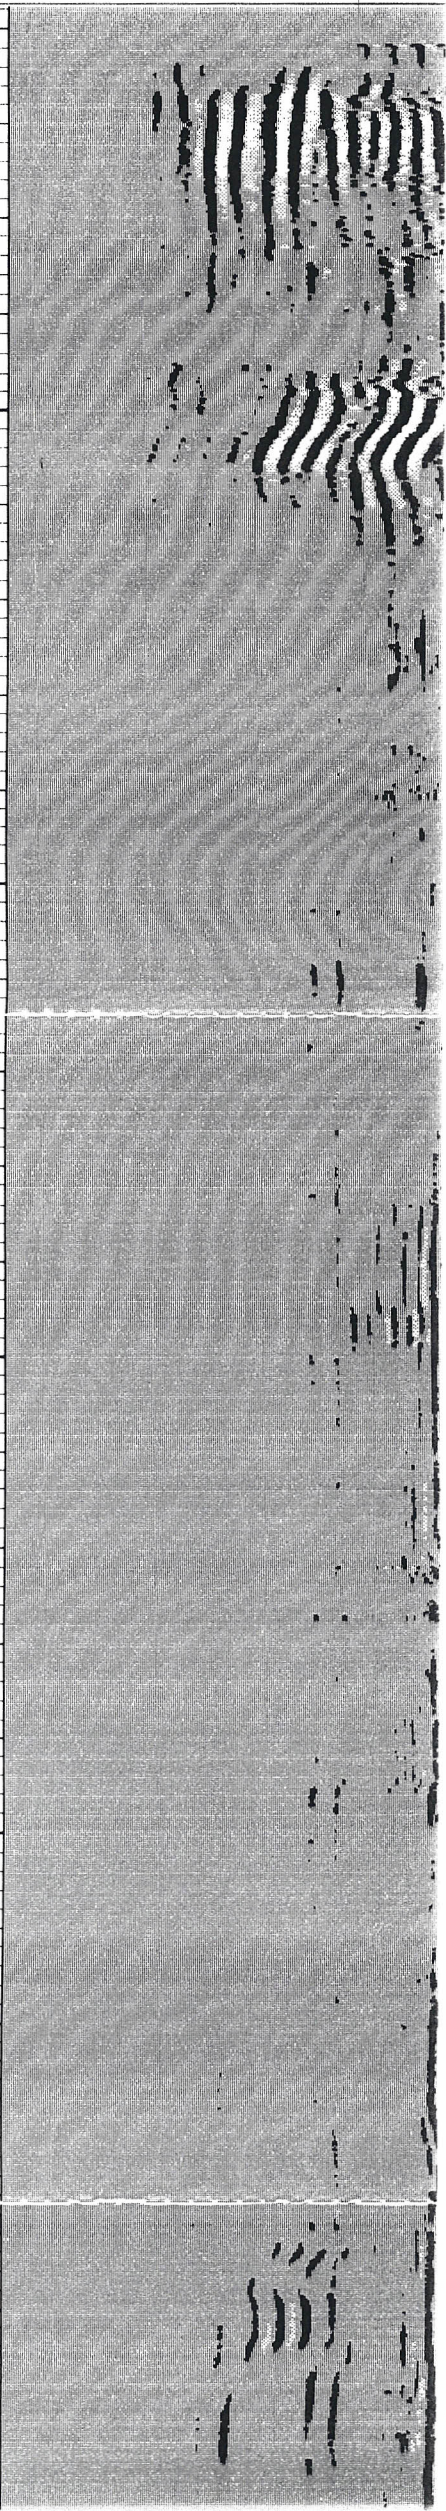

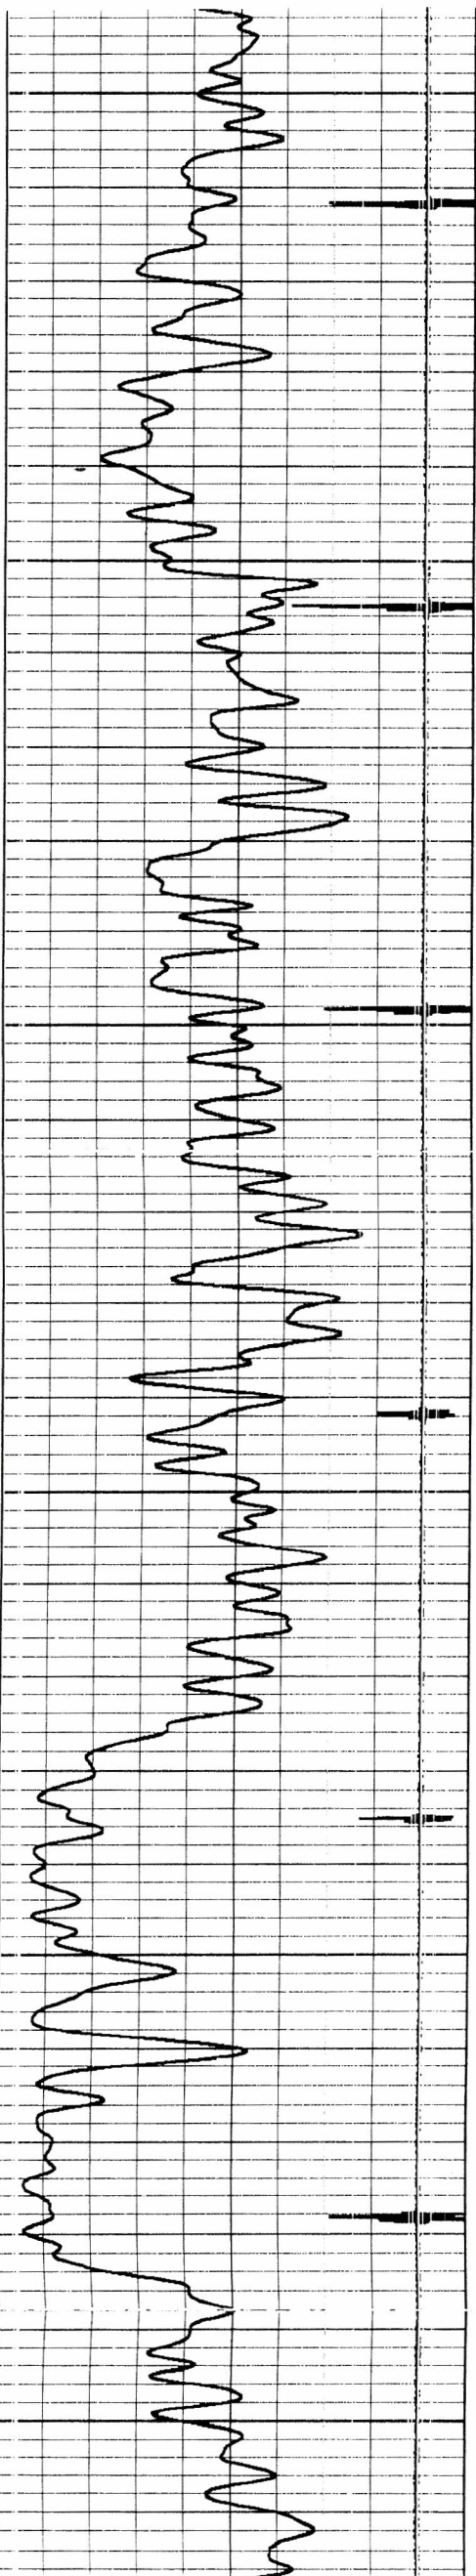

250



300


350

400

450

500

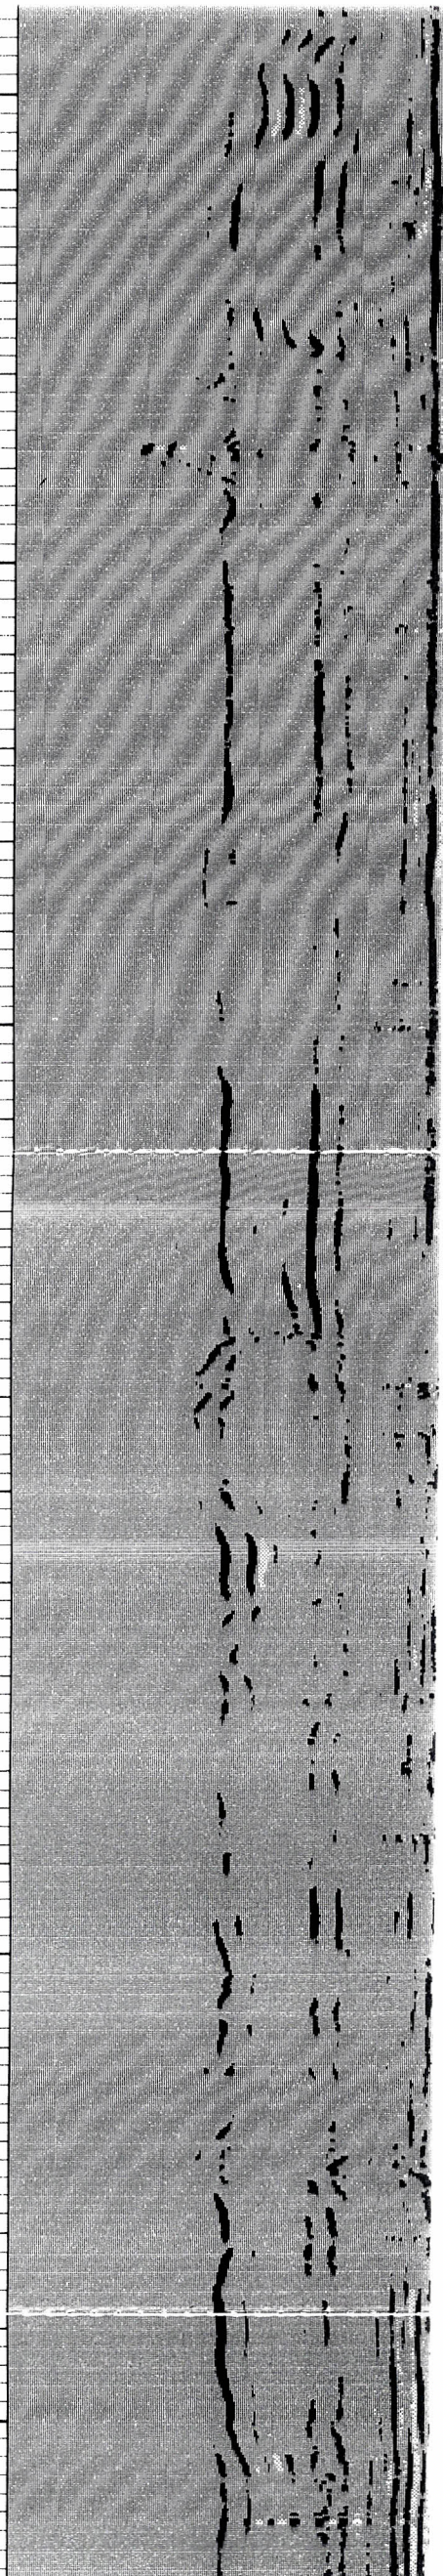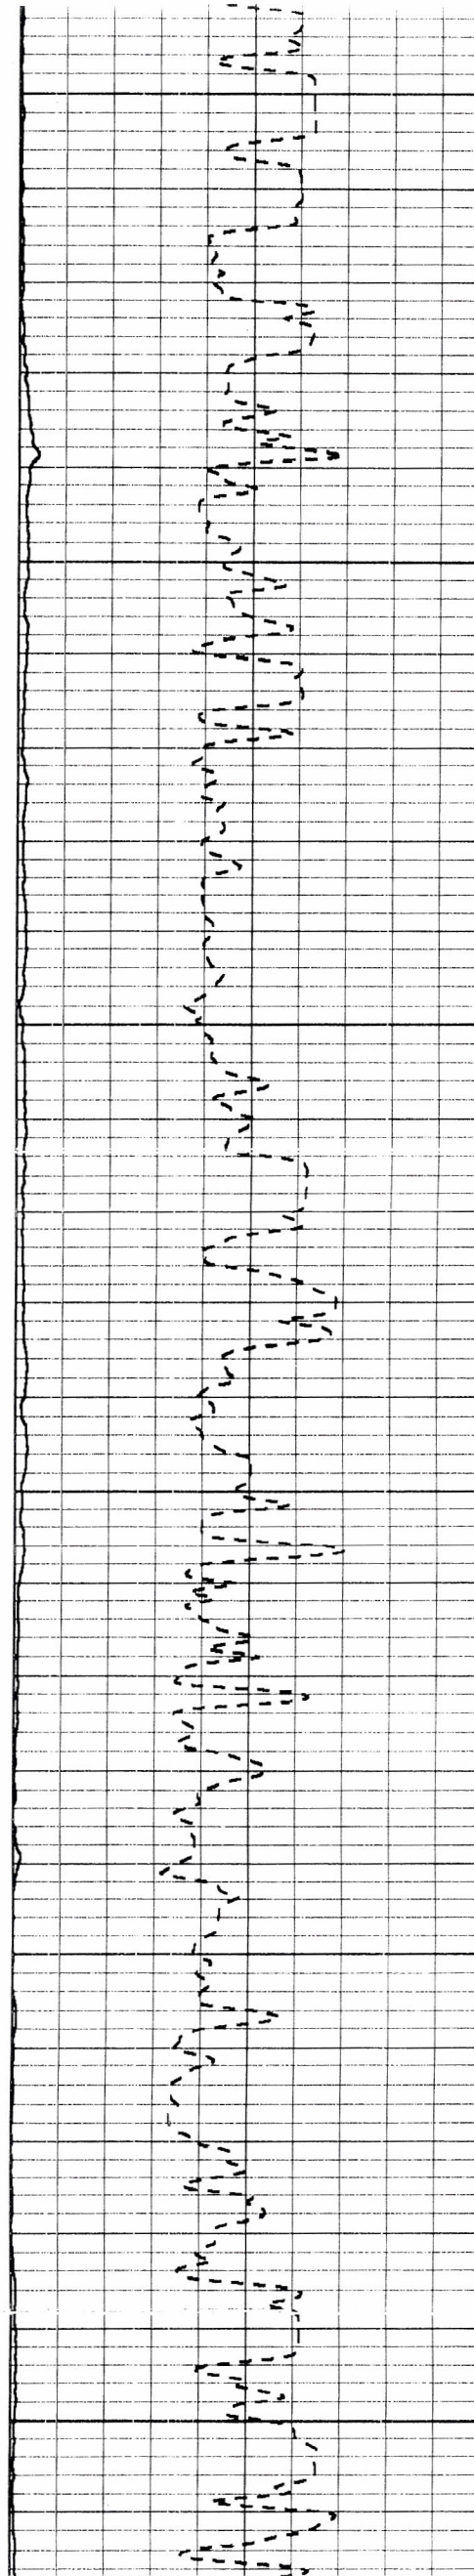

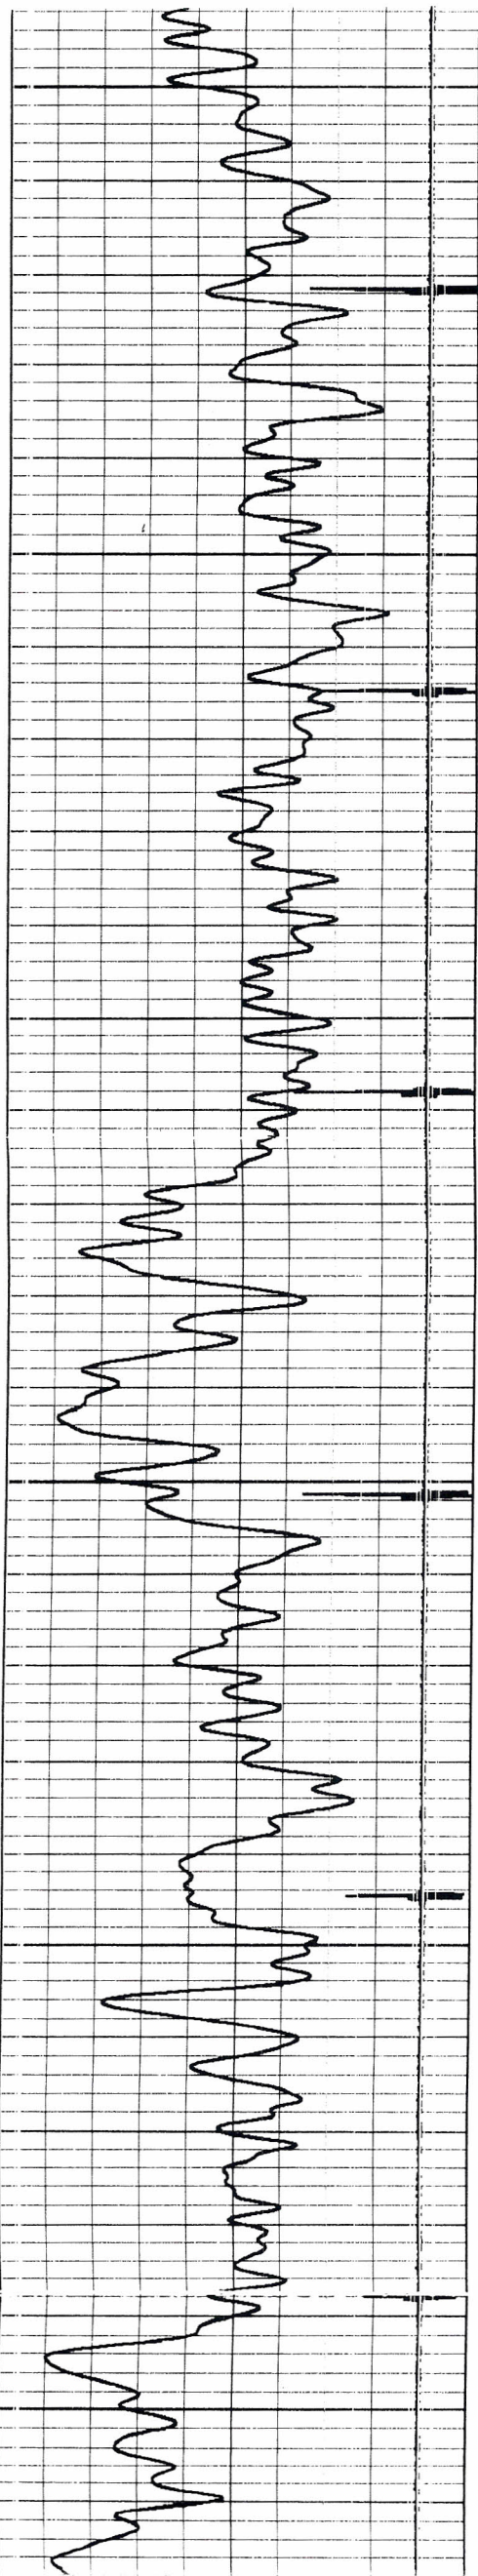

500



550


600

650

700

750

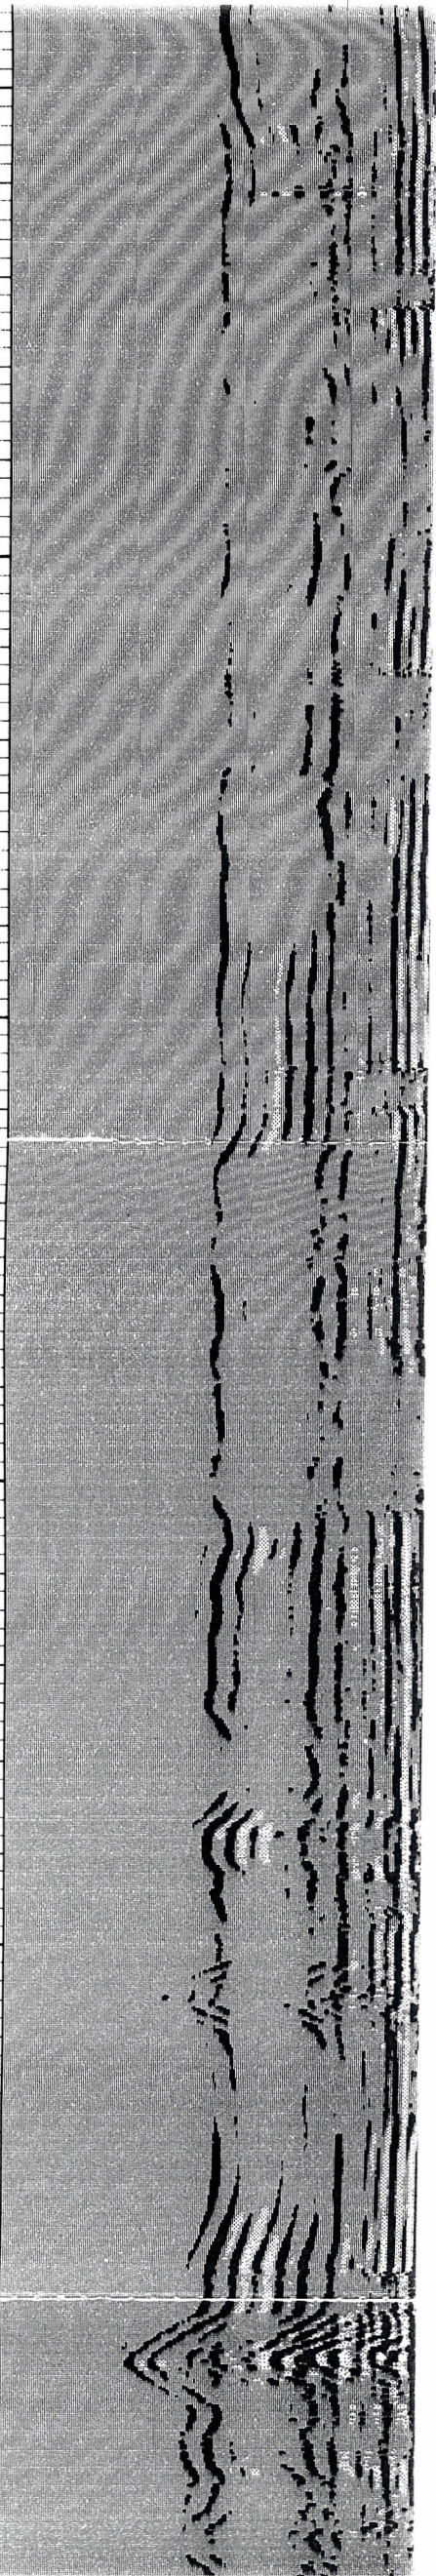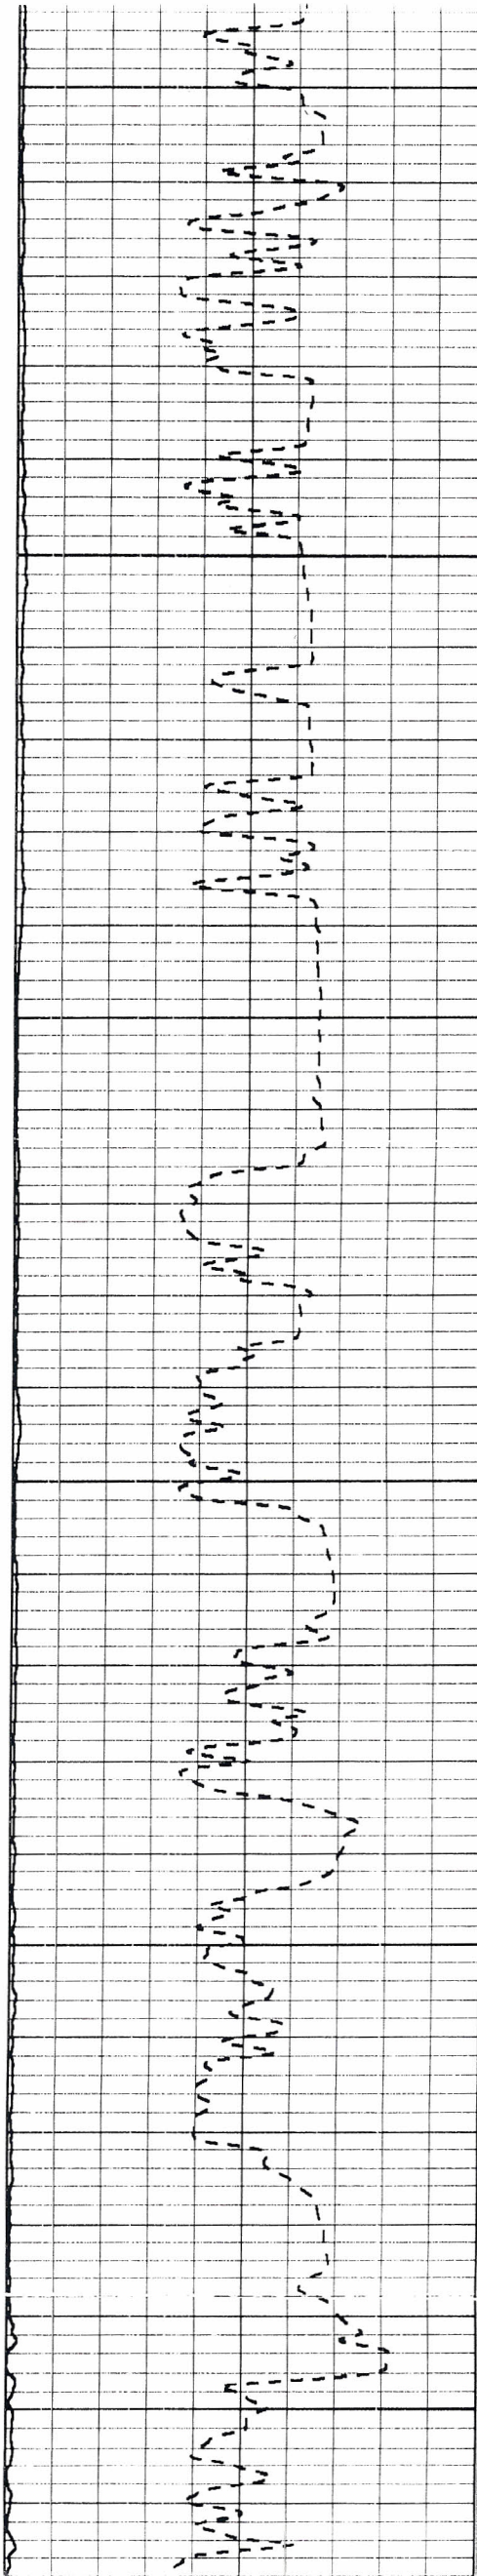

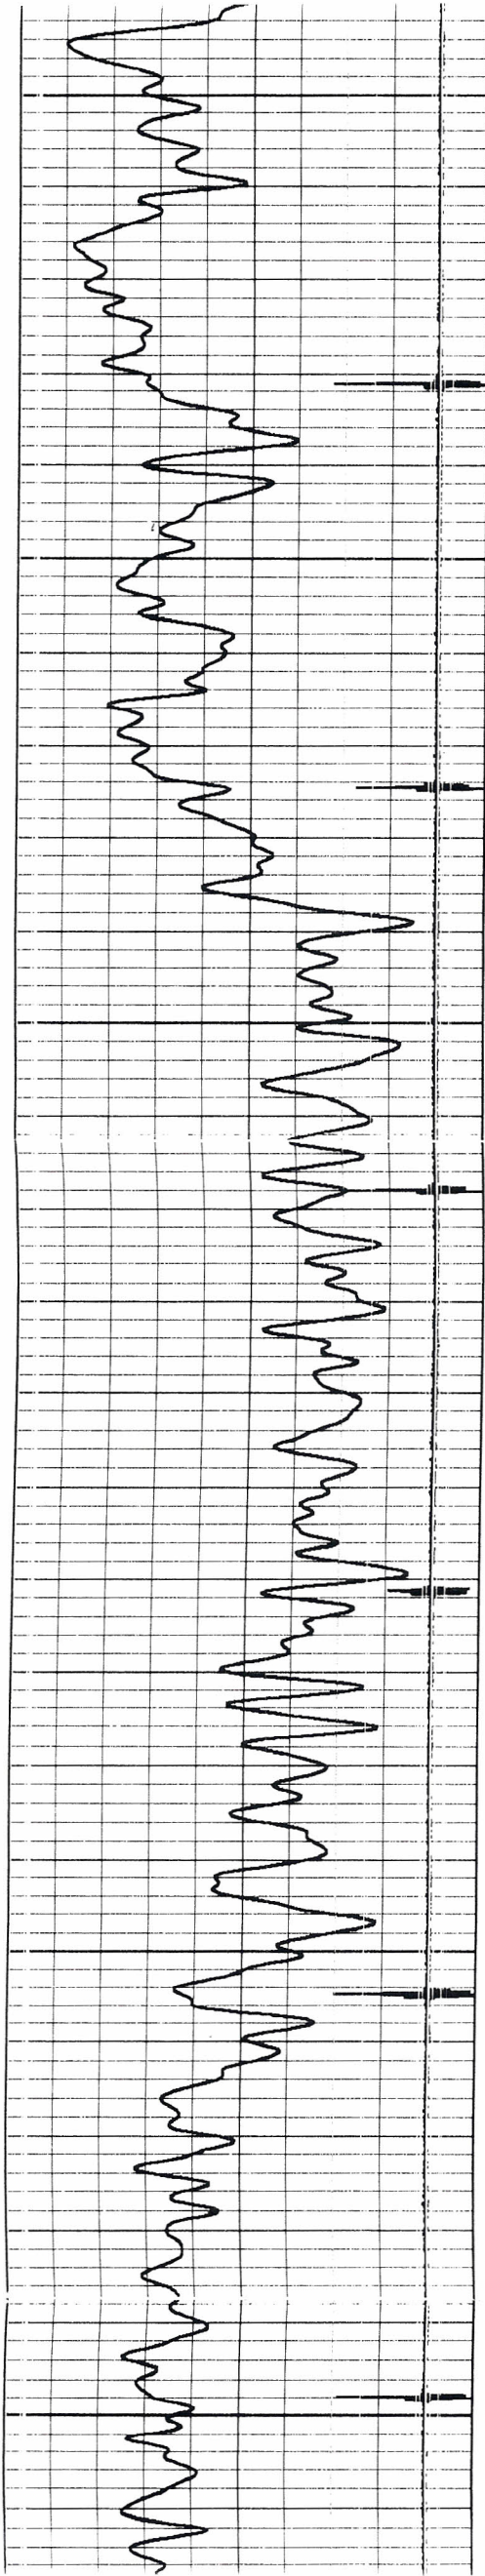

750



800


850

900

950

1000

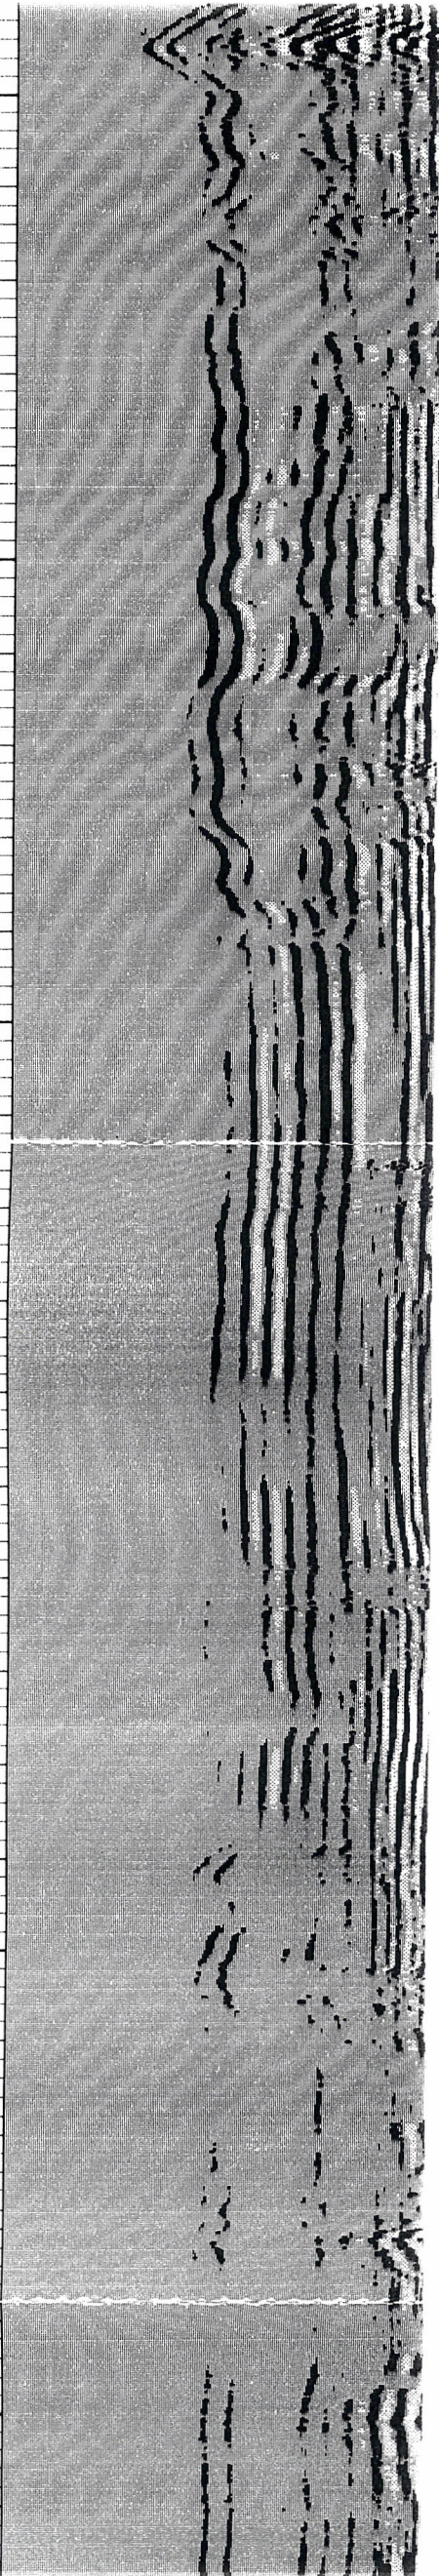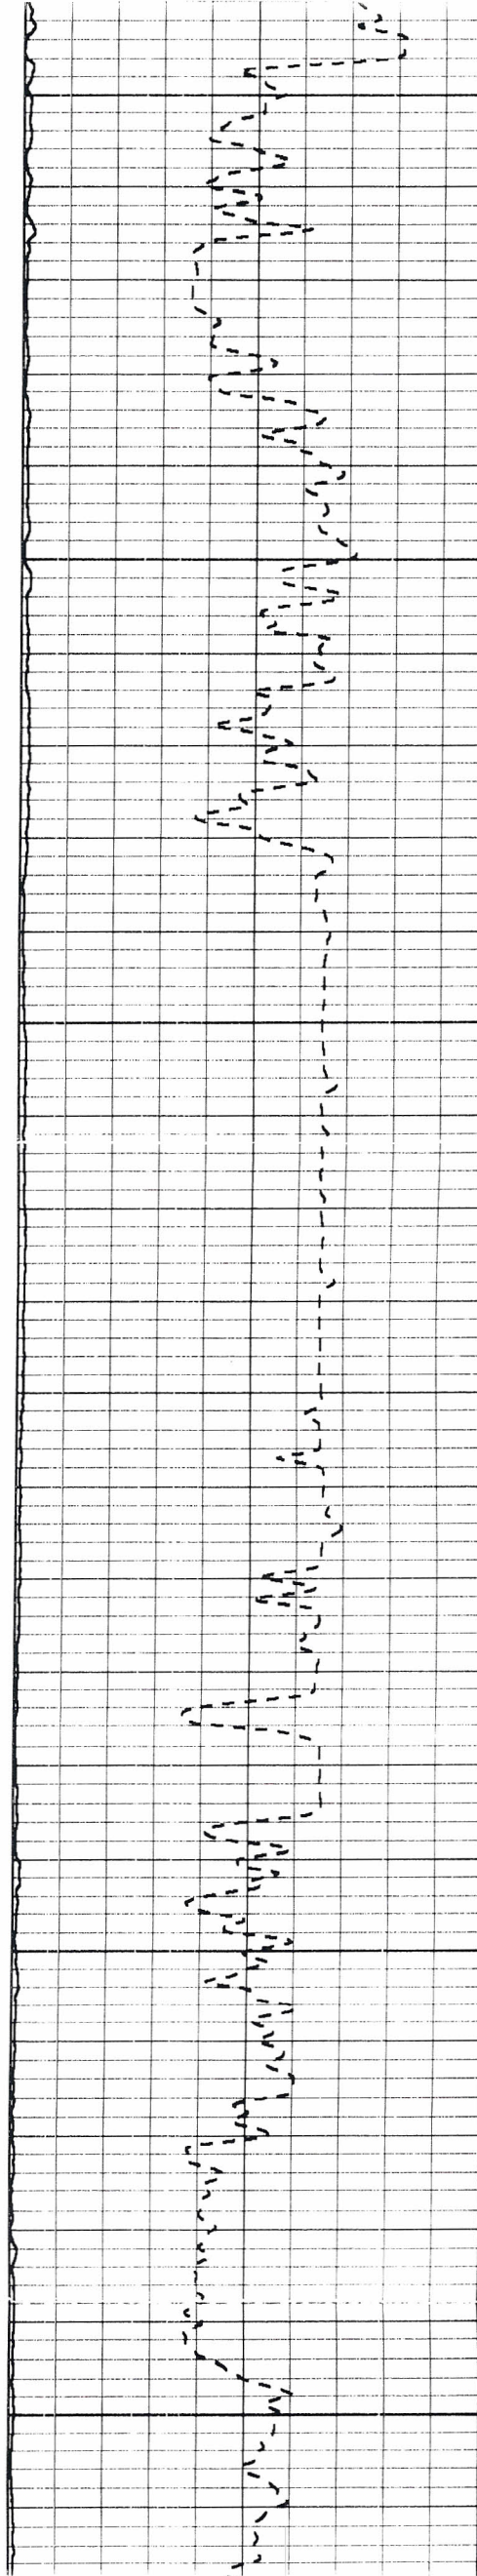

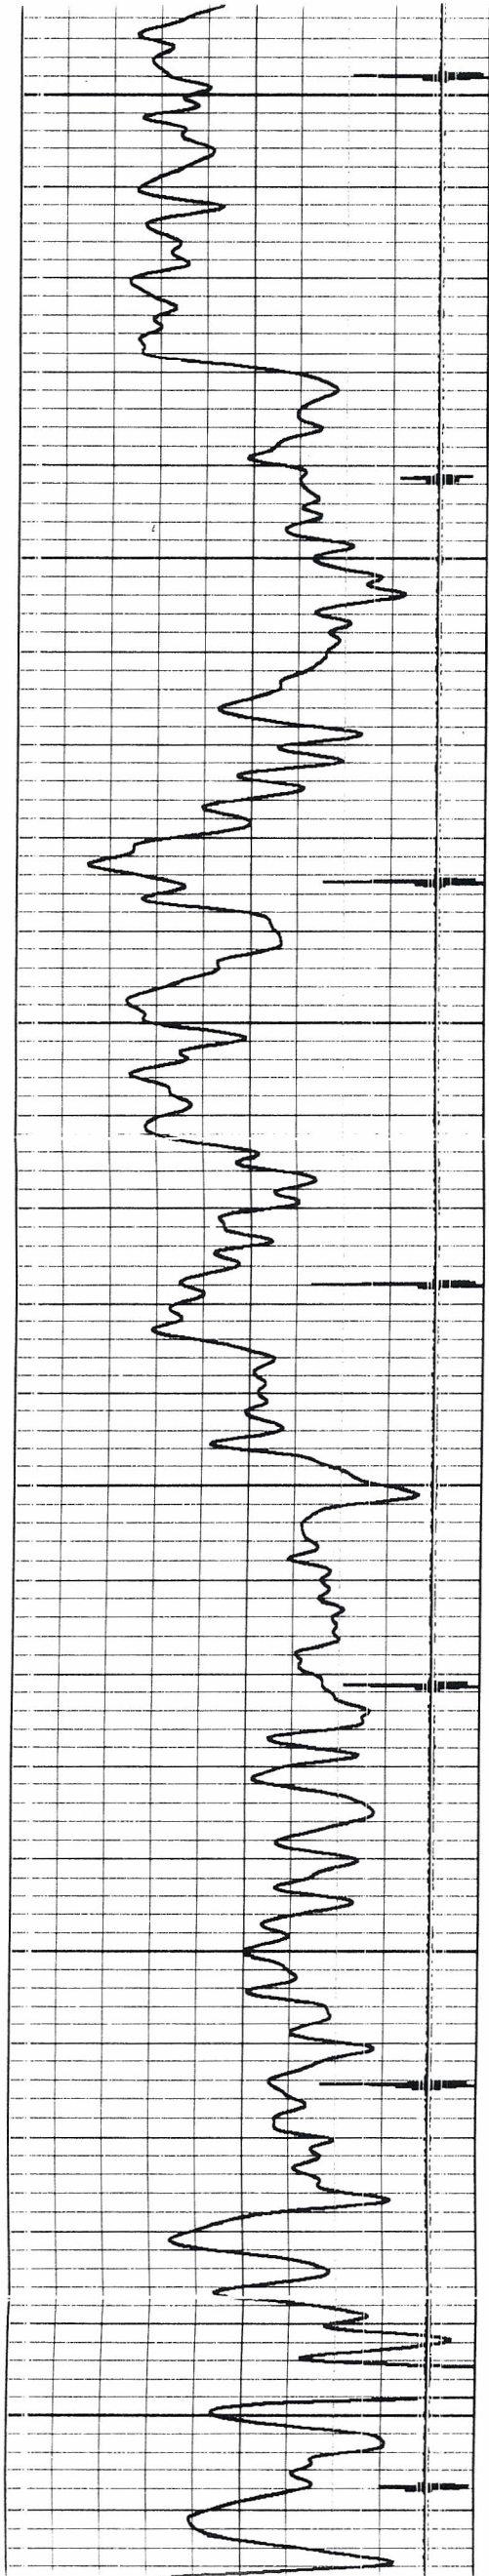

1000



1050


1100

1150

1200

1250

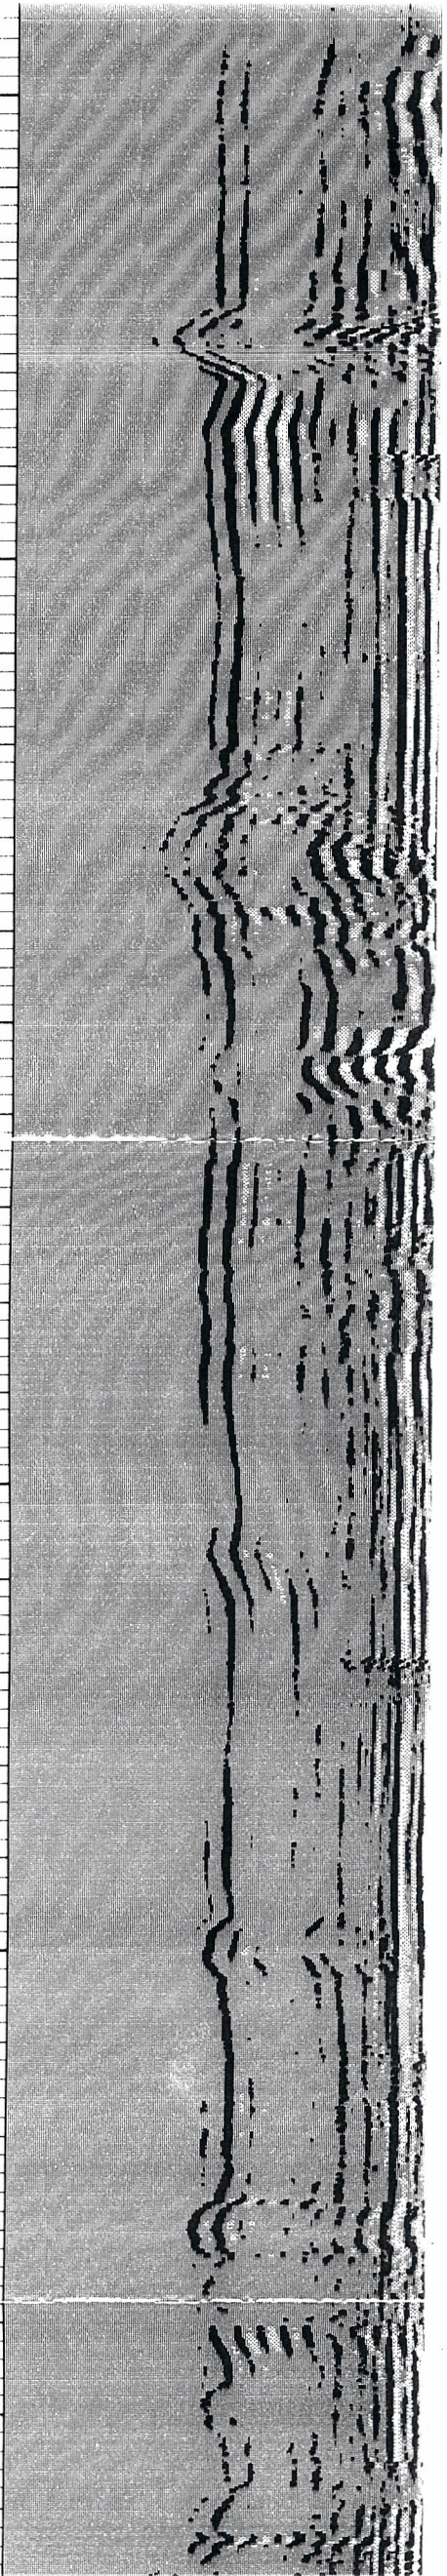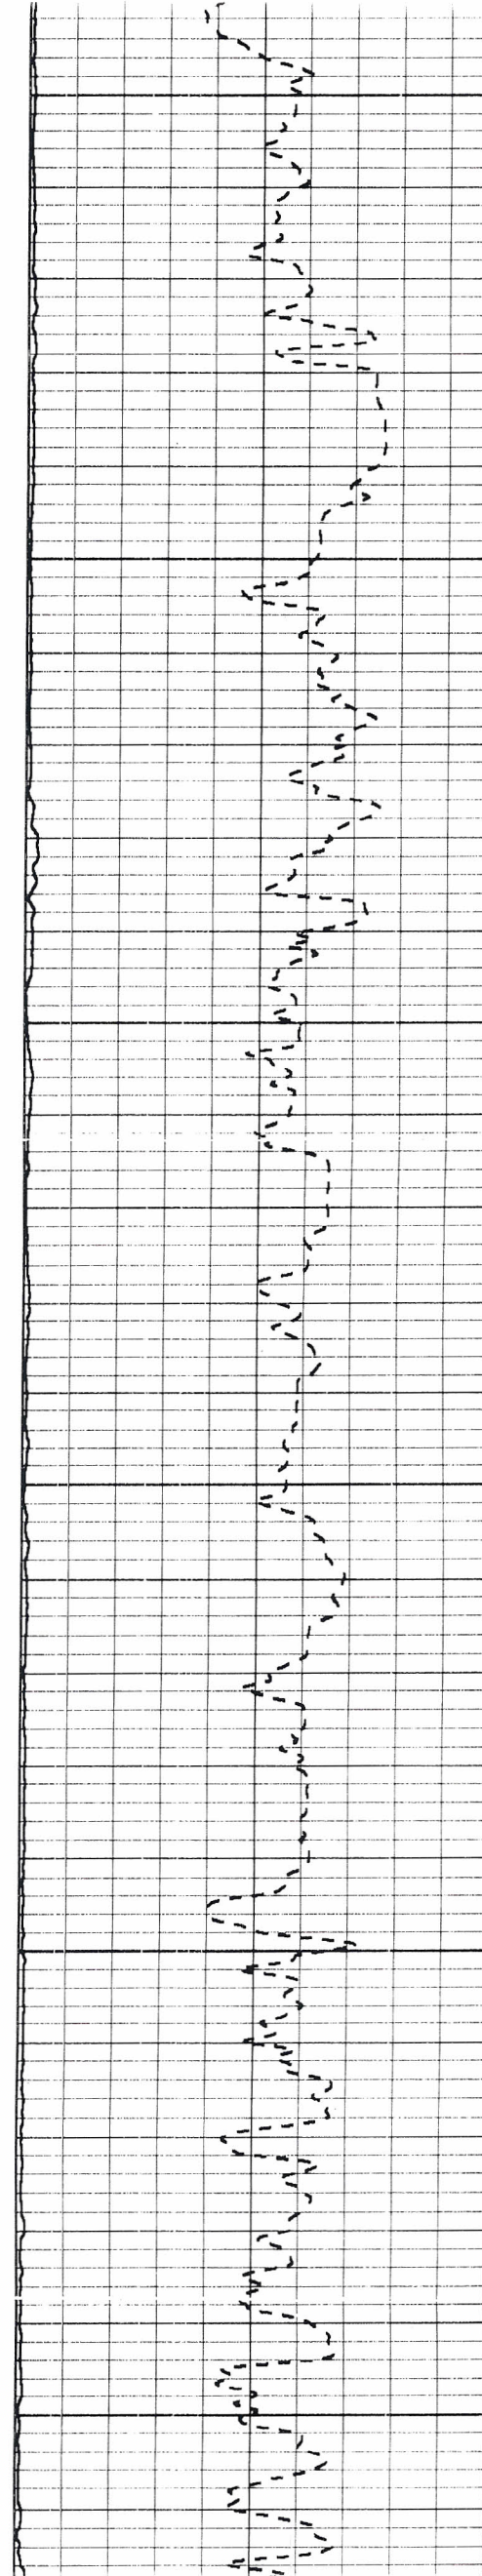

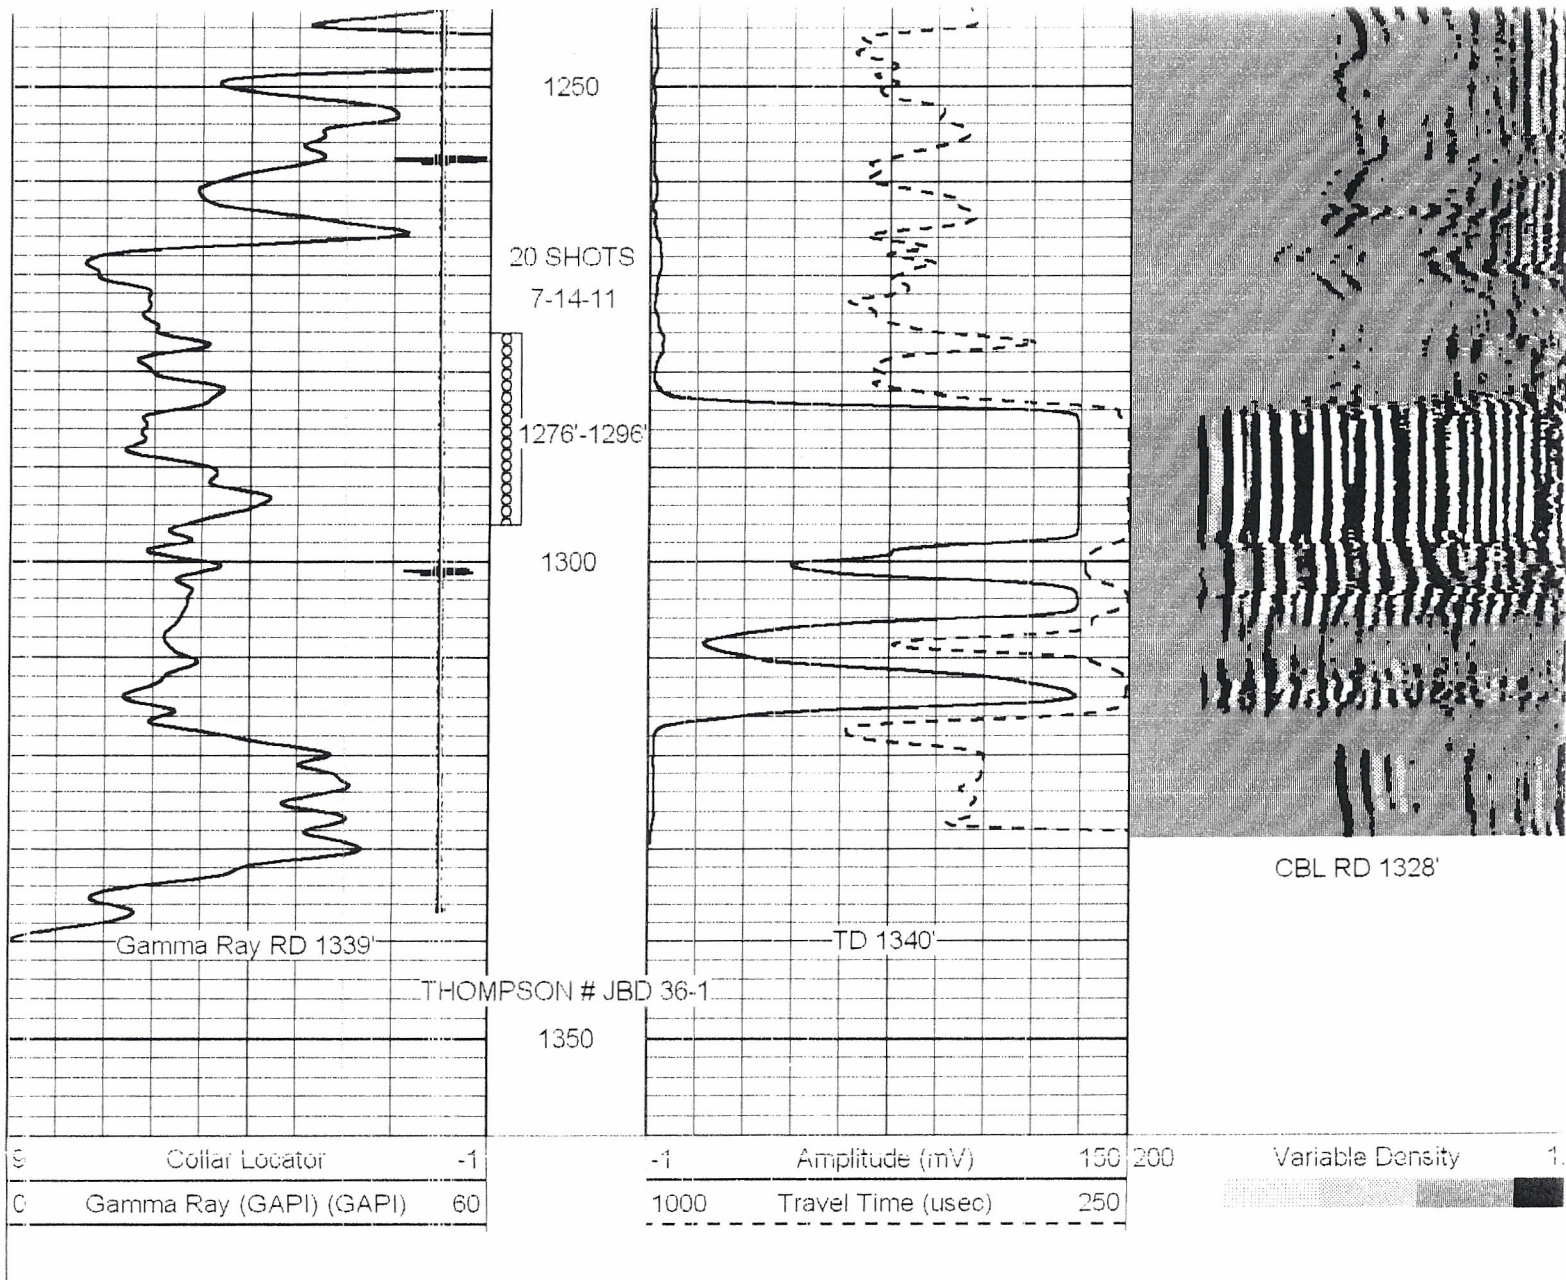

S	Collar Locator	-1	-1	Amplitude (mV)	150	200	Variable Density	1.
C	Gamma Ray (GAPI) (GAPI)	60	1000	Travel Time (usec)	250			