



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.		Company		Roberts Resources	
15-007-23,743-00-00		Well		Bible-Hoss No. 1-11	
		Field		Wildcat	
		County		Barber State Kansas	
Location		2580' FDL & 1030' FEL		Other Services CNL/CDL DIL	
Sec: 11		Twp: 30 S		Rge: 15 W	
Permanent Datum		Ground Level		Elevation 1902	
Log Measured From		Kelly Bushing		9 Ft. Above Perm. Datum	
Drilling Measured From		Kelly Bushing		K.B. 1911 D.F. 1902 G.L. 1902	
Date	8/15/2011				
Run Number	Two				
Depth Driller	4700				
Depth Logger	4697				
Bottom Logged Interval	4696				
Top Log Interval	2100				
Casing Driller	10.75 @ 297				
Casing Logger	294				
Bit Size	7.875				
Type Fluid in Hole	Chemical				
Salinity, ppm CL	3000				
Density / Viscosity	9.4 50				
pH / Fluid Loss	11 8.8				
Source of Sample	Flowline				
Rm @ Meas. Temp	.50 @ 79				
Rmf @ Meas. Temp	.38 @ 79				
Rmc @ Meas. Temp	.68 @ 79				
Source of Rmf / Rmc	Charts				
Rm @ BHT	.32 @ 123				
Operating Rig Time	5 Hours				
Max Rec. Temp. F	123				
Equipment Number	10				
Location	Hays				
Recorded By	D. Kerr				
Witnessed By	Kent Roberts				

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Sun City KS, 4 1/2 North,
West Into

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

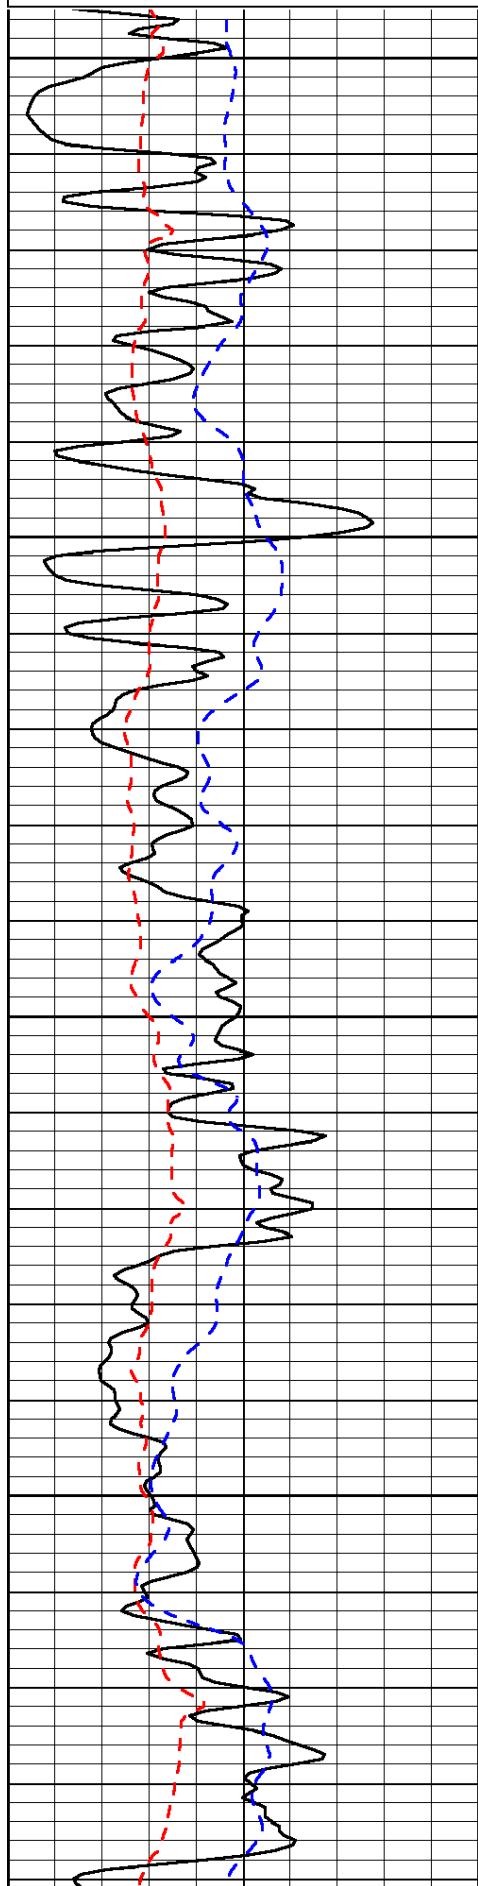

2100


2150

2200

2250

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD


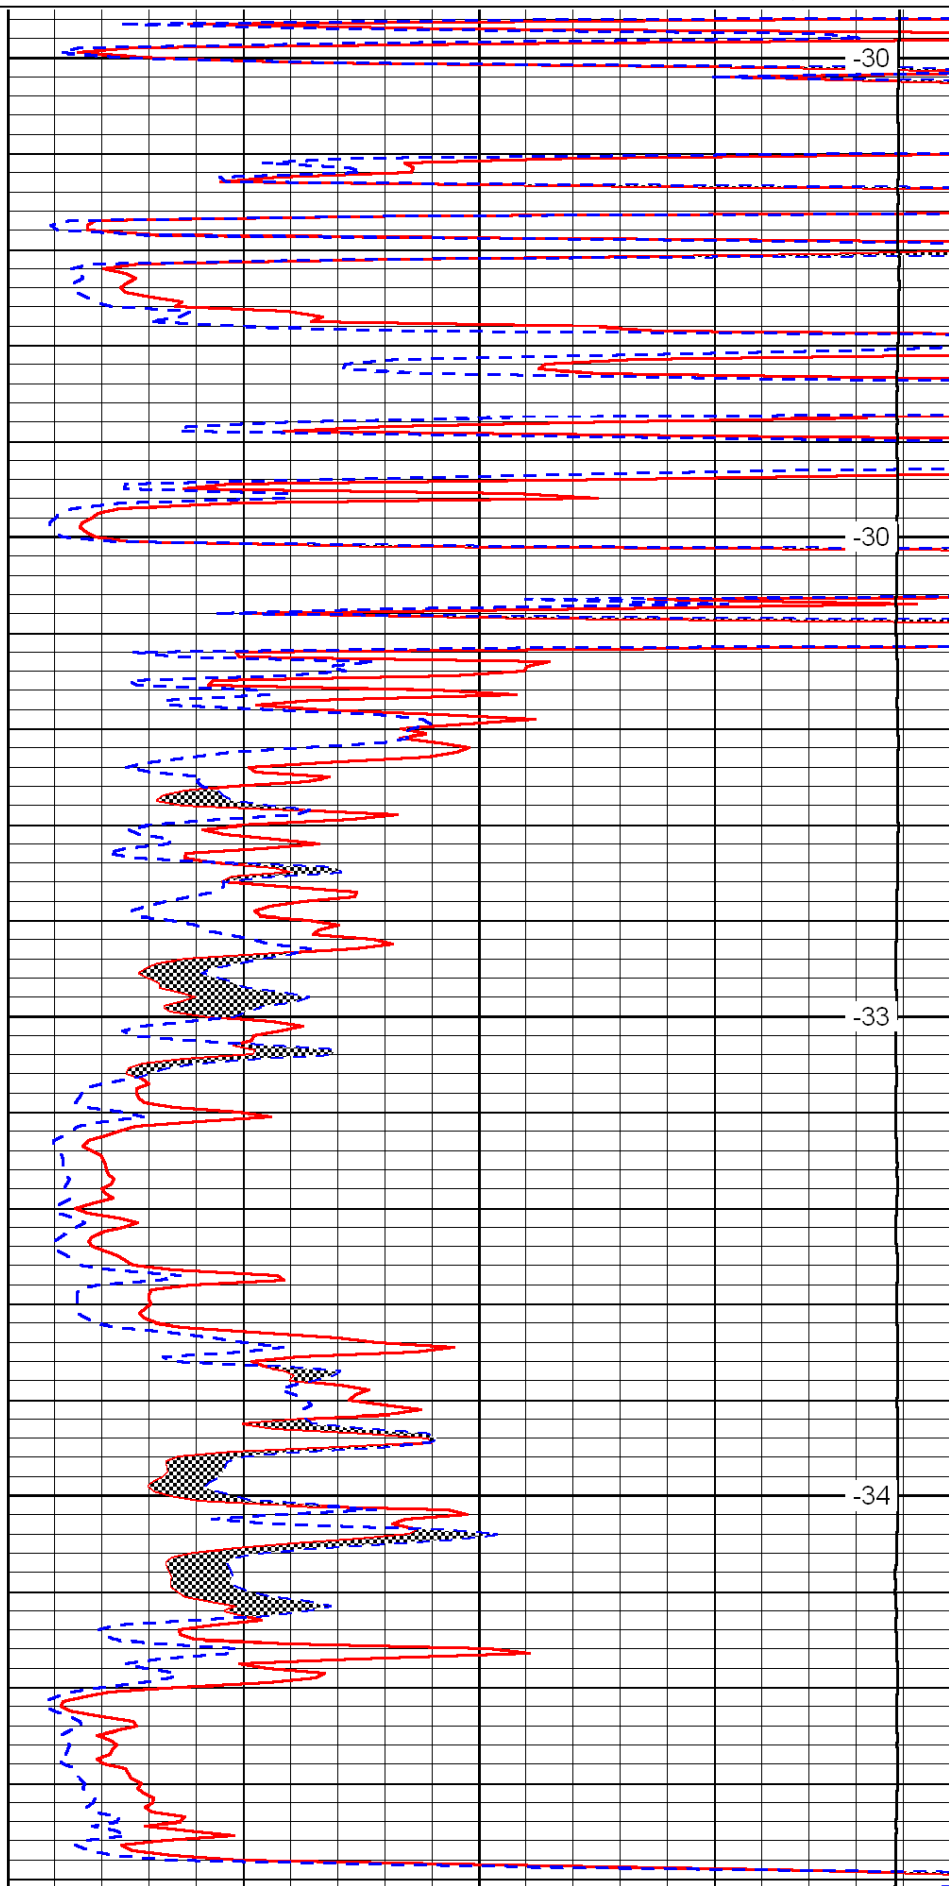




-30



-30



-33


-34

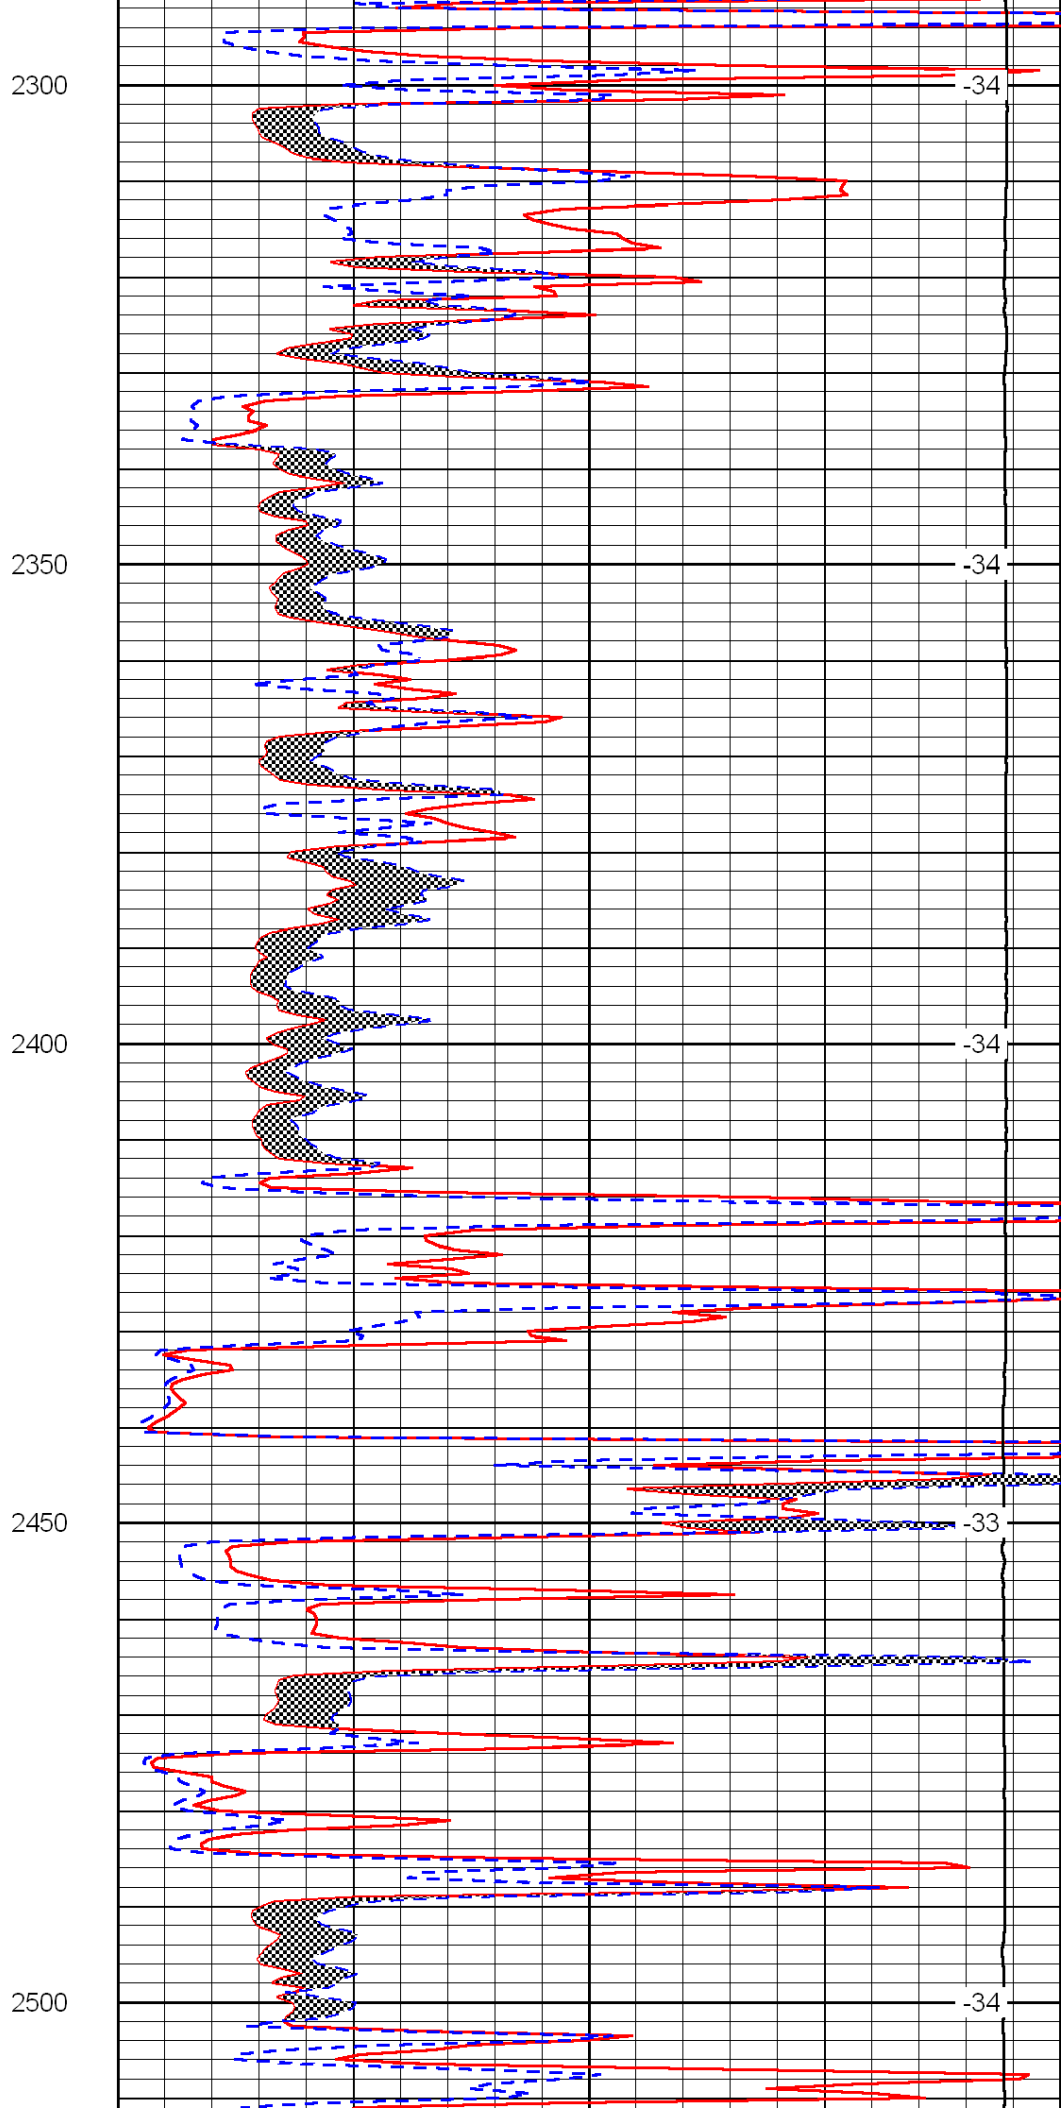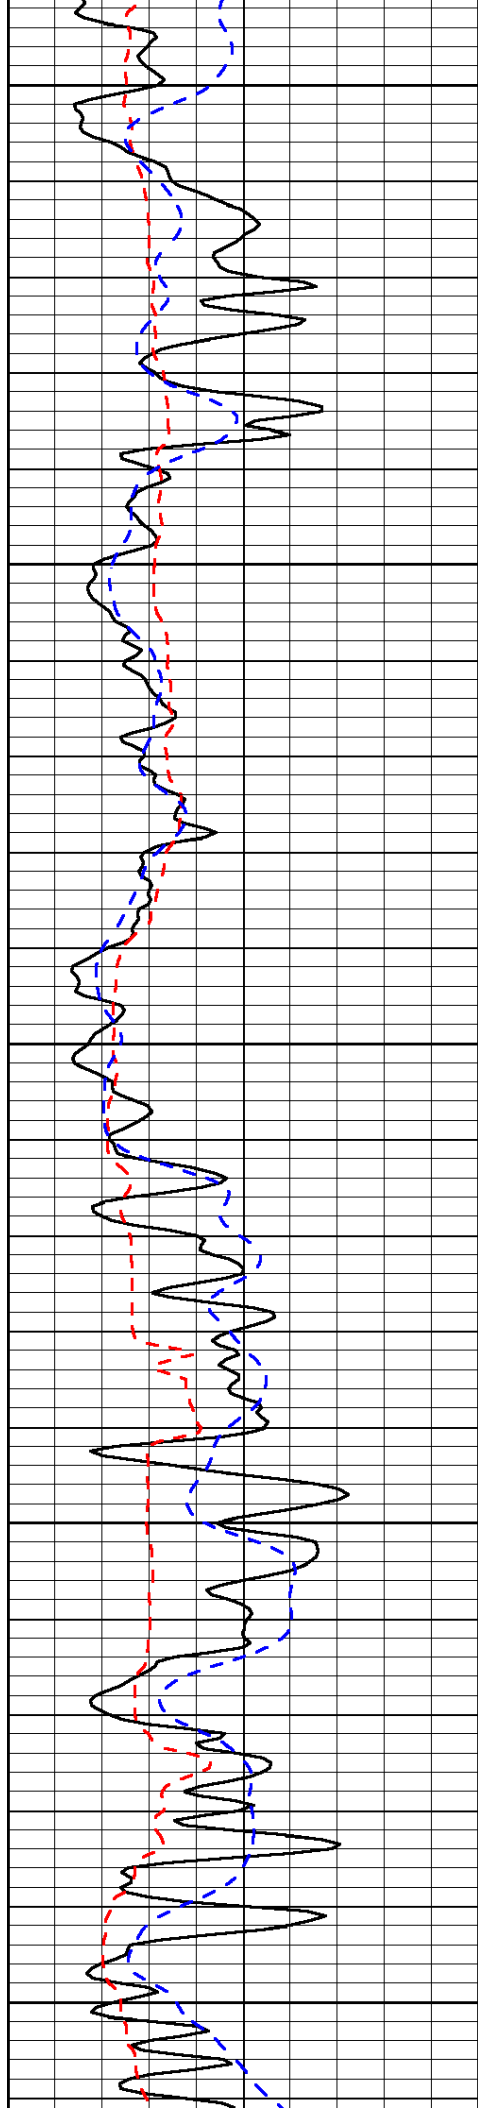

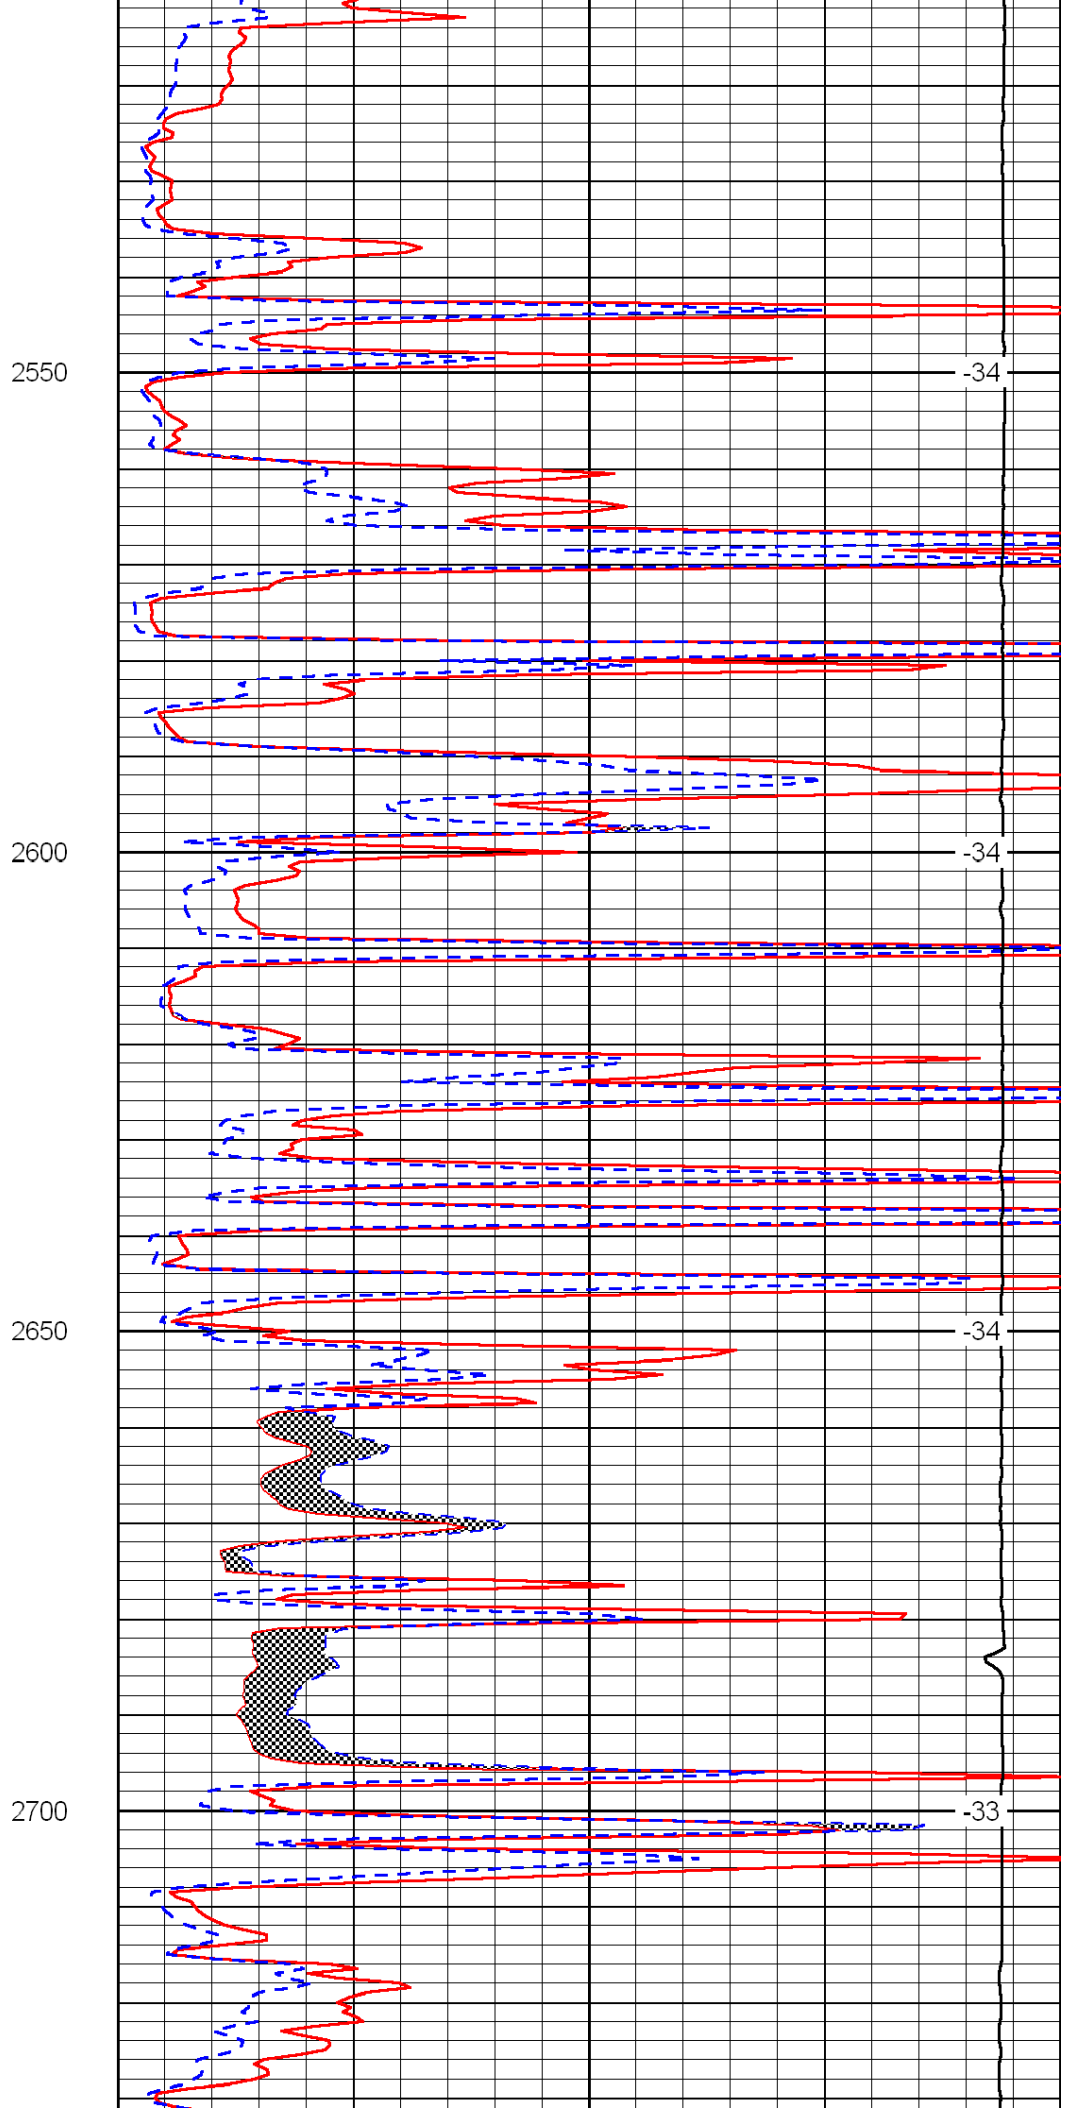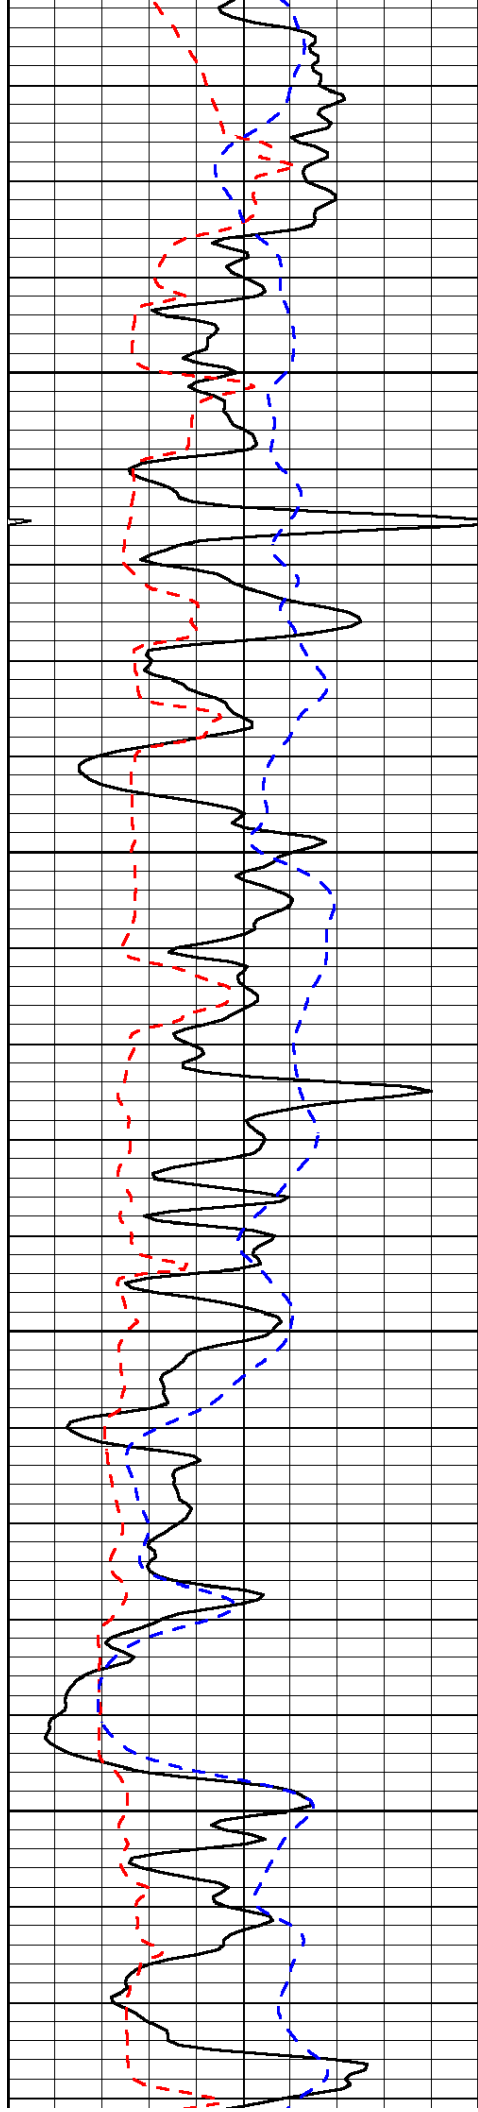

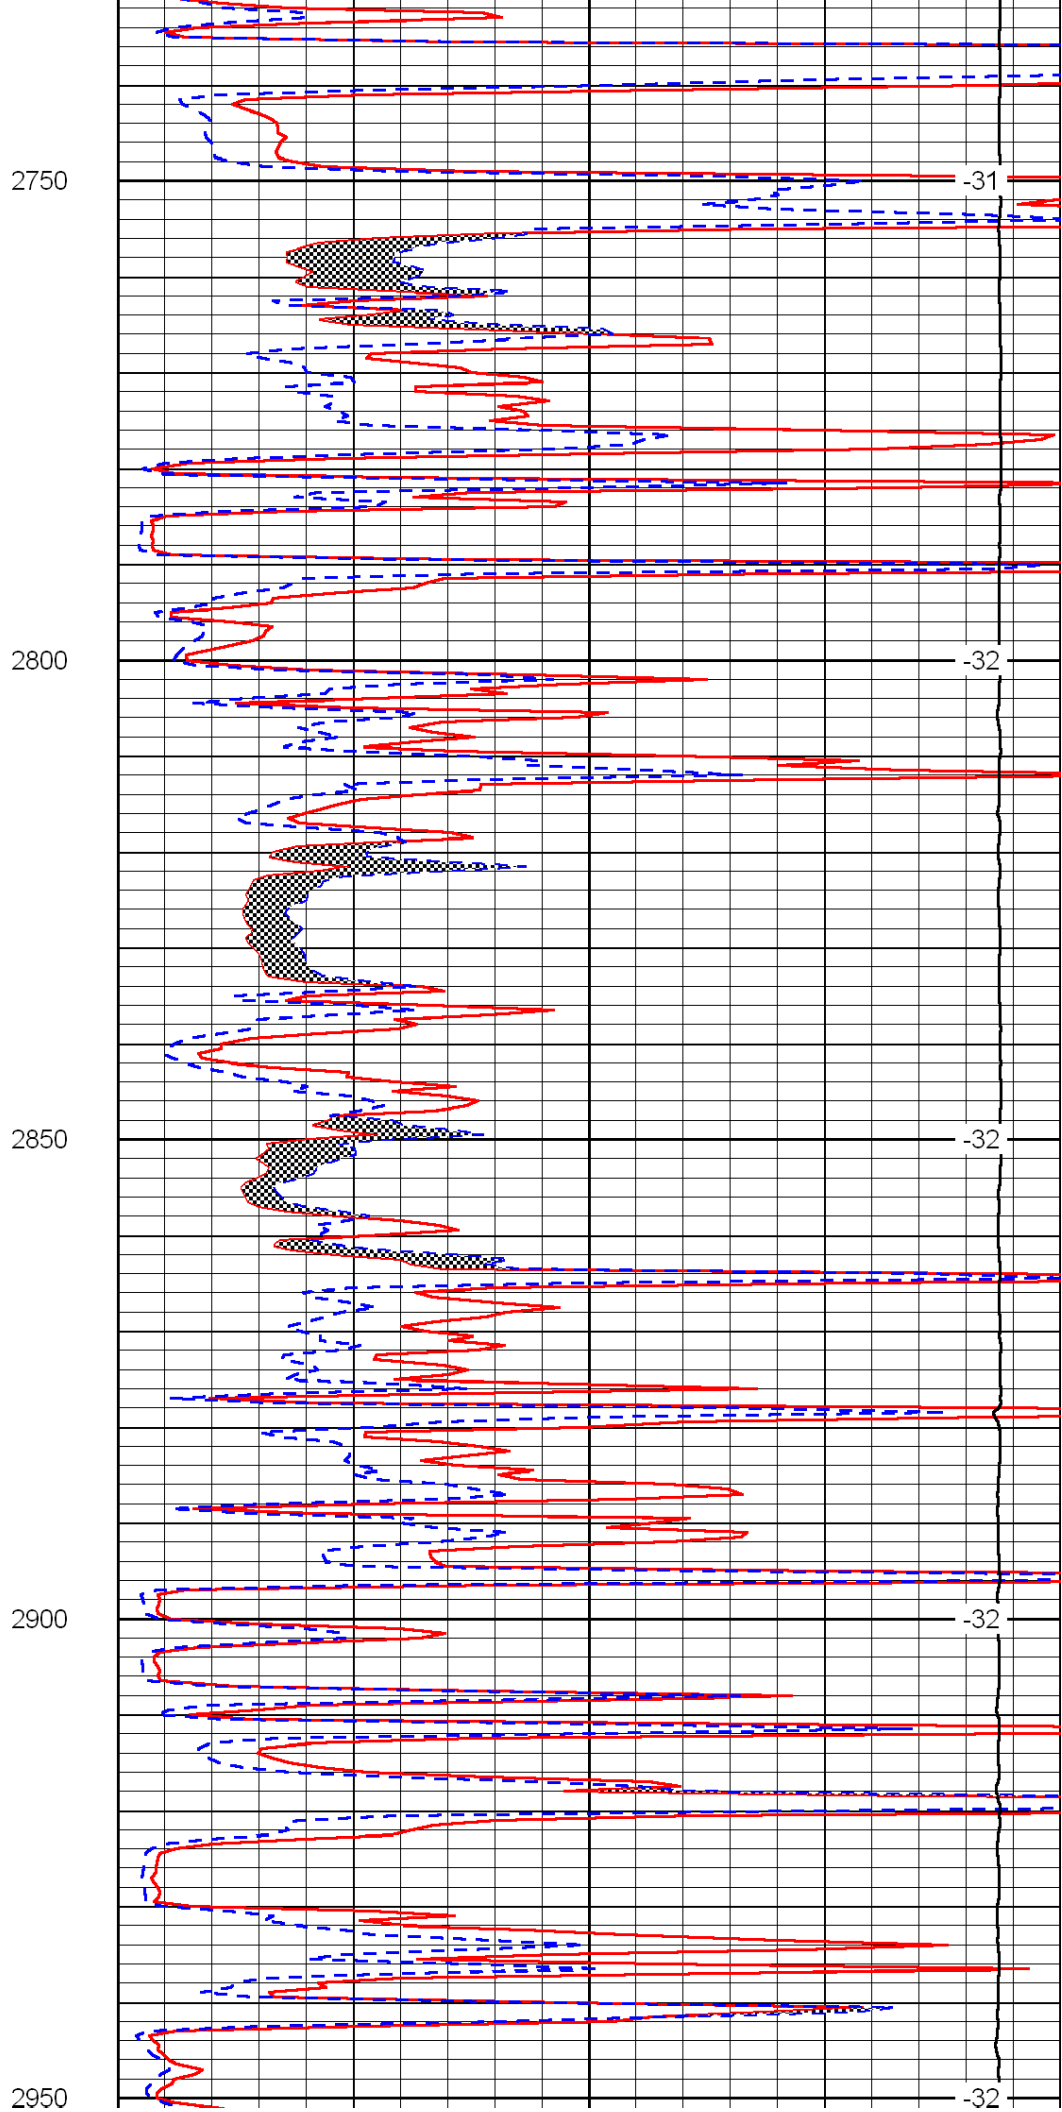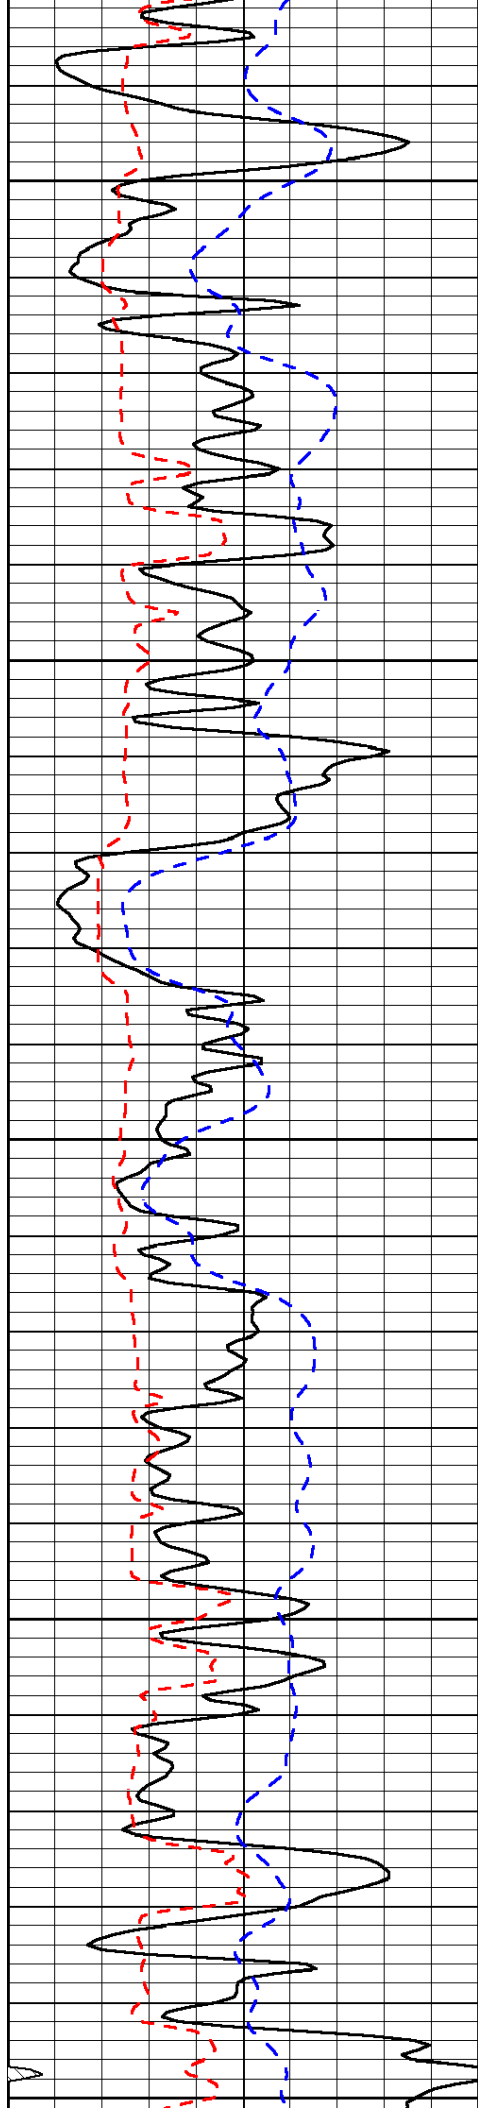

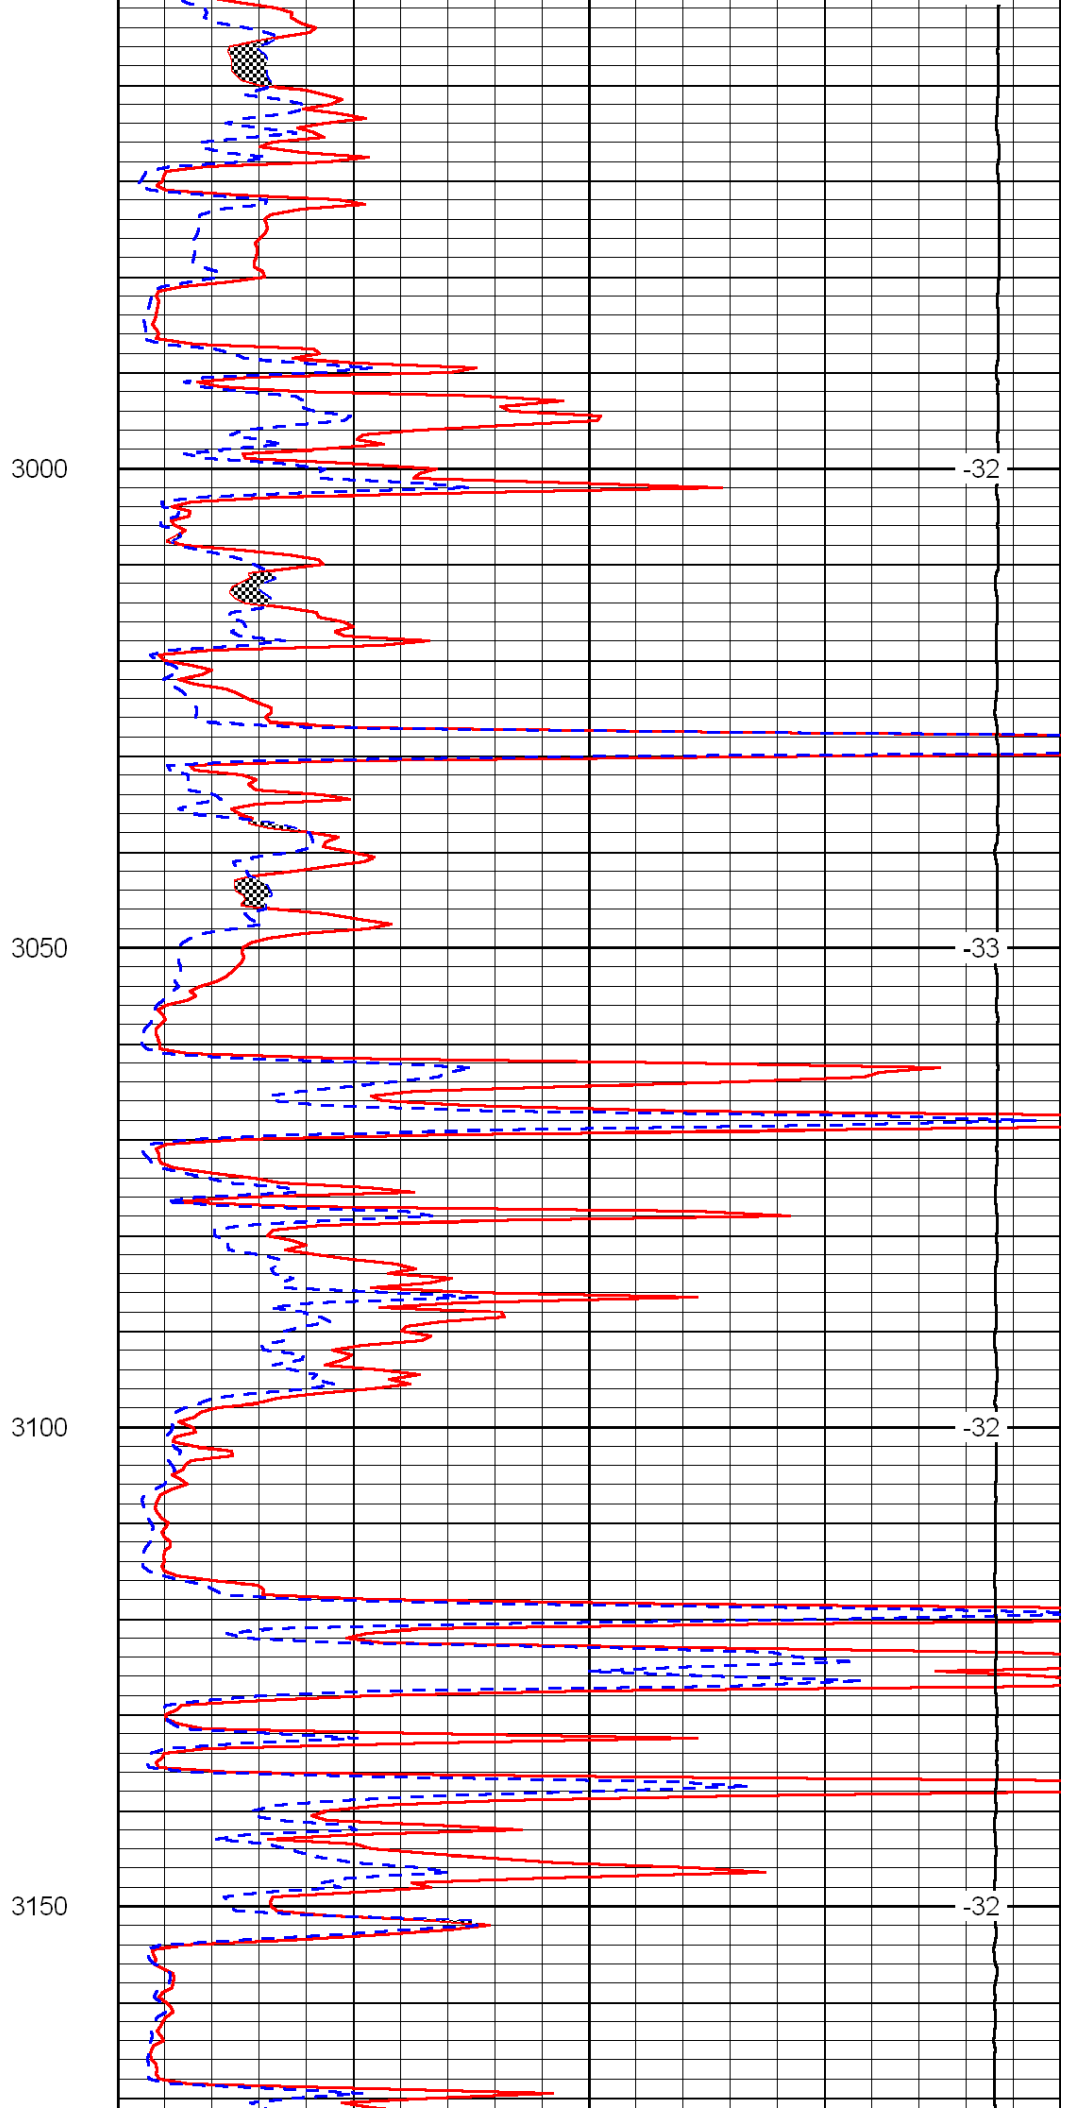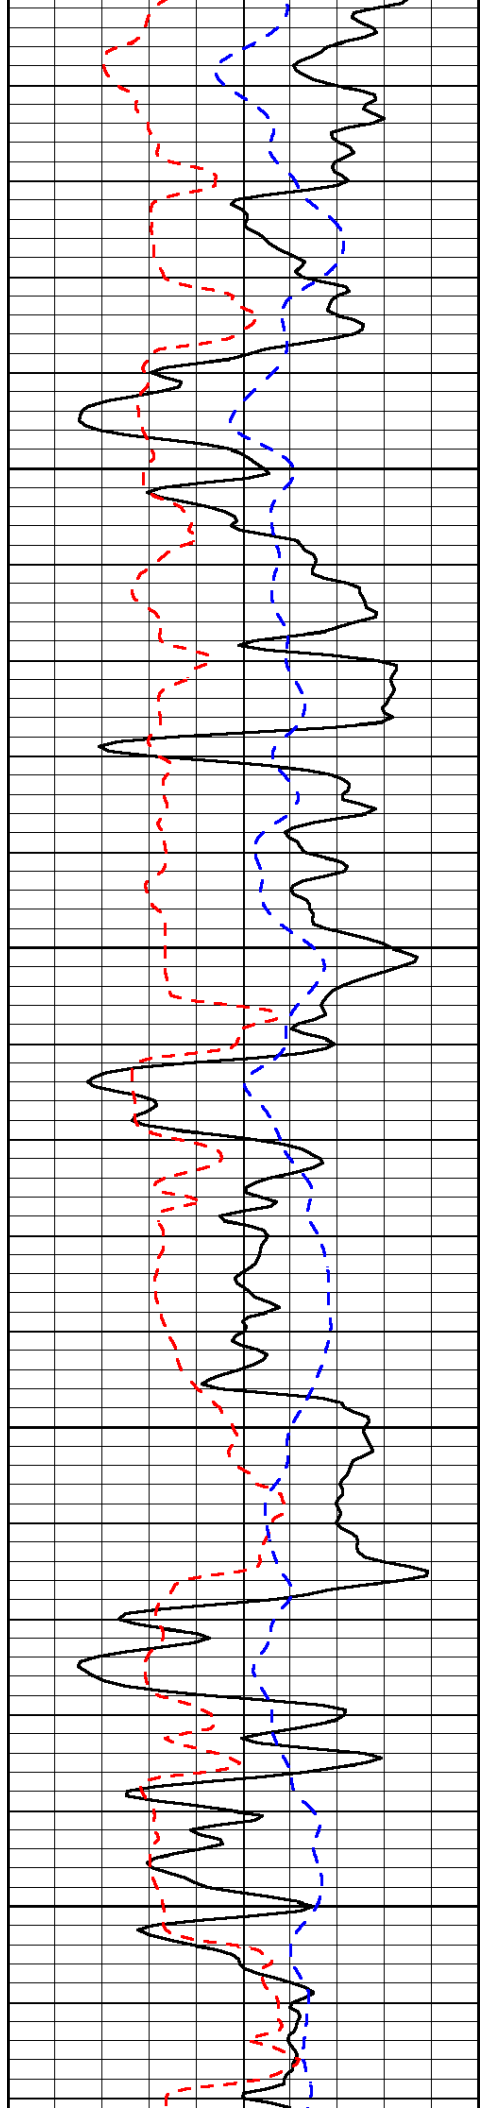

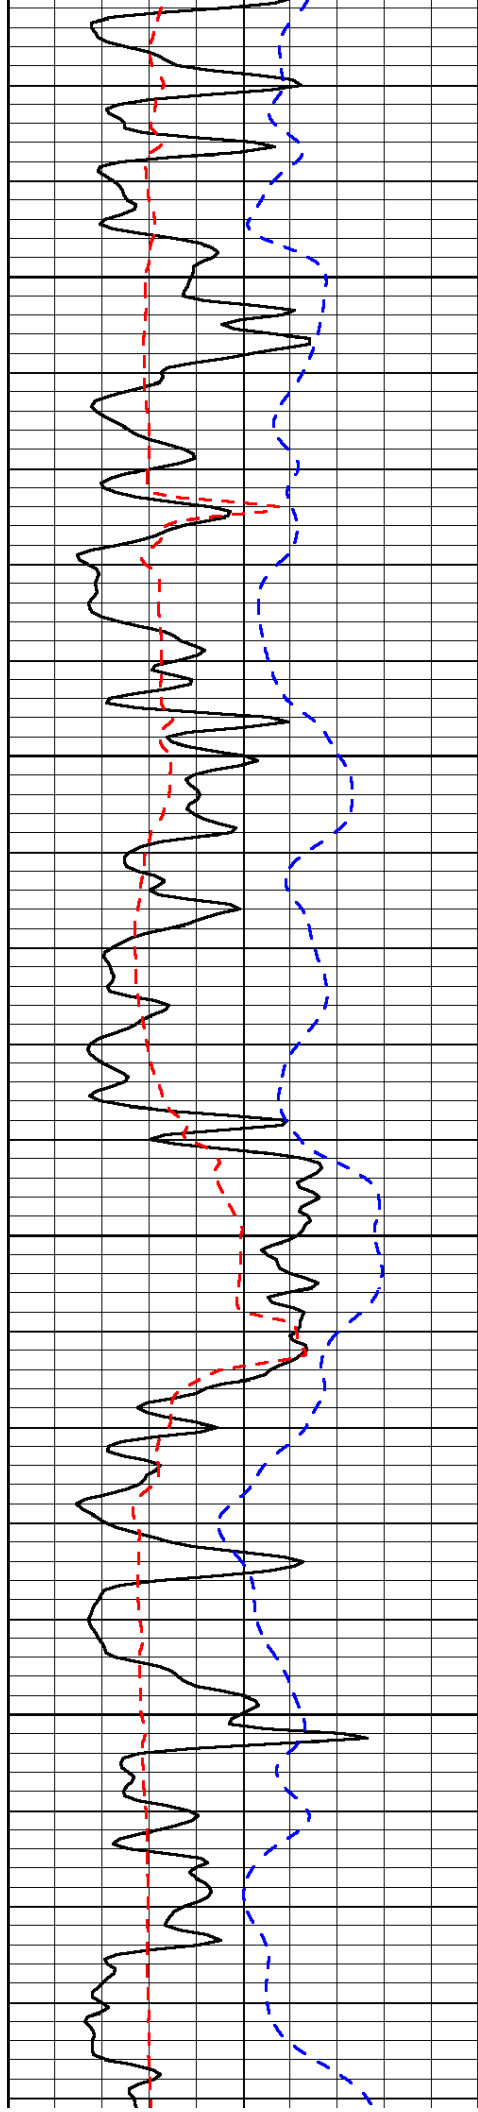


3200

3250

3300

3350

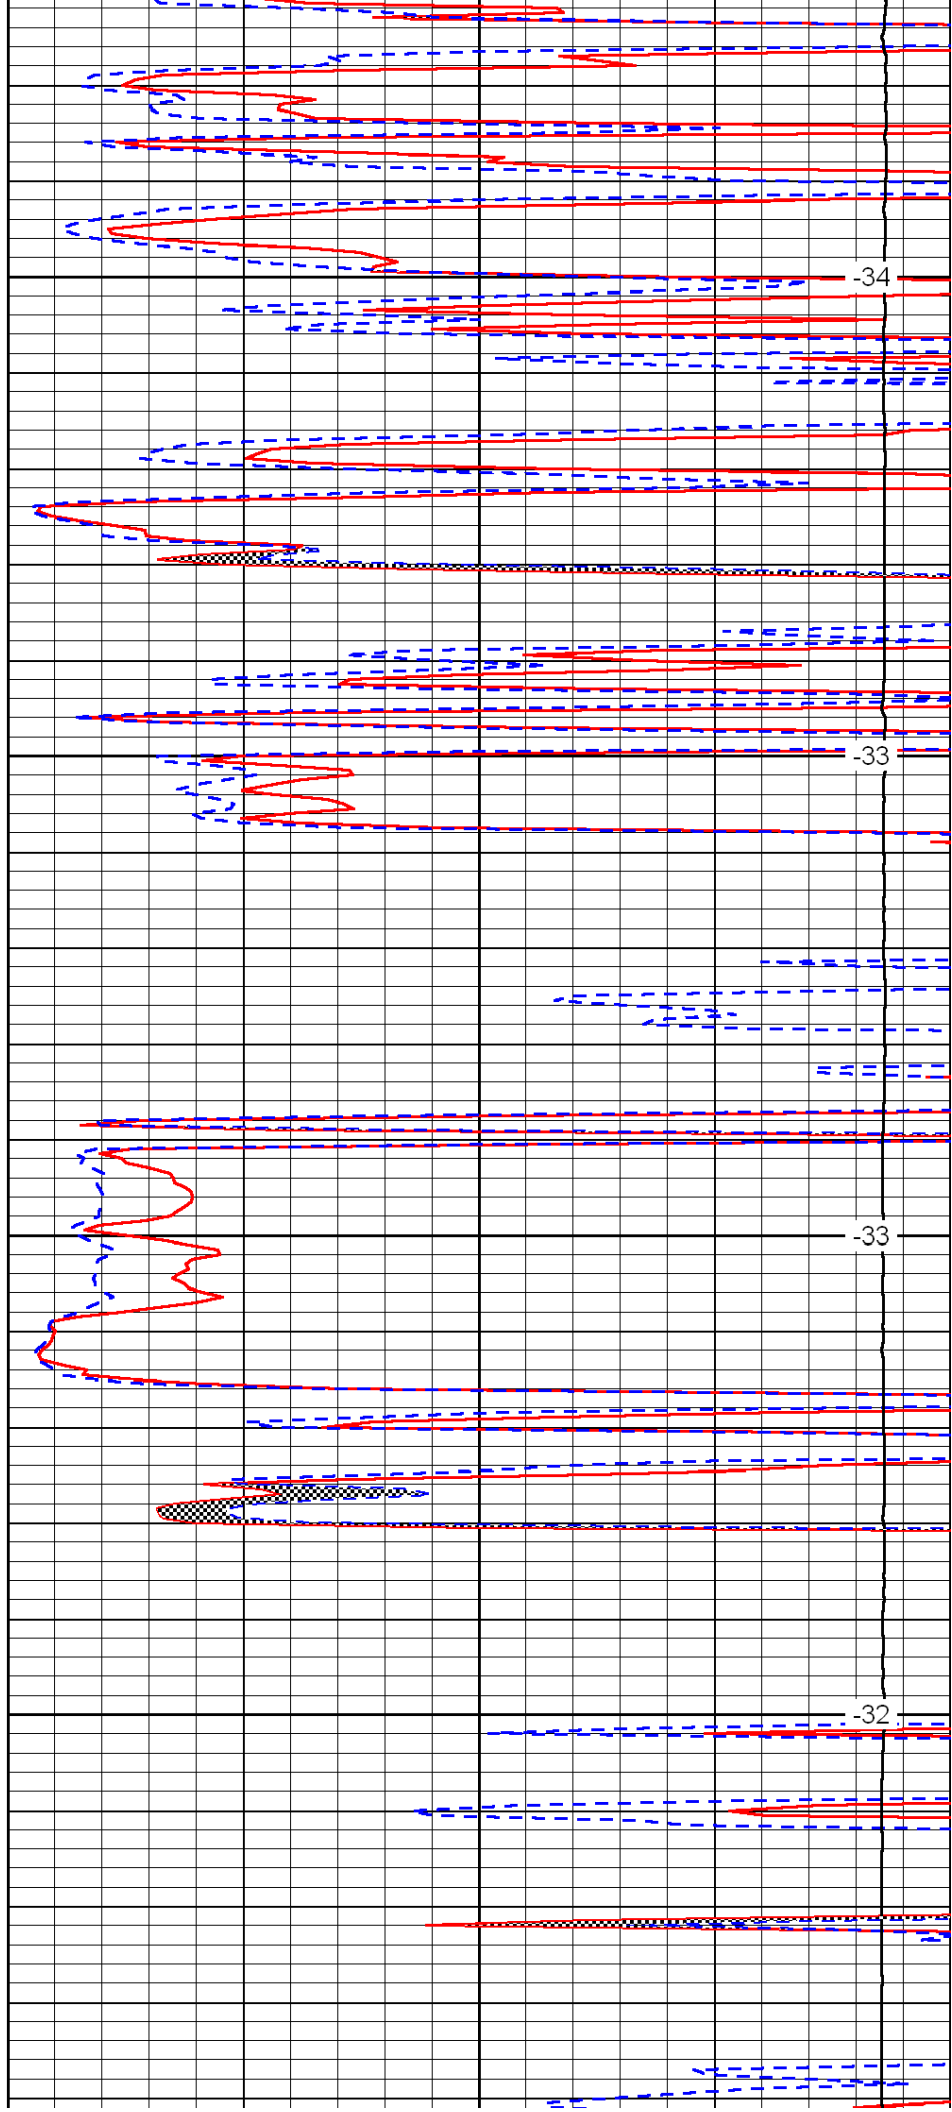


-34

-33

-33

-32

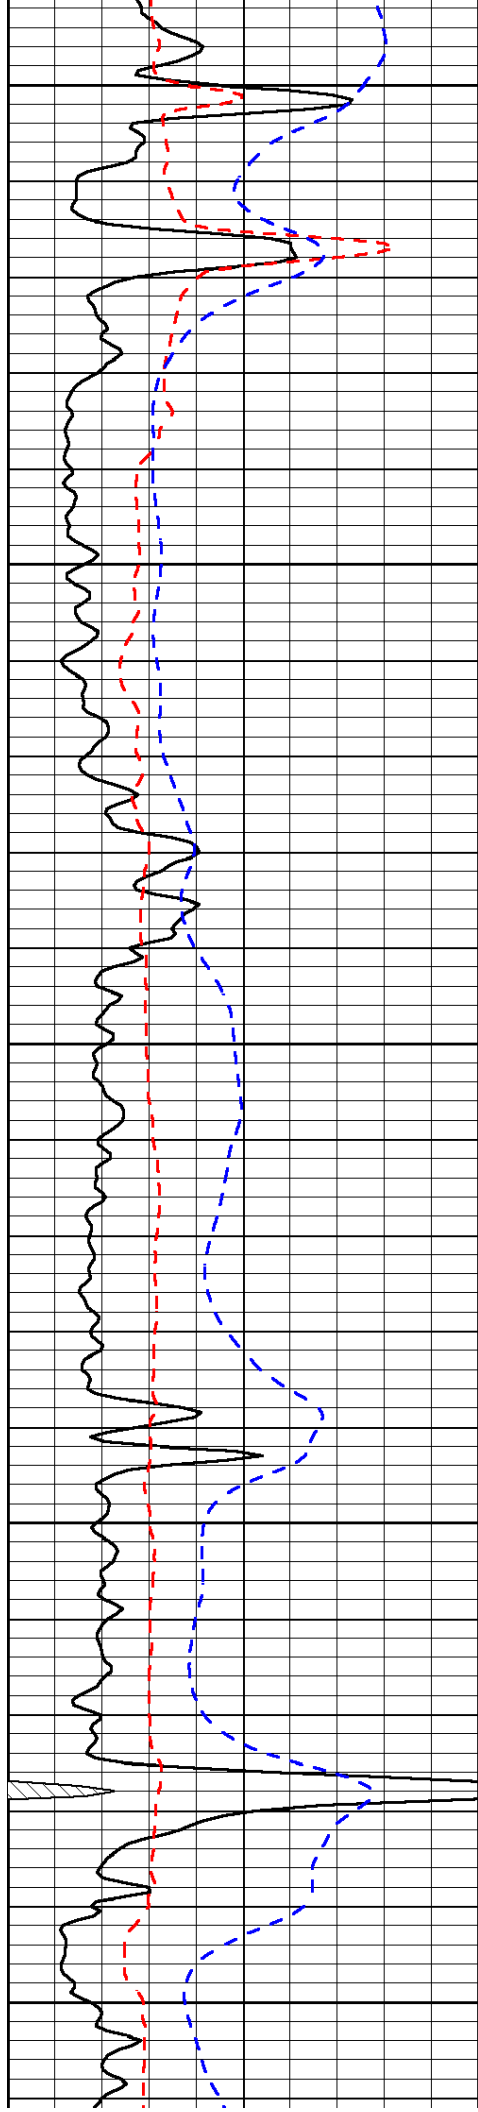


3400


3450

3500

3550

3600

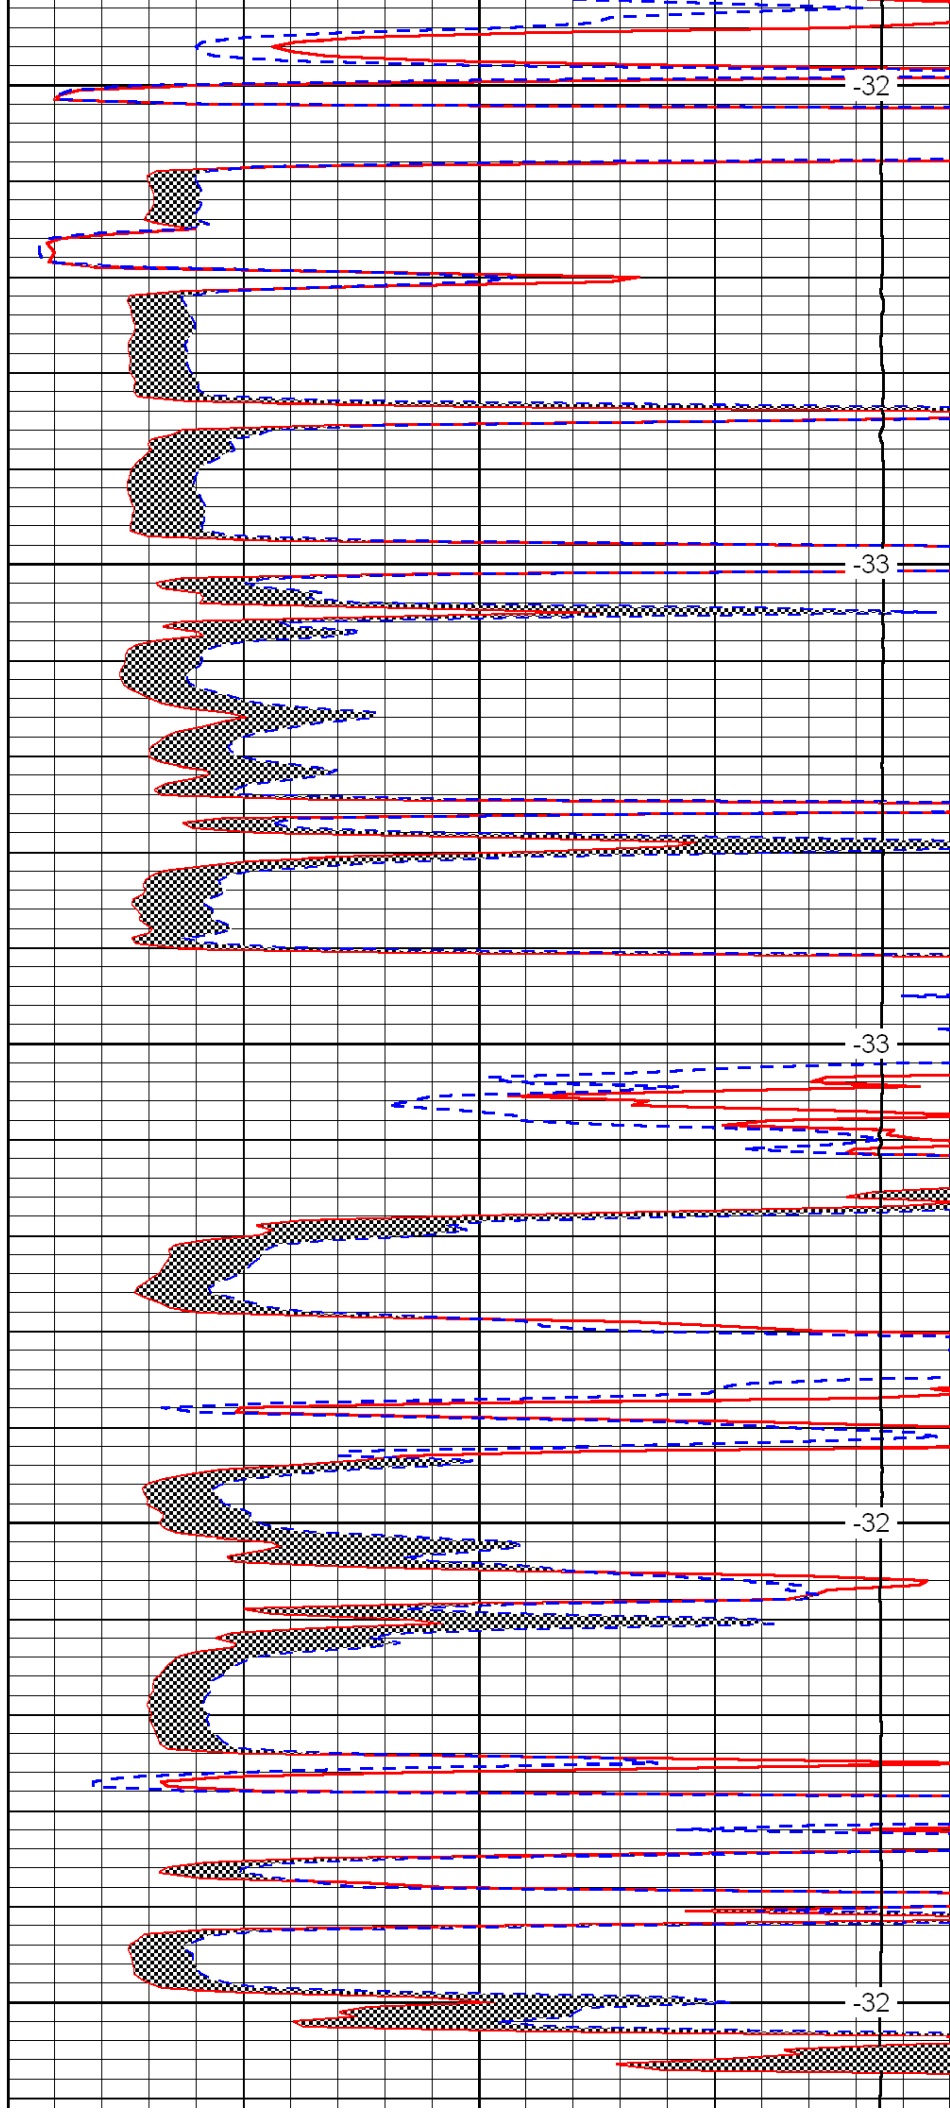

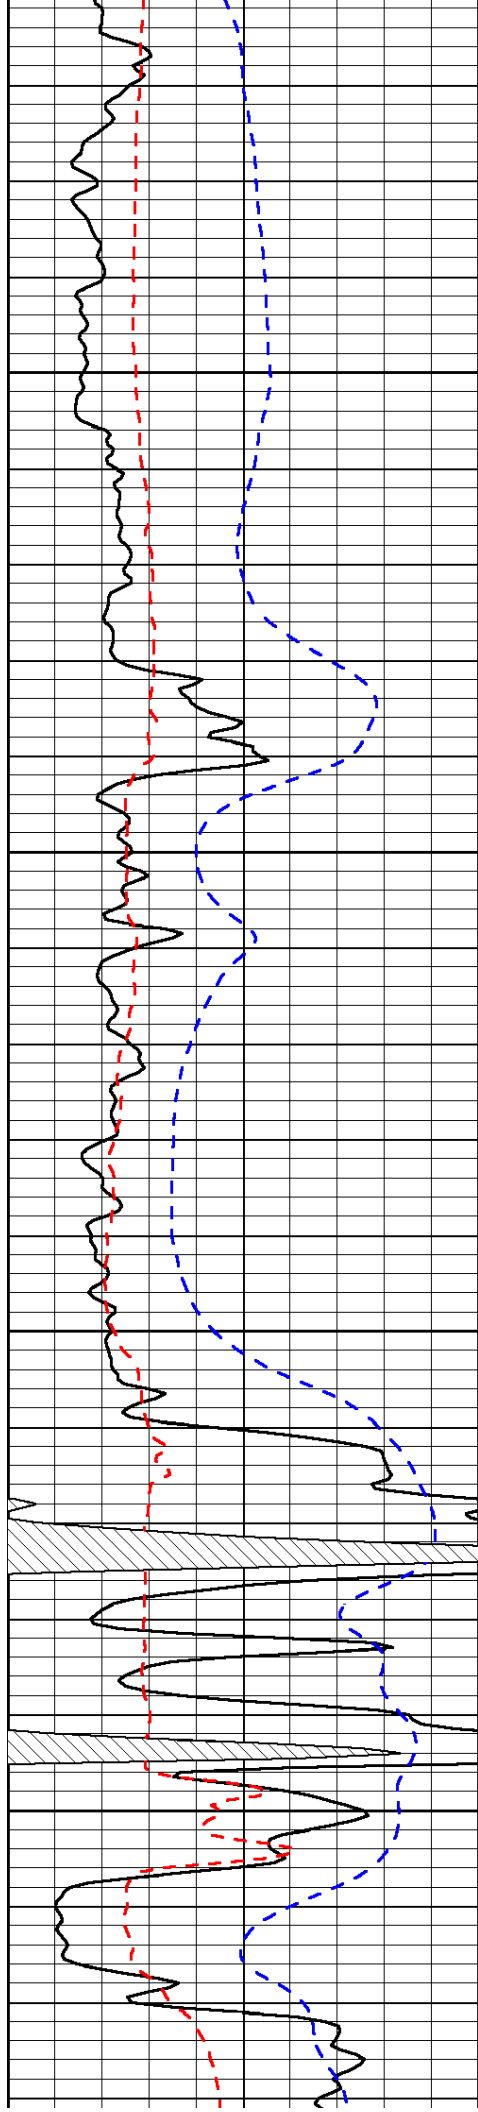




3650


3700

3750

3800

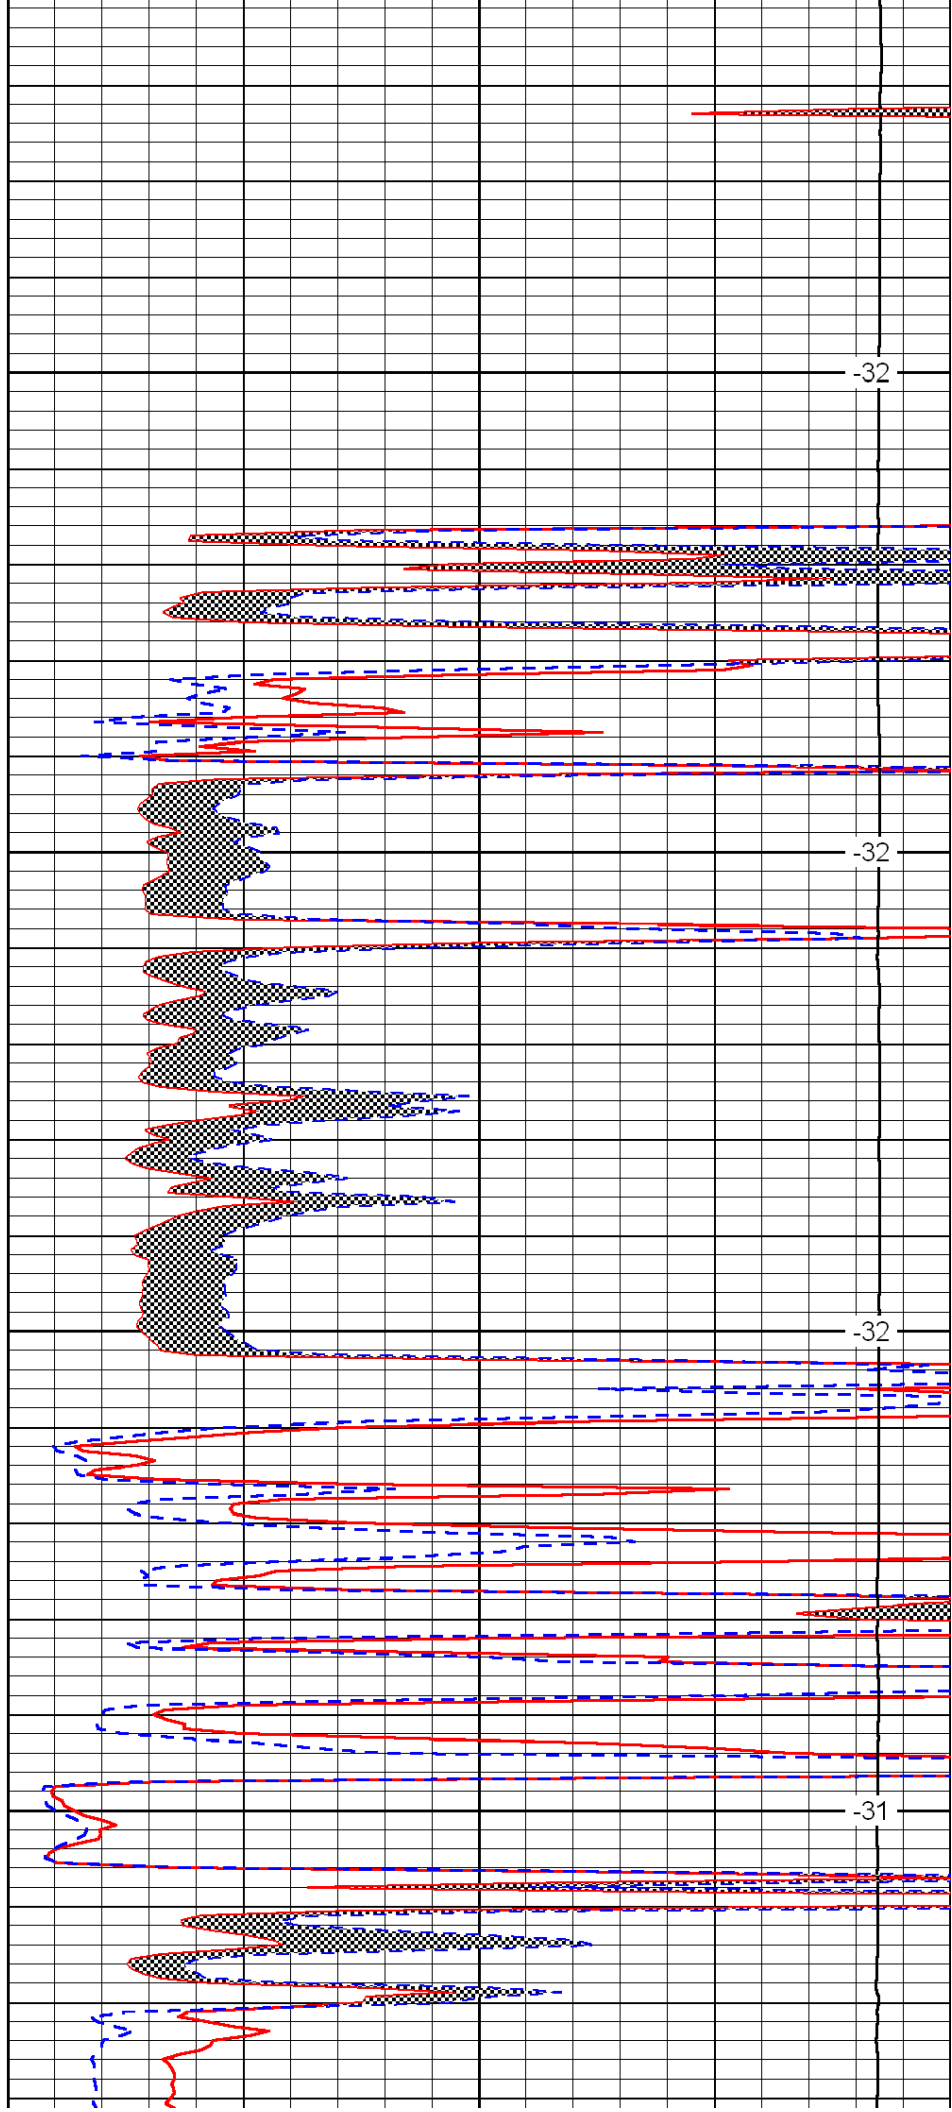

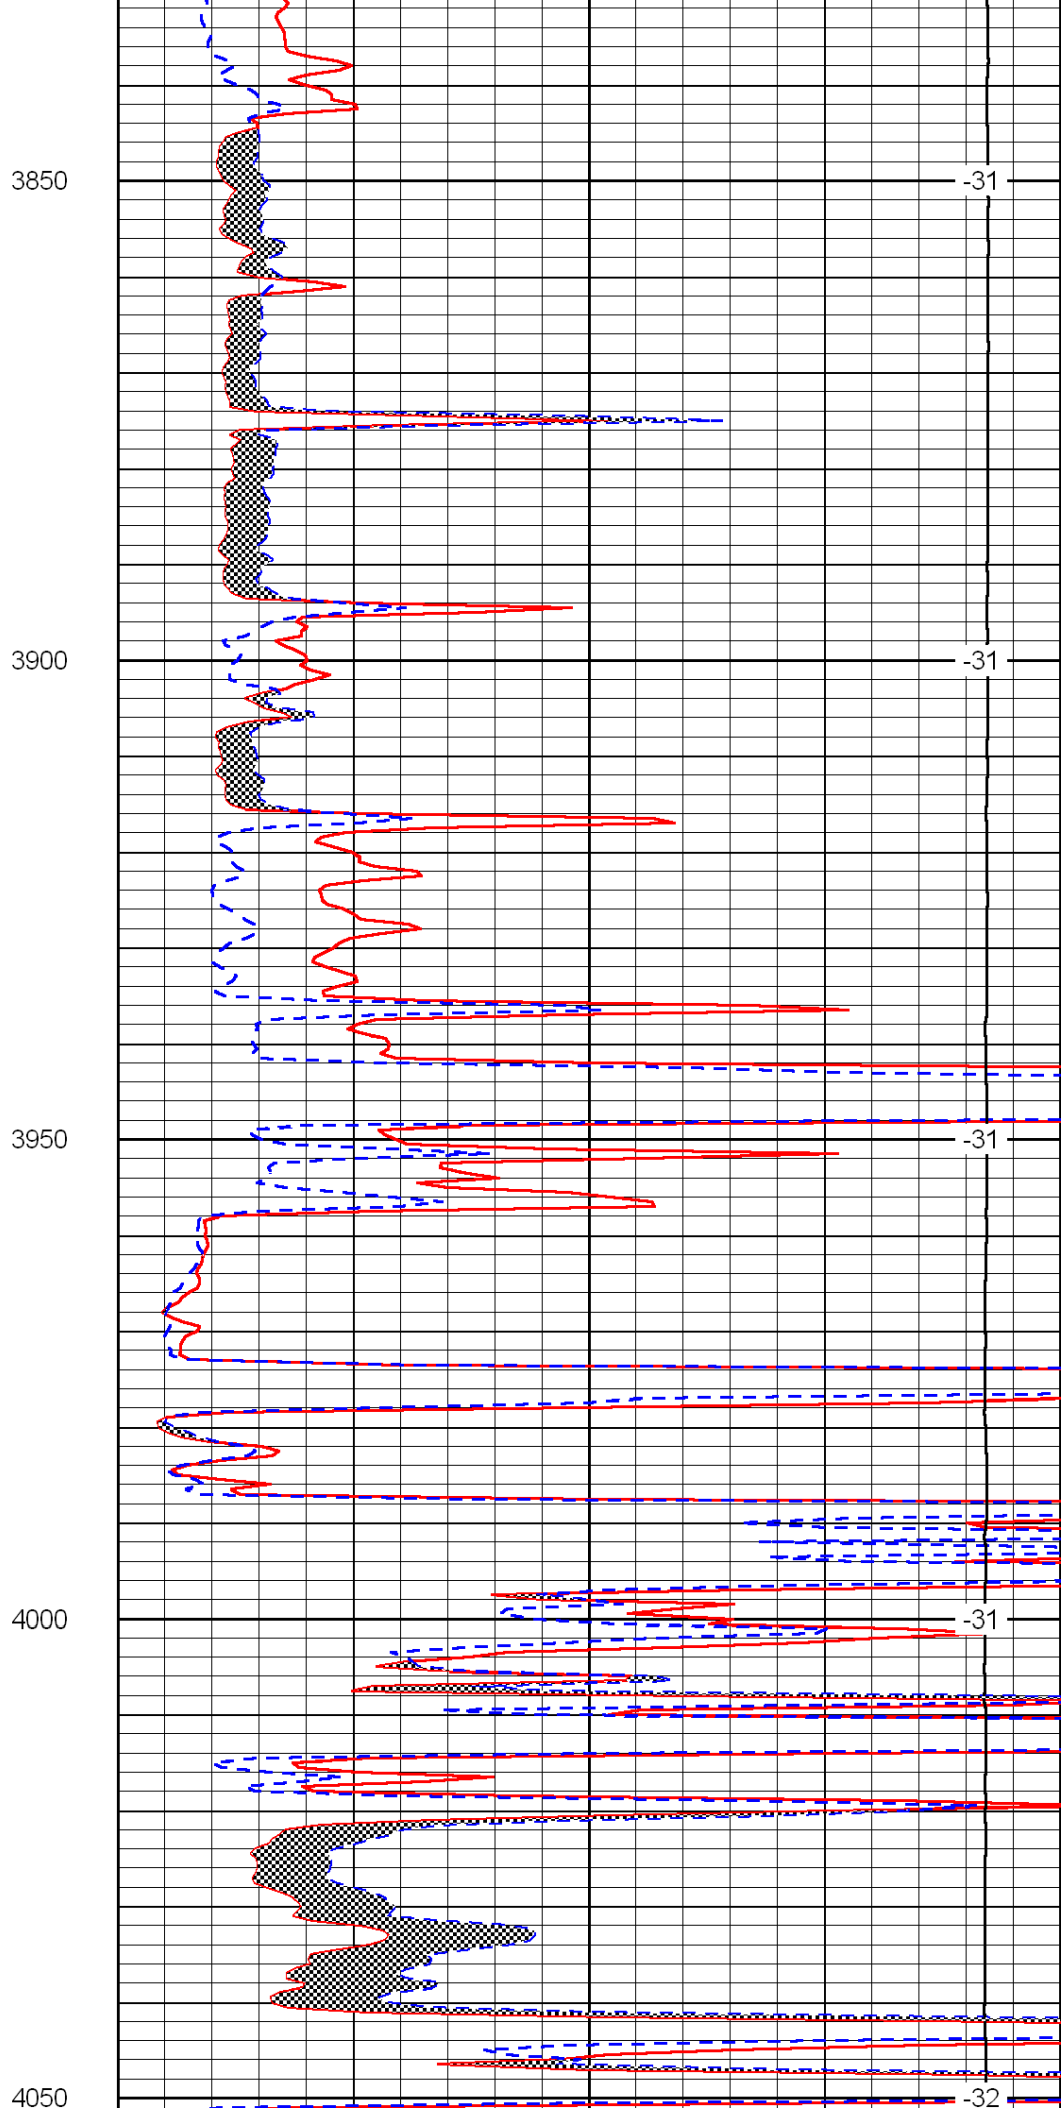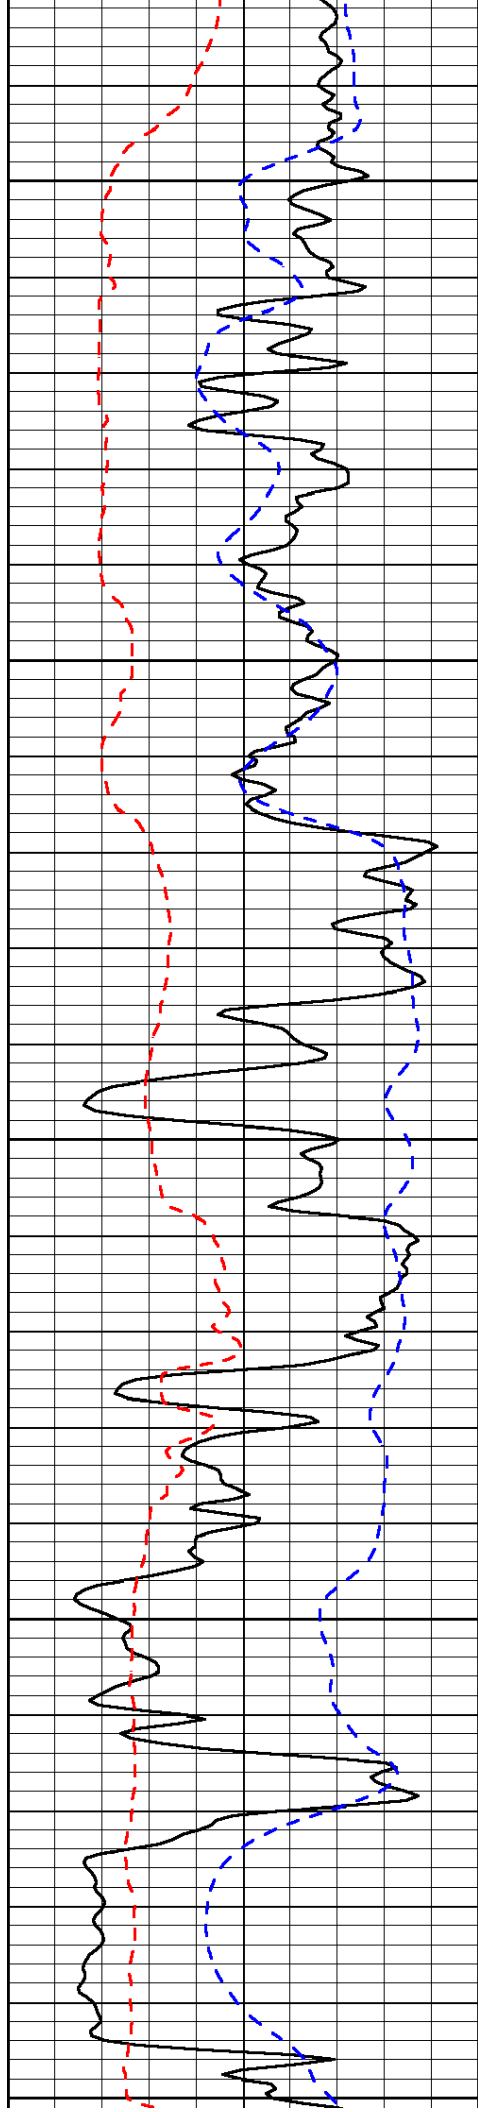

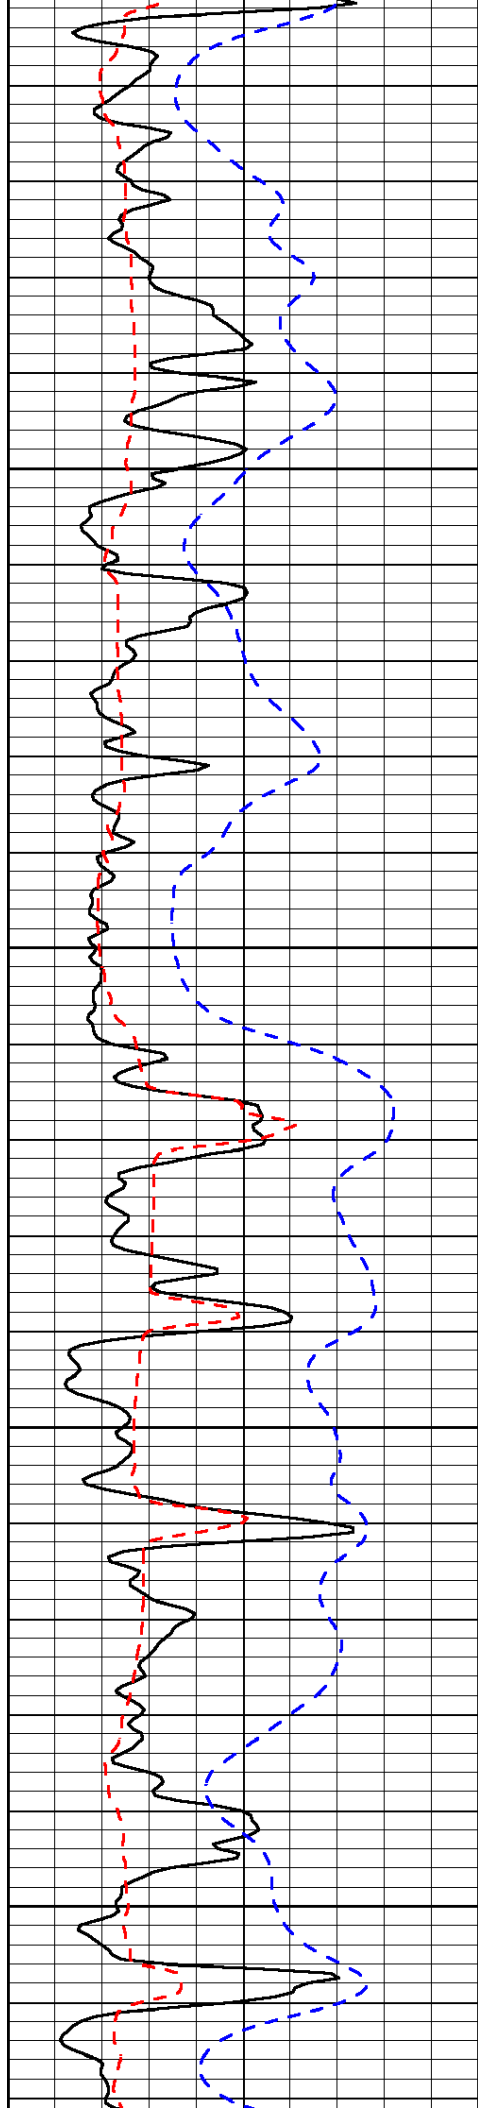



4100

4150

4200

4250

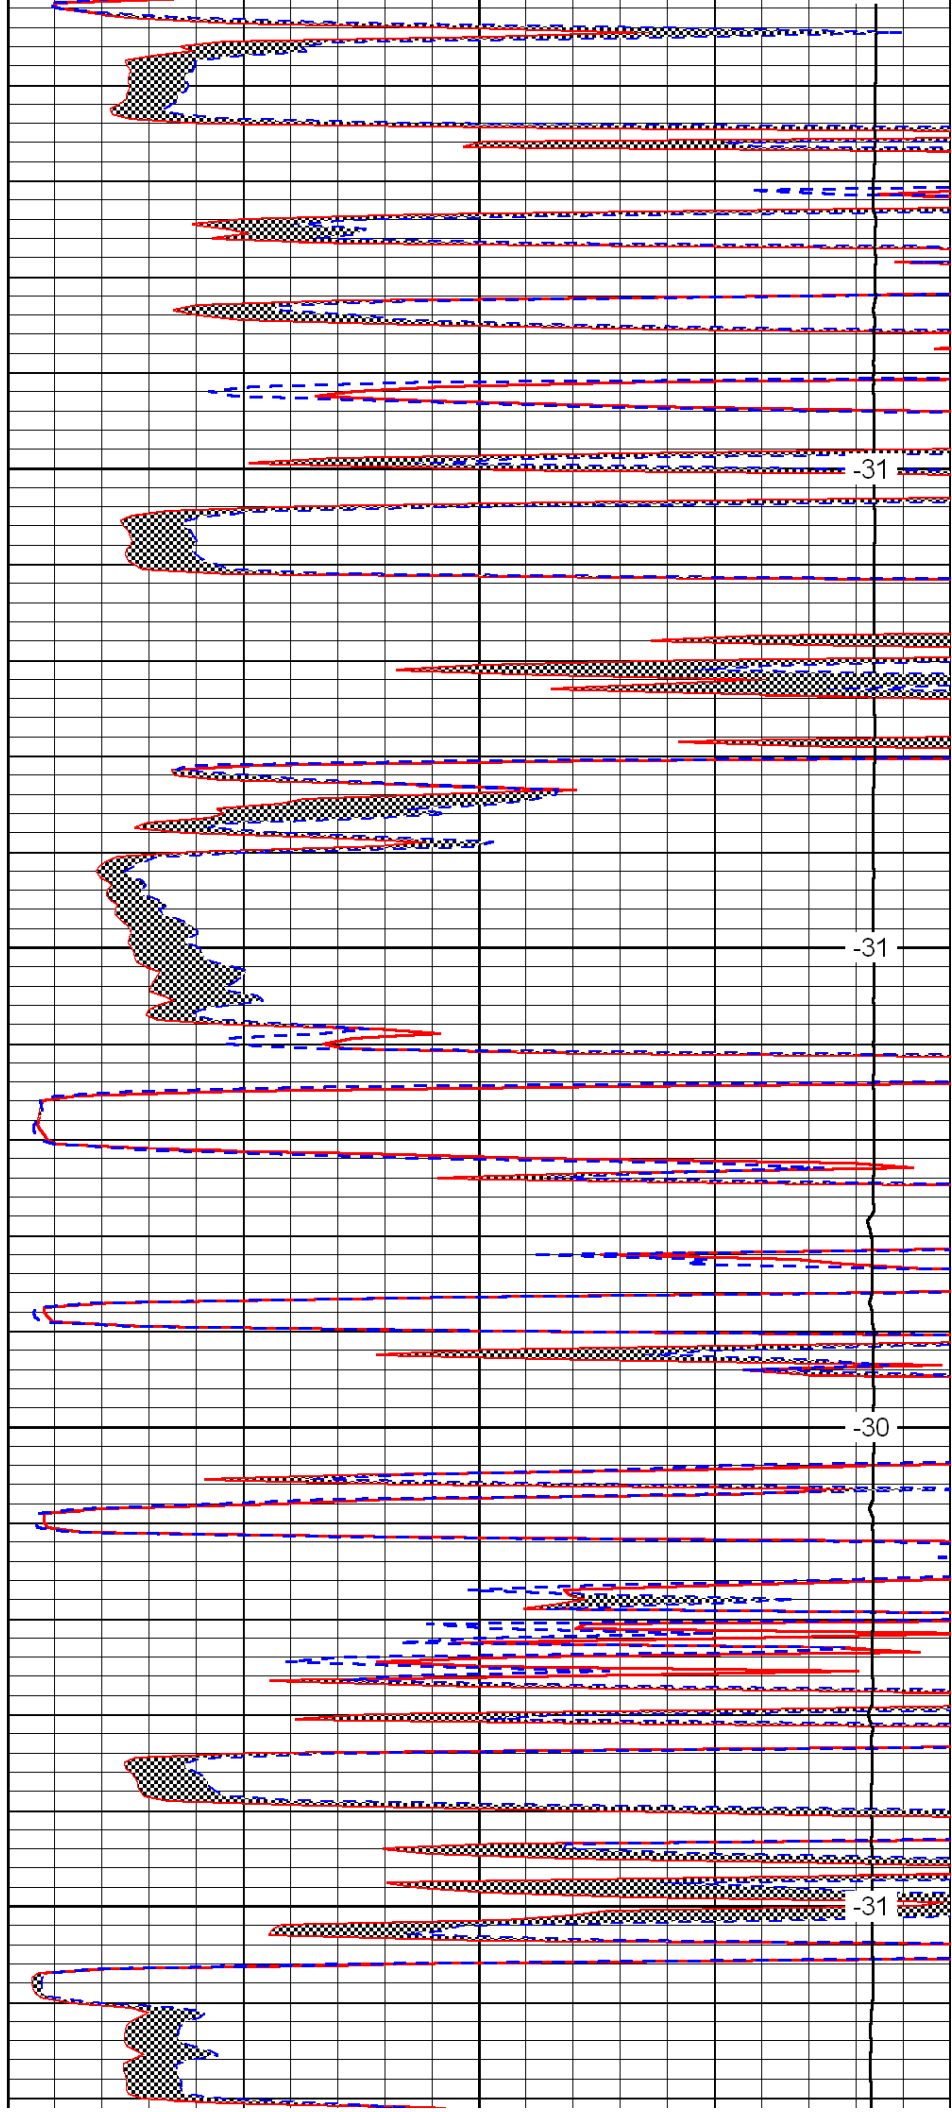

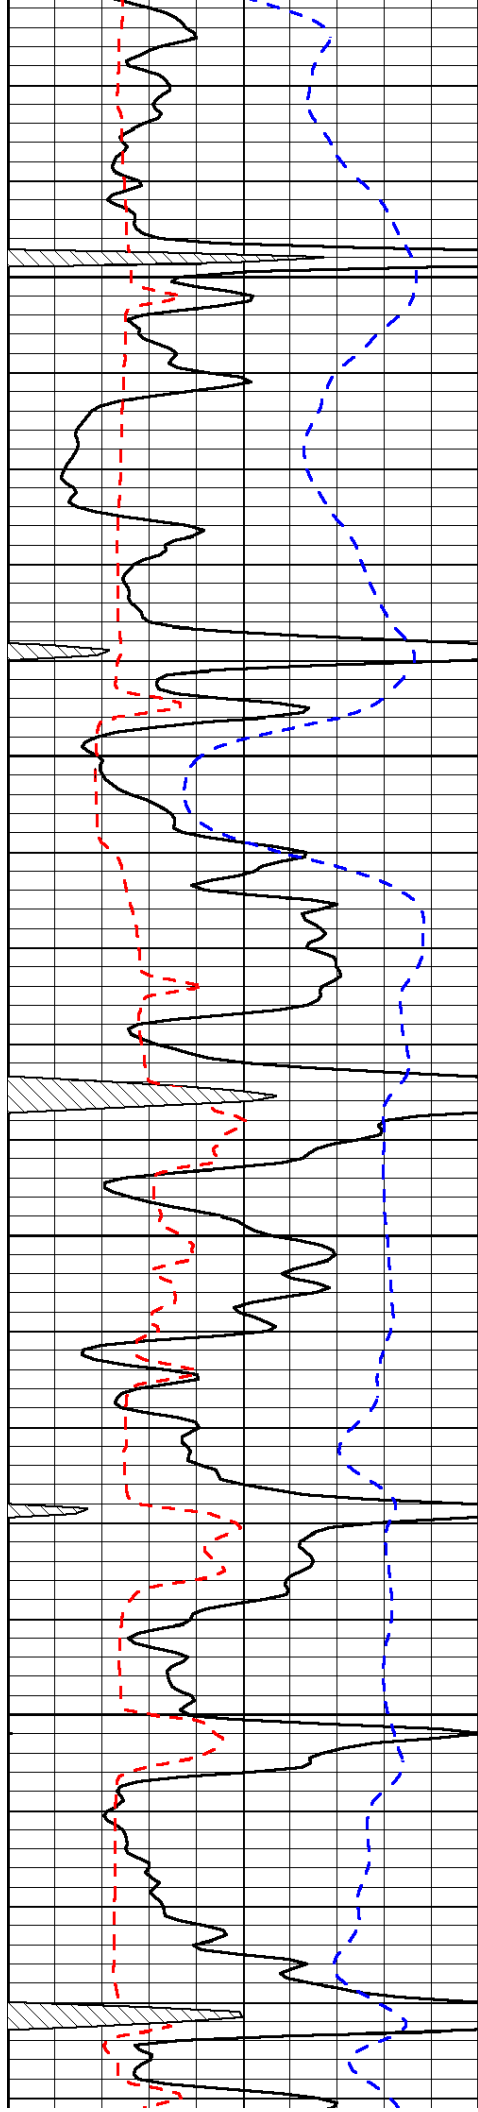


4300

4350

4400

4450


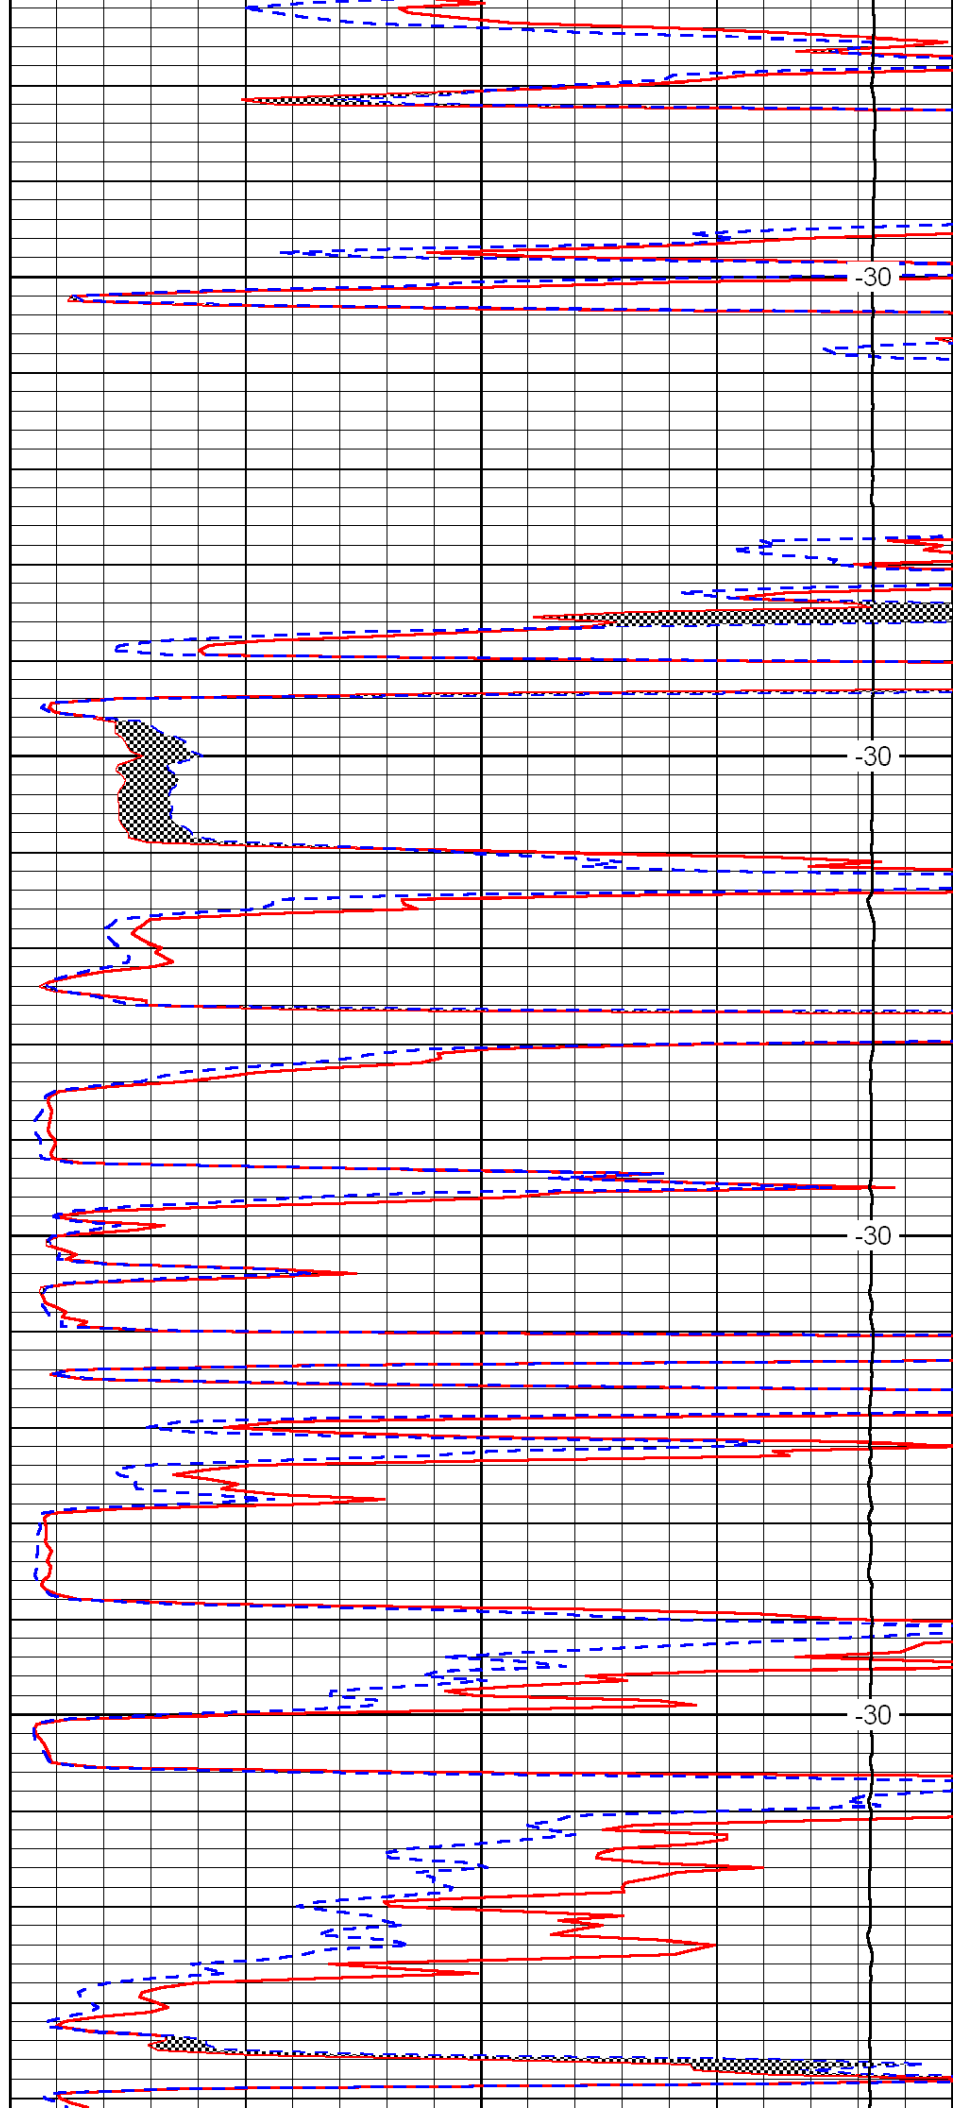


-30

-30

-30

-30

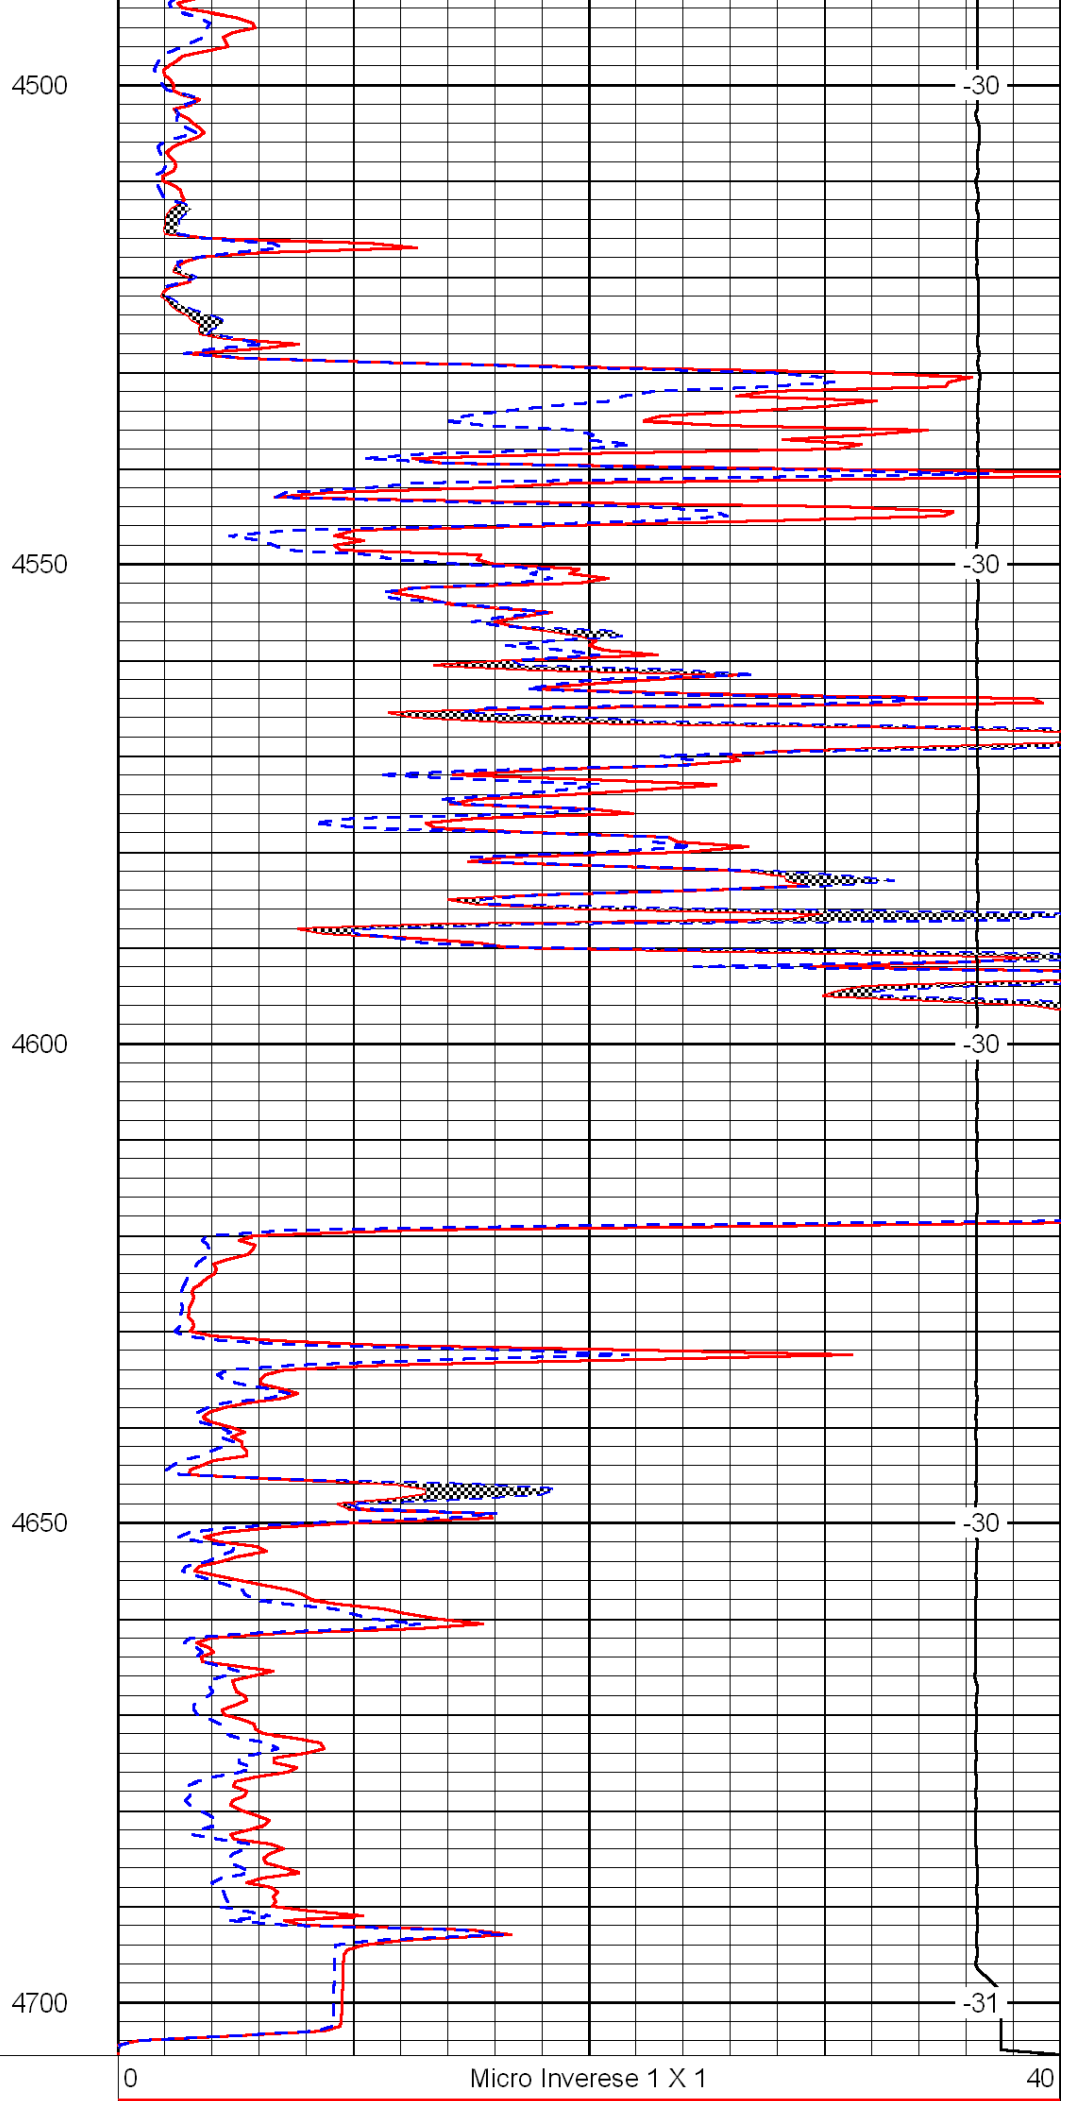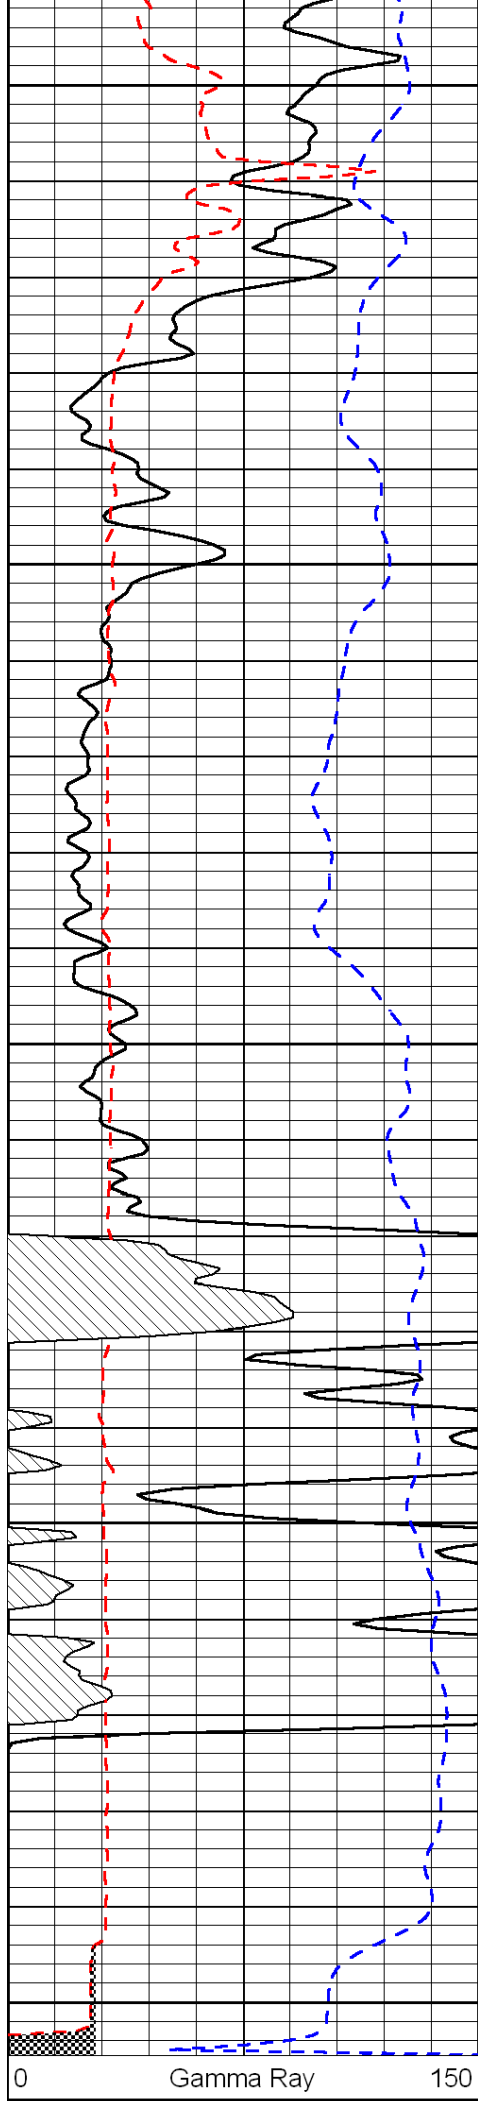

6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

0	Micro Normal 2"	40
15000	Line Weight	0
		LSPD