



# Microresistivity Log

**DIGITAL LOG** (785) 625-3858

API No.	15-081-21,950-00-00		
Company	Berecxco LLC		
Well	Doerksen 'B' No. 1-27		
Field	Eubank N.		
County	Haskell	State	Kansas
Location	SE - NW - NE - NE 335' FNL & 890' FEL		
Sec: 27	Twp: 28 S	Rge: 34 W	Elevation K.B. 3012 D.F. 2999 G.L. 2999
Permanent Datum	Ground Level	Elevation 2999	
Log Measured From	Kelly Bushing	13 Ft. Above Perm. Datum	
Drilling Measured From	Kelly Bushing		

Date	8/6/2011		
Run Number	Two		
Depth Driller	5770		
Depth Logger	5765		
Bottom Logged Interval	5764		
Top Log Interval	3500		
Casing Driller	8.625 @ 1786		
Casing Logger	1786		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	2.100		
Density / Viscosity	8.8	45	
pH / Fluid Loss	9.5	9.6	
Source of Sample	Flowline		
Rm @ Meas. Temp	0.40 @ 79		
Rmf @ Meas. Temp	0.30 @ 79		
Rmc @ Meas. Temp	0.54 @ 79		
Source of Rmf / Rmc	Charts		
Rm @ BHT	0.23 @ 136		
Operating Rig Time	4 Hours		
Max Rec. Temp. F	136		
Equipment Number	17		
Location	Hays		
Recorded By	B. Becker		
Witnessed By	Ed Graves		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

### Comments


Thank you for using Log-Tech, Inc.  
(785) 625-3858

Sublette, Ks; 6 North;  
8 West to EE; 2 North;  
1/4 West; South Into

Database File: berexcohd.db  
 Dataset Pathname: DIL/berstk  
 Presentation Format: micro  
 Dataset Creation: Sat Aug 06 14:09:28 2011  
 Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	MCAL (GAPI)	16
2.875	Mud Cake (GAPI)	7.875
-200	SP	0

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
10000	Line Weight	0
	LSPD	

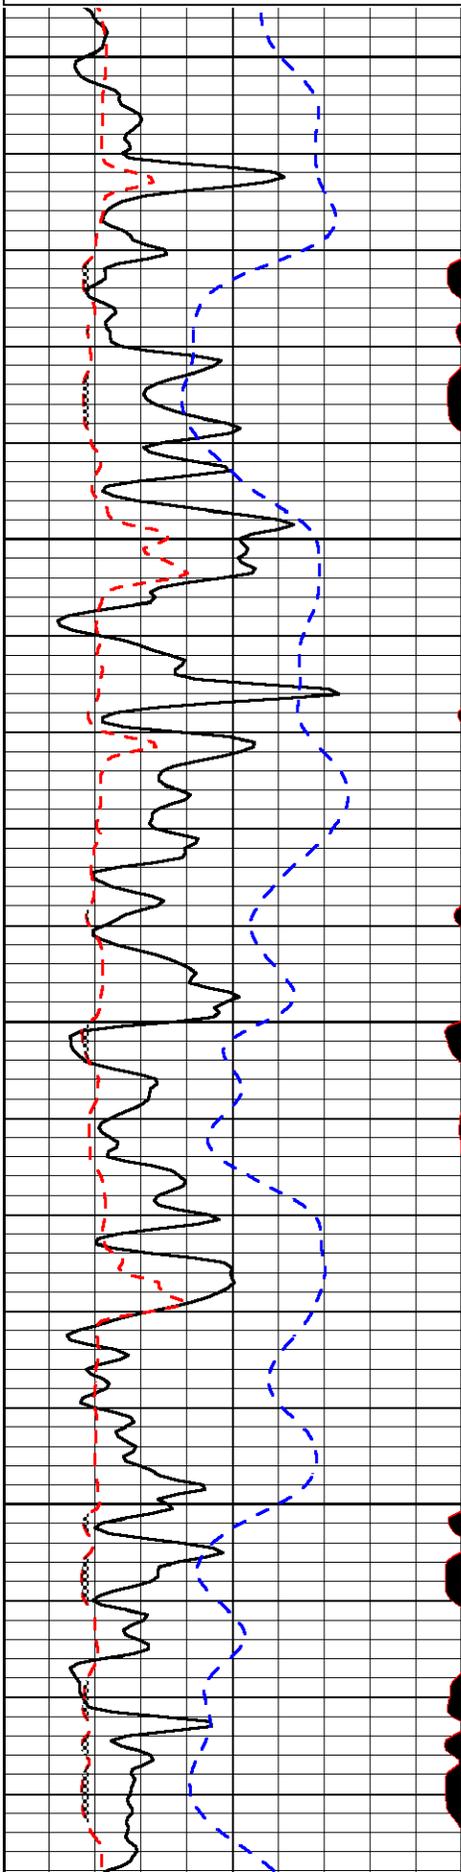


3500

3550

3600

3650

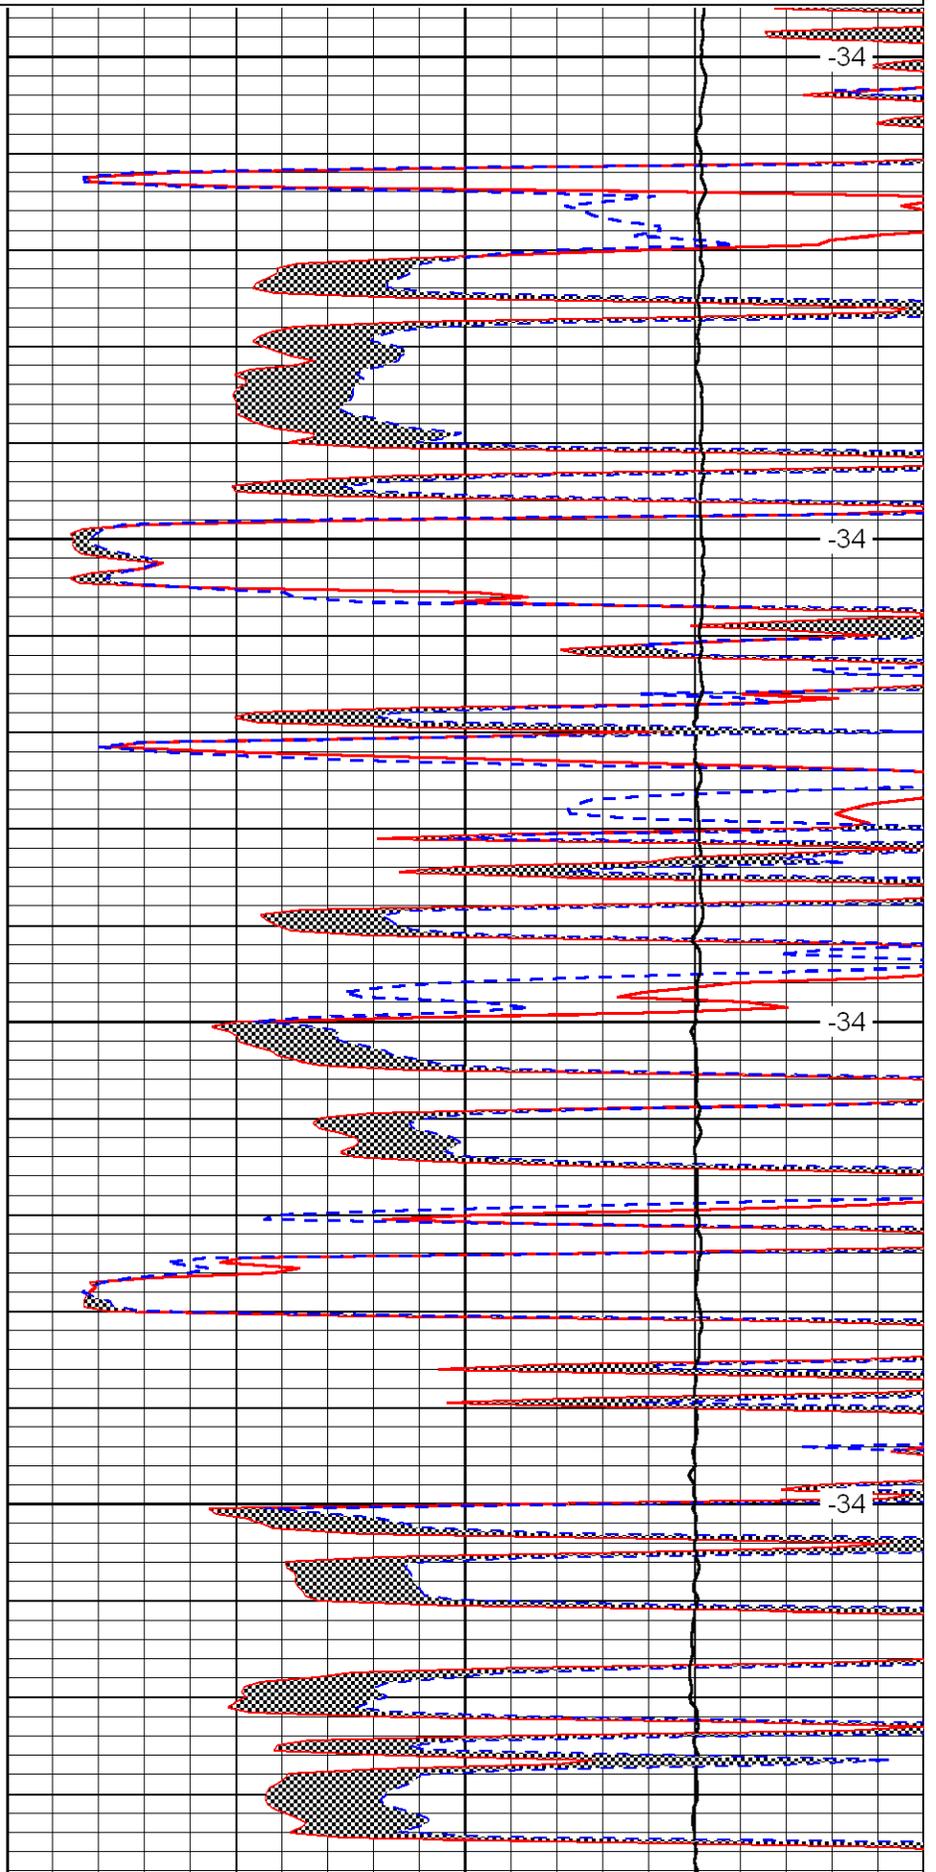


-34

-34

-34

-34

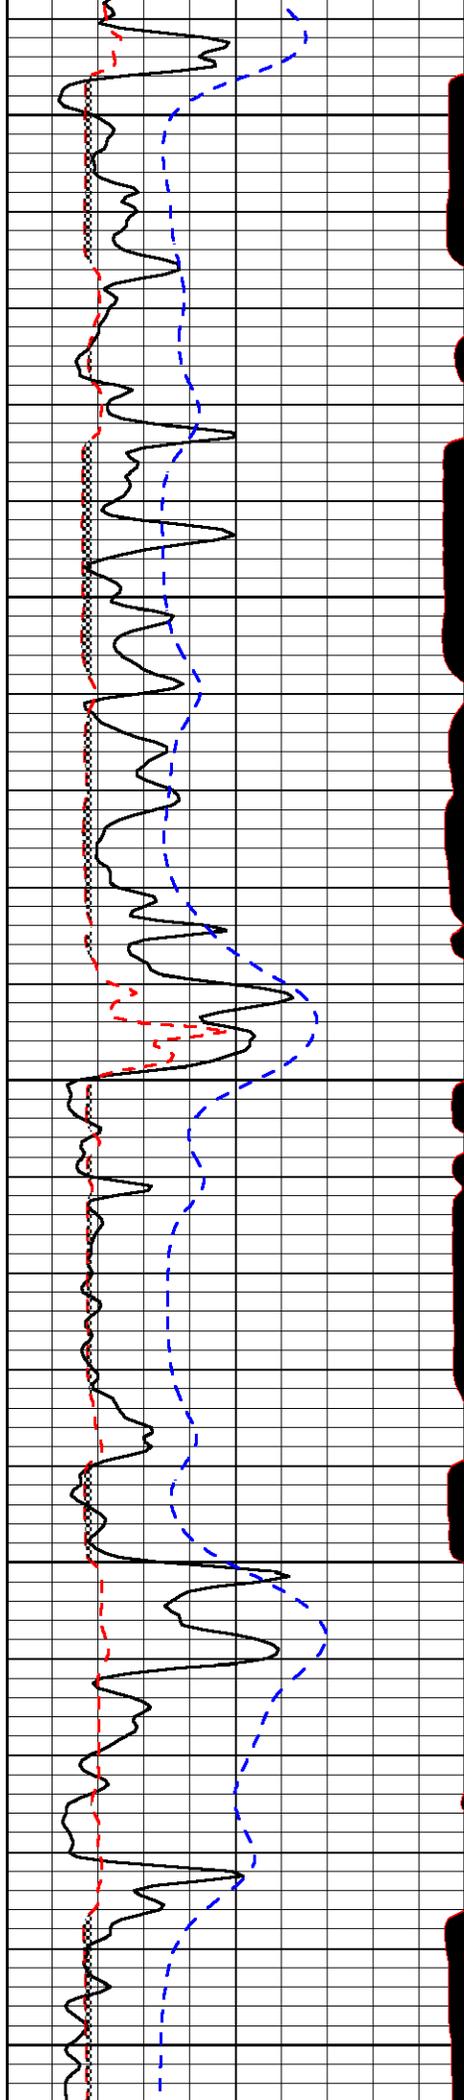


3700

3750

3800

3850

3900

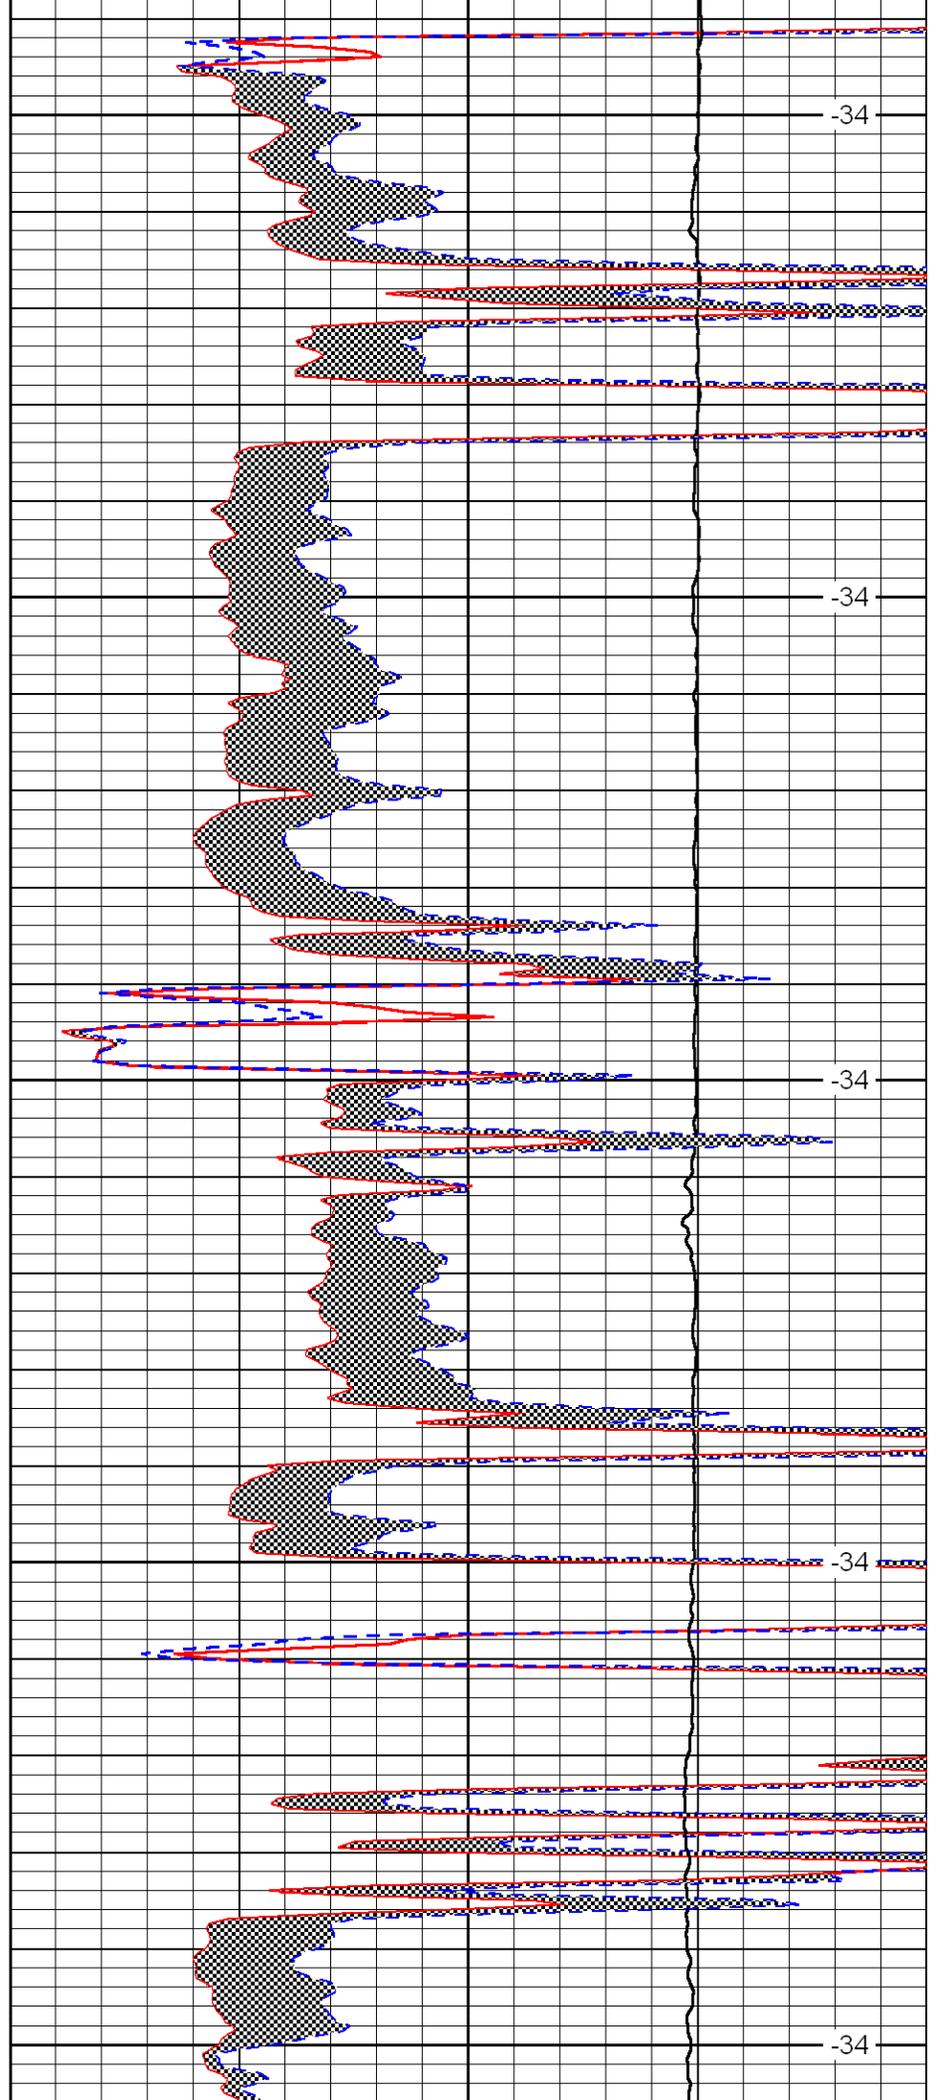


-34

-34

-34

-34

-34

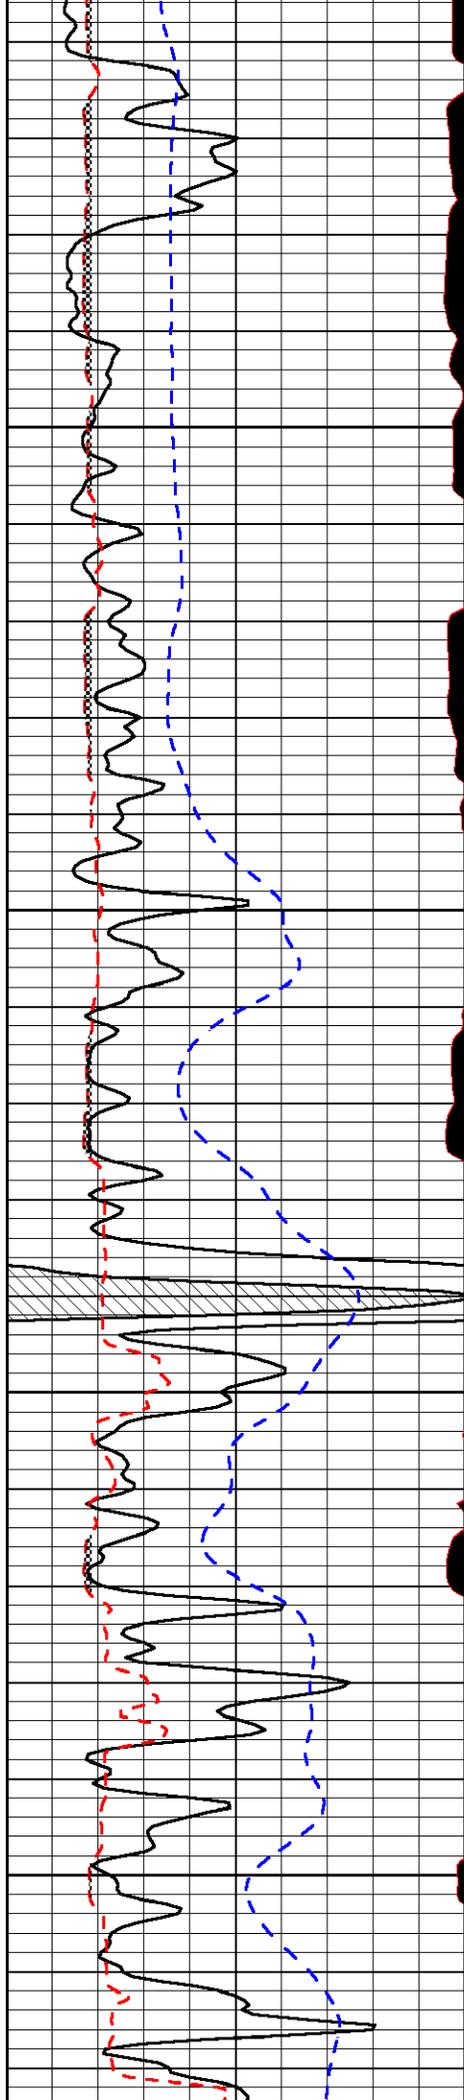


3950

4000

4050

4100

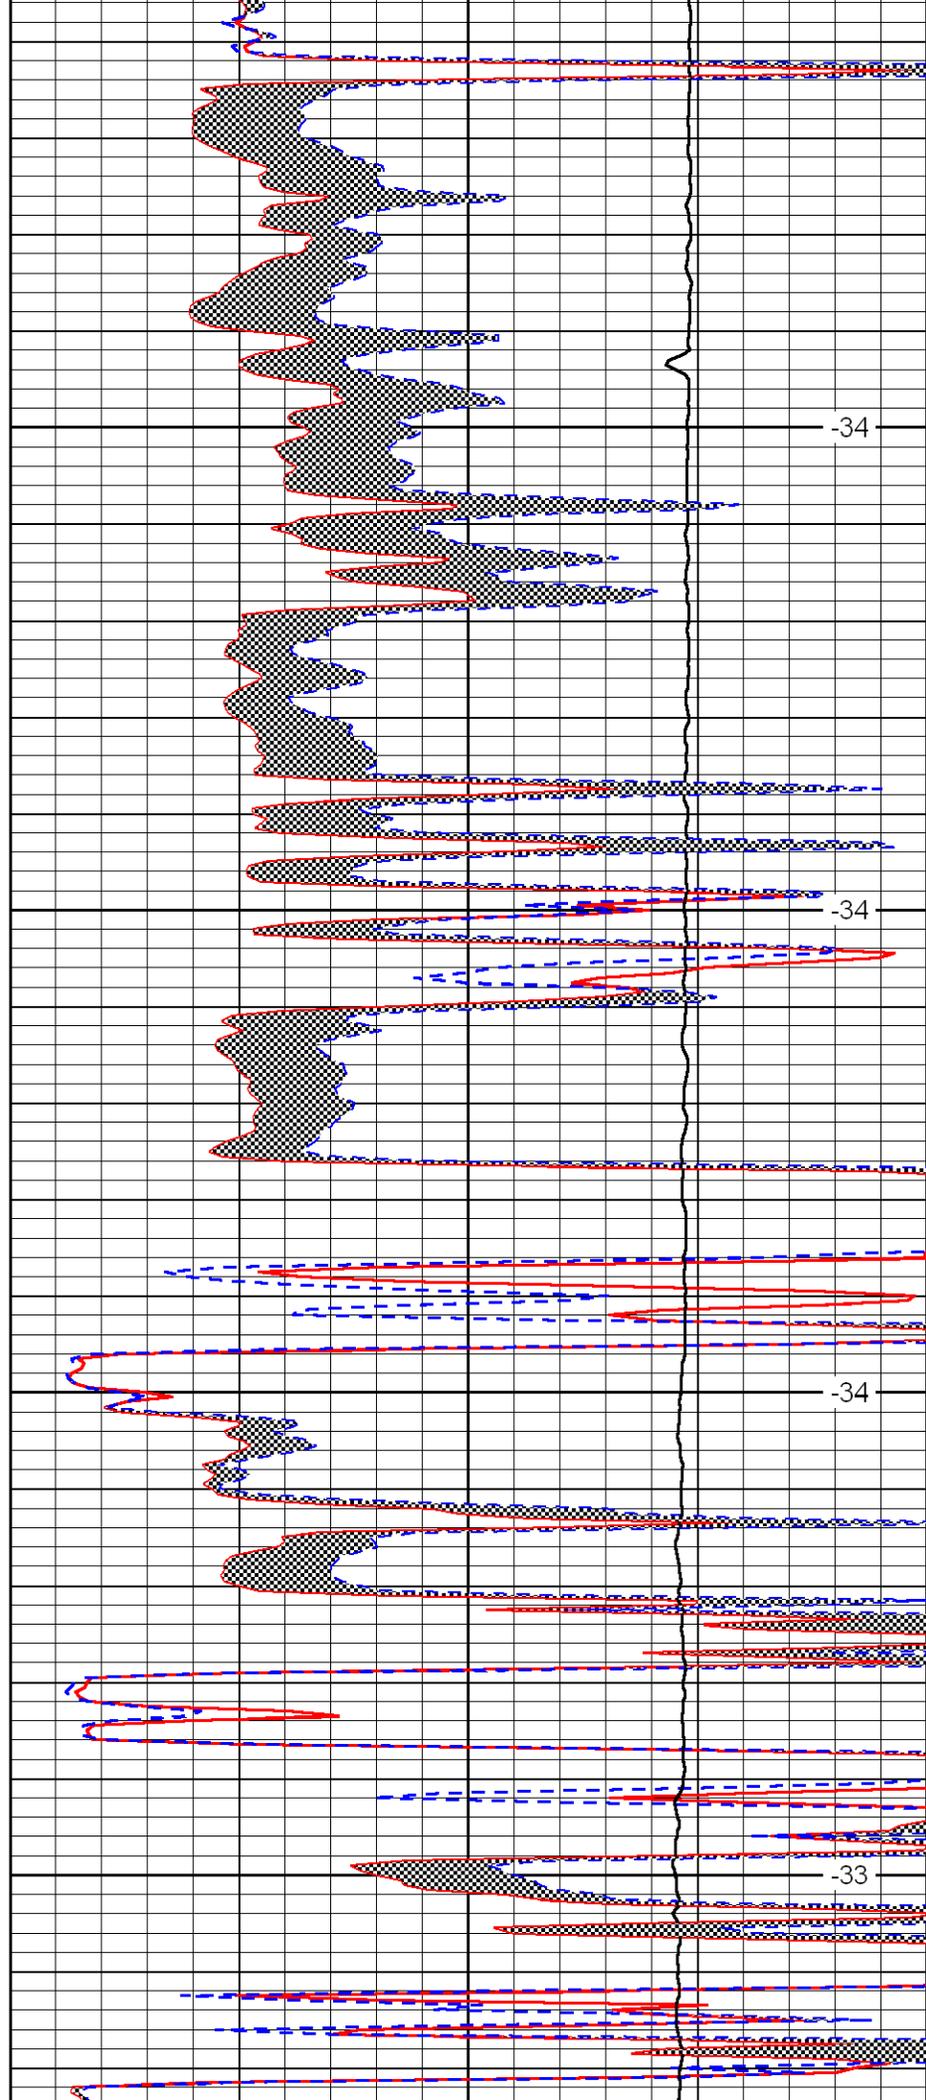


-34

-34

-34

-33

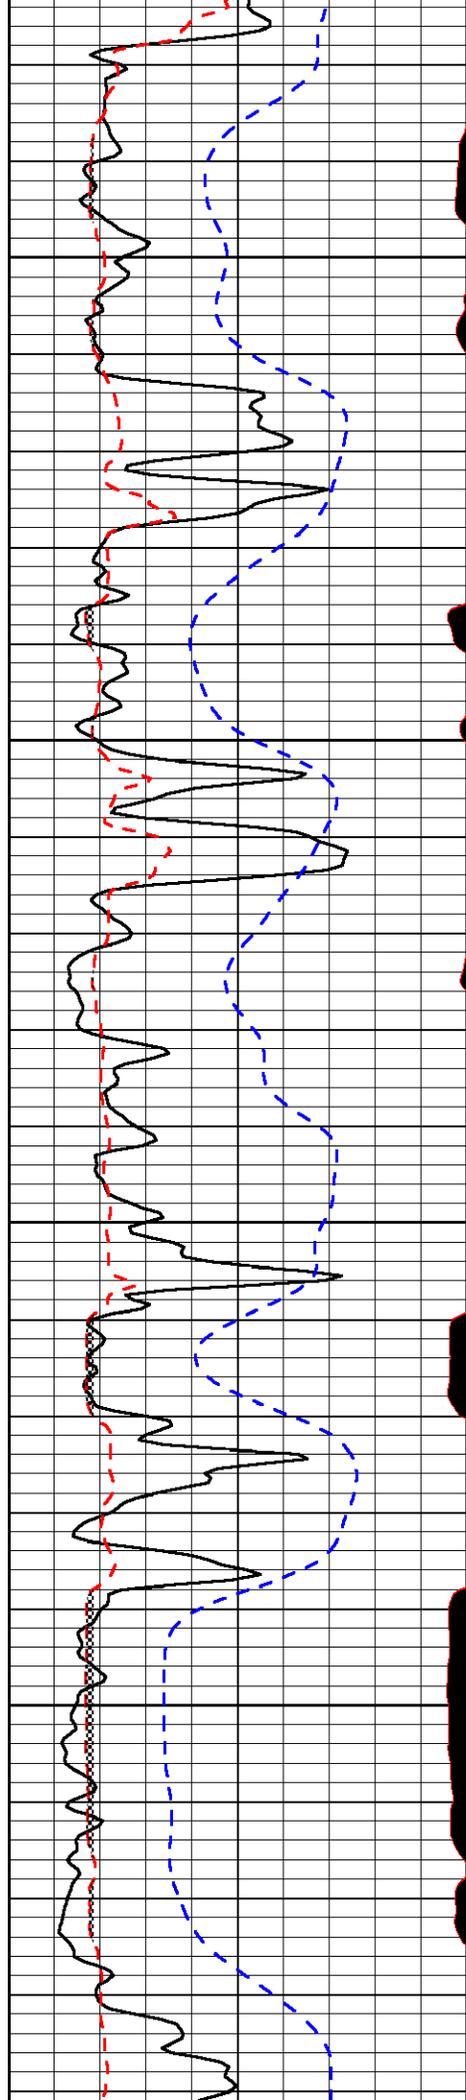


4150

4200

4250

4300

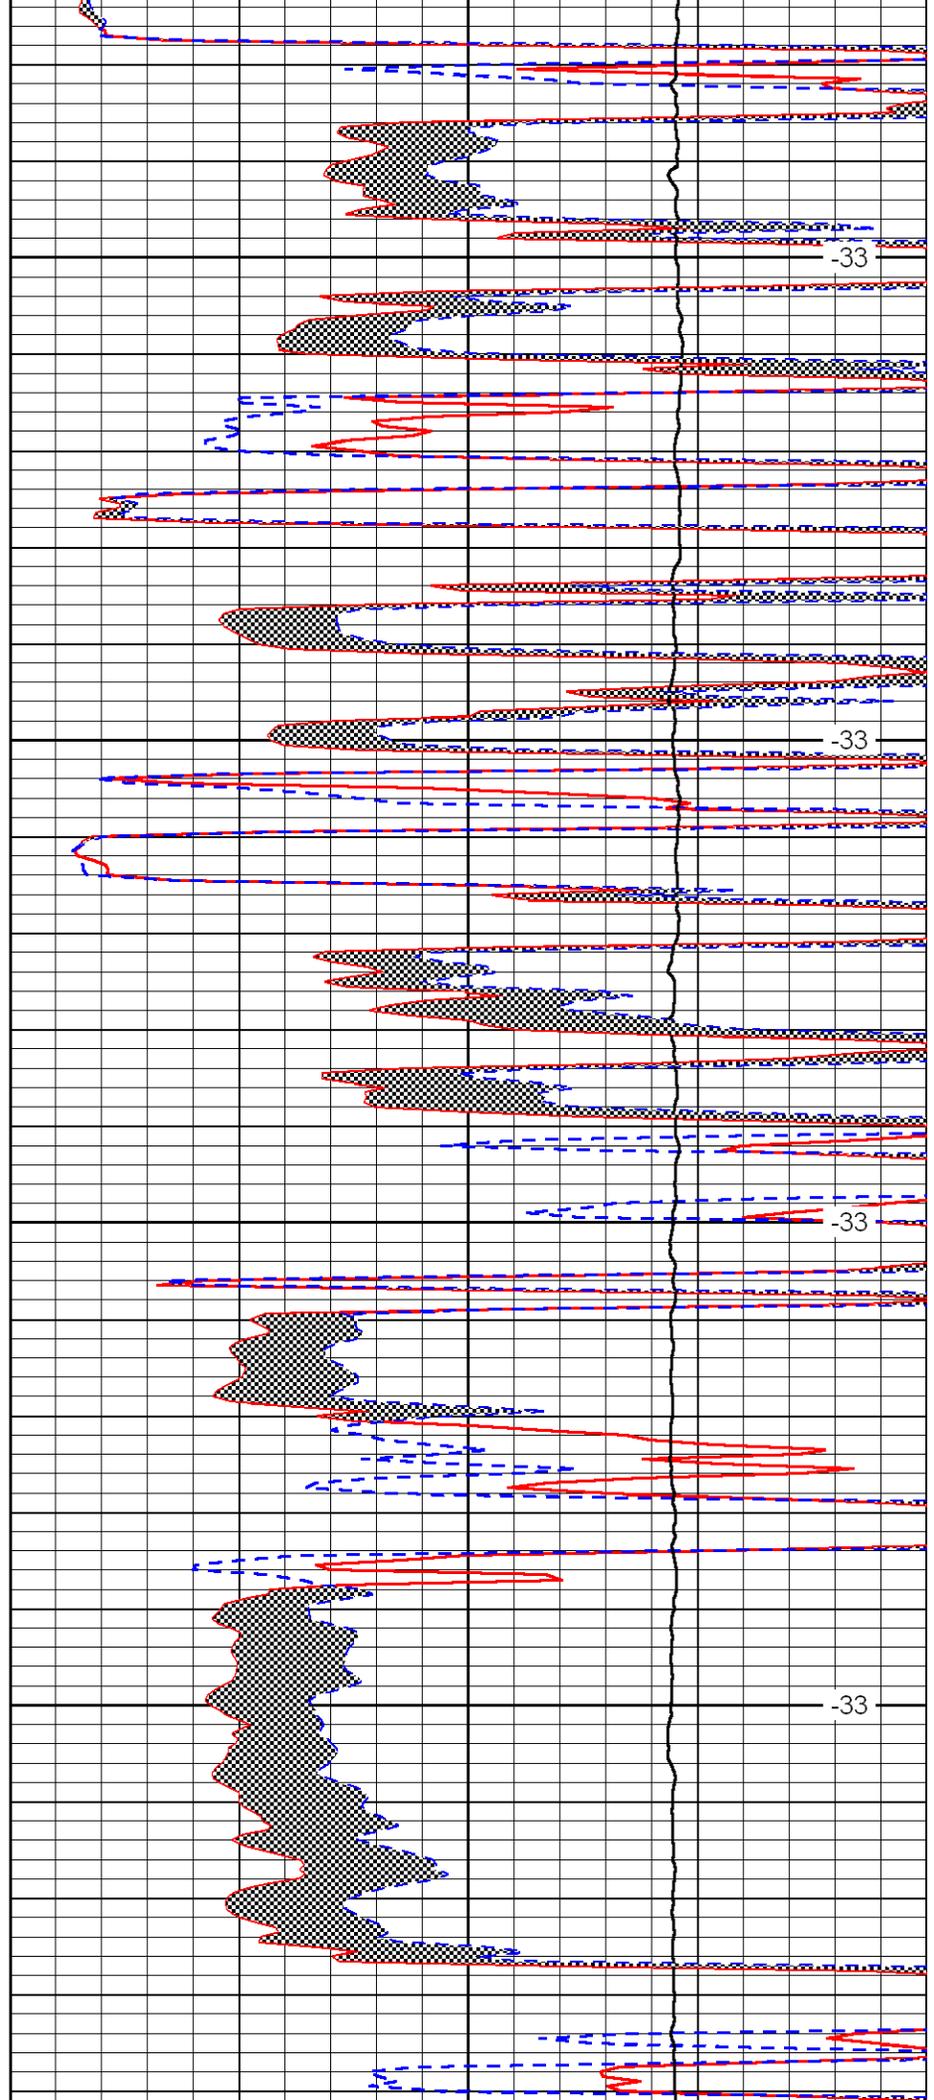


-33

-33

-33

-33

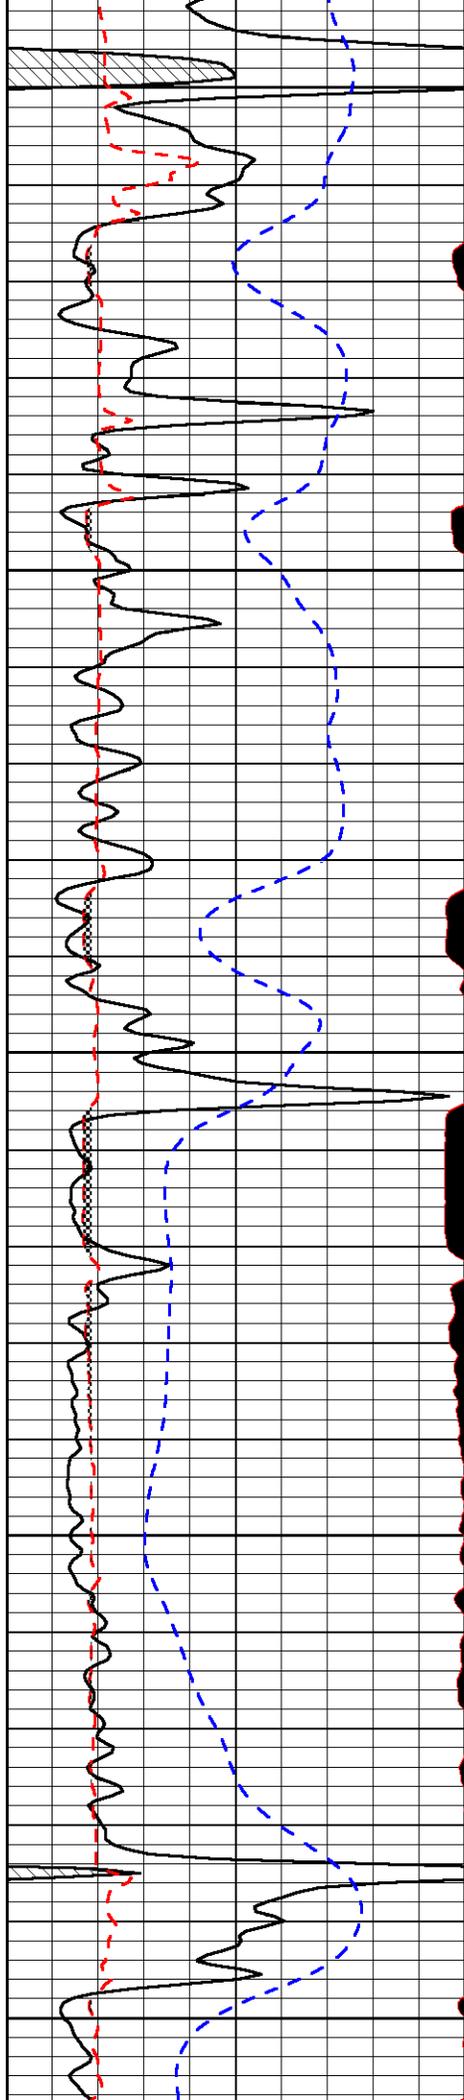


4350

4400

4450

4500

4550

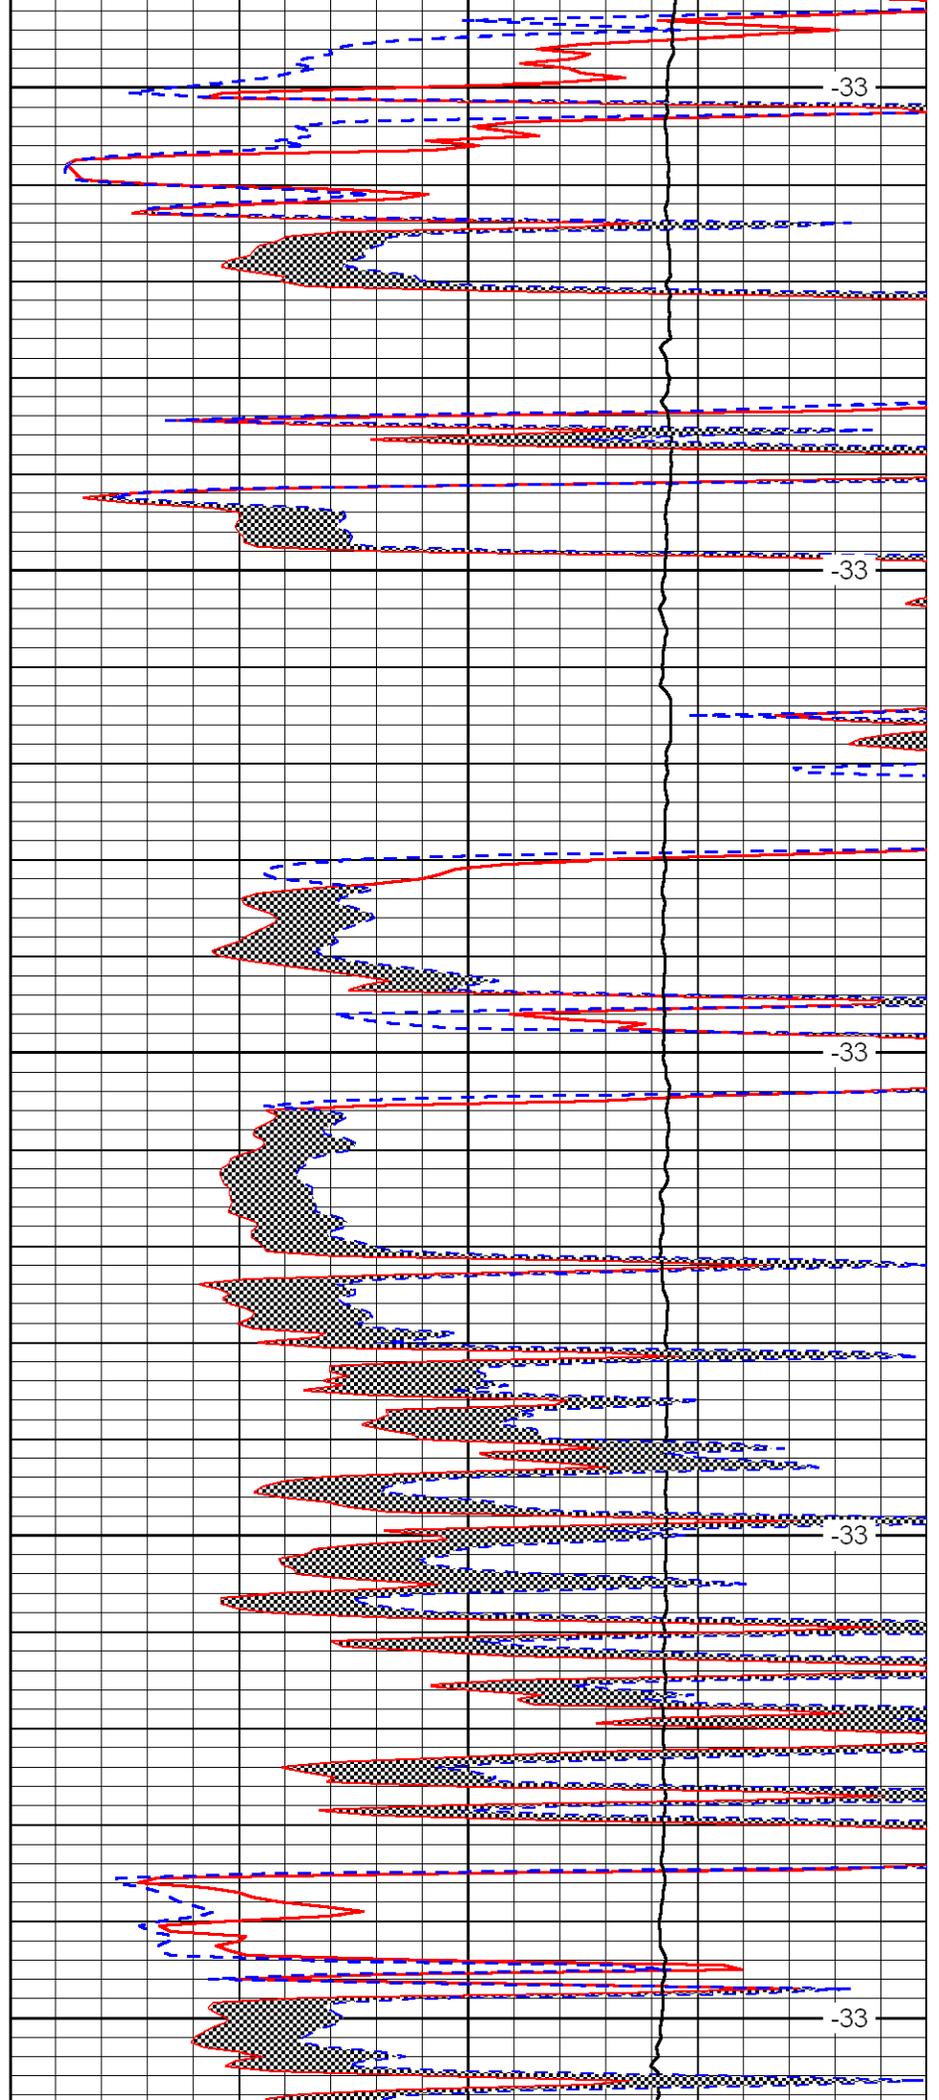


-33

-33

-33

-33

-33

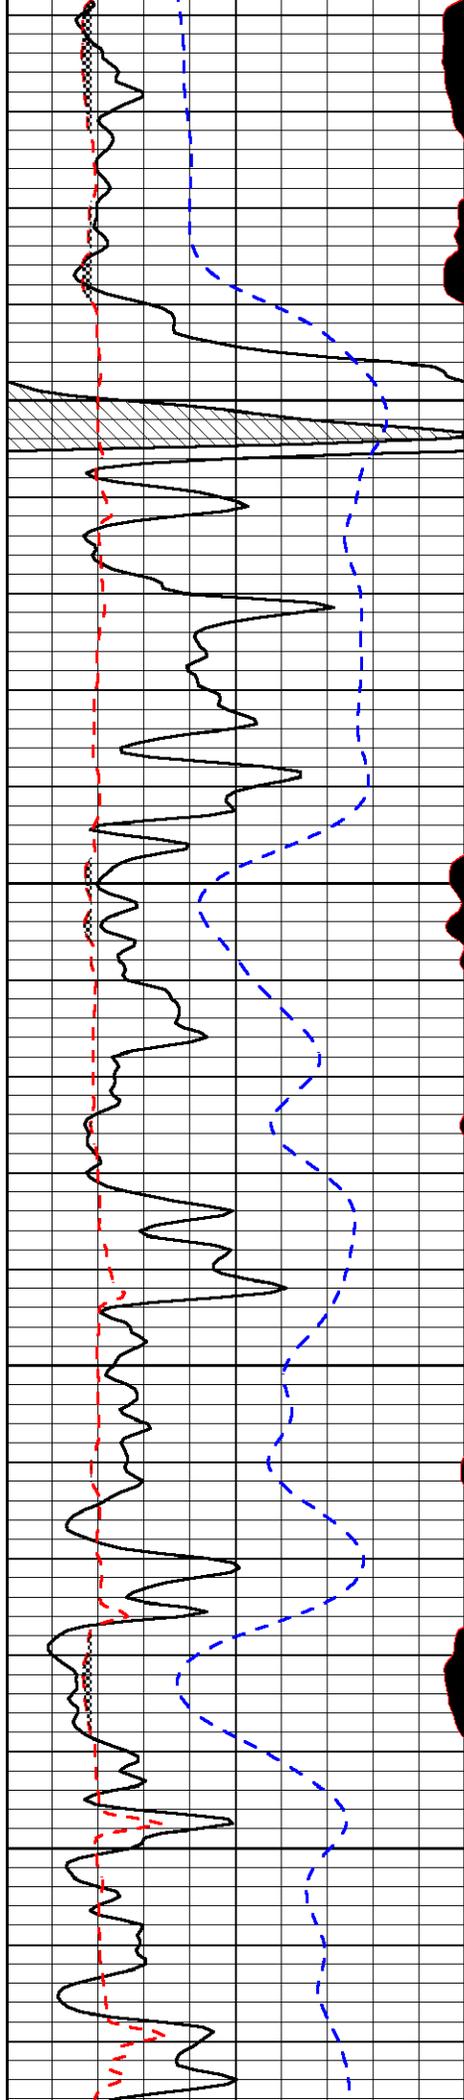


4600

4650

4700

4750

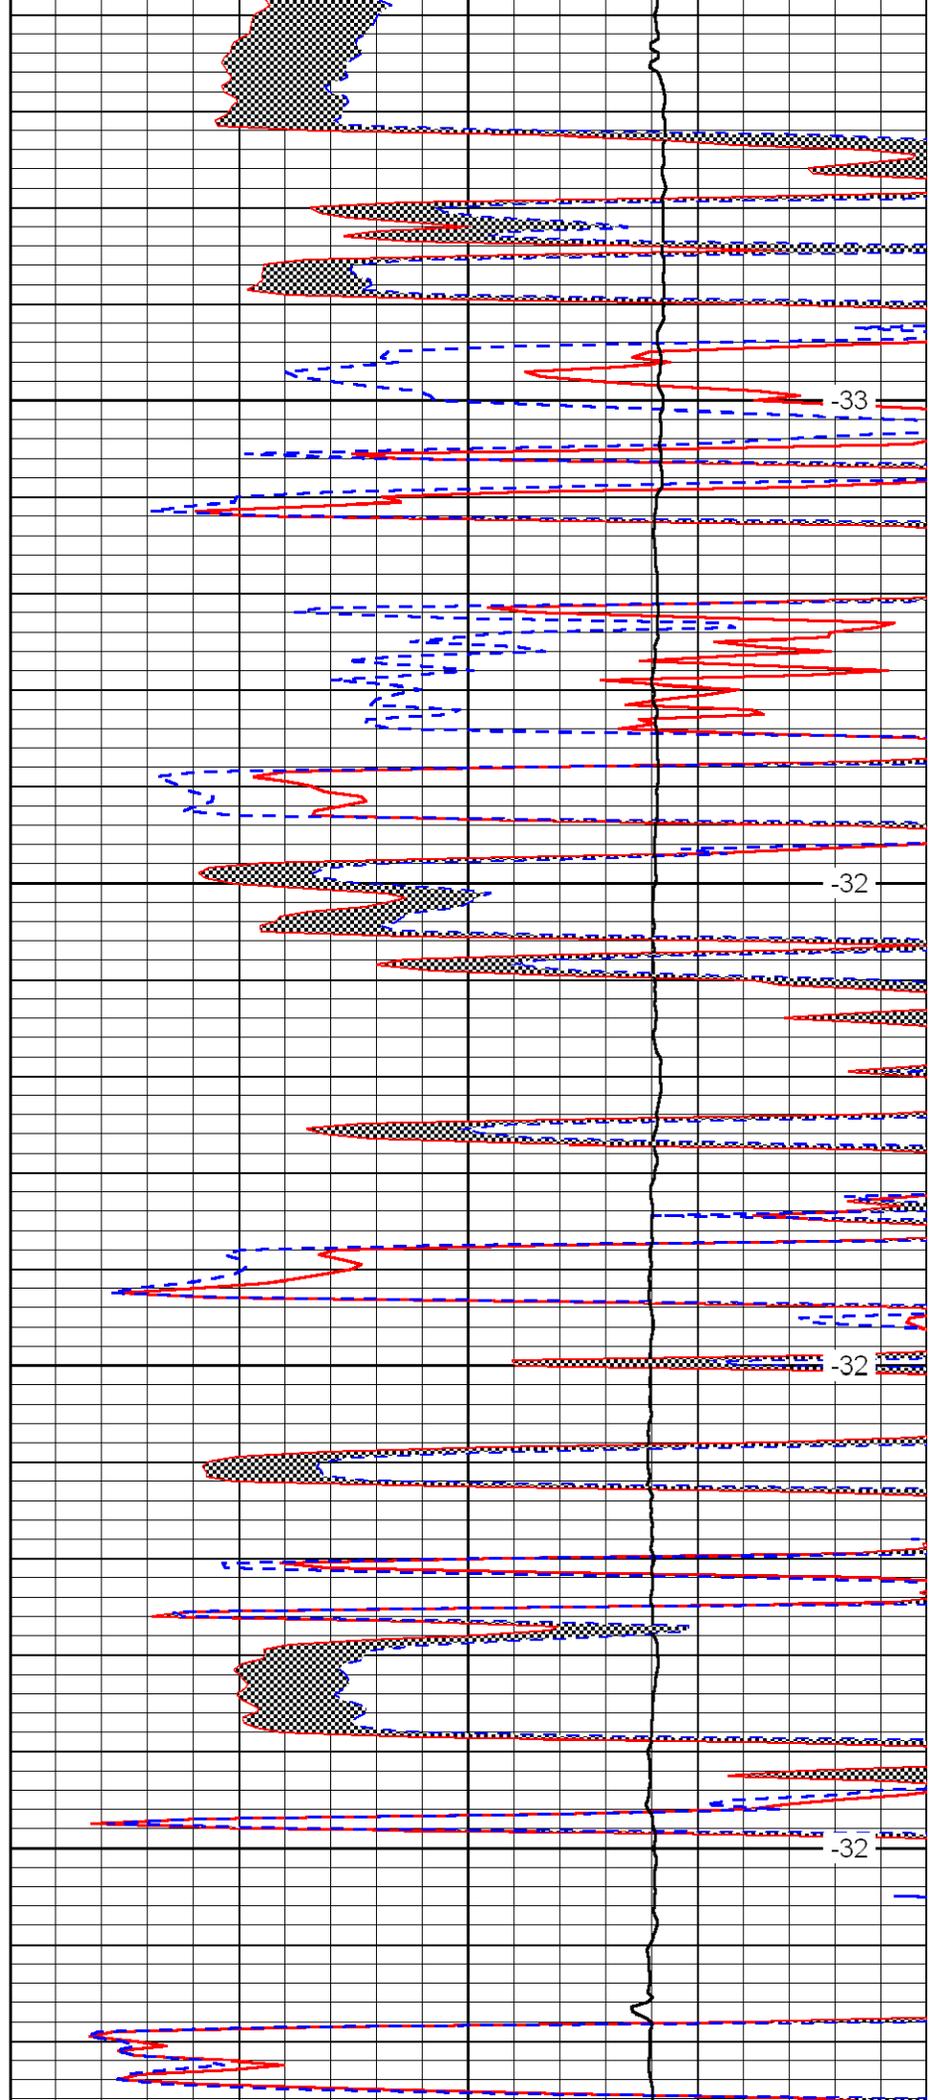


-33

-32

-32

-32

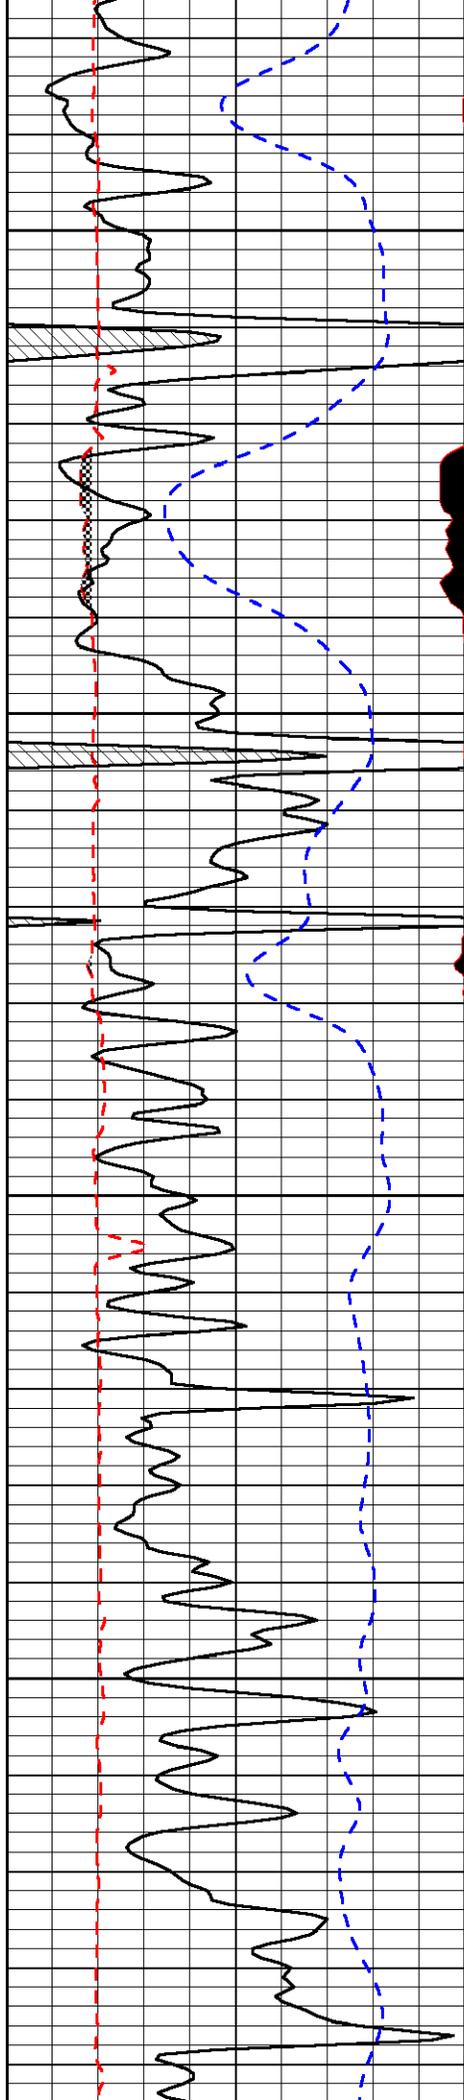


4800

4850

4900

4950

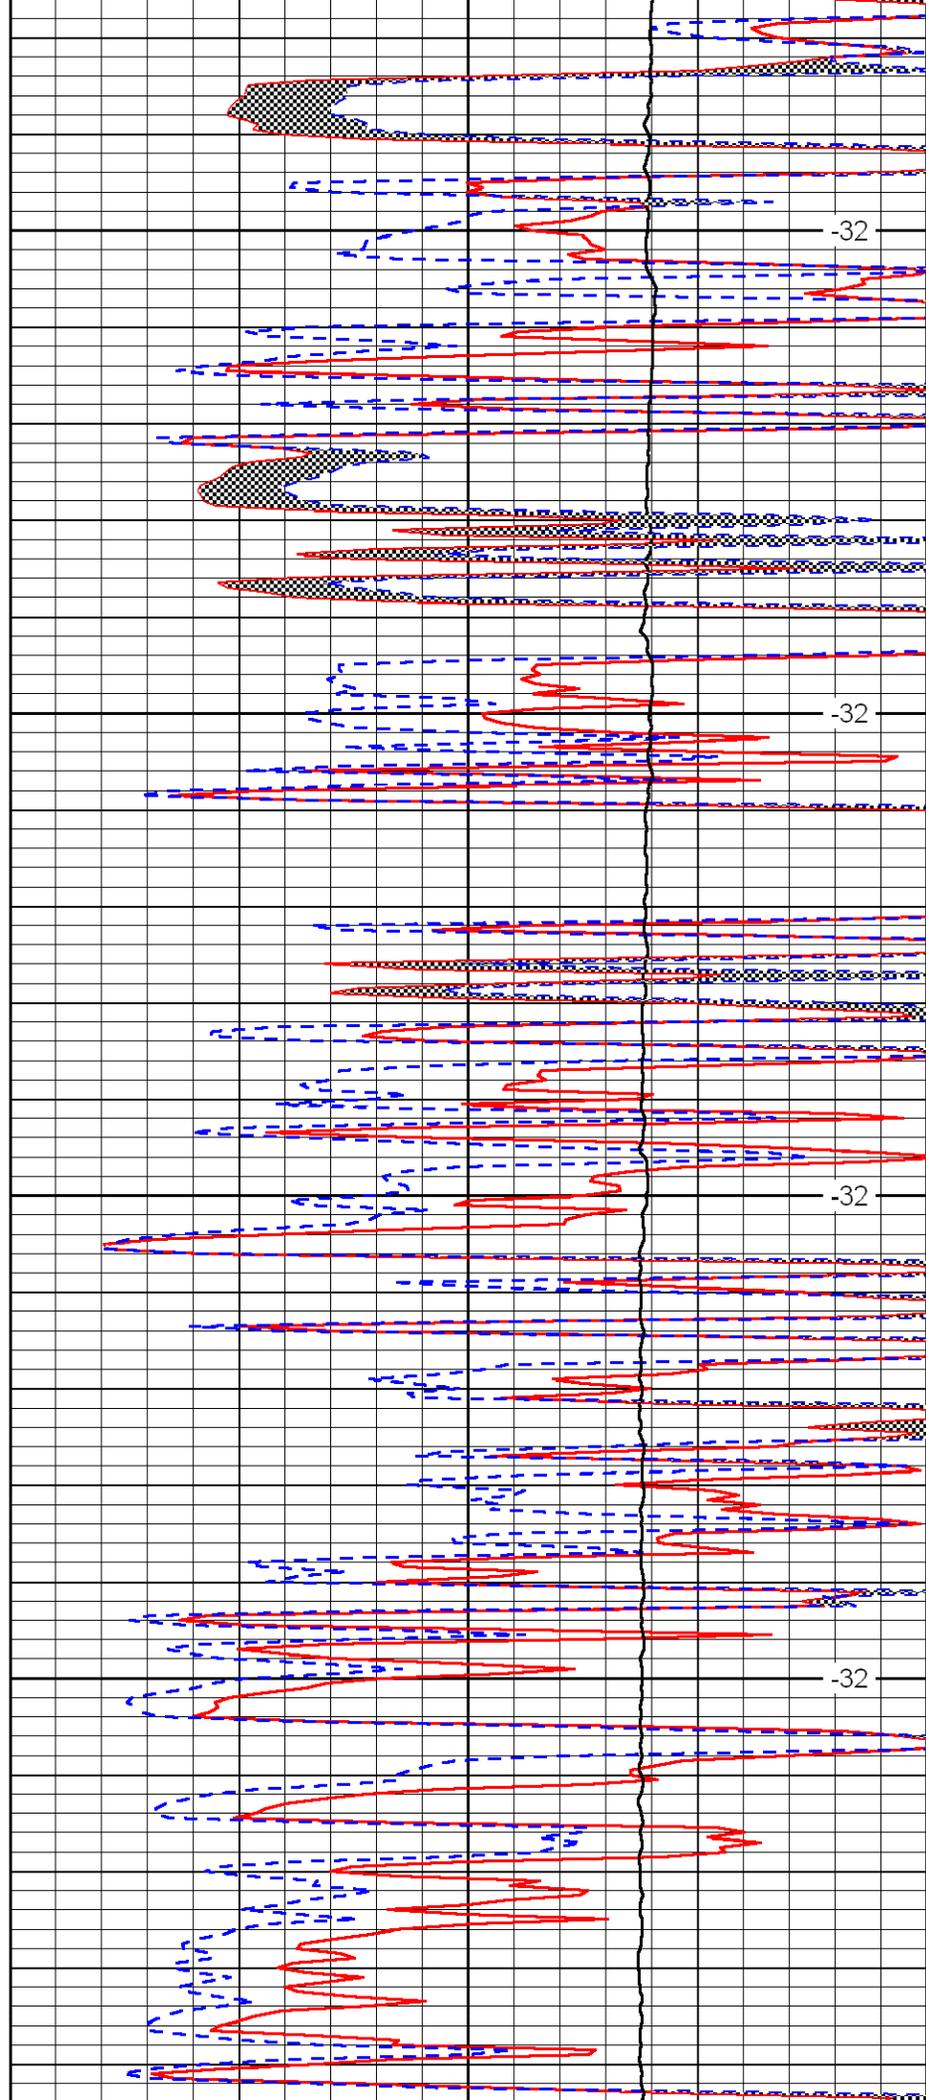


-32

-32

-32

-32

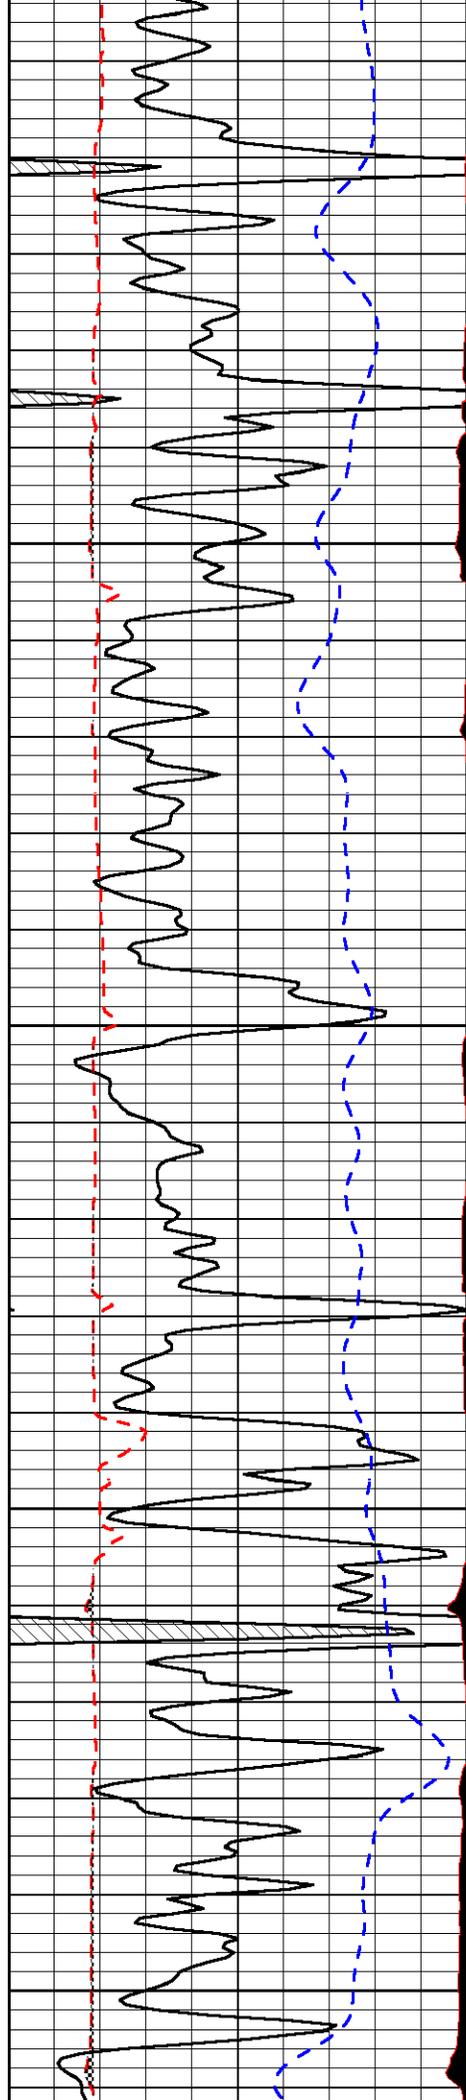


5000

5050

5100

5150

5200

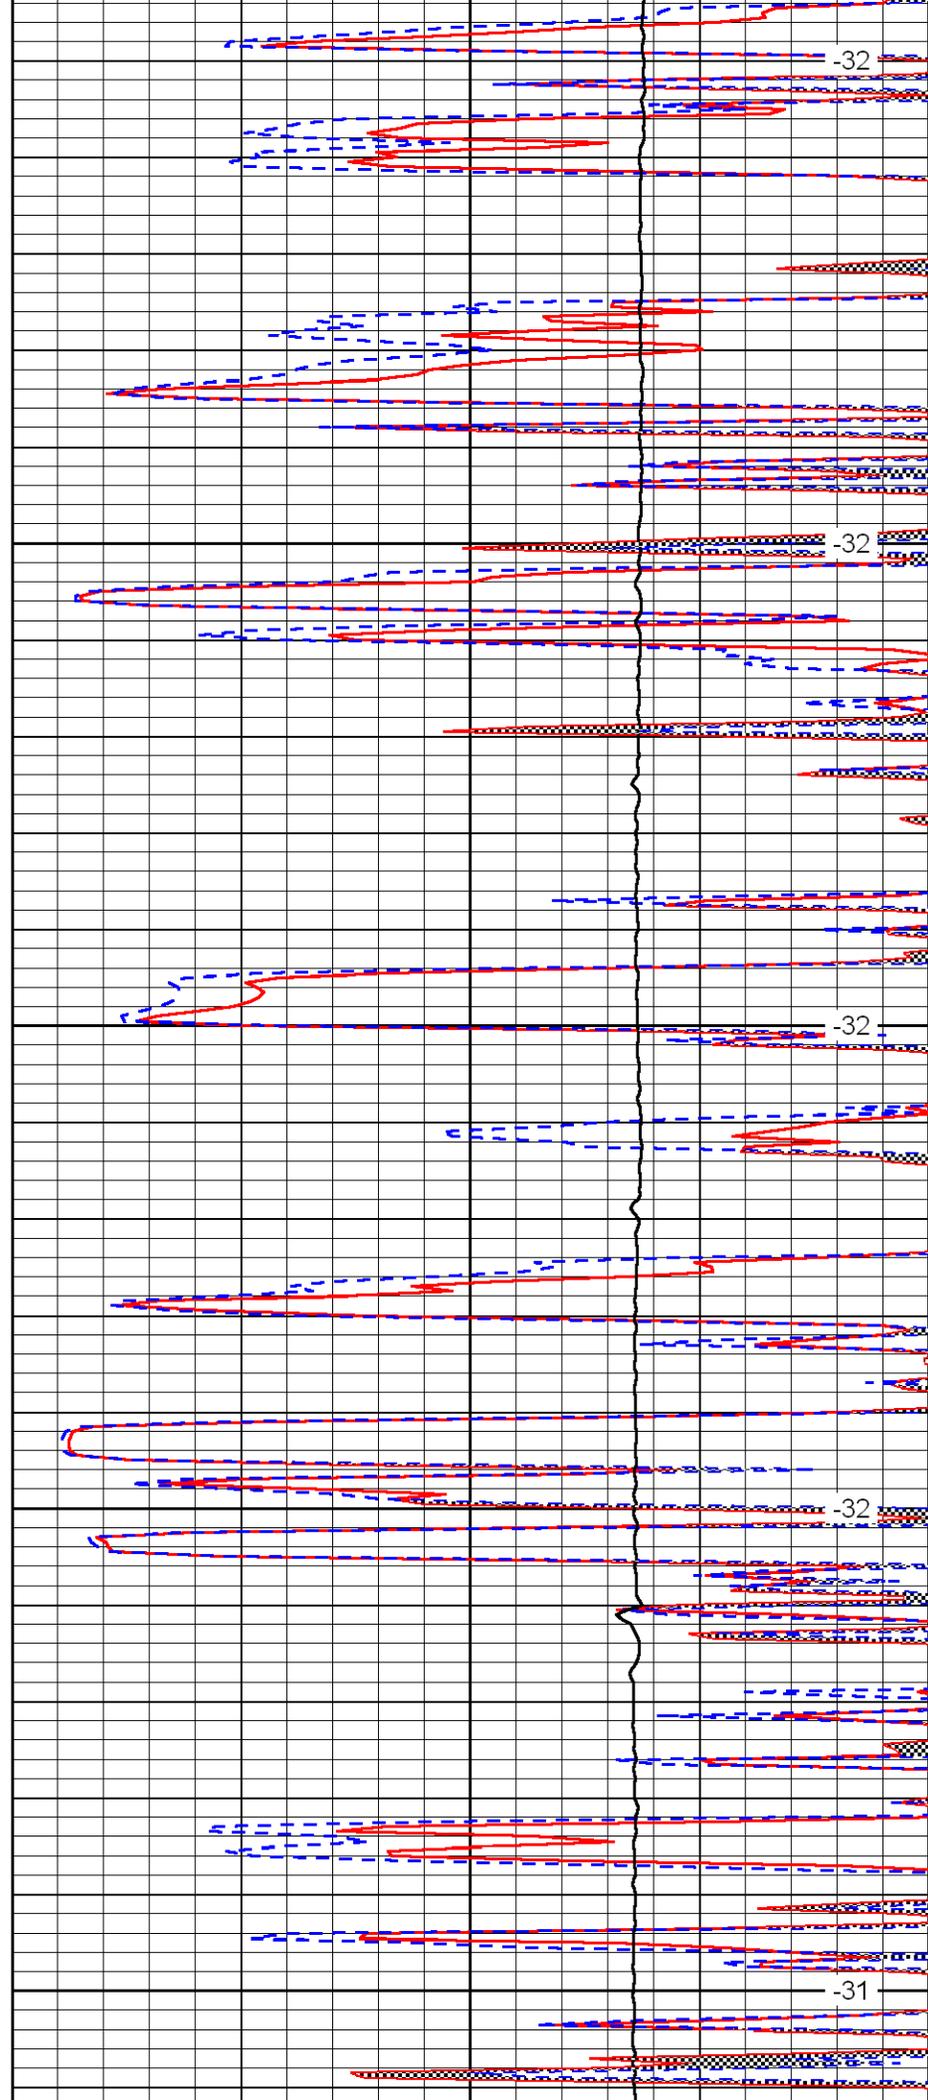


-32

-32

-32

-32

-31

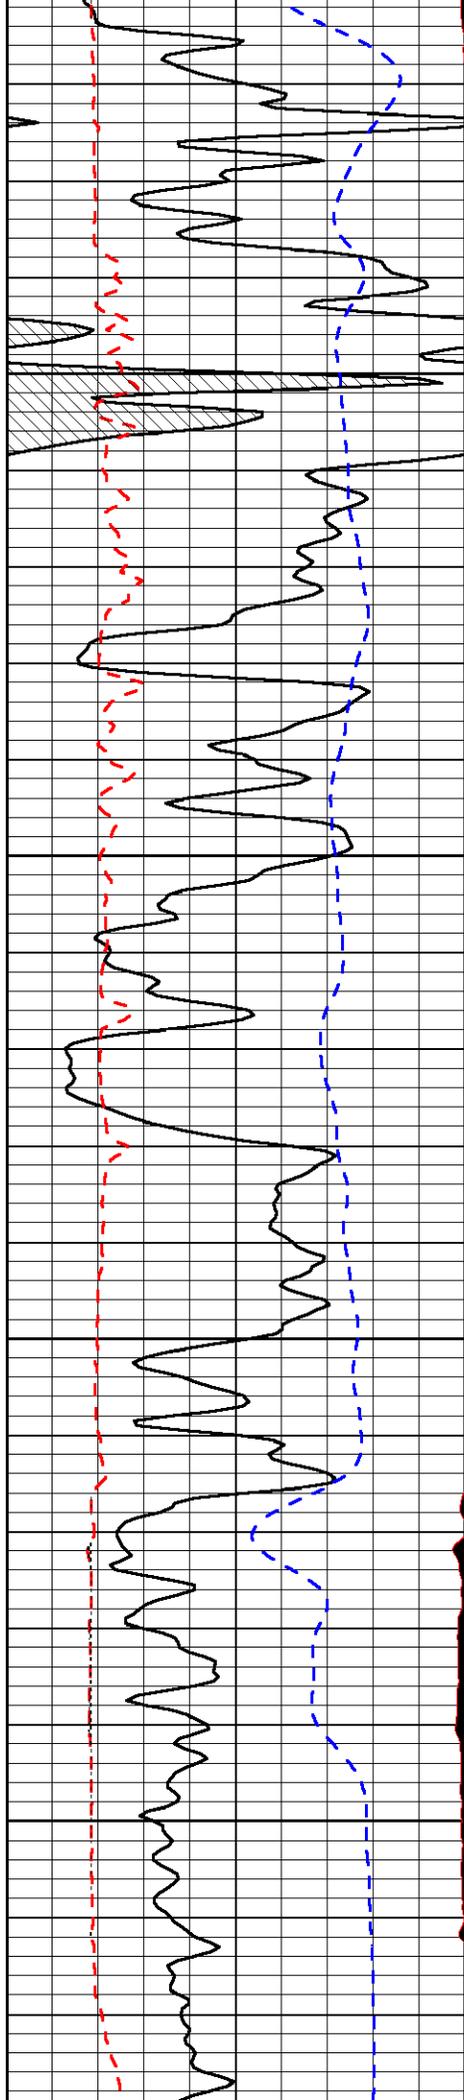


5250

5300

5350

5400

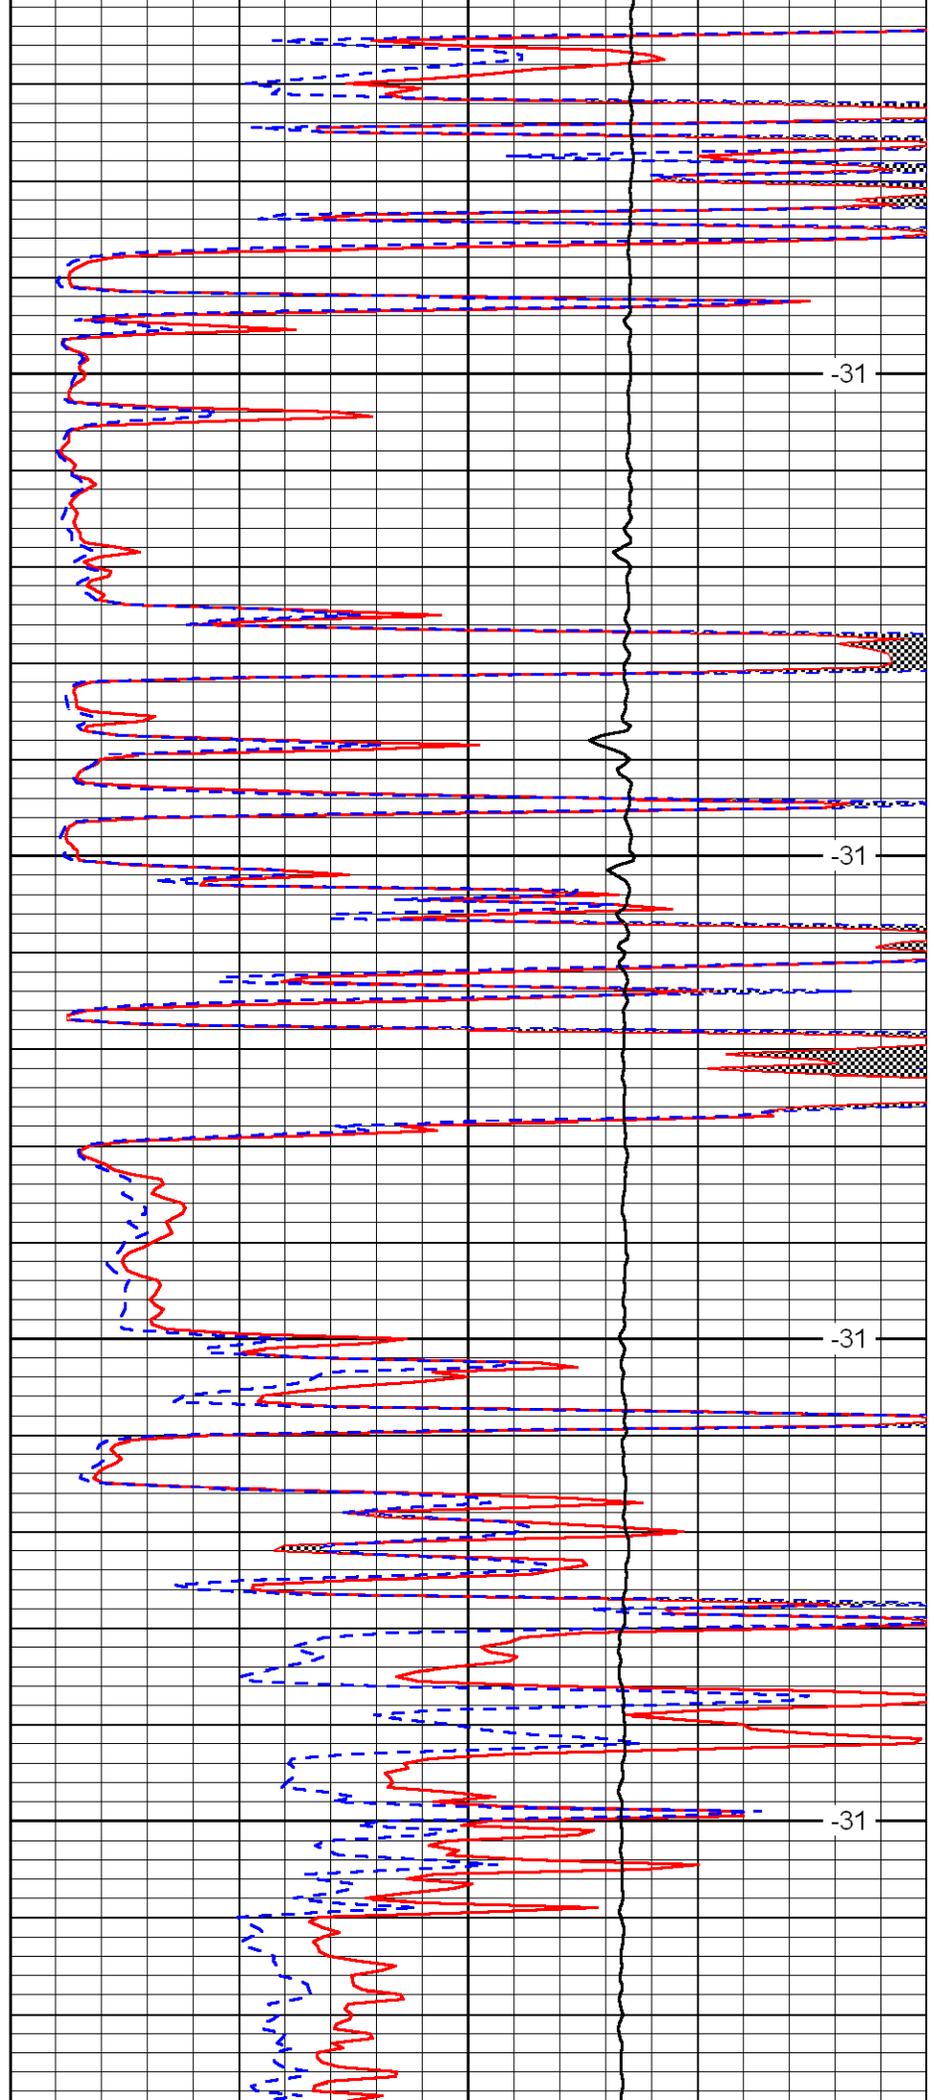


-31

-31

-31

-31

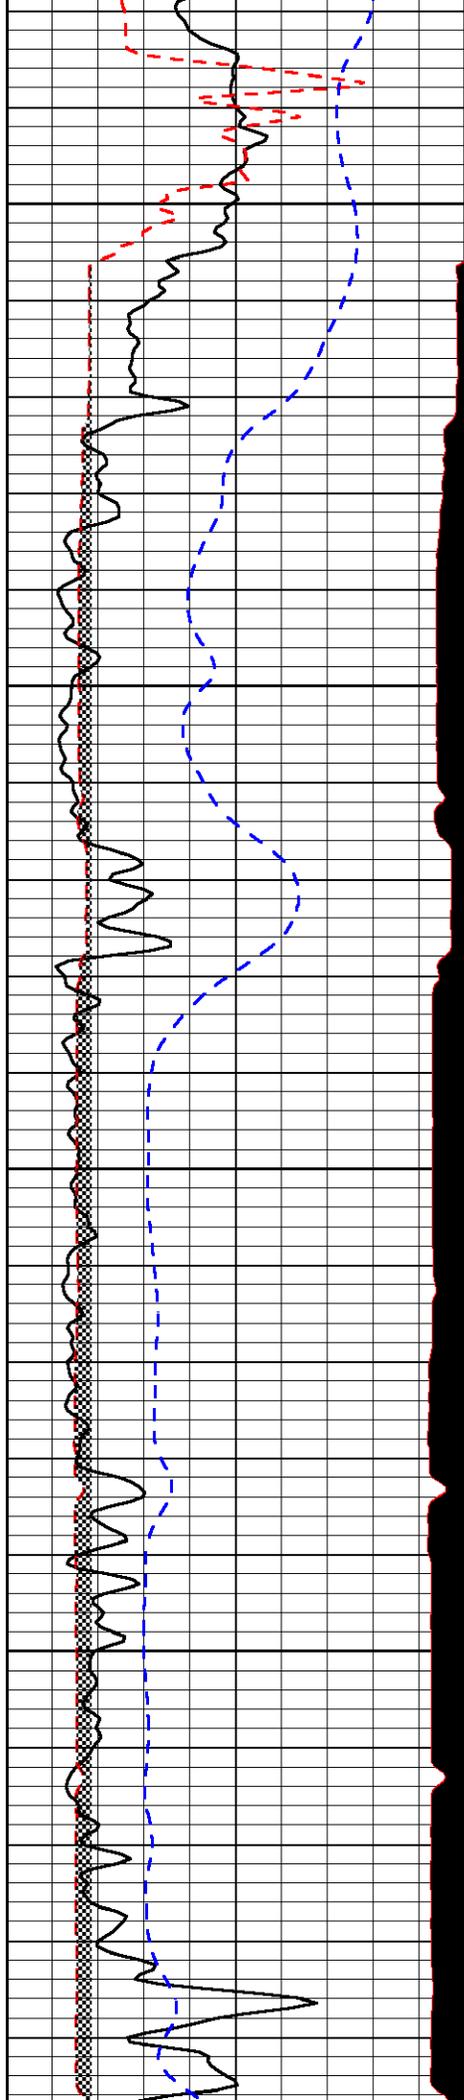


5450

5500

5550

5600

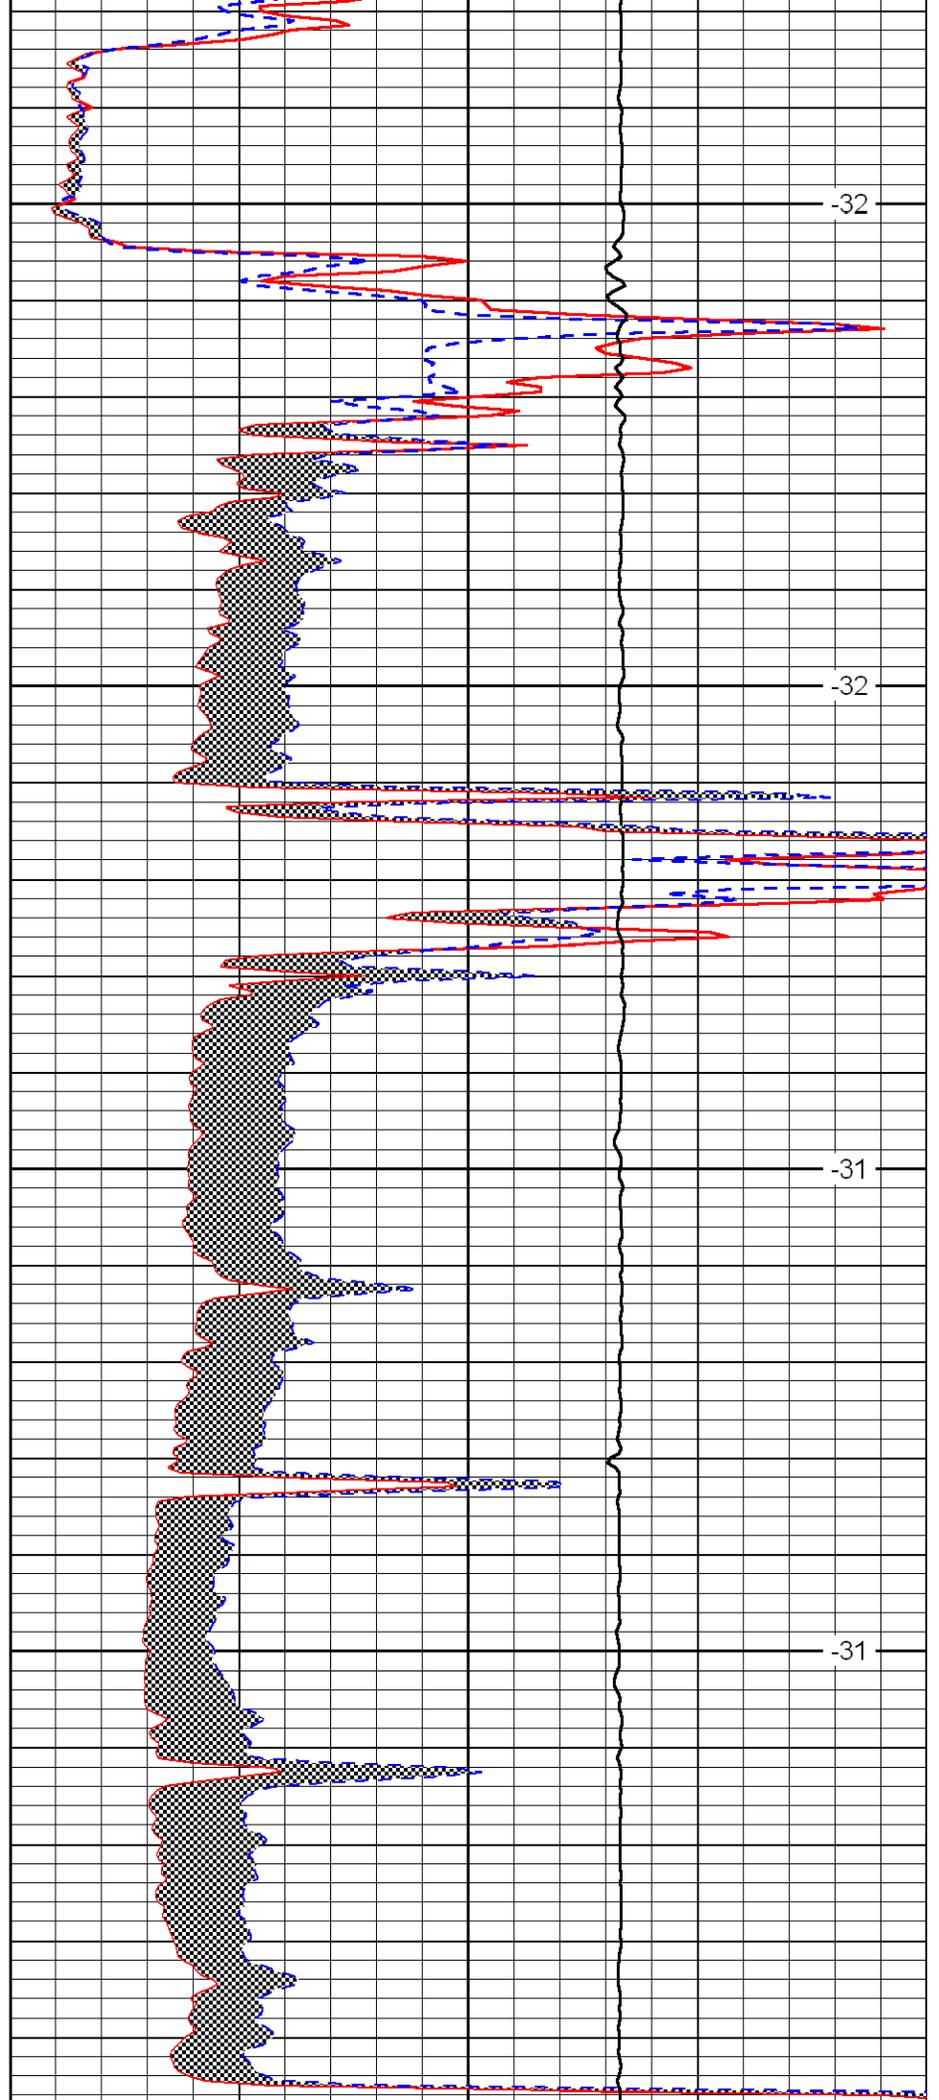


-32


-32

-31

-31

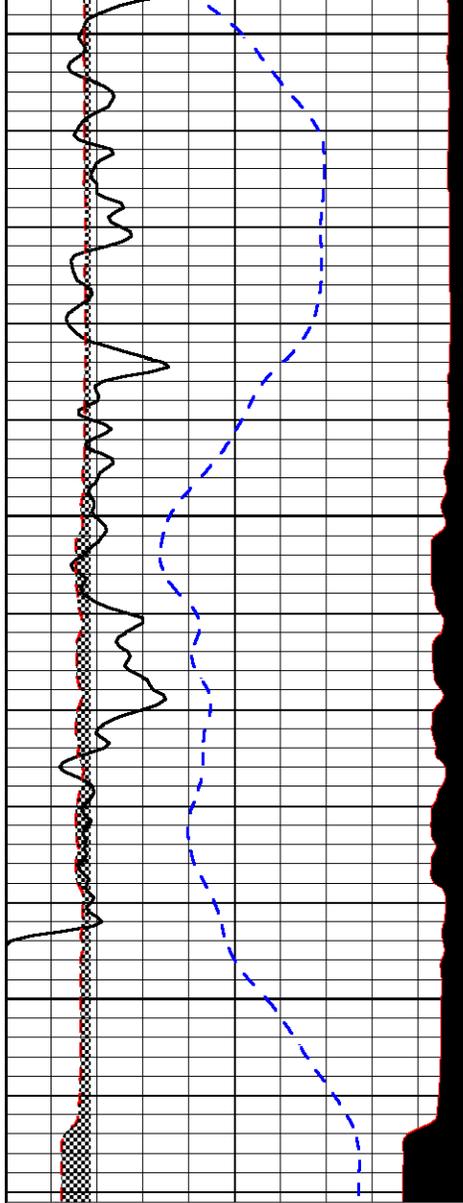

0	Gamma Ray	150
6	MCAL (GAPI)	16
2.875	Mud Cake (GAPI)	7.875
-200	SP	0

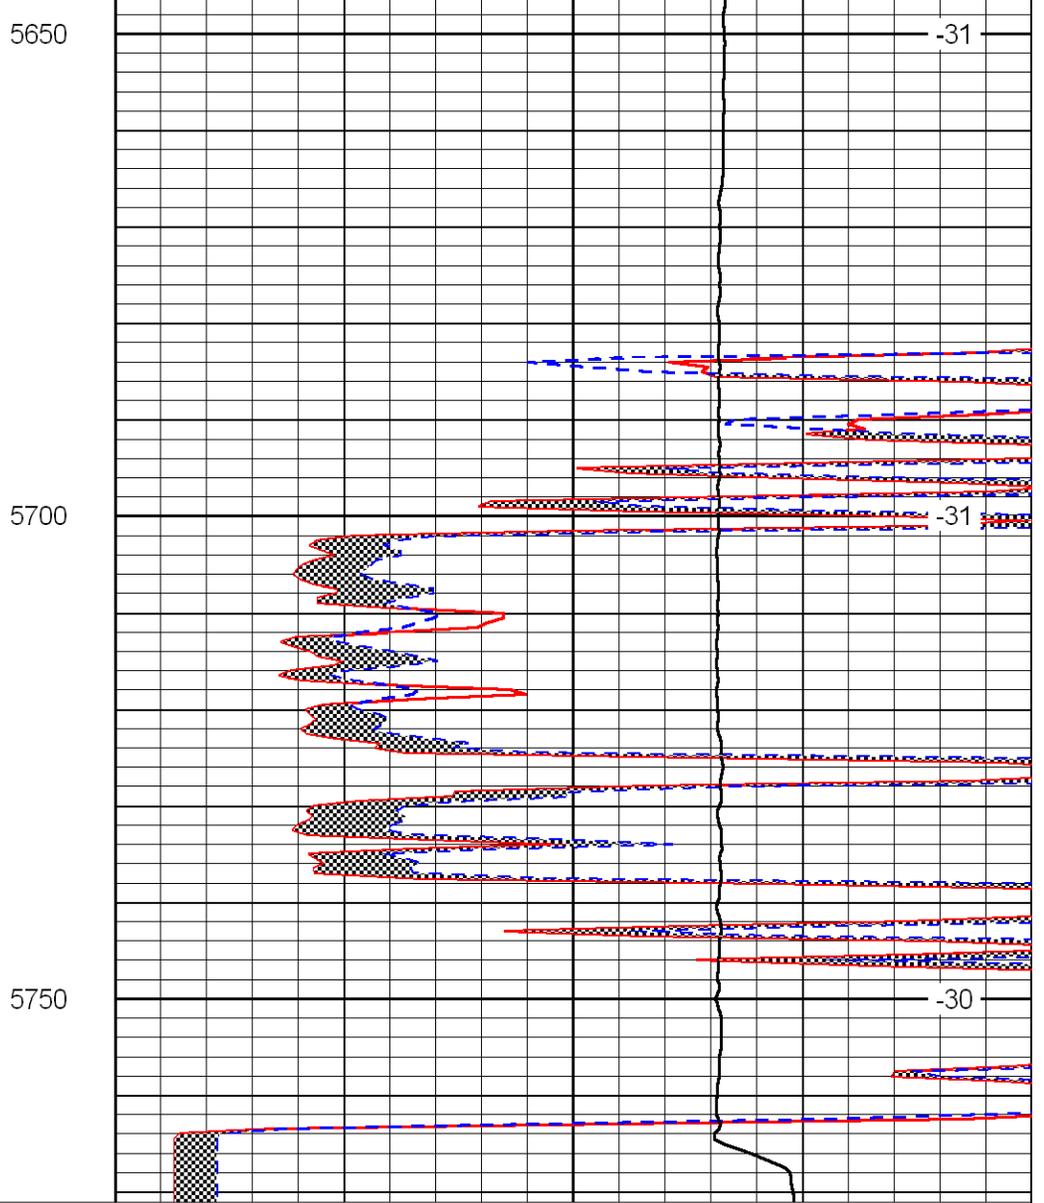

0	Micro Inverse 1 X 1	40
0	Micro Normal 2''	40
10000	Line Weight	0

LSPD