



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company J Carter Oil		
	Well Keil No. 11		
	Field Gorham		
	County Russell	State	Kansas
15-167-23,687-00-00	Location N2 N2 SW NE 1,520' FNL & 1,980' FEL	Other Services RAG	
	Sec: 5 Twp: 15 S Rge: 14 W	Elevation	
	Permanent Datum Ground Level	K.B. 1763	
	Log Measured From Kelly Bushing	D.F. 1757	
	Drilling Measured From Kelly Bushing	G.L. 1757	
Date	1/17/2011		
Run Number	Two		
Depth Driller	3275		
Depth Logger	3275		
Bottom Logged Interval	3274		
Top Log Interval	2300		
Casing Driller	8.625 @ 776		
Casing Logger	769		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	5000		
Density / Viscosity	9.3 52		
pH / Fluid Loss	9.5 9.6		
Source of Sample	Flowline		
Rm @ Meas. Temp	.75 @ 60		
Rmf @ Meas. Temp	.56 @ 60		
Rmc @ Meas. Temp	1.01 @ 60		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.41 @ 109		
Operating Rig Time	4 Hours		
Max Rec. Temp. F	109		
Equipment Number	10		
Location	Hays		
Recorded By	J Schuler	J Long	
Witnessed By	Herb Deines		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858


Balta Road, Across River, Second Bridge, to Walter Lane. East 1 3/4 Miles, North Into


0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

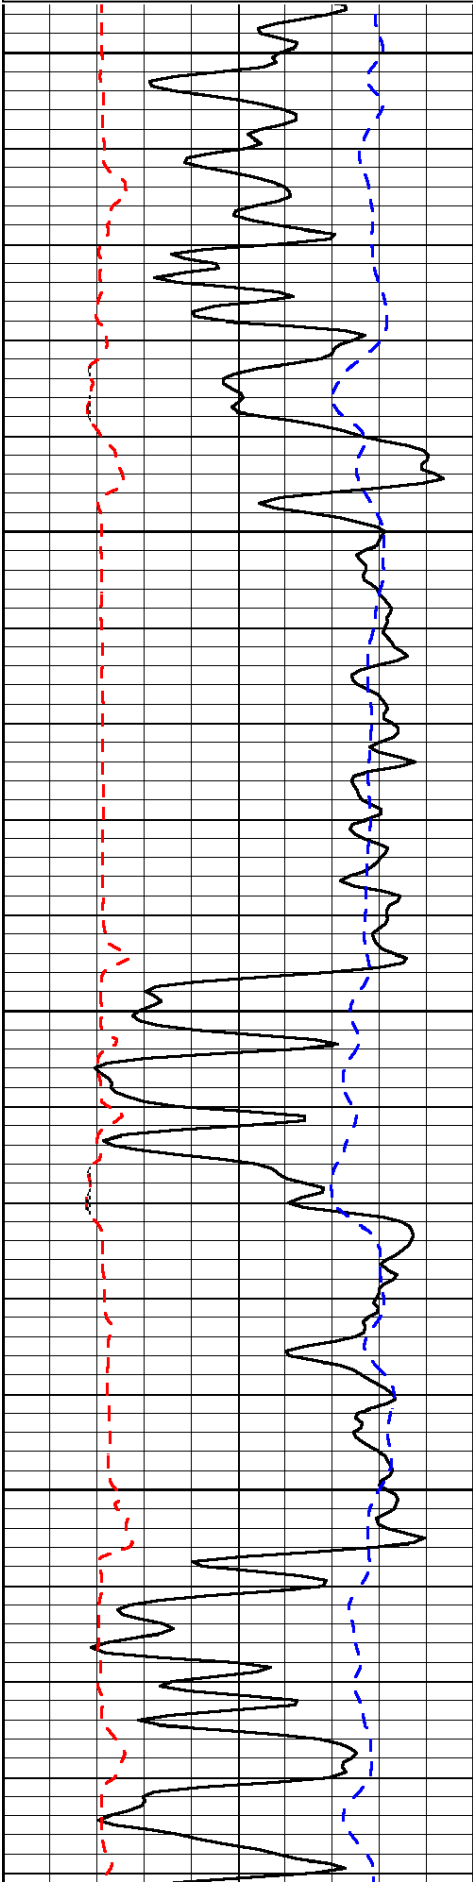

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

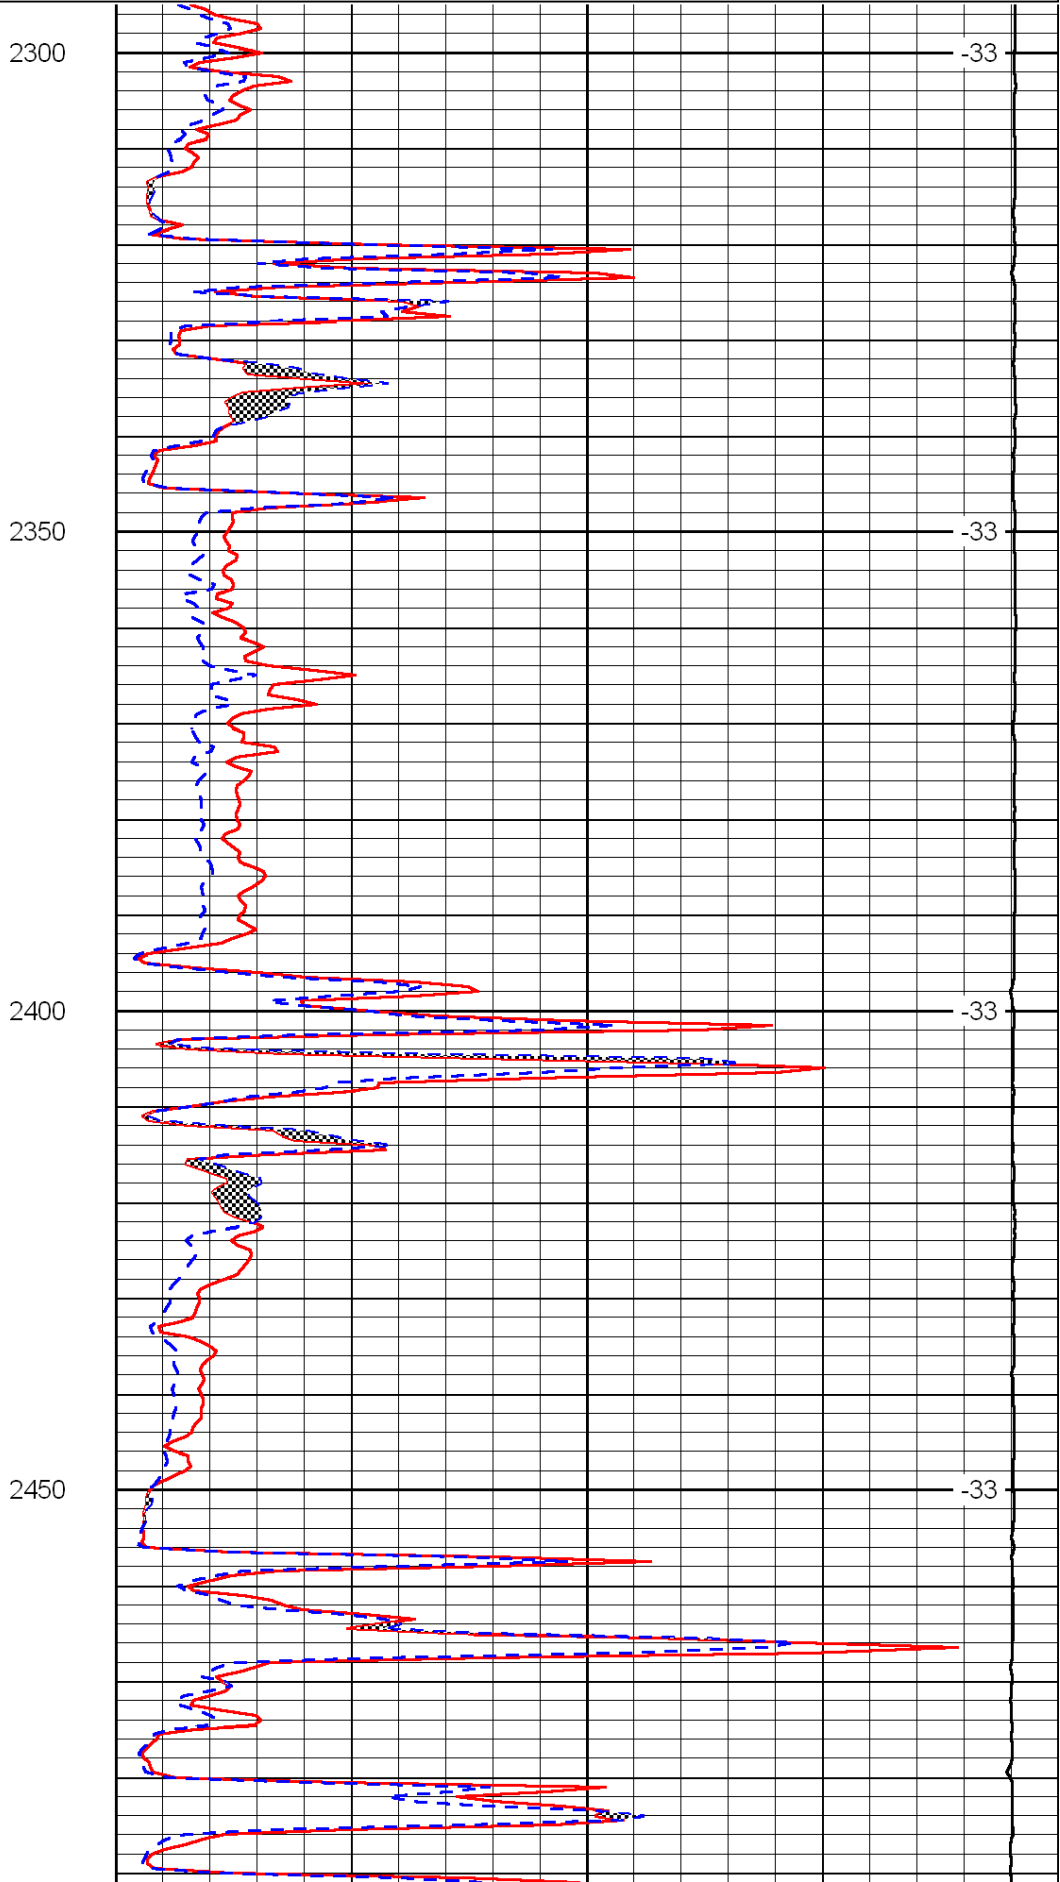

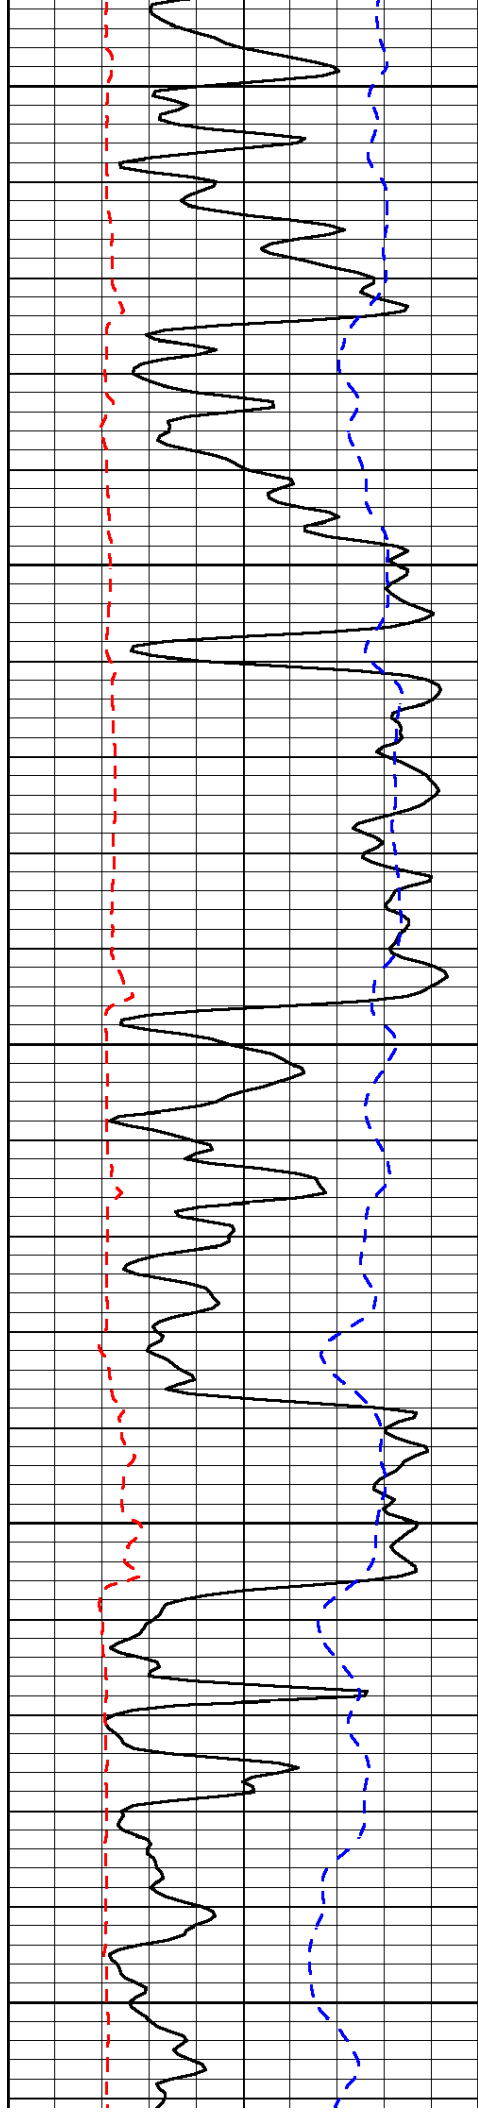


2500

2550

2600

2650

2700

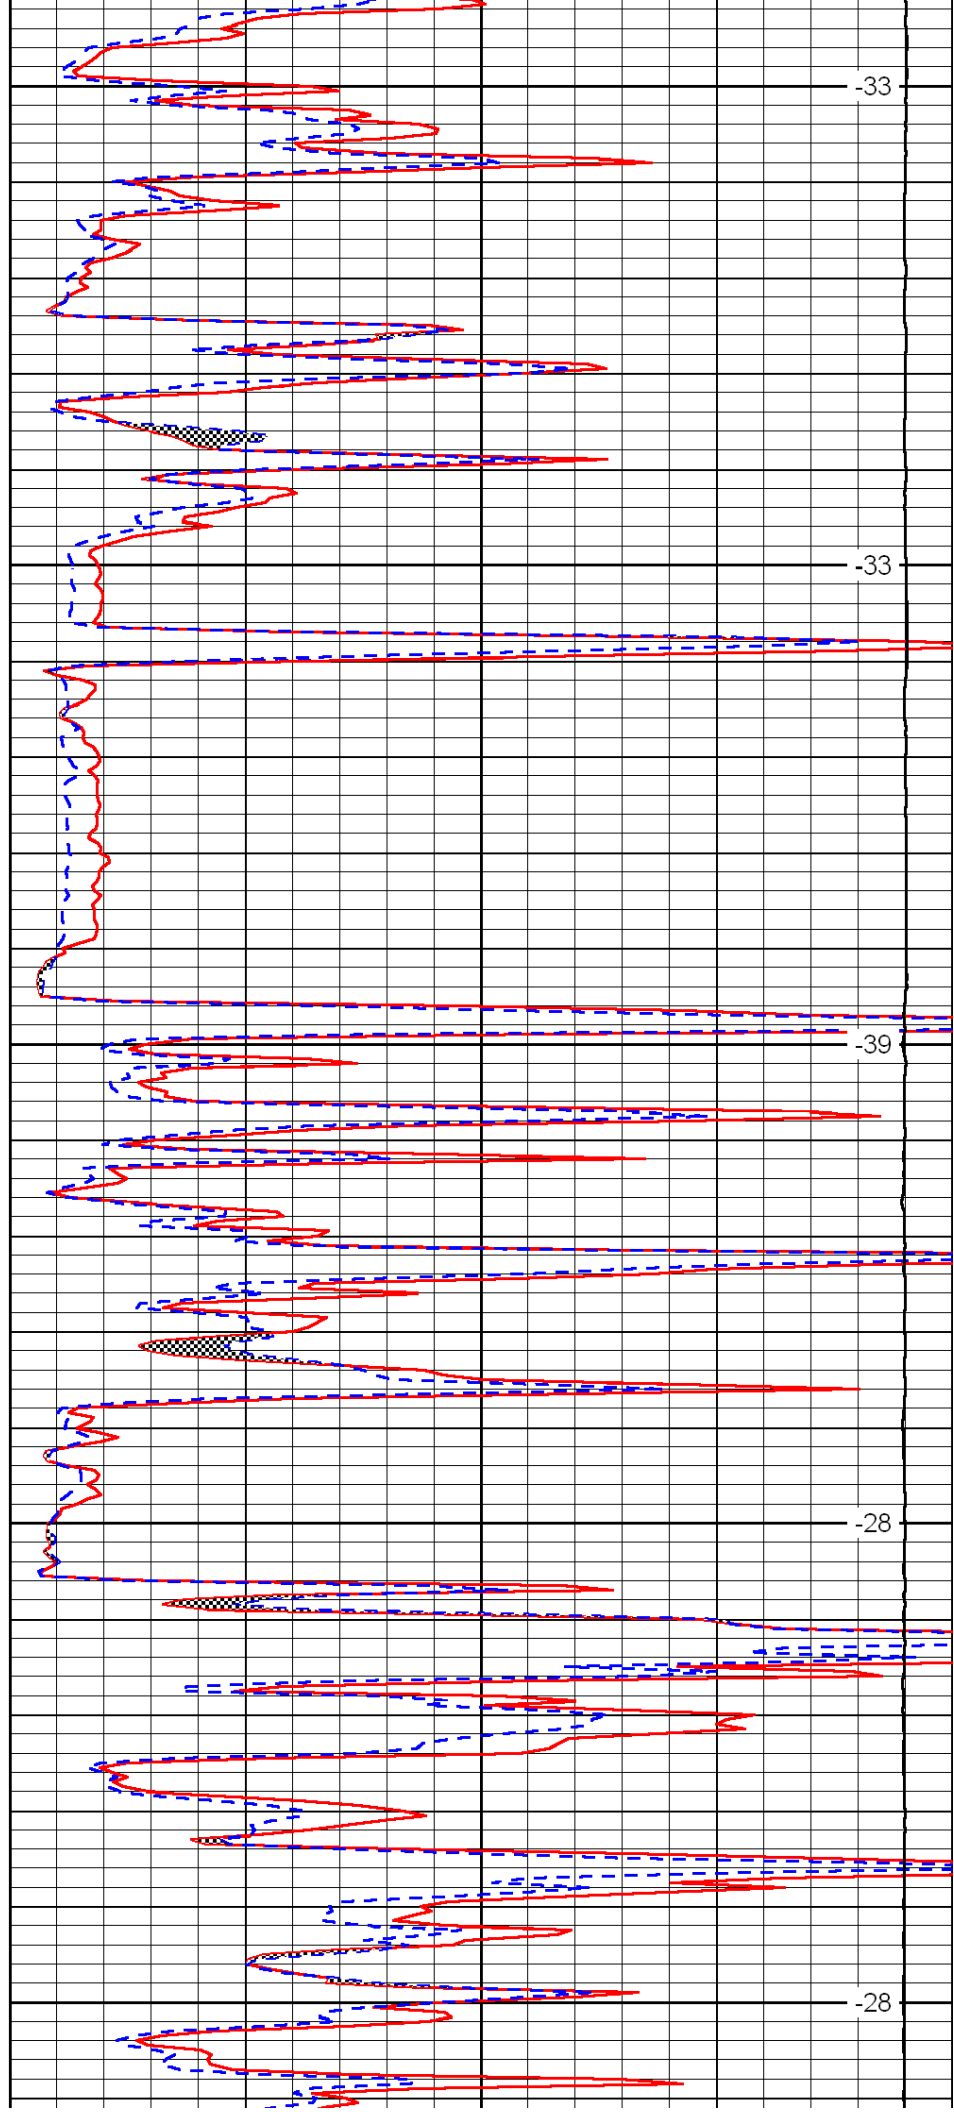


-33

-33

-39

-28

-28

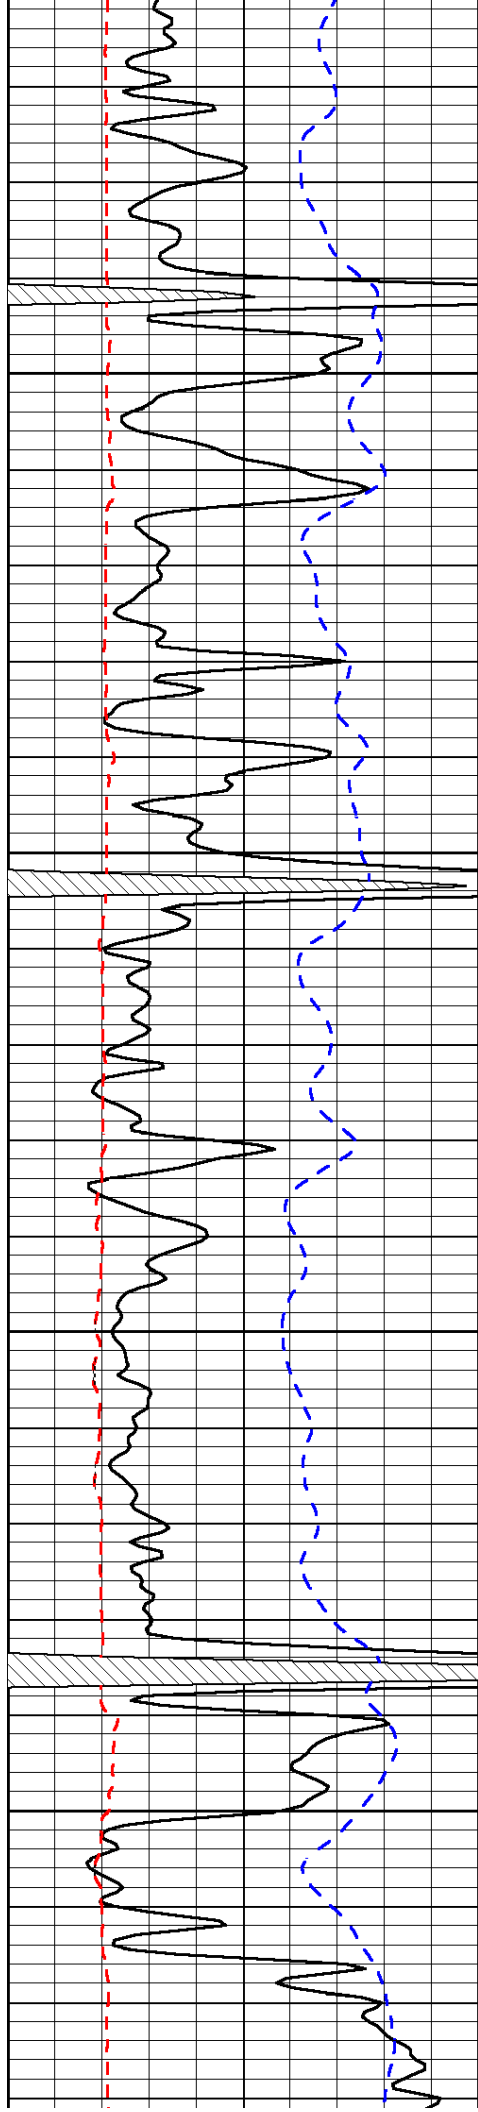



2750

2800

2850

2900

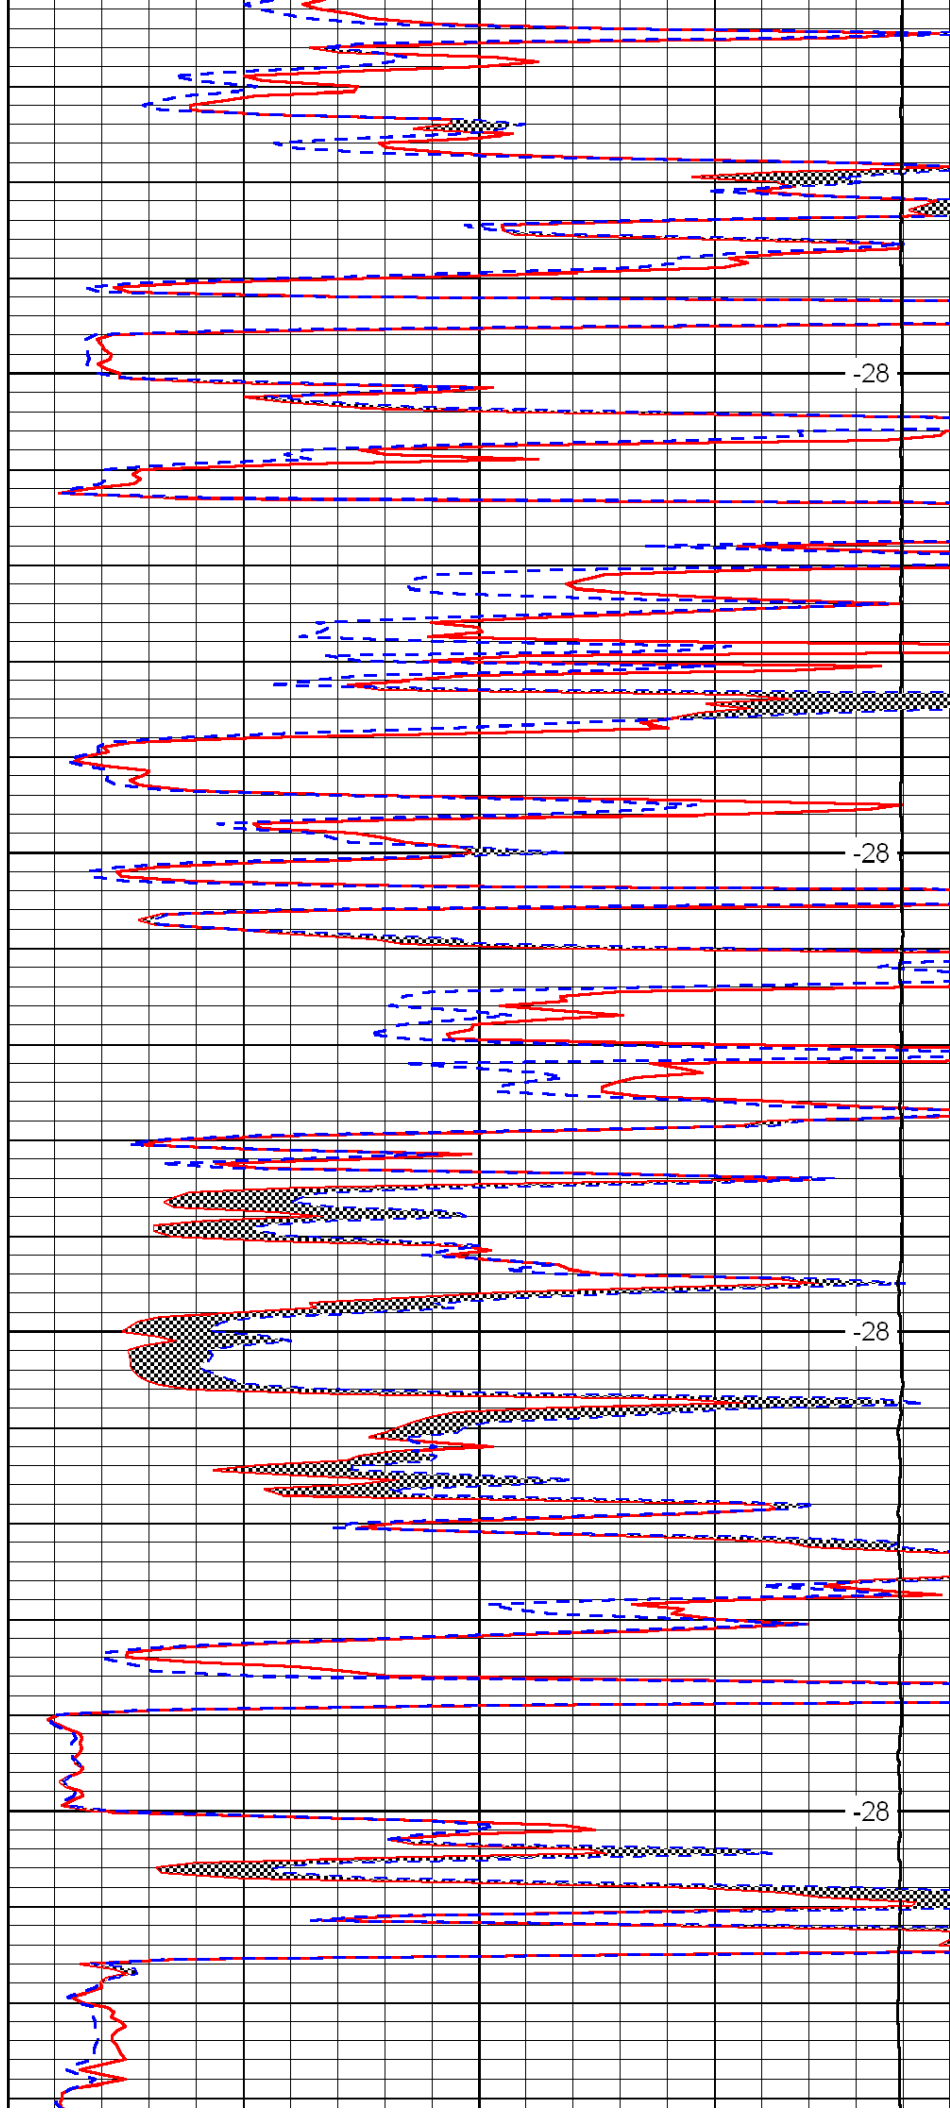

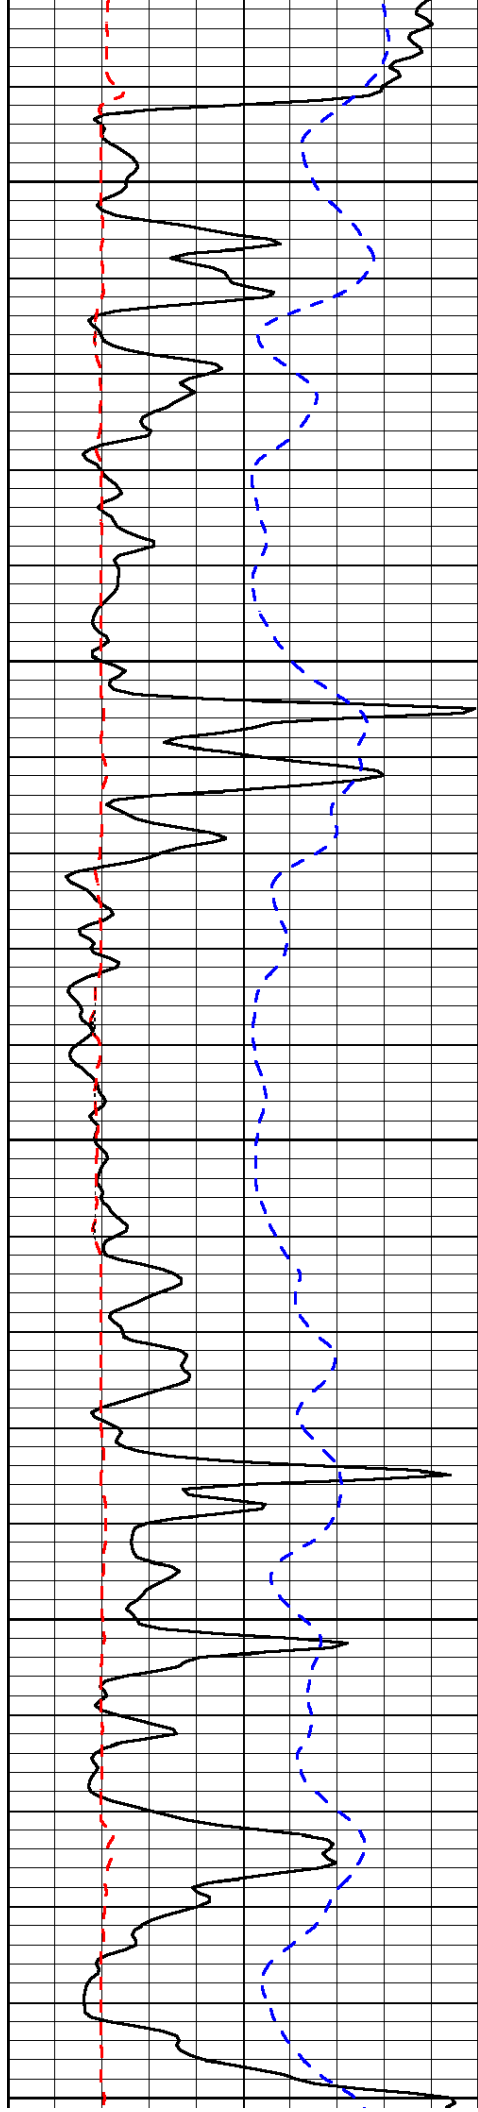


2950

3000

3050

3100

3150

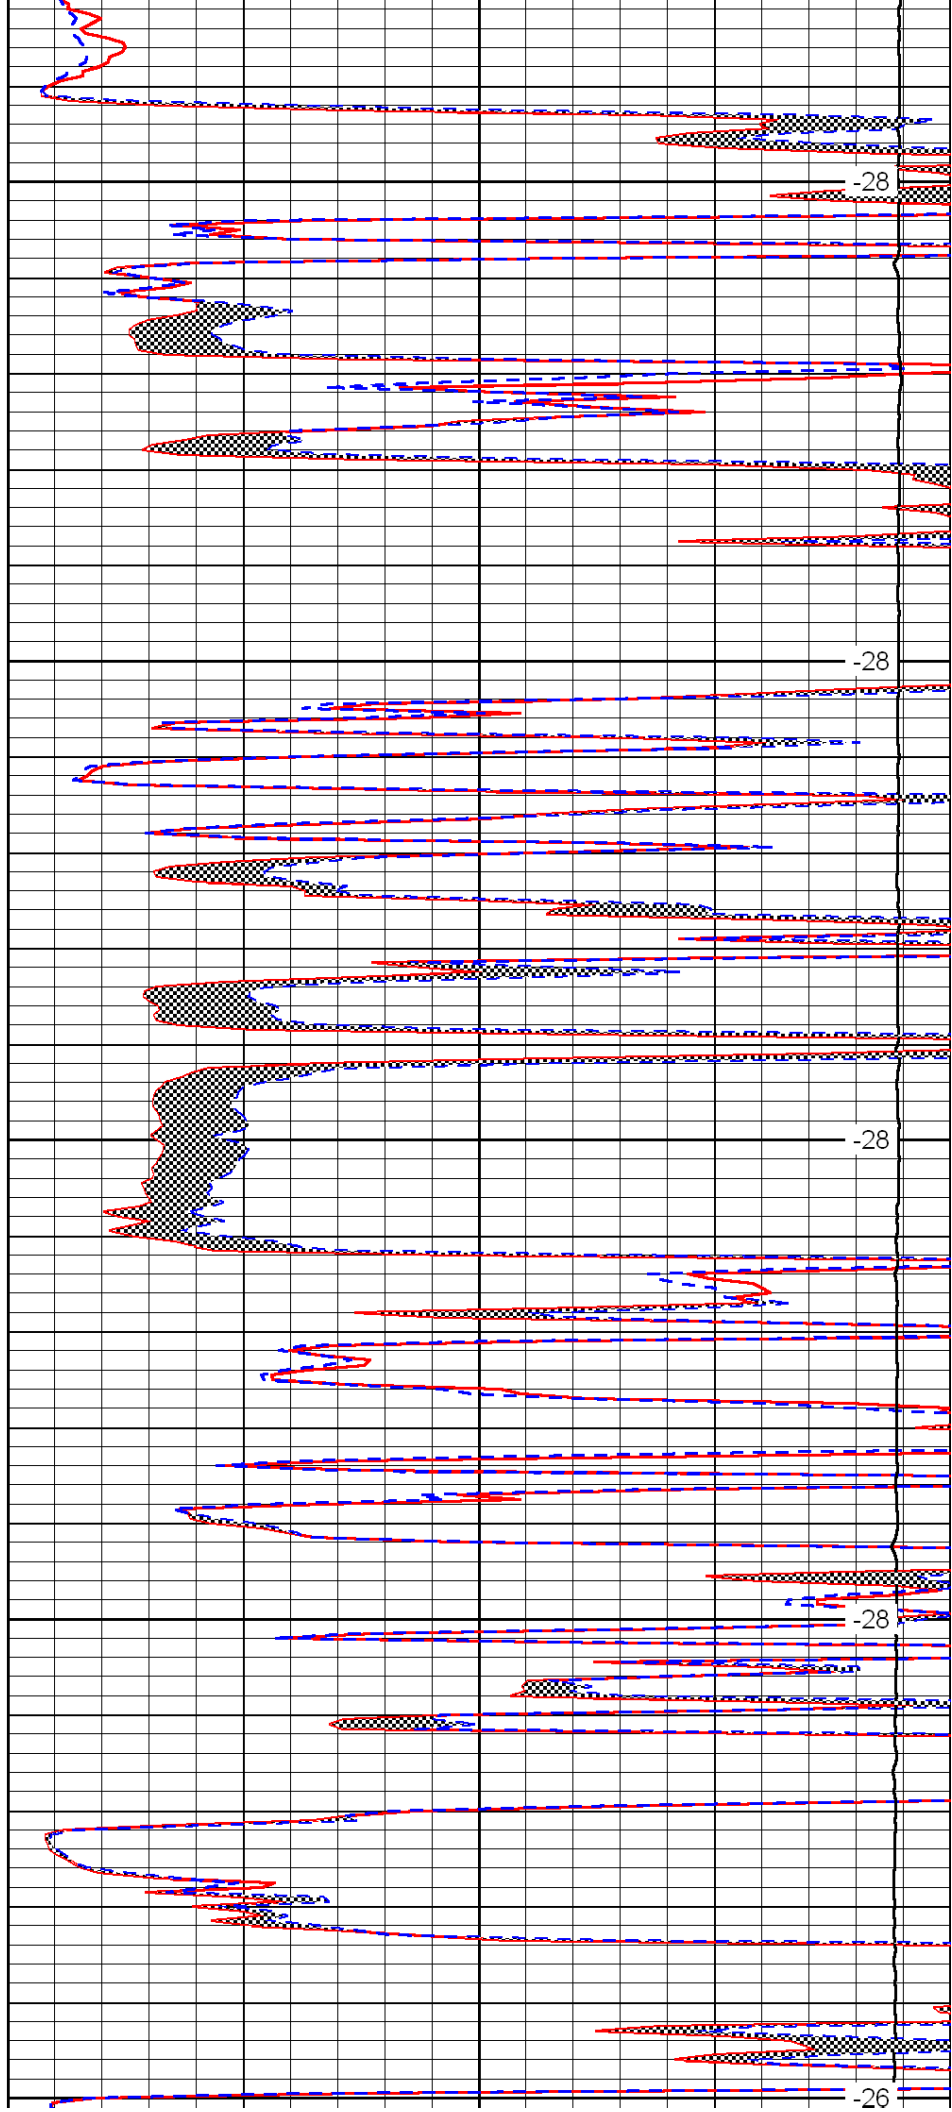


-28

-28

-28


-28

-26

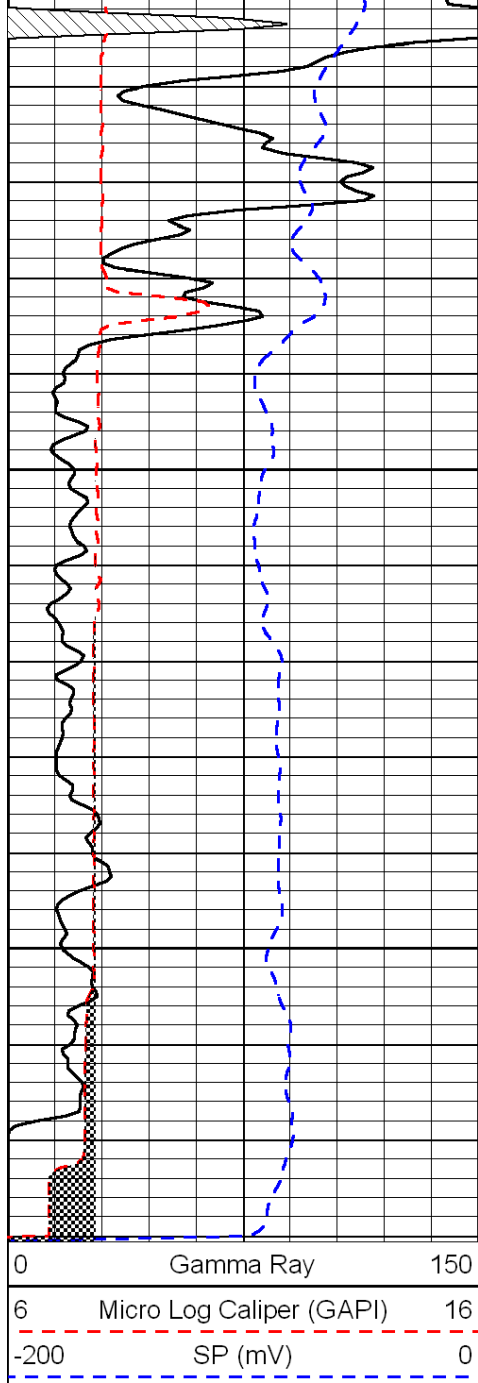

3200

3250

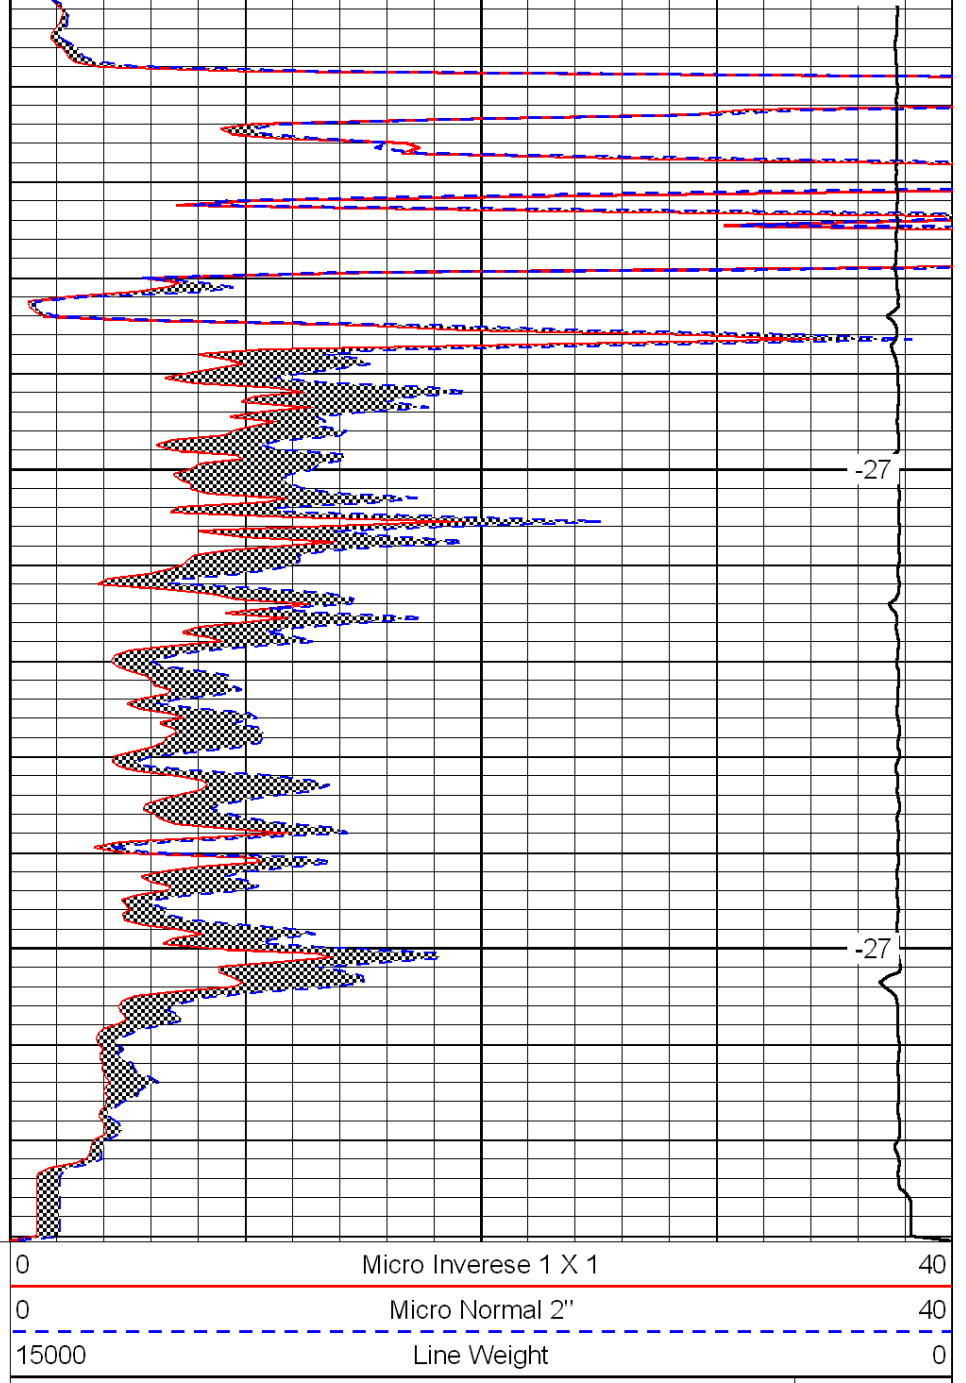

-27

-27

LSPD