


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
800 BITTING BUILDING  
WICHITA, KANSAS



15-103-03 935-00-00

WELL PLUGGING APPLICATION FORM

Well Location C SW/4 Sec. 34 Twp. 6S Rge. (E) 19 (W)


Field Name (if any)  County Rooks

Lease (Farm Name) A. C. Hammond Well No. 1

Was well log filed with application? Yes If not, explain circumstances and give available data (Use an additional sheet if necessary )

Date and hour plugging is desired to begin August 6, 1938

Plugging of the well will be done in accordance with the Rules and Regulations of the State Corporation Commission, or with the approval of the following exceptions: Explain fully any exceptions desired (Use an additional sheet if necessary) Mr. Edd Shield was called and supervised the plugging of this well.

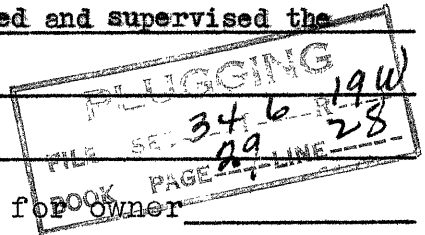

Name of the person on the lease in charge of well for owner

C. L. Barrett Address Box 408, Burrton, Kansas

Name of well owner or acting agent Power Oil Company

Address Tulsa, Oklahoma

Invoice covering assessment for plugging this well should be sent to: Olson Oil Company Address Drawer 588, Tulsa, Oklahoma


And payment will be guaranteed by applicant.

C. L. Barrett  
Operator or Acting Agent

Date August 10, 1938

15-163-03935-00-00

Power Oil Company  
A. C. Hammond # 1  
C SW/4 Sec. 34-6S-19W  
Rooks County, Kansas



COMMENCED 7 - 15 - 38  
COMPLETED 8 - 6 - 38  
ELEVATION 2045'  
INT. PROD. Dry

0		2903	Broken lime	3351	Shale & shells
206	Surface	2912	Shale	3345	S.L.M. Correction
242	Lime, white	2945	Lime	3411	Lime, white
274	Shale & shells	2983	Shale	3416	Lime & shale
446	Shale	2985	Shale, soft	3425	Lime
690	Shale & shells	2991	Lime, hard	3428	S.L.M. Correction
715	Sand	3005	Shale, gray & sticky	3432	Shale
750	Shale	3050	Shale & lime	3460	Lime & shale
903	Shale & sand	3057	Lime, white	3467	Lime
955	Shale & sand, hard	3060	Lime, soft	3482	Core, Lime & shale
989	Water sand	3080	Shale & lime	3498	Lime & shale
1076	Shale & shells	3120	Lime	3500	Lime
1087	Shale & Pyrite	3148	Shale	3516	Core, red shale & lime shells
1301	Sand	3158	Lime	3518	Red shale
1325	Shale, gray	3175	Shale	3544	Lime & shale
1588	Shale & red bed	3235	Lime	3553	Shale & lime shells
1639	Anhydrite	3237	Shale	3560	Chat
1670	Red bed	3246	Lime	3570	Core, Lime
1892	Shale	3273	Shale & lime shells	3593	Lime & shale
1971	Shale & shells	3277	Shale	3646	Lime & red shale
2015	Shale	3330	Lime	3725	Lime, Total Depth
2035	Broken lime				
2146	Lime & shale				
2212	Shale & shells				
2240	Lime				
2310	Shale & lime shells				
2340	Shale & shells				
2355	Lime				
2367	Shale				
2429	Shale & shells				
2442	Lime, white				
2490	Broken lime				
2517	Shale				
2526	Shale, soft				
2545	Lime				
2620	Shale & shells				
2631	Shale				
2692	Broken lime				
2714	Shale, gray				
2721	Shale, red				
2740	Lime, white				
2767	Broken lime				
2857	Shale & shells				

CASING RECORD

13" OD 40# L.W. 193'

SAND RECORD

Top of Neva	2520
Top of Topeka	3030
Top of Lansing & K.C.	3270
Penn. Cong.	3552 - 3559
Top of Arbuckle	3560

PLUGGING  
 FILE NO. 34-6S-19W  
 BOOK PAGE 29 LINE 28

PLUGGING RECORD

Filled hole with heavy mud from bottom to 200 ft. Drove wood plug at 200 ft. and put in 15 sacks of cement. Filled with heavy mud to 90 ft. Put in bridge and plug at 90 ft. and dumped 15 sacks of cement. Filled to top of pipe with mud and welded a metal plate on top of the surface pipe.

Subscribed and sworn to before me  
this 10th day of August, 1938

*G. J. Bryant*

Notary Public

I hereby certify that the above  
is a true and correct copy of the log  
of the A. C. Hammond # 1, C SW/4,  
Sec. 34-6S-19W, Rooks County, Kansas

*C. L. Barrett*



STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION

800 BITTING BUILDING  
WICHITA, KANSAS

LEO R. PRICE, SECRETARY  
INNIS D. HARRIS, ATTORNEY

801 HARRISON  
TOPEKA, KANSAS

IN REPLY PLEASE  
REFER TO THIS  
SUBJECT

August 9, 1938

15-163-03935-00-00

Well No.	1
Farm	Hammond
Description	0 SW 1/4 34-6-19W
County	Rooks
File	89-88

Power Oil Co.,  
Tulsa, Oklahoma.

Dear Sirs:

This letter is your permit to  
plug the above subject well, in accord-  
ance with the Rules and Regulations of  
the STATE CORPORATION COMMISSION.

Yours very truly,

STATE CORPORATION COMMISSION  
CONSERVATION DIVISION

E. G. DAHLGREN, DIRECTOR

TRJ:ha

BY

T. H. JOHNS

NOTICE:

PLUGGING SUPERVISOR

Ed. Shell  
Box 181

Great Bend, Kansas