

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
800 BITTING BUILDING
WICHITA, KANSAS

WELL PLUGGING APPLICATION FORM

Well Location C 8 1/2 SW SW Sec. 32 Twp. 6 Rge. _____ (E) _____ (W) 19

Field Name (if any) Wild Cat County Rooks

Lease (Farm Name) Liebenau Well No. 1

Was well log filed with application? Yes If not, explain circumstances and give available data (Use an additional sheet if necessary) _____

Well was plugged on verbal application to C. T. Alexander

Date and hour plugging is desired to begin 5:00 P.M. 6-7-41

Plugging of the well will be done in accordance with the Rules and Regulations of the State Corporation Commission, or with the approval of the following exceptions: Explain fully any exceptions desires (Use an additional sheet if necessary) No exception

Name of the person on the lease in charge of well for owner _____



C. R. Smith Address Russell, Kansas

Name of well owner or Acting Agent Helmerich & Payne, Inc.

Address 415 Philtower Building, Tulsa, Oklahoma.

Invoice covering assessment for plugging this well should be sent to Helmerich & Payne, Inc. Address Tulsa, Oklahoma

and payment will be guaranteed by applicant.

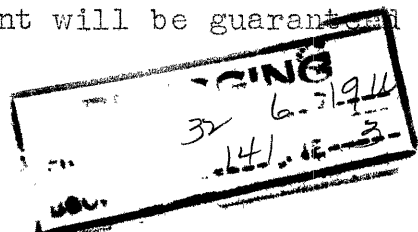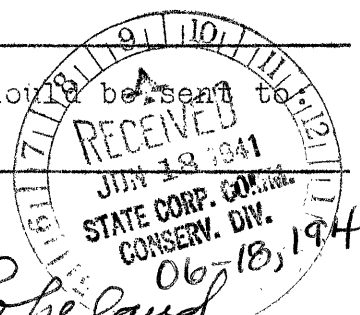

E M Copeland
Operator or Acting Agent

Date 6-17-41

Liabeneau #1
Center S/3 T/4 R/4 Section 32-58-19W
Rooks County, Kansas
Central Petroleum Company, Inc.
And
Helmerich & Payne, Inc.

15-163-00033-00-00

Commenced: May 25, 1941
 Completed: June 8, 1941

| | | |
|------------------------|------|------|
| Shale and surface sand | 0 | 35 |
| Shale and shells | 35 | 190 |
| Lime | 190 | 210 |
| Shale and lime shells | 210 | 385 |
| Blue shale | 385 | 710 |
| Lime | 710 | 755 |
| Sand and shale | 755 | 840 |
| Shale and shells | 840 | 970 |
| Hard sand | 970 | 1040 |
| Shale and shells | 1040 | 1065 |
| Sand | 1065 | 1270 |
| Shale and sand | 1270 | 1360 |
| Shale and shells | 1360 | 1490 |
| Sand and shale | 1490 | 1550 |
| Lime | 1550 | 1590 |
| Shale and lime shells | 1590 | 1670 |
| Lime, broken | 1670 | 1730 |
| Shale | 1730 | 1800 |
| Sand | 1800 | 1850 |
| Shale and shells | 1850 | 2085 |
| Sand | 2085 | 2105 |
| Shale and shells | 2105 | 2205 |
| Shale | 2205 | 2340 |
| Lime | 2340 | 2370 |
| Broken lime | 2370 | 2310 |
| Lime | 2310 | 2400 |
| Broken lime | 2400 | 2555 |
| Shale | 2555 | 2580 |
| Broken lime | 2580 | 2658 |
| Lime, hard | 2658 | 2668 |
| Lime | 2668 | 2755 |
| Broken lime | 2755 | 2925 |
| Lime | 2925 | 3195 |
| Sand and lime | 3195 | 3225 |
| Hard lime | 3225 | 3268 |
| Lime | 3268 | 3327 |
| Lime and chert | 3327 | 3367 |
| Lime | 3367 | 3431 |
| Lime and shale | 3431 | 3504 |
| Shale | 3504 | 3523 |
| Lime and shale | 3523 | 3565 |
| TOTAL DEPTH | 3565 | |

CASING RECORD


2-5/8" O. D. Surface Casing set at 152' and cemented with 60 sacks of cement.

PLUGGING RECORD

Set cement plug at 180'. Set Cement Plug 6' from bottom of cellar. Cut off surface pipe. Welded plate over surface pipe. Put 6 inches of cement over surface pipe and bottom of cellar.

STATE OF OKLAHOMA }
 COUNTY OF TULSA }

PLUGGING
 FILE 32 6-R 1941
 BOOK PAGE 41 LINE 3

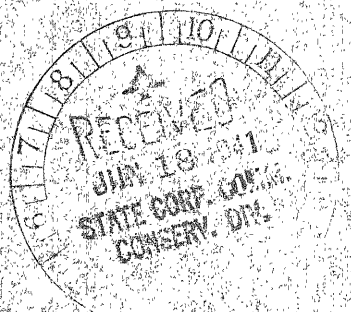

I hereby affirm that the above and foregoing is a true and correct copy of the log of the Liabeneau Well #1, located in the Center of the South Half of the Southwest Quarter of the Southwest Quarter of Section 32, Township 6 South, Range 19 West, Rooks County, Kansas.

HELMERICH & PAYNE, INC.,
William Ross
 Treasurer

Subscribed and sworn to before me, a Notary Public, this 13th day of June, 1941.

Lucas Griffing
 Notary Public

My commission expires July 22, 1943.



STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
800 BITTING BUILDING
WICHITA, KANSAS

June 9, 1941

IN REPLY PLEASE
REFER TO THIS
SUBJECT

15-163-00033-00-00

Well No. 1
Farm Lieberman
Description C S $\frac{1}{2}$ SW SW 22-6-19W
County Rooks
File 141-3

Helmerich & Payne, Inc.
415 Philtower Bldg.
Tulsa, Oklahoma

Dear Sirs:

This letter is your permit to plug
the above subject well, in accordance
with the Rules and Regulations of the
STATE CORPORATION COMMISSION.

Yours very truly,

STATE CORPORATION COMMISSION

T. A. MORGAN, DIRECTOR
CONSERVATION DIVISION

HA

BY: J. P. Roberts
J. P. ROBERTS

NOTICE: C. T. Alexander
Great Bend, Kansas