



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company Cholla Production, LLC		
	Well Stithem No. 2-4		
	Field Diebolt		
	County Trego	State	Kansas
15-195-01,358-00-01	Location	E2 SW SE 660' FSL & 1,650' FEL	
	Sec: 4	Twp: 11 S	Rge: 23 W
	Permanent Datum	Ground Level	Elevation 2289
	Log Measured From	Kelly Bushing	5 Ft. Above Perm. Datum
	Drilling Measured From	Kelly Bushing	
Date		5/14/2011	
Run Number		Two	
Depth Driller		4225	
Depth Logger		4228	
Bottom Logged Interval		4227	
Top Log Interval		3100	
Casing Driller		8.625 @ 193	
Casing Logger		189	
Bit Size		7.875	
Type Fluid in Hole		Chemical	
Salinity, ppm CL		2100	
Density / Viscosity		9.1 7.3	
pH / Fluid Loss		10.0 7.4	
Source of Sample		Flowline	
Rm @ Meas. Temp		.92 @ 68	
Rmf @ Meas. Temp		.69 @ 68	
Rmc @ Meas. Temp		1.24 @ 68	
Source of Rmf / Rmc		Charts	
Rm @ BHT		.53 @ 118	
Operating Rig Time		4 Hours	
Max Rec. Temp. F		118	
Equipment Number		10	
Location		Hays	
Recorded By		Jim Schuler	
Witnessed By		Bill Goff	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Wakeeney Kansas, 6 Miles North to B Road,
West 1/2 Mile, North Into

Database File: c:\warrior\data\cholla_stithem no. 2-4\cholla_stithem_2_4hd.db
Dataset Pathname: DIL\chstk
Presentation Format: micro
Dataset Creation: Sat May 14 07:03:23 2011
Charted by: Depth in Feet scaled 1:240

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

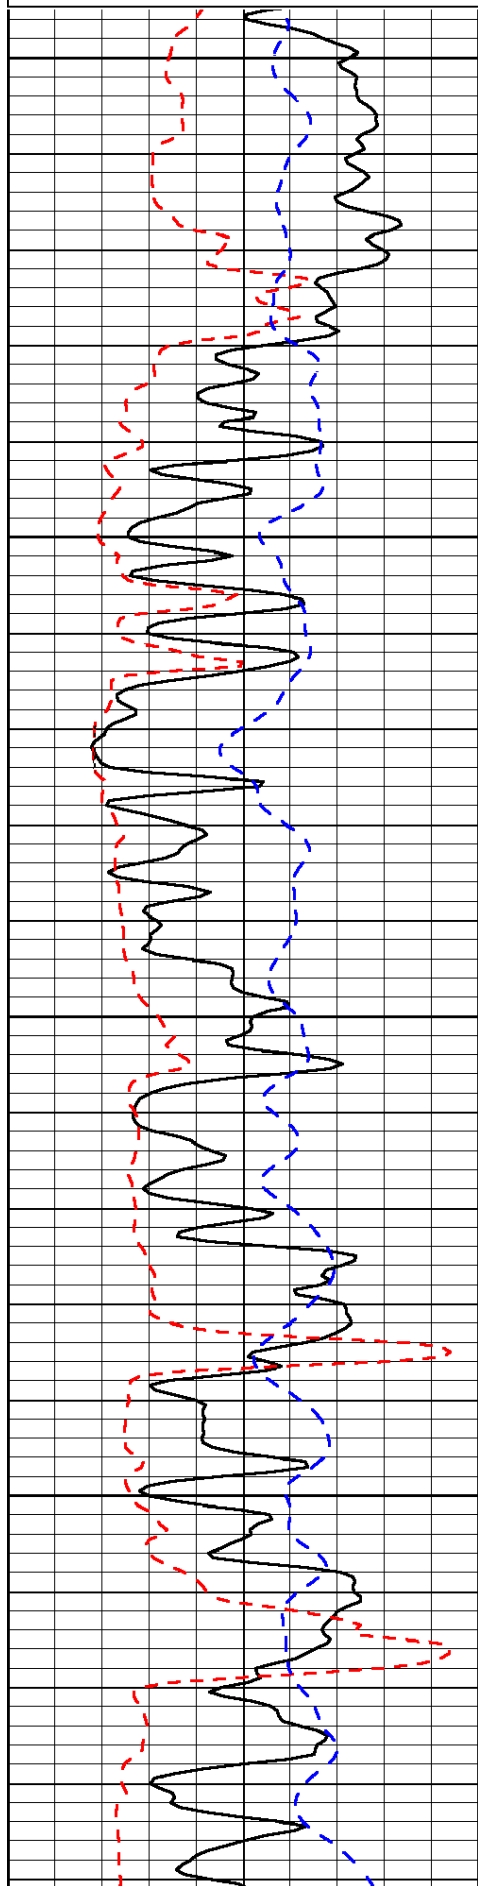


3100

3150

3200

3250

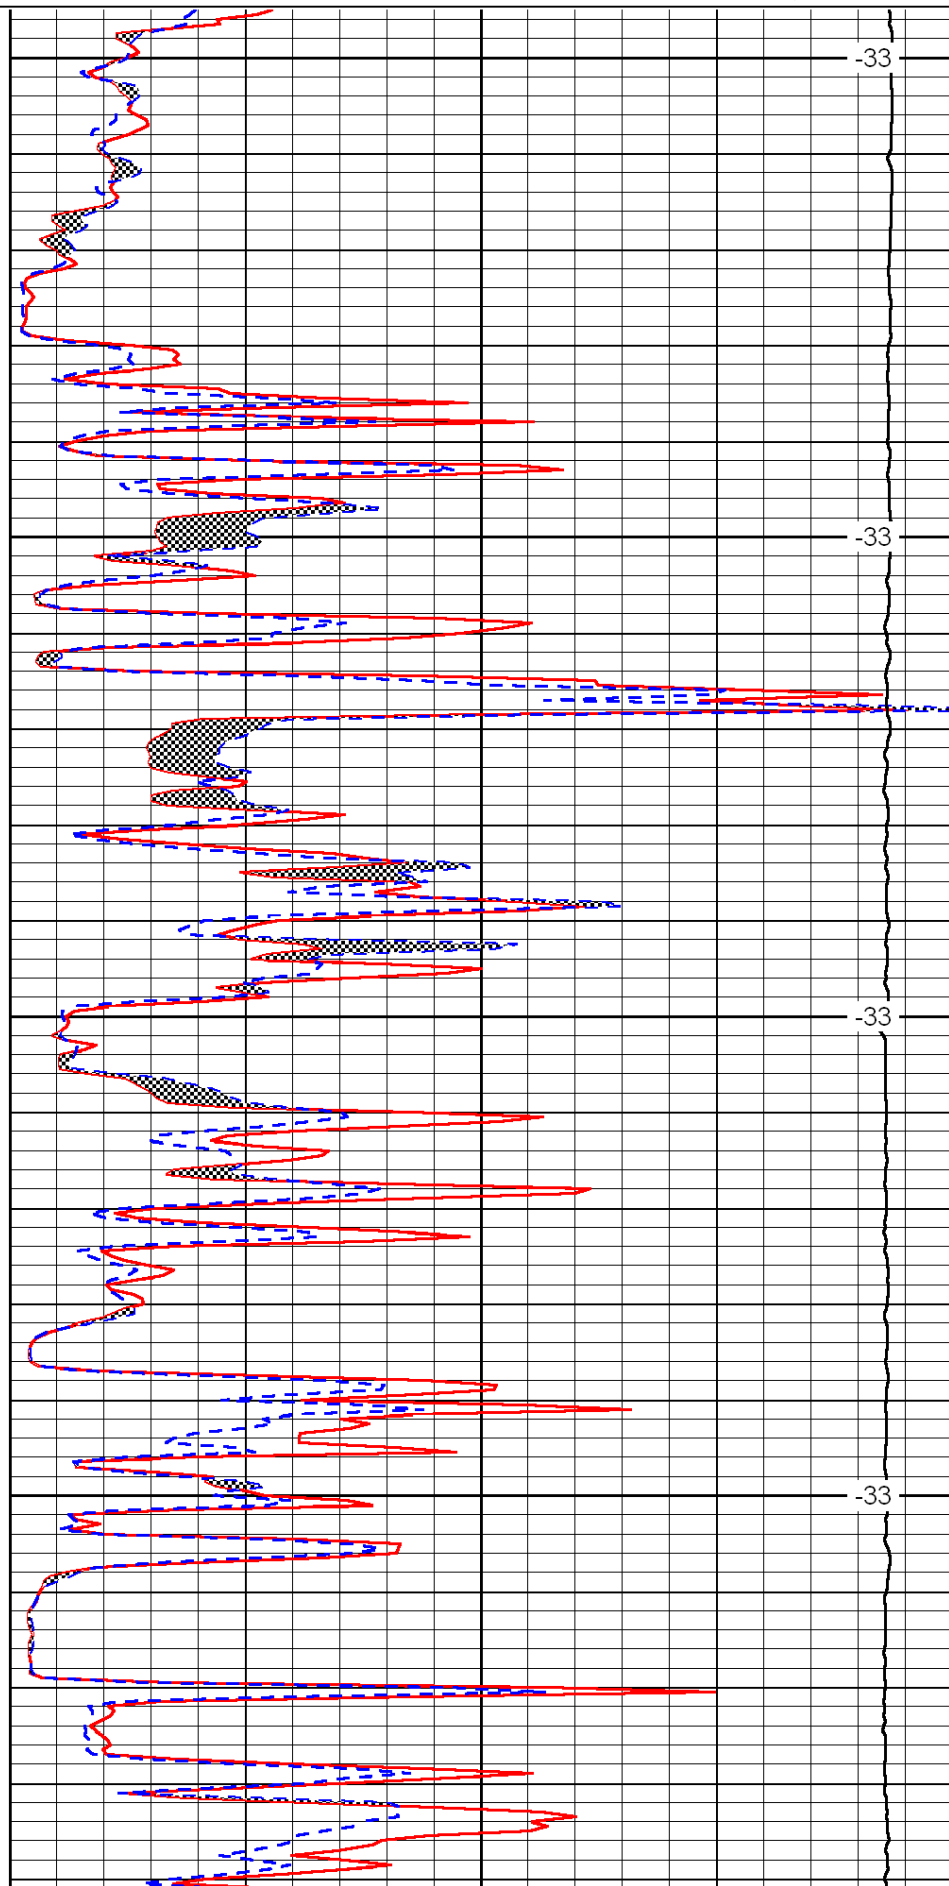



-33


-33

-33

-33

LSPD

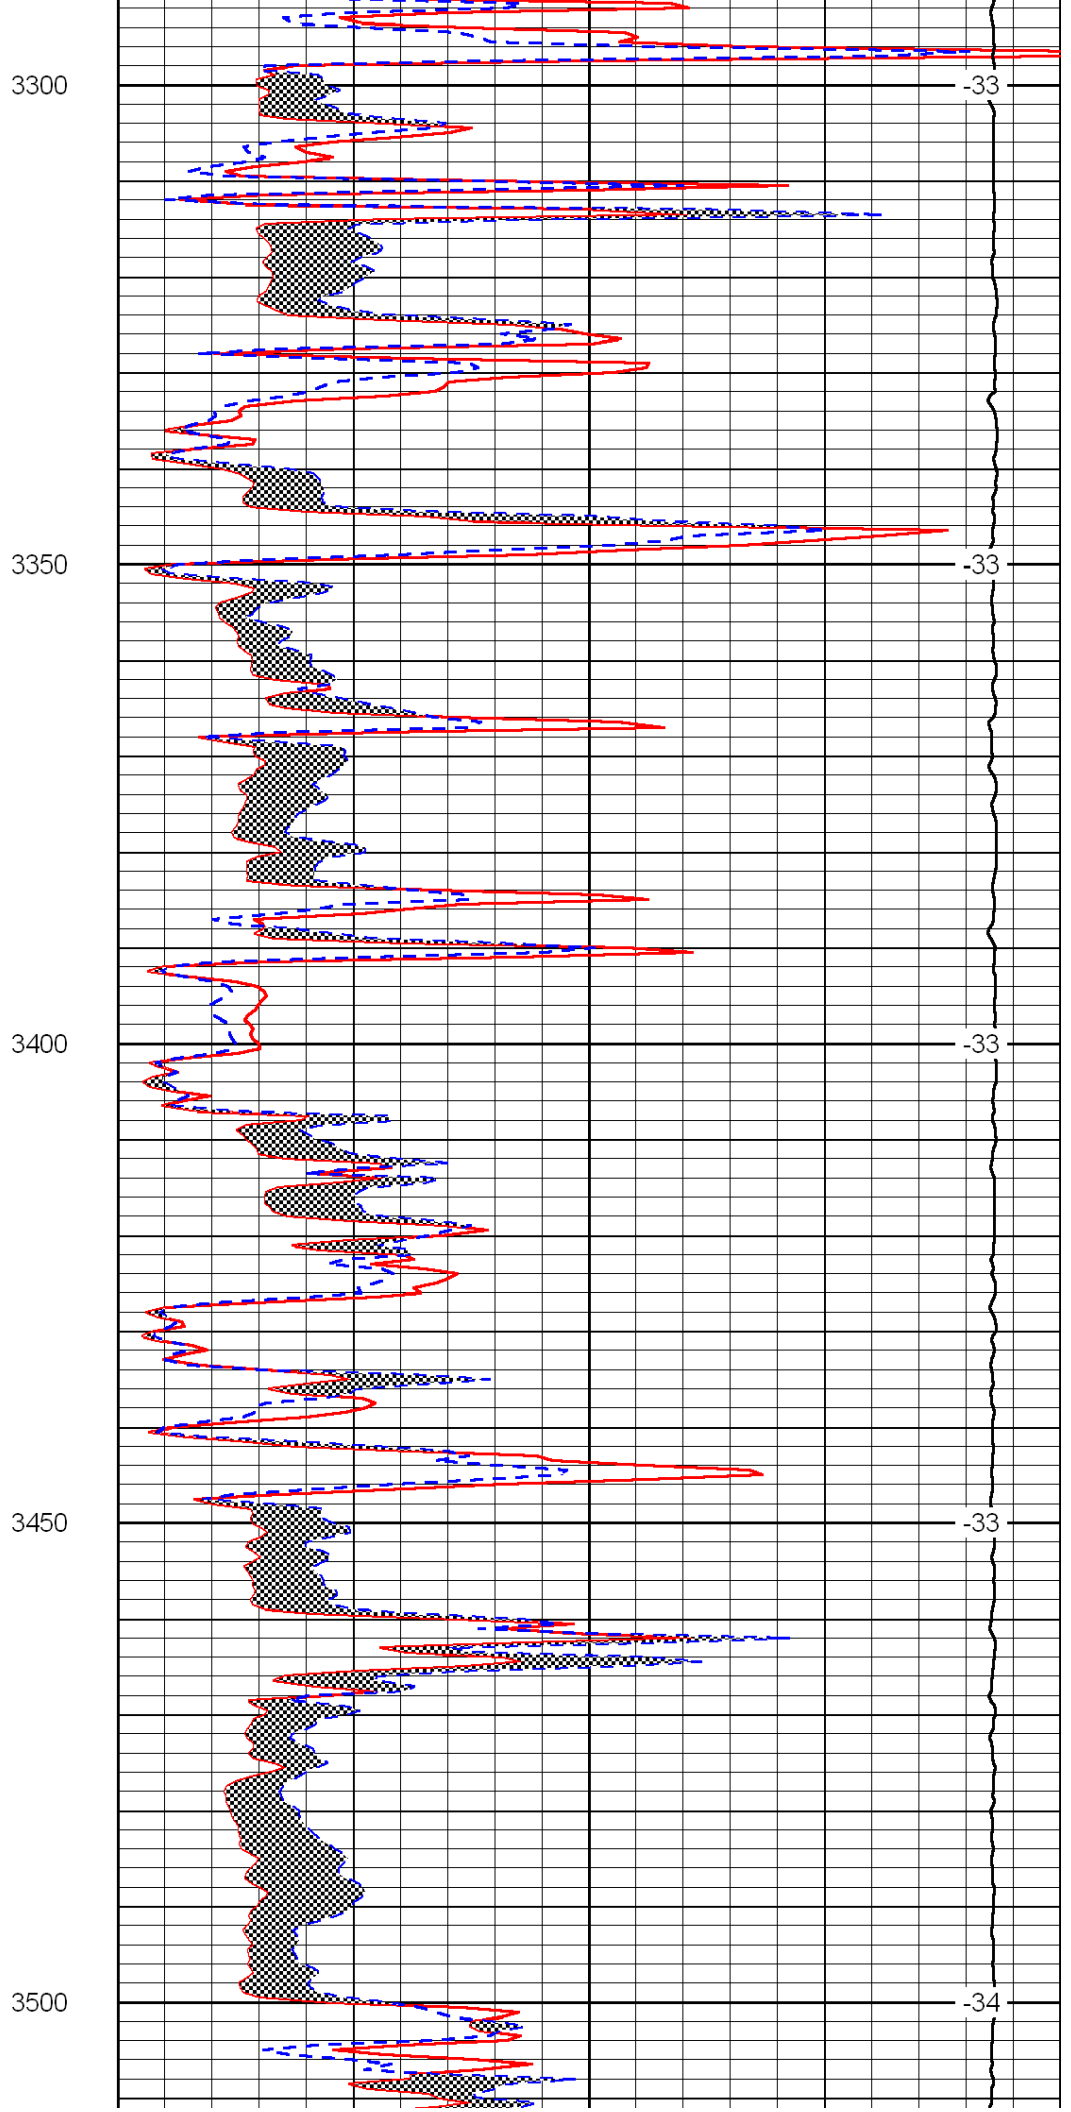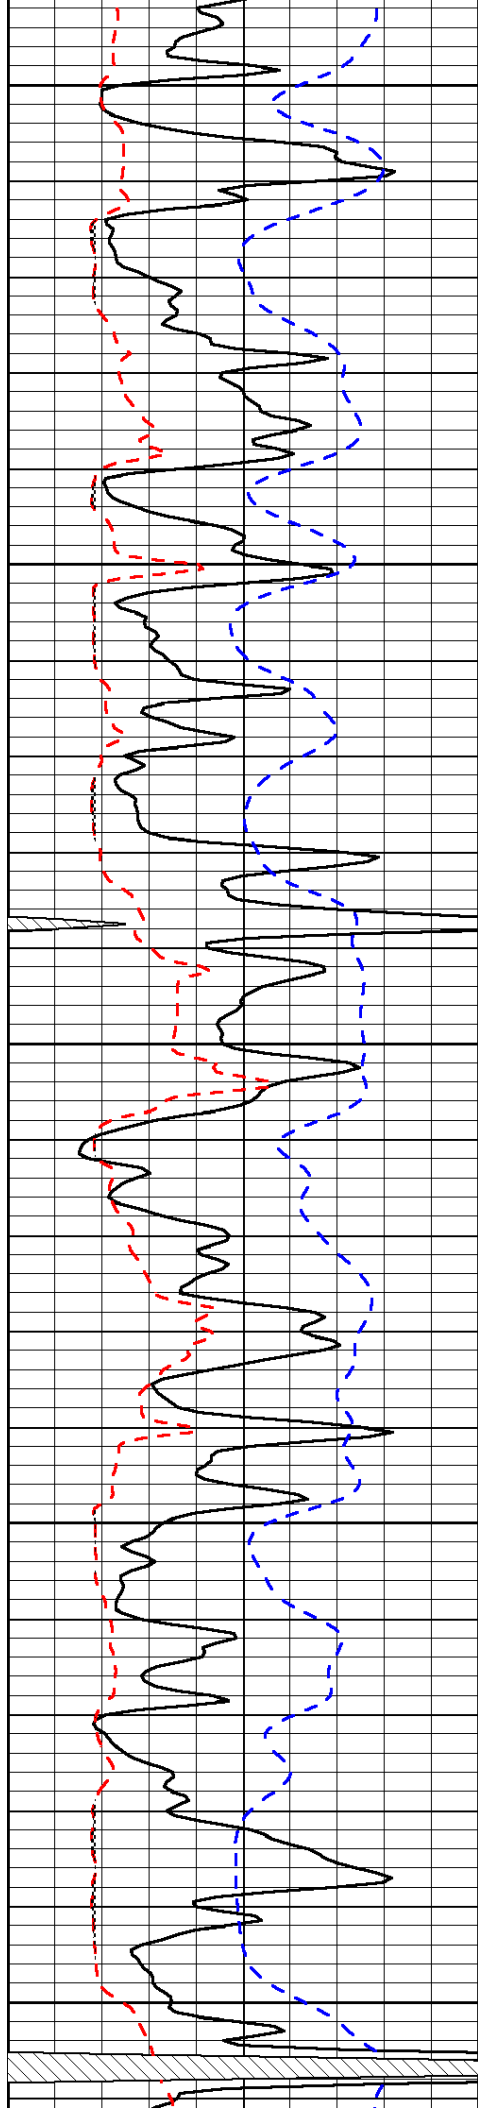

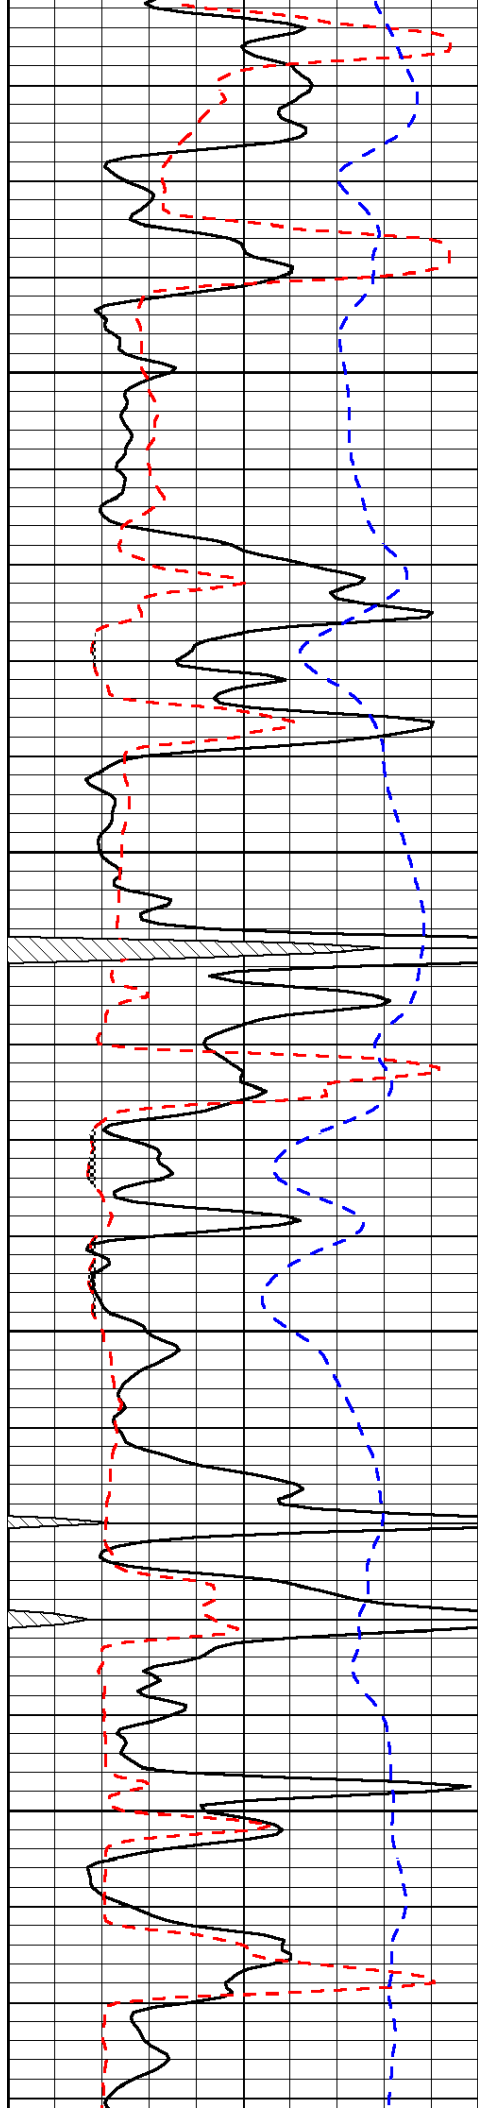



3550

3600

3650

3700

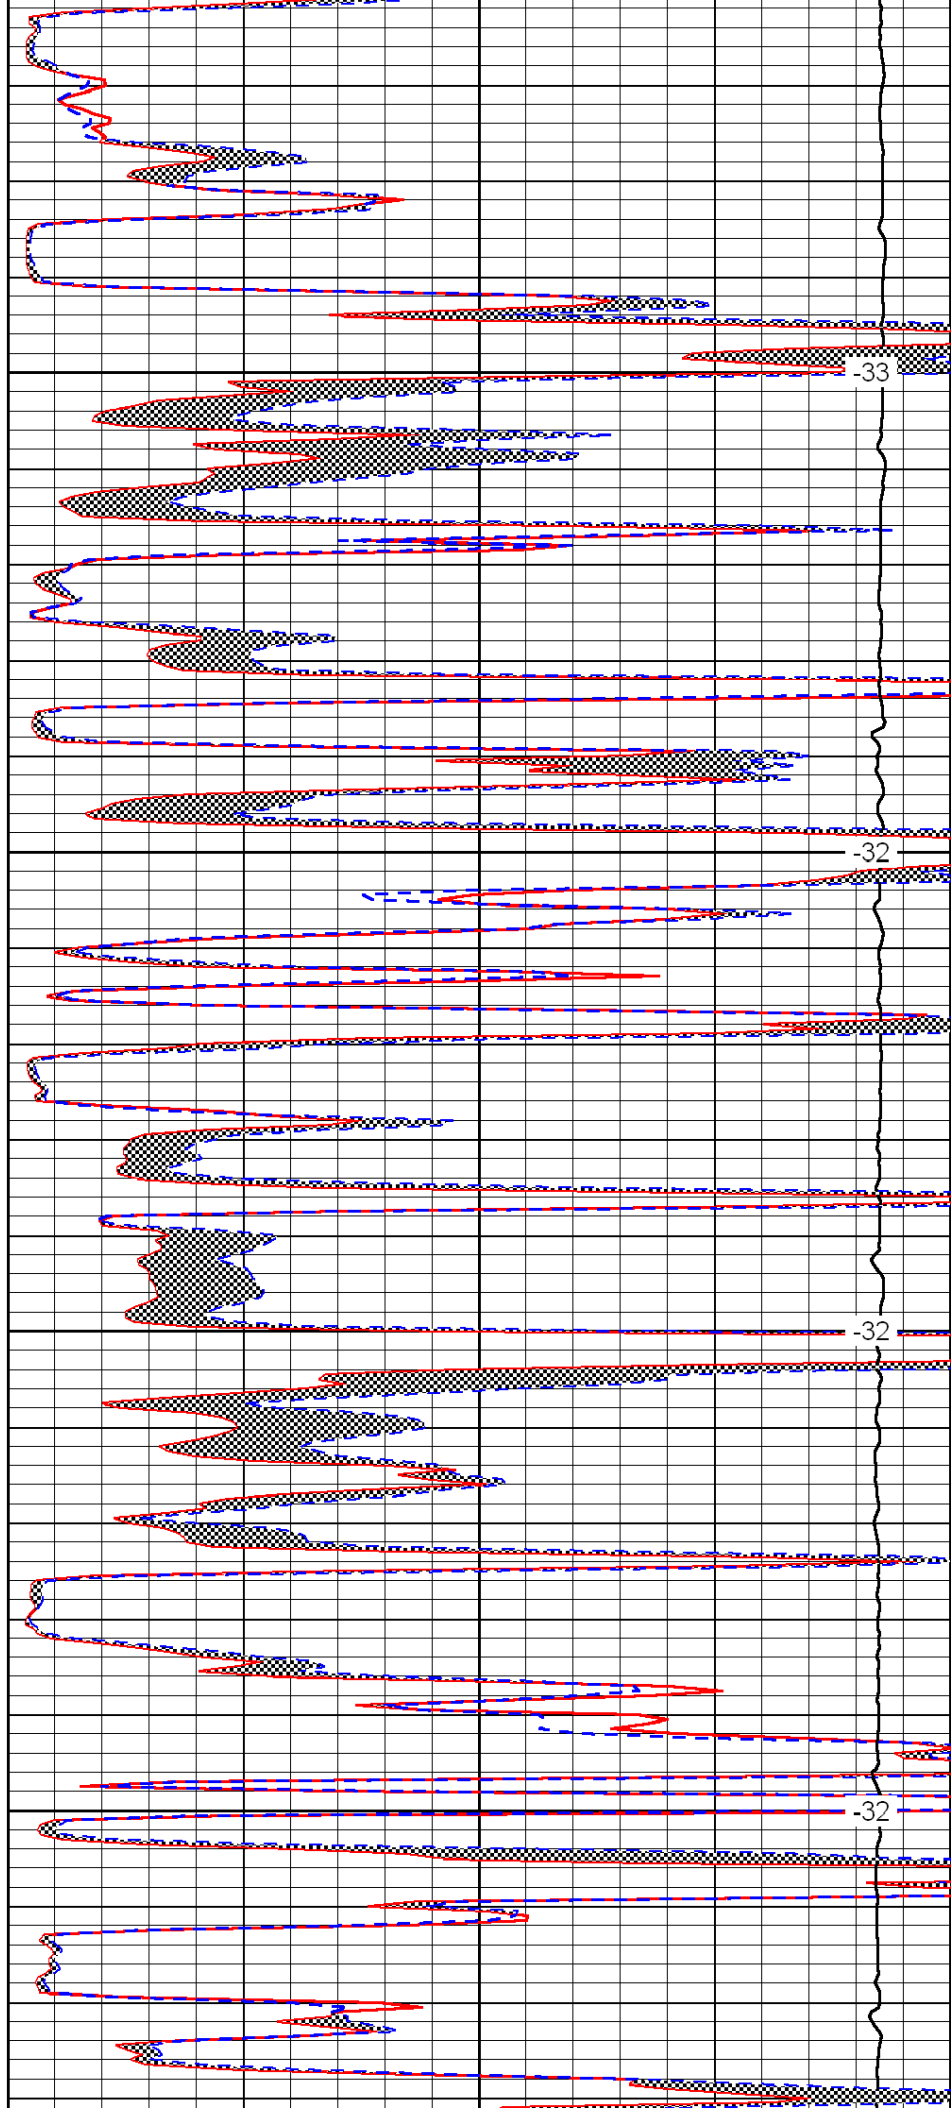

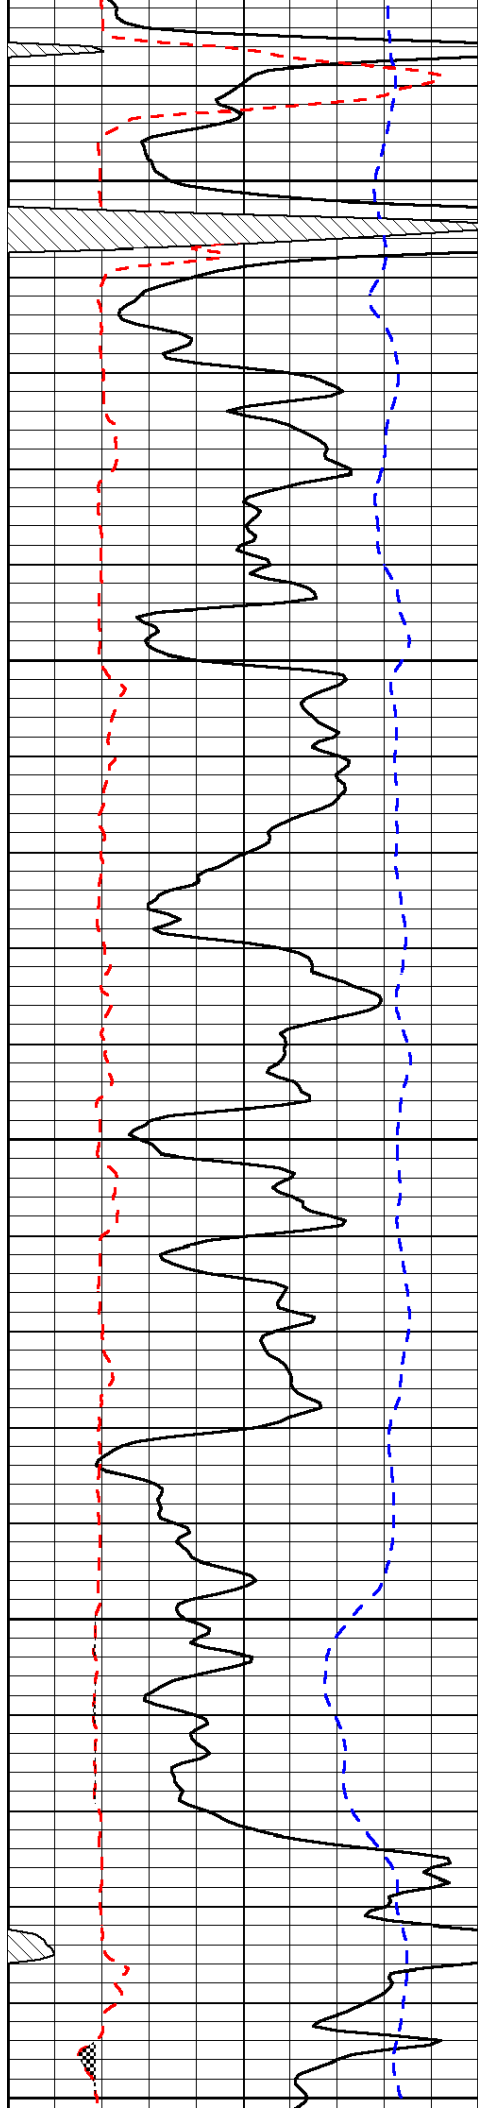


3750


3800

3850

3900

3950

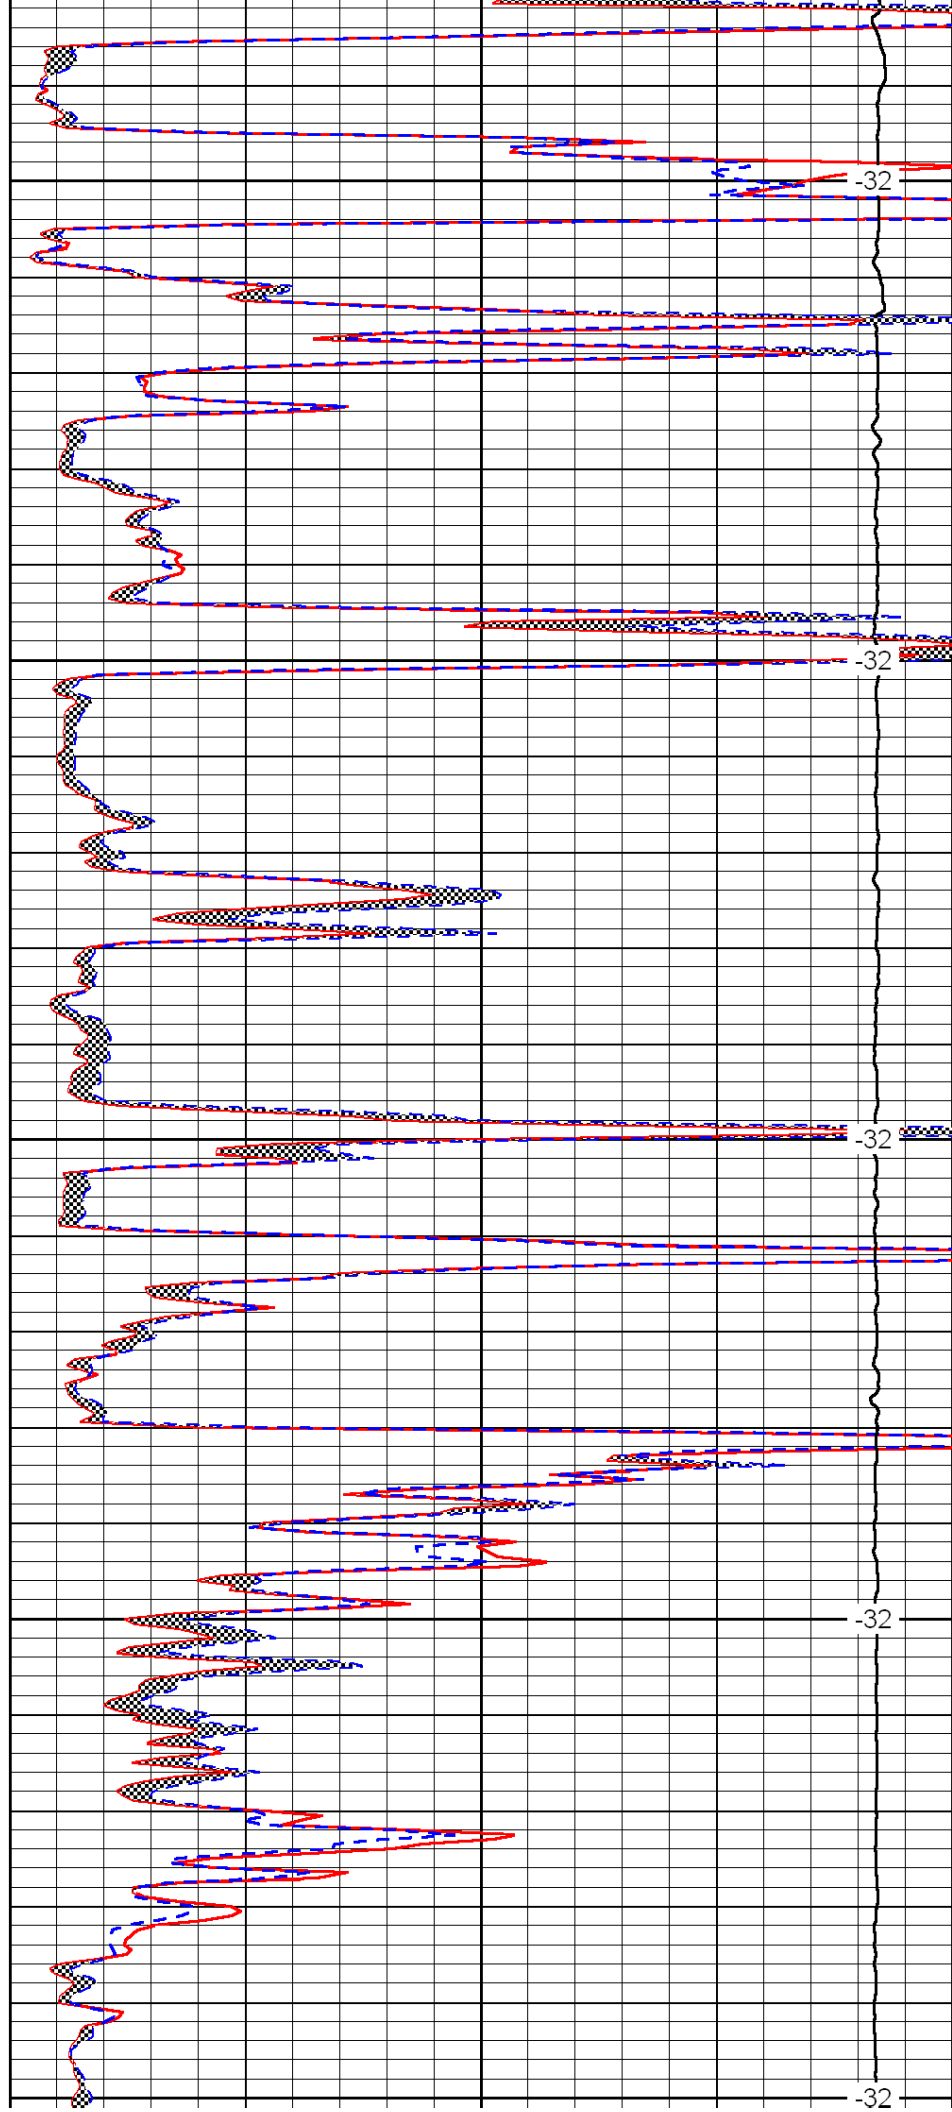

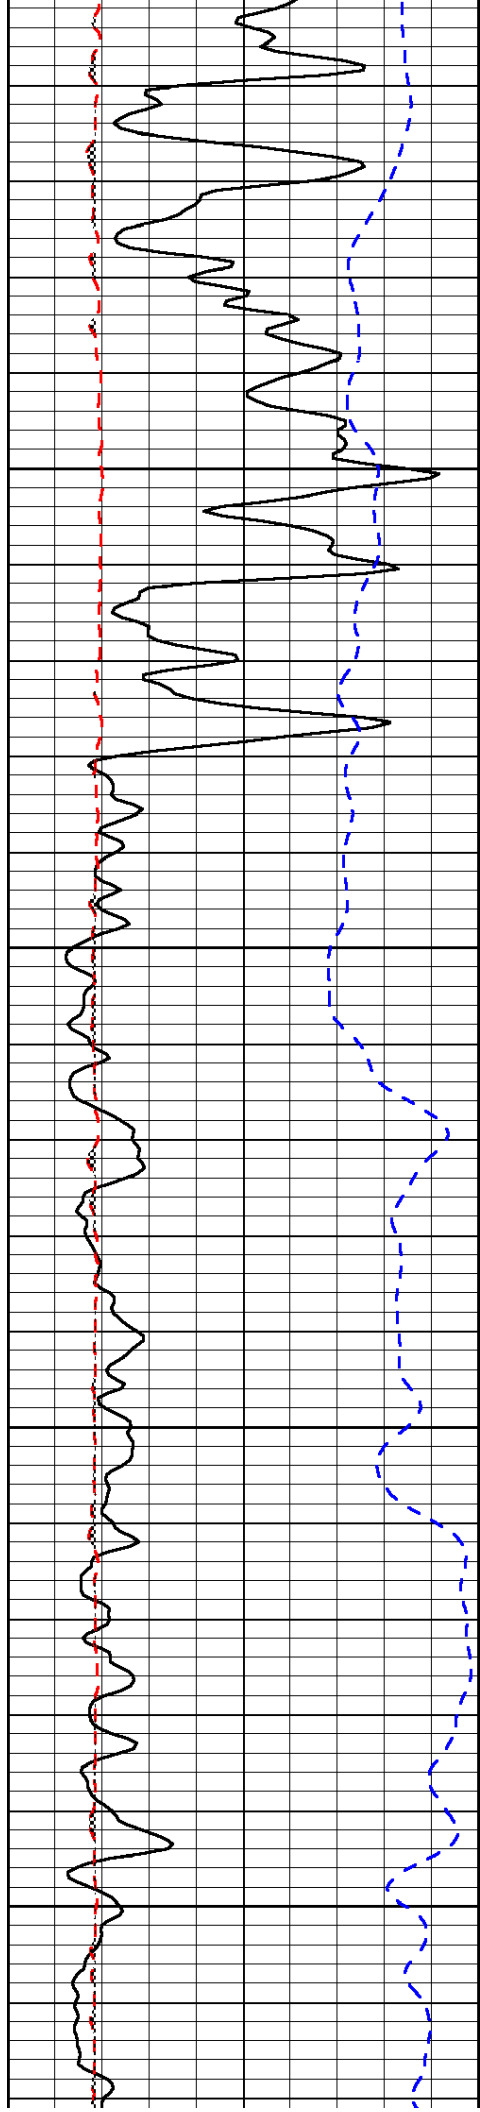


4000

4050

4100

4150

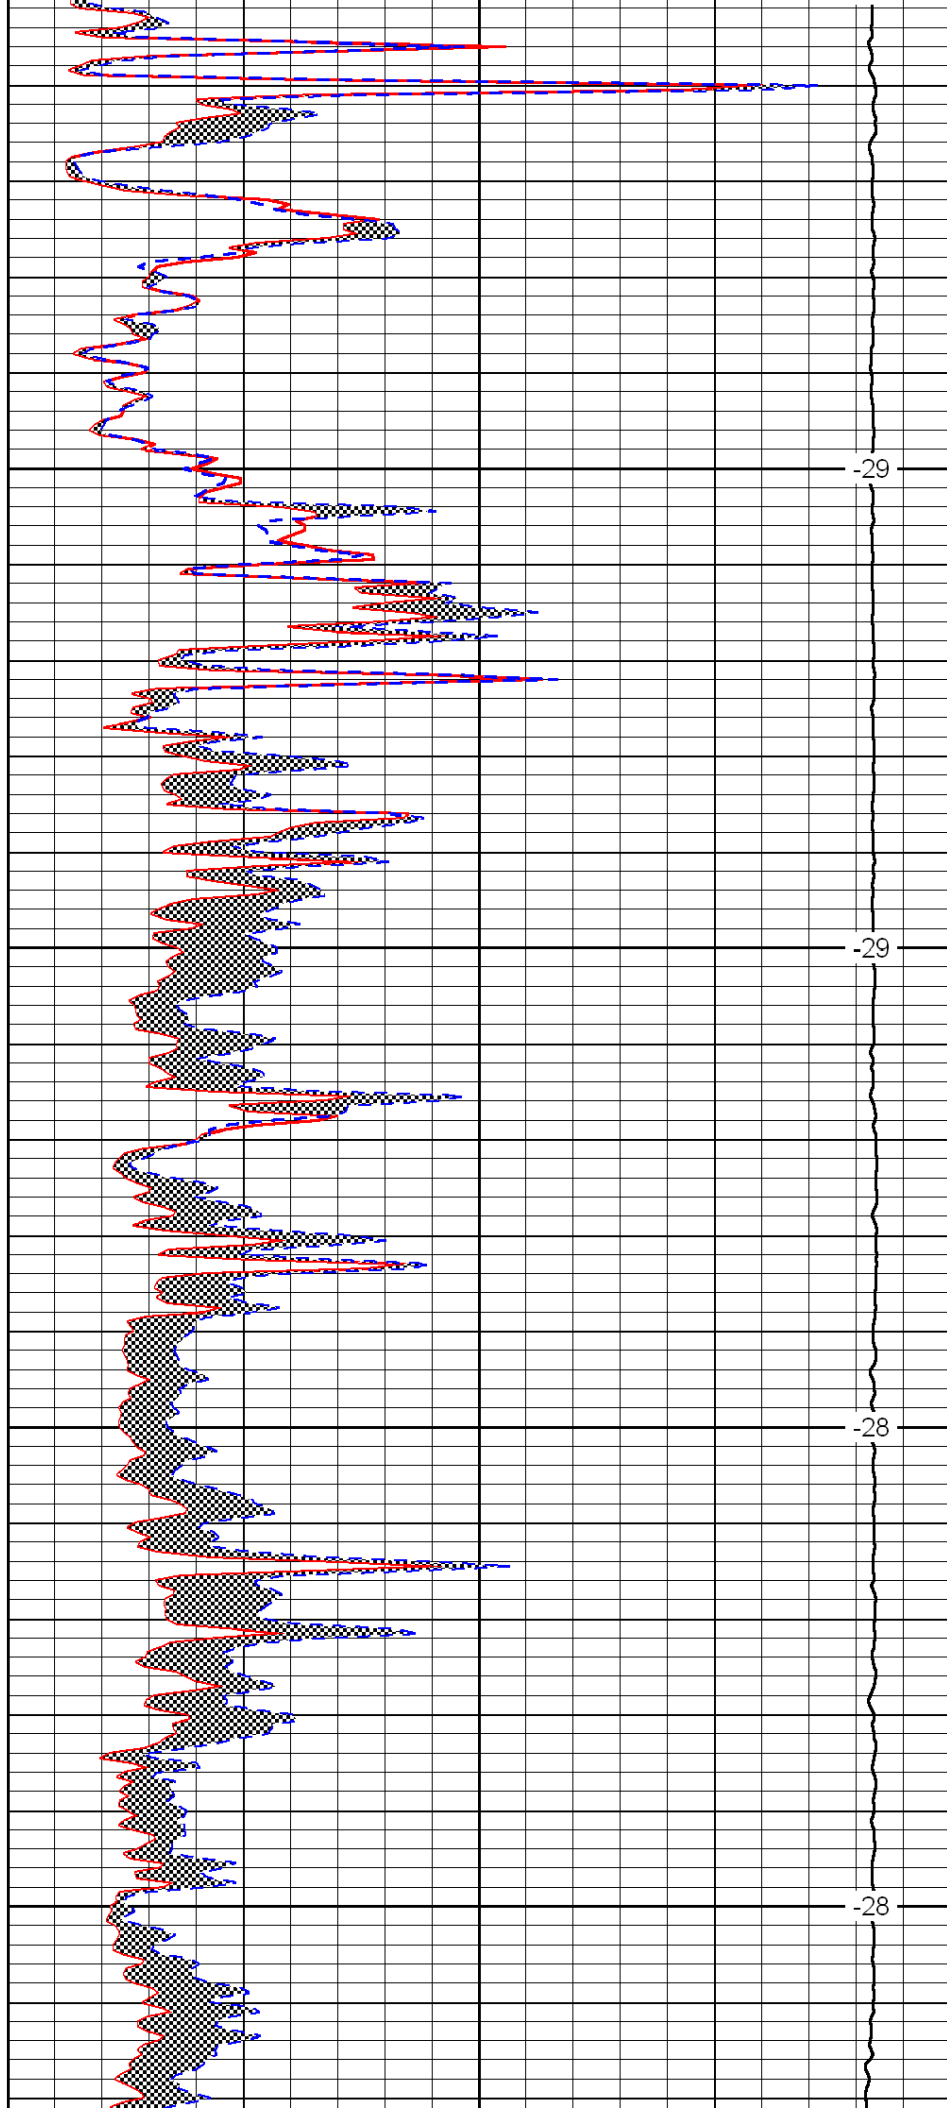


-29


-29

-28

-28

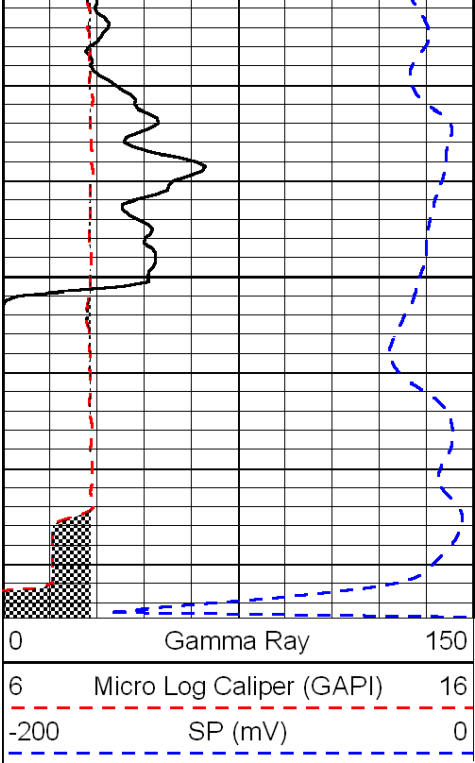

4200

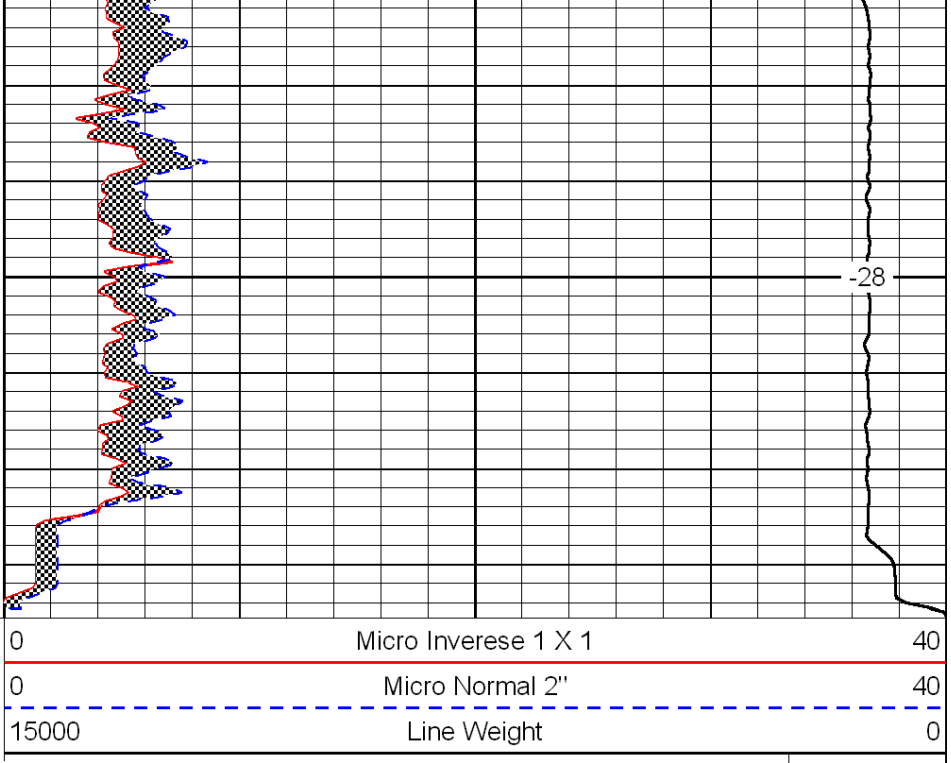

-28

LSPD