



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No. 15-057-20,749-00-00	Company American Warrior, Inc.		Other Services CNL/CDL DIL
Well Herman No. 1-24			
Field Konda Southeast			
County Ford	State Kansas		
Location SE SW NW NW 1,044' FNL & 354' FWL			
Sec: 24 Twp: 27S Rge: 22W			
Permanent Datum Ground Level Elevation 2418		Elevation	
Log Measured From Kelly Bushing 11 Ft. Above Perm. Datum		K.B. 2418	
Drilling Measured From Kelly Bushing		D.F. 2407	
		G.L. 2407	

Date	10/13/2011	
Run Number	Two	
Depth Driller	5180	
Depth Logger	5174	
Bottom Logged Interval	5173	
Top Log Interval	4000	
Casing Driller	8.625 @ 430	
Casing Logger	430	
Bit Size	7.875	
Type Fluid in Hole	Chemical	
Salinity, ppm CL	10000	
Density / Viscosity	9.55 51	
pH / Fluid Loss	10.5 13.6	
Source of Sample	Flowline	
Rm @ Meas. Temp	.31 @ 76	
Rmf @ Meas. Temp	.23 @ 76	
Rmc @ Meas. Temp	.42 @ 76	
Source of Rmf / Rmc	Charts	
Rm @ BHT	.18 @ 128	
Operating Rig Time	4 Hours	
Max Rec. Temp. F	128	
Equipment Number	10	
Location	Hays	
Recorded By	J. Long	
Witnessed By	Harley Sayles	

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Ford, 2 North to Ridge Road, 3 1/2 East to 129 Road, 1 3/4 North, East Into

0	Gamma Ray	150
6	MCAL (GAPI)	16
2.875	Mud Cake (GAPI)	7.875
-200	SP	0

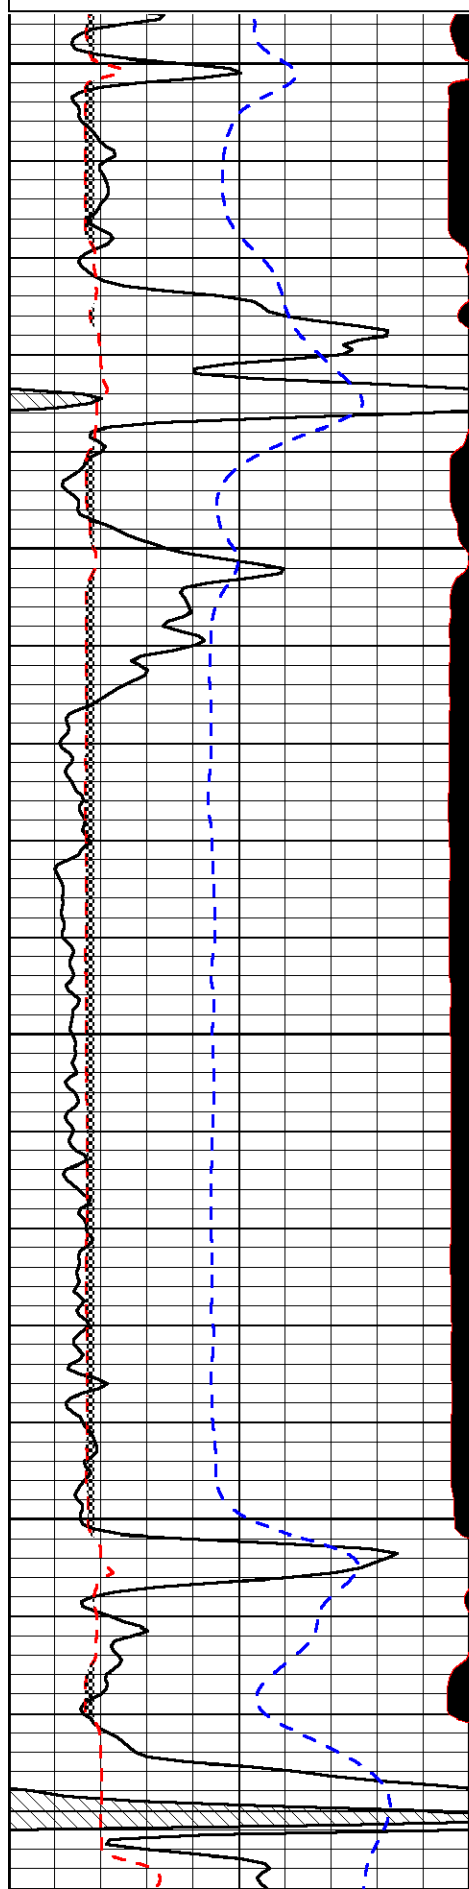

4000


4050

4100

4150

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
10000	Line Weight	0

LSPD

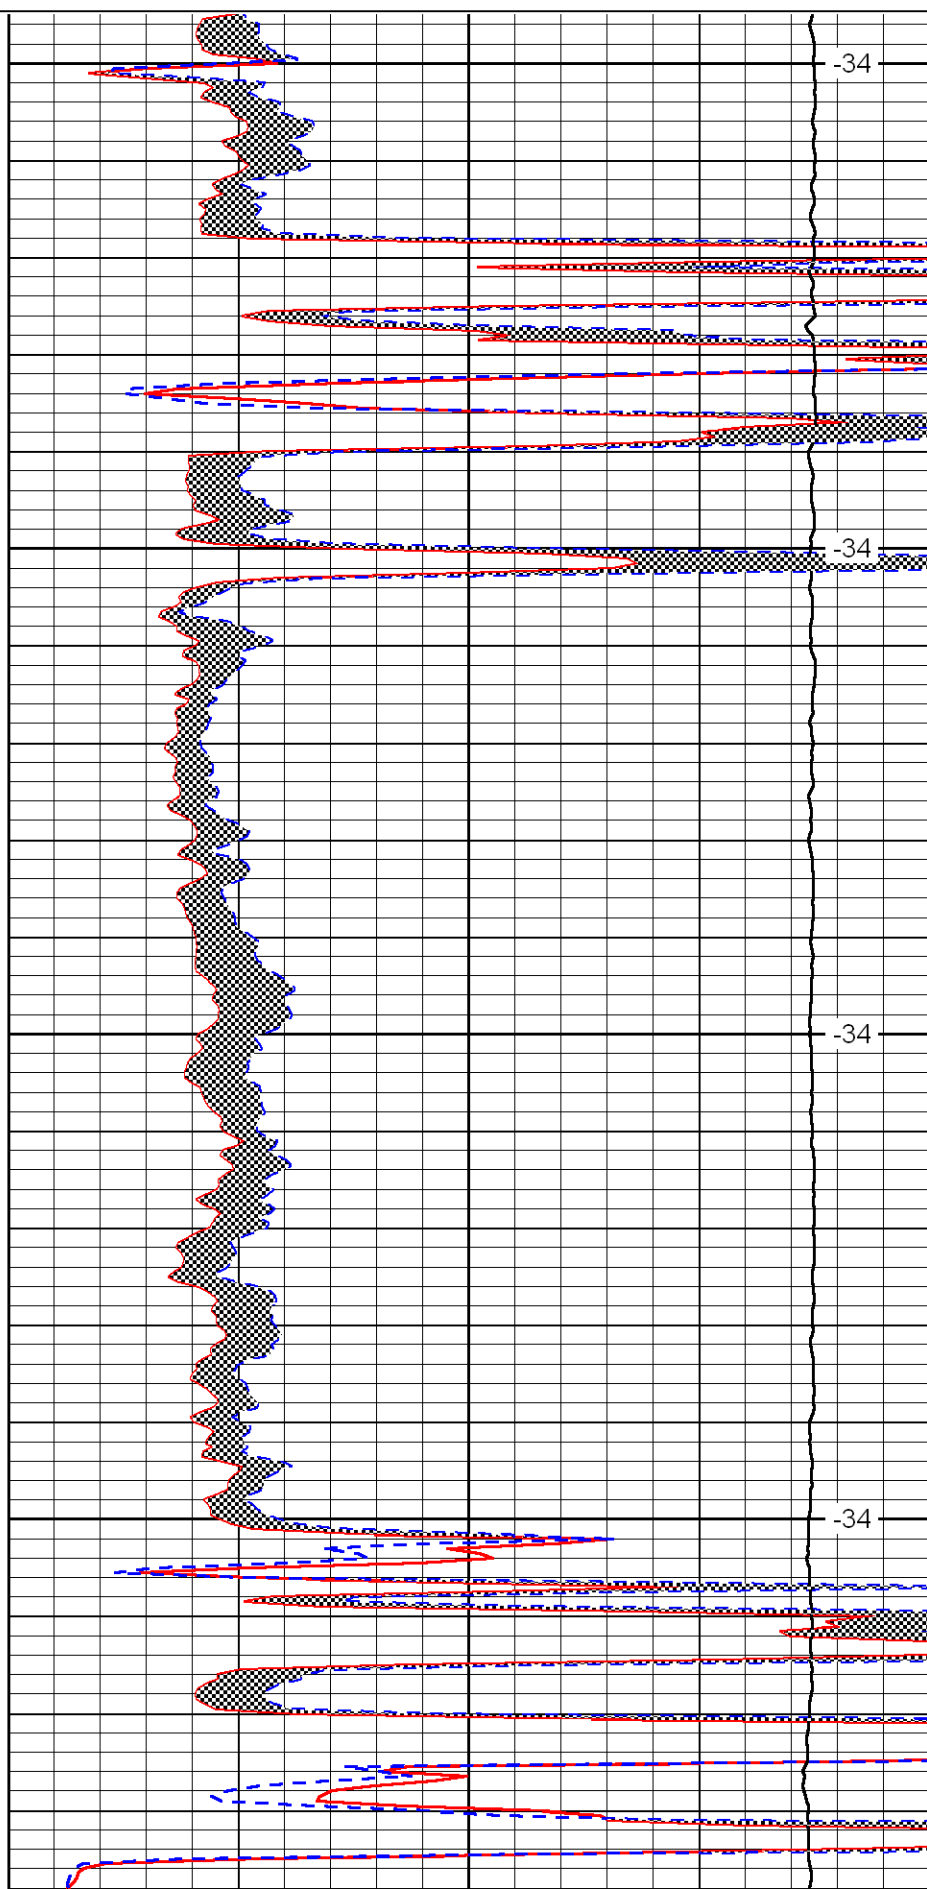


-34

-34

-34

-34

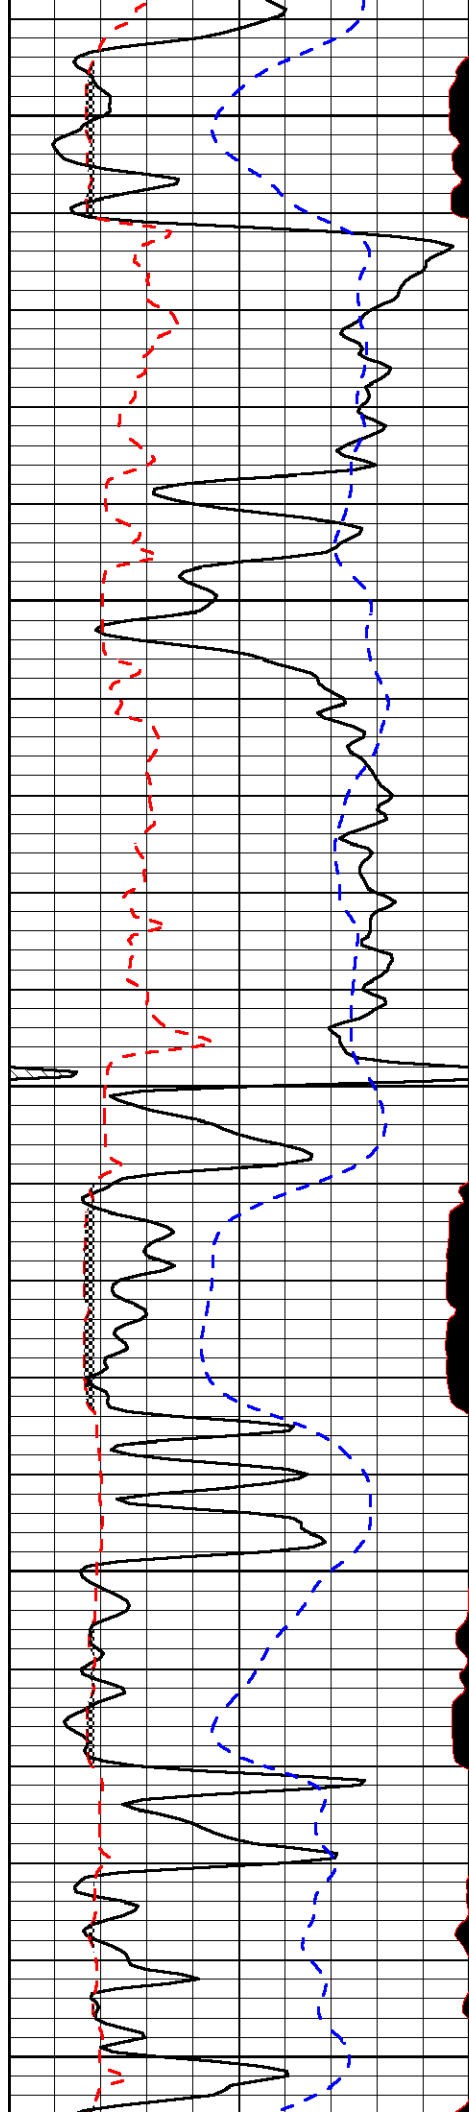


4200

4250

4300

4350

4400

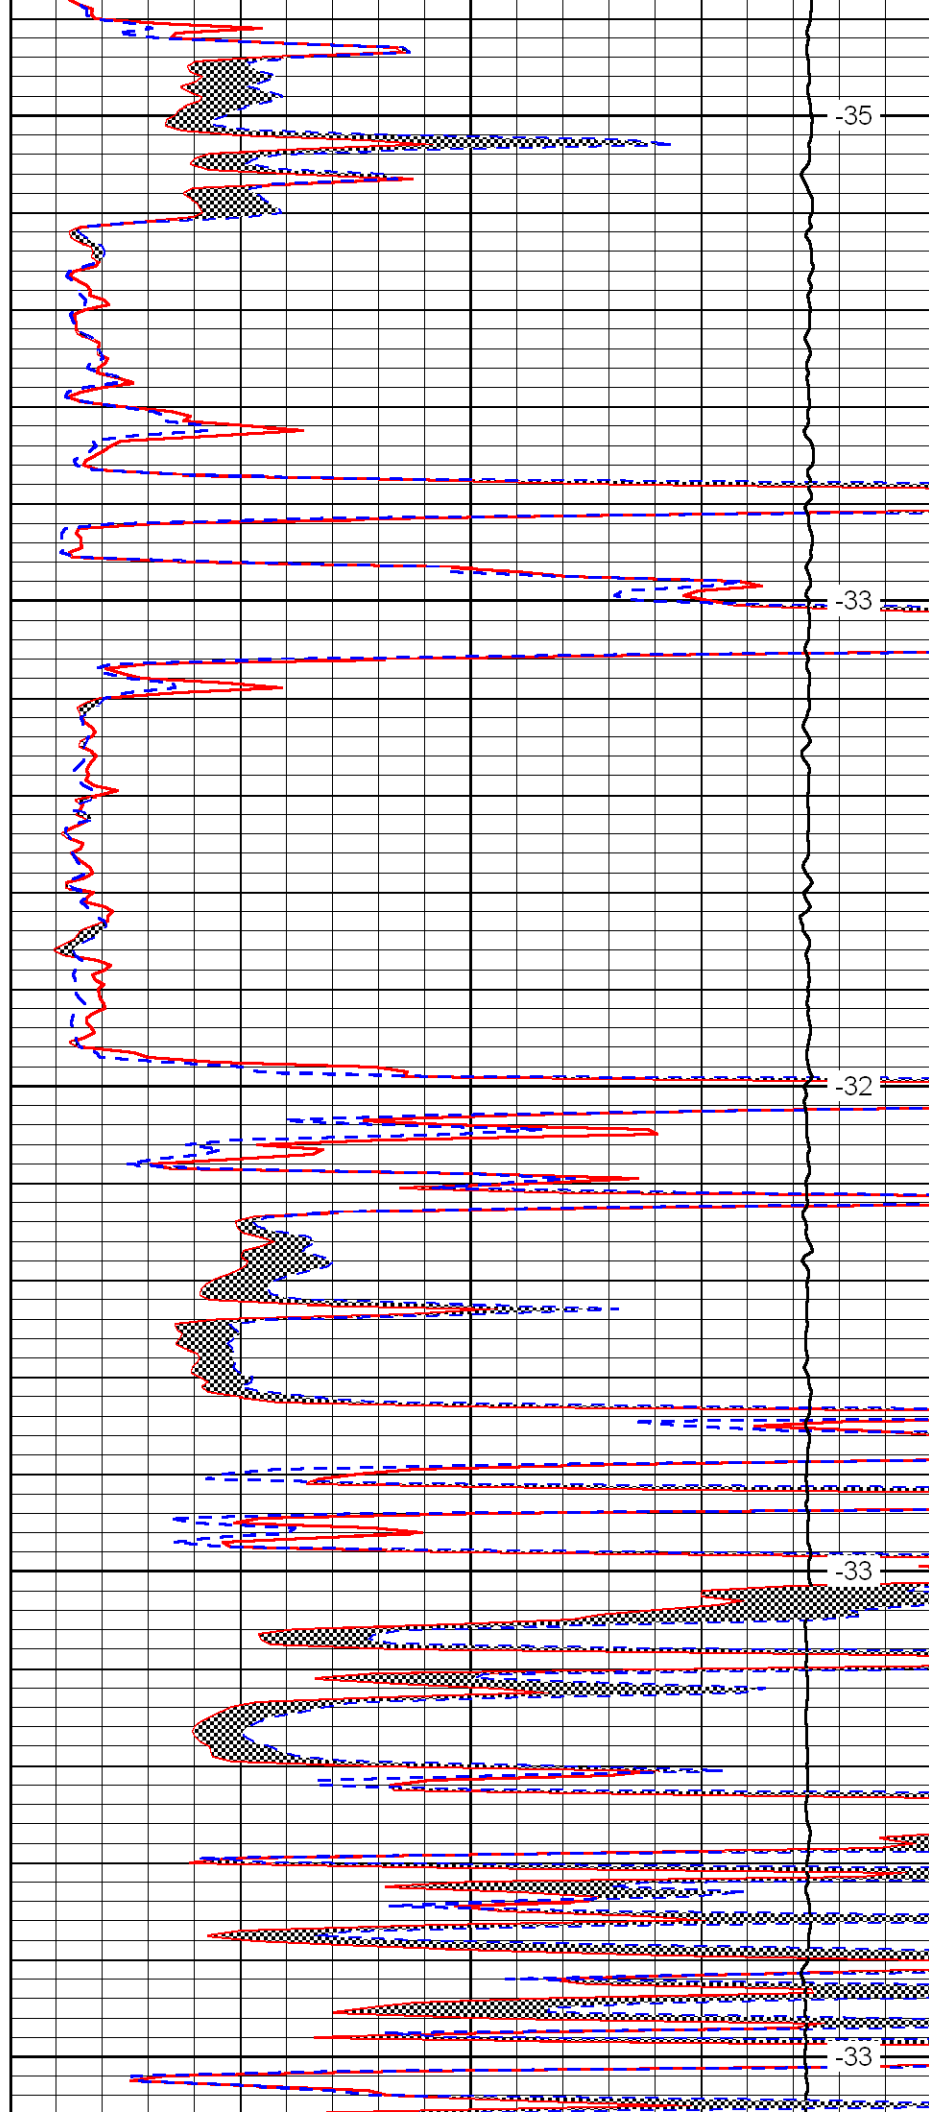


-35

-33

-32

-33

-33

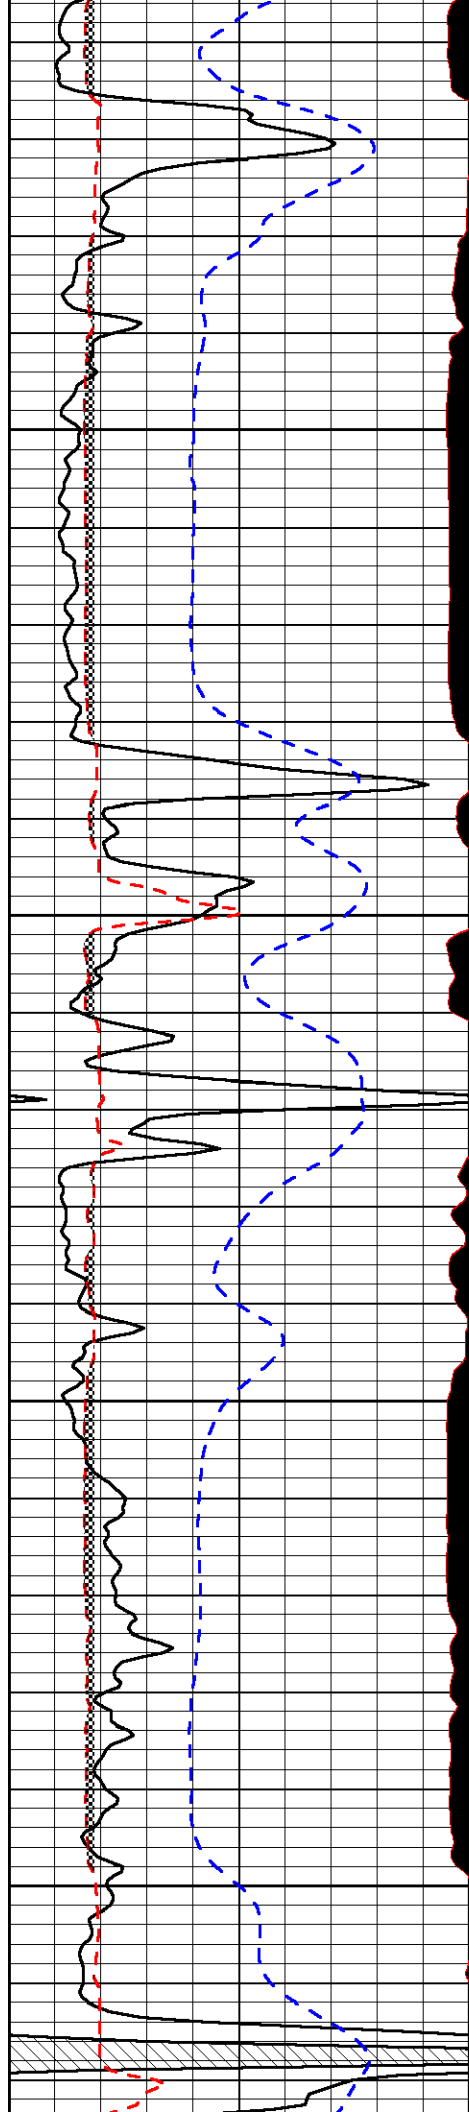


4450

4500

4550

4600

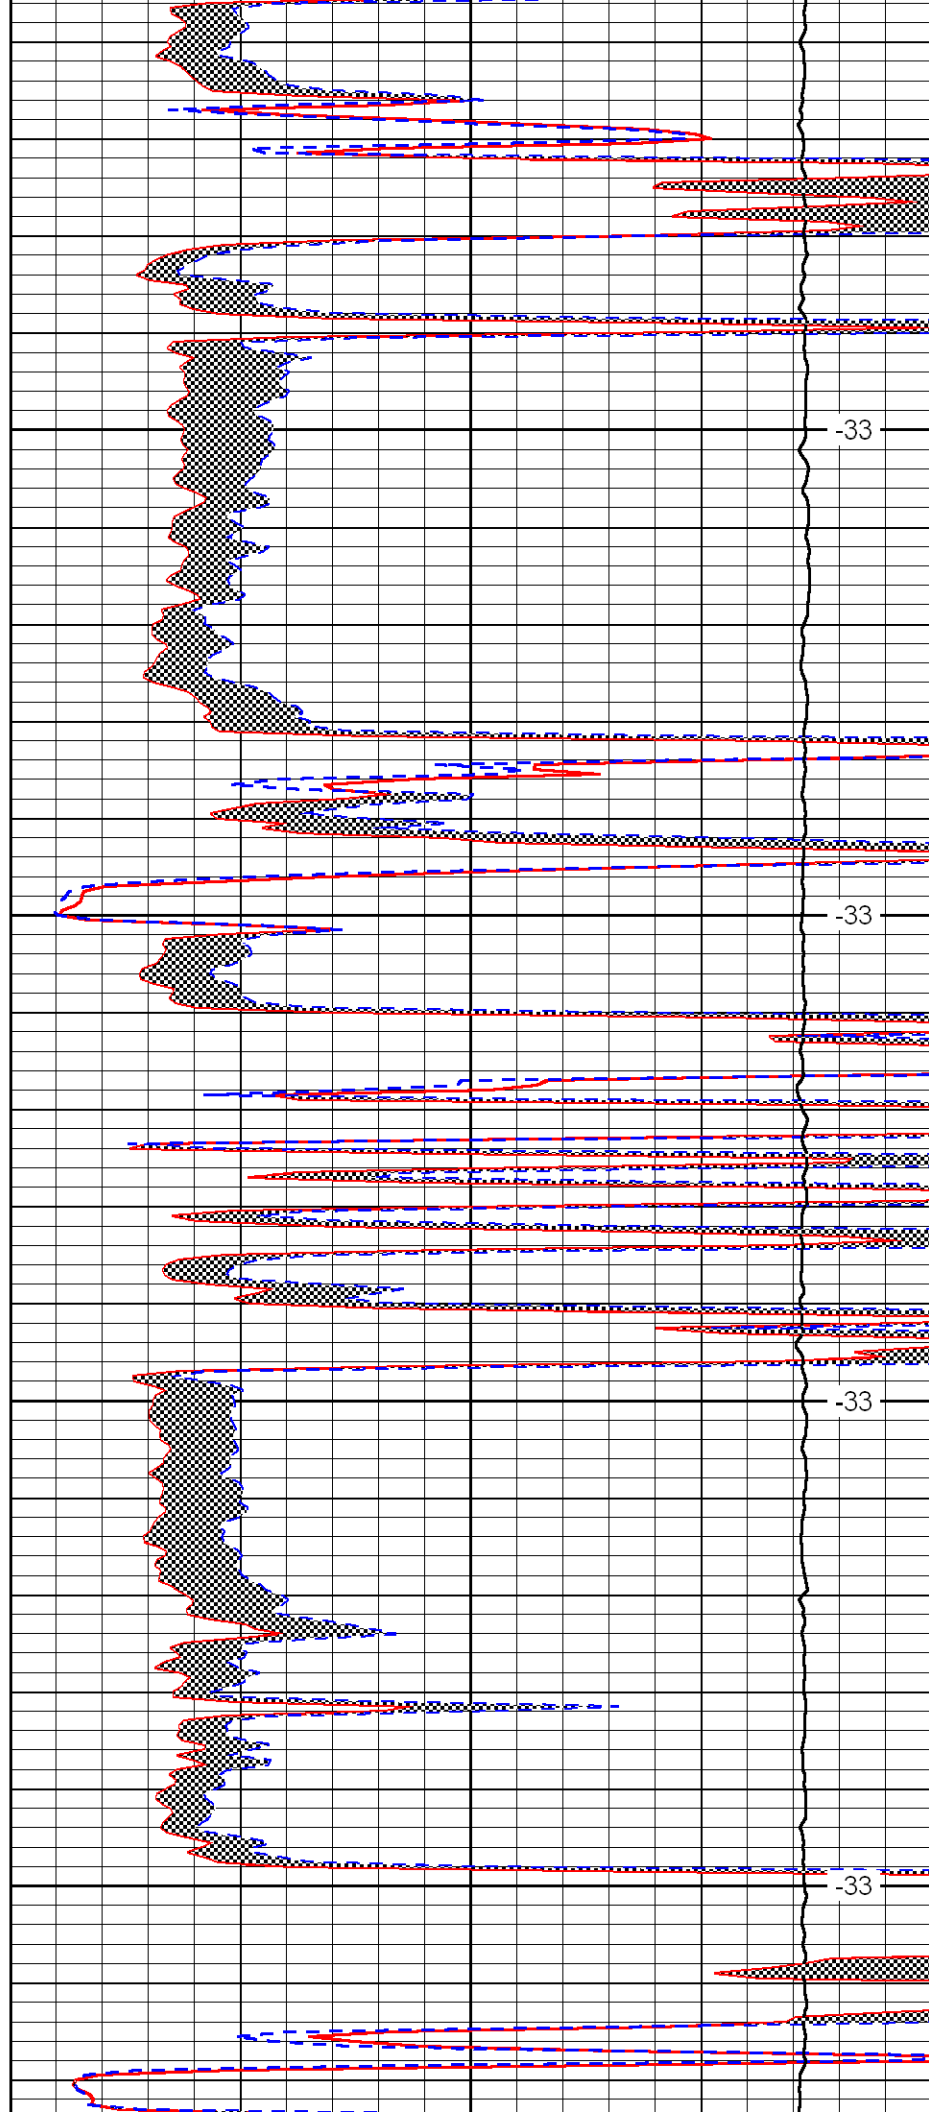


-33

-33

-33

-33

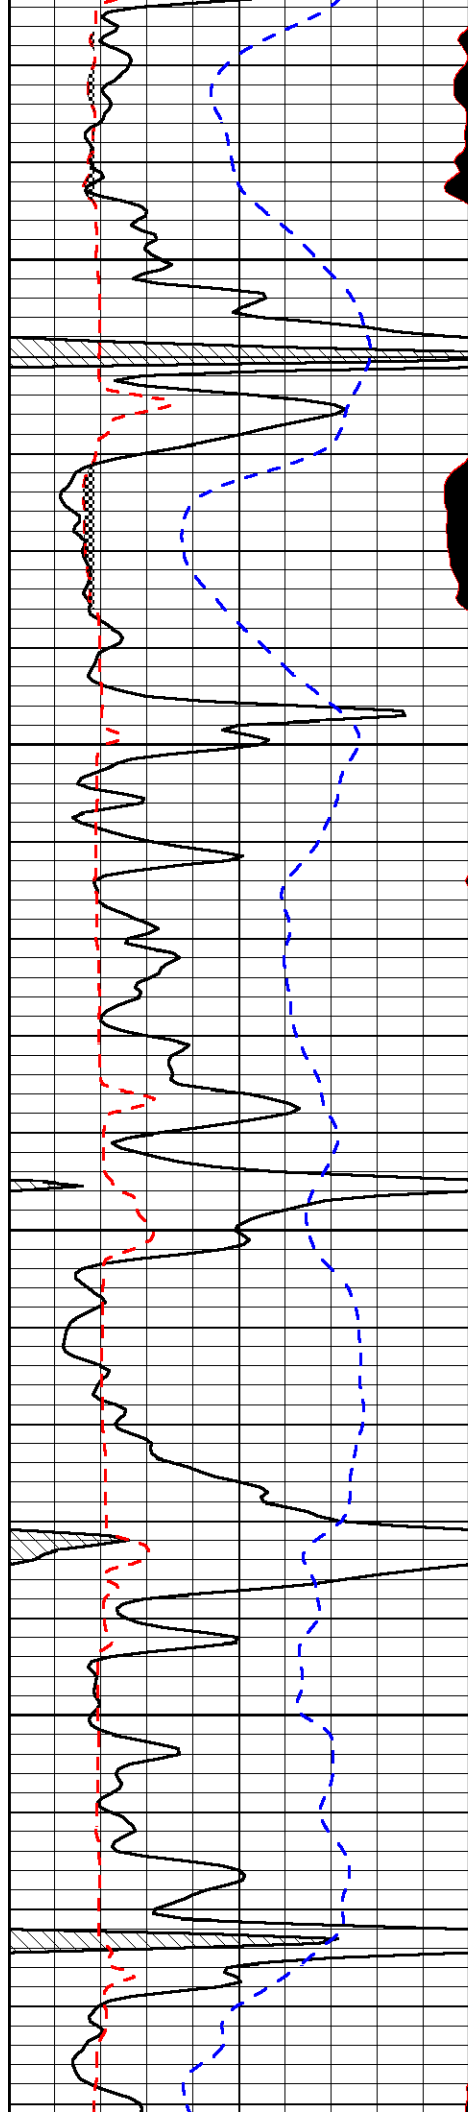


4650

4700

4750

4800

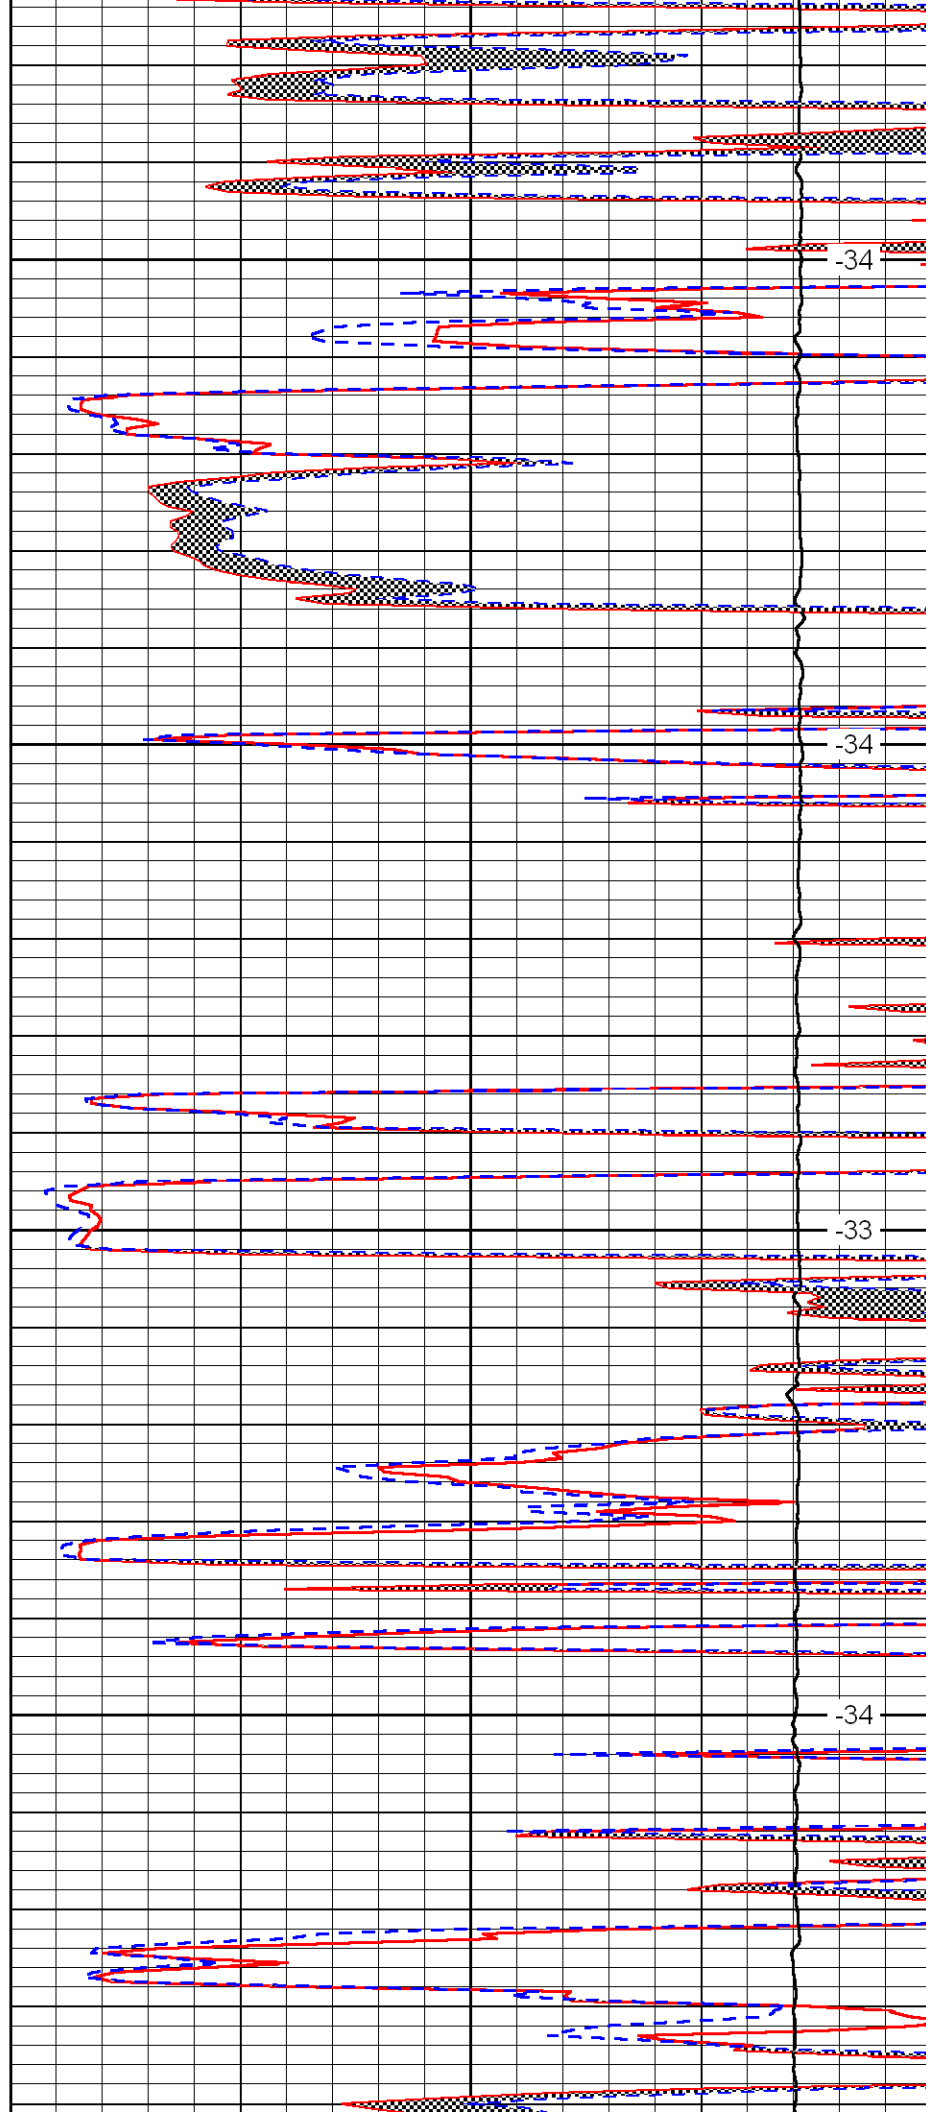


-34

-34

-33

-34

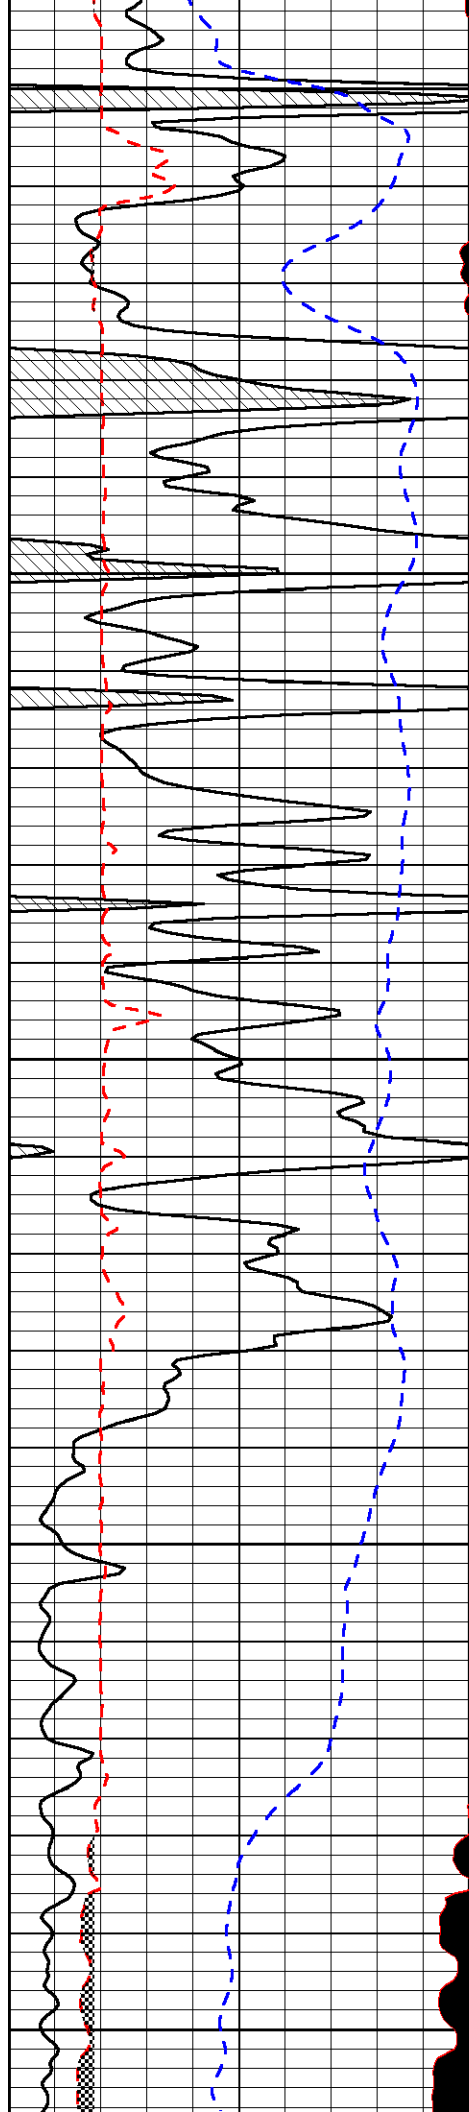


4850

4900

4950

5000

5050

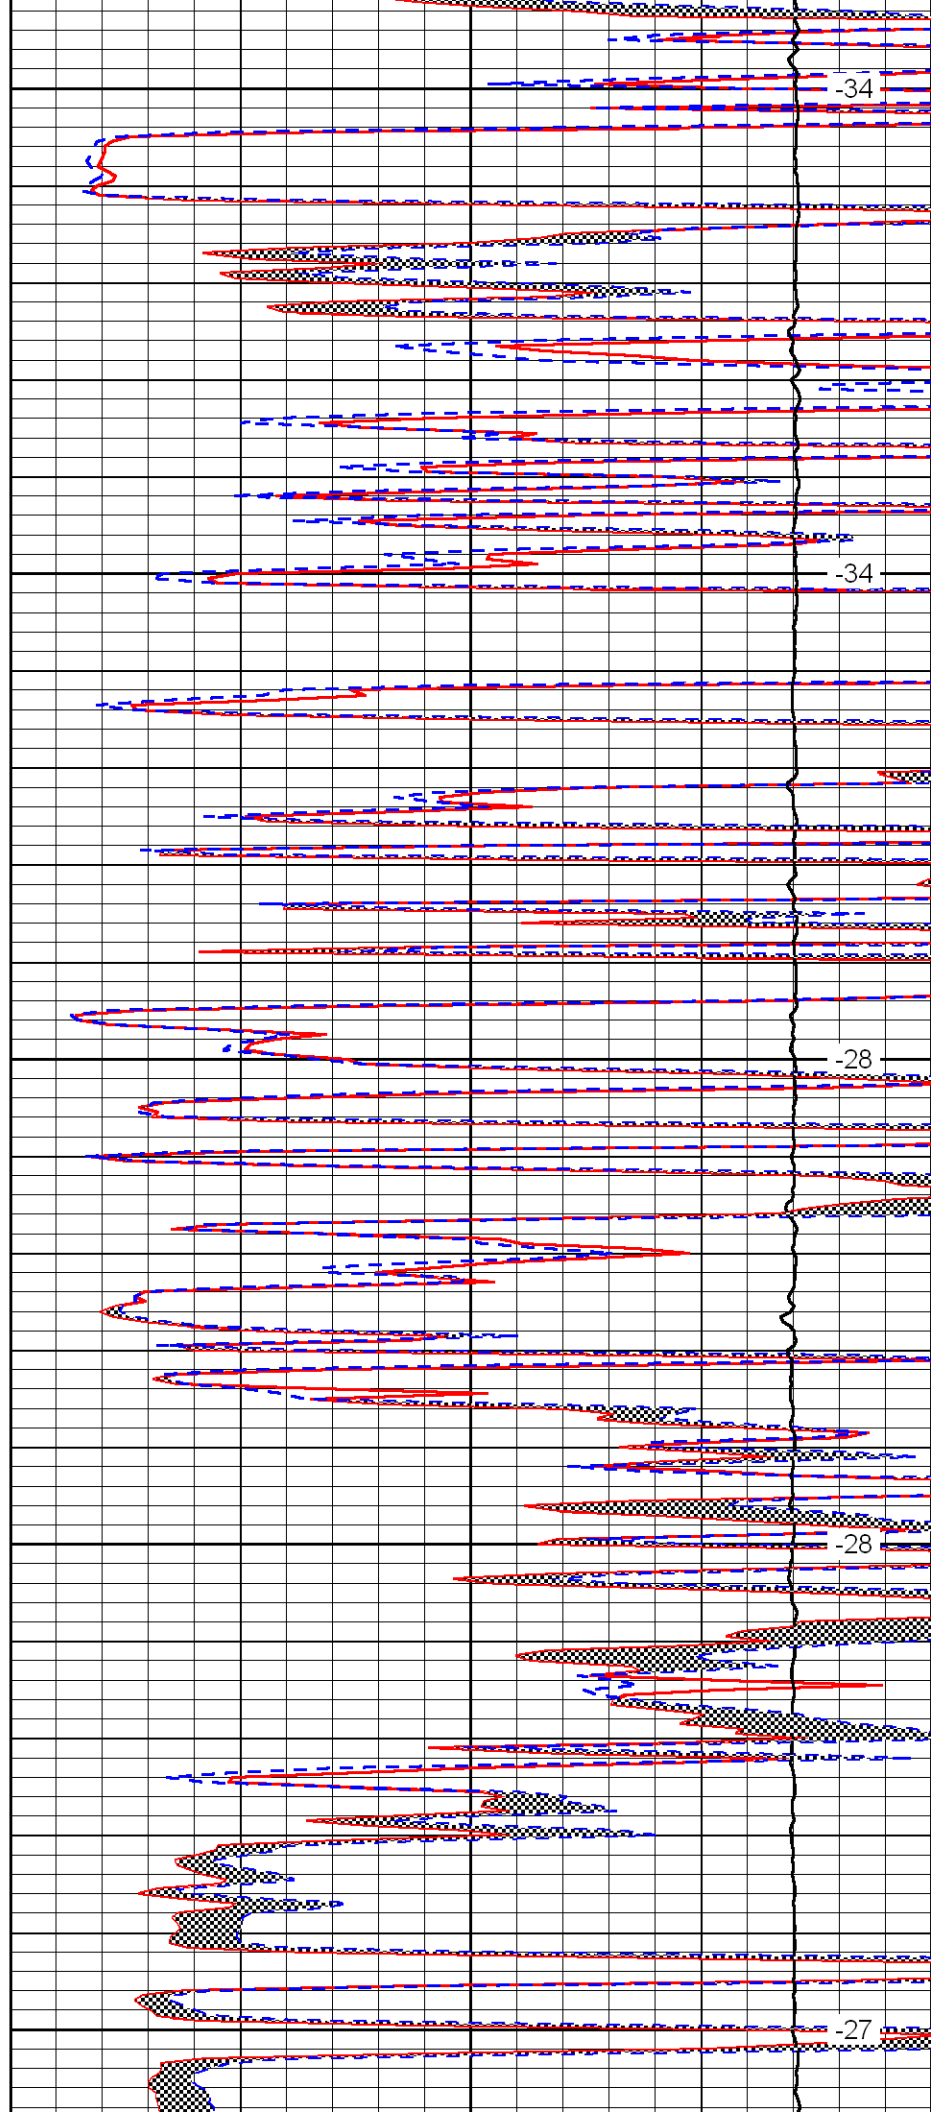


-34-

-34-

-28-

-28-


-27-

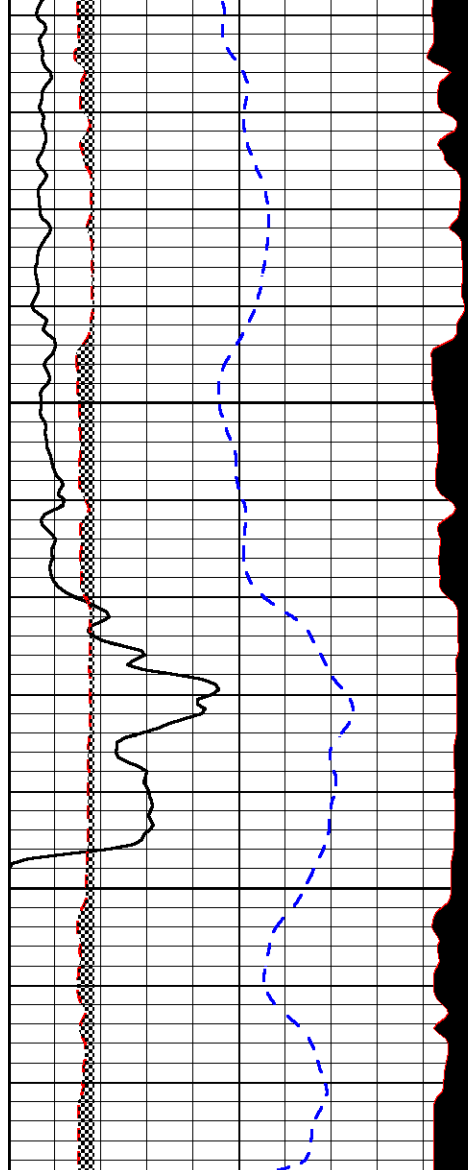

0	Gamma Ray	150
6	MCAL (GAPI)	16
2.875	Mud Cake (GAPI)	7.875
-200	SP	0

5100

5150

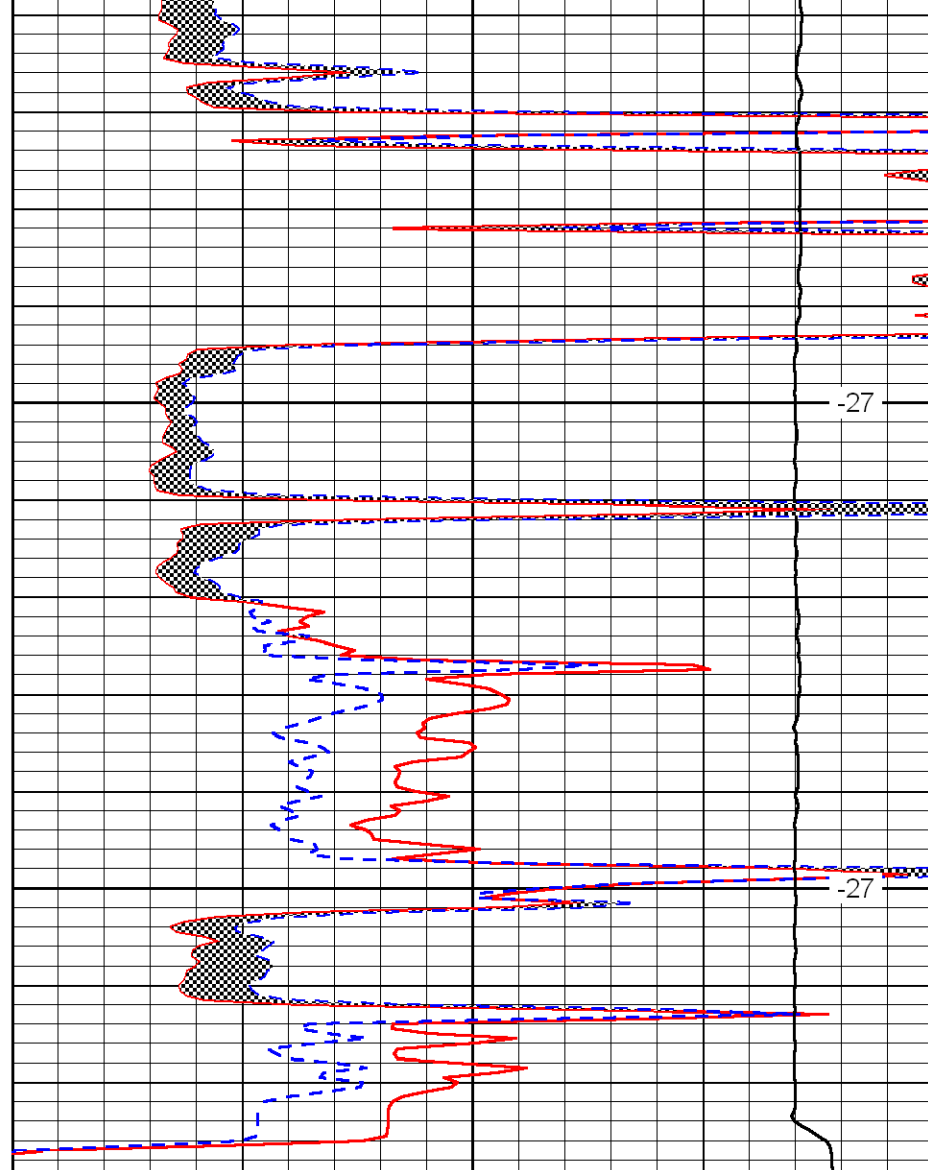

0	Micro Inverse 1 X 1	40
0	Micro Normal 2''	40
10000	Line Weight	0

LSPD