



MIDWEST SURVEYS
LOGGING - PERFORATING - CONSULTING SERVICES
P.O. Box 68, Osawatomie, KS 66064
913 / 755 - 2128

GAMMA RAY / NEUTRON / CCL

File No.	Company Bobcat Oilfield Services, Inc.		
	Well North Baker No. H-7		
	Field Cadmus / LaCygne		
	County Linn	State Kansas	
	Location	1485' FSL & 3135' FEL SW-SE-NE	
	Sec. 5	Twp. 20S	Rge. 23E
	Permanent Datum	GL	Elevation NA
	Log Measured From	GL	K.B. NA D.F. NA G.L. NA
	Drilling Measured From	GL	
Date	03-16-2011		
Run Number	One		
Depth Driller	300.0		
Depth Logger	296.2		
Bottom Logged Interval	294.2		
Top Log Interval	20.0		
Fluid Level	Full		
Type Fluid	Water		
Density / Viscosity	NA		
Salinity - PPM Cl	NA		
Max Recorded Temp	NA		
Estimated Cement Top	0.0		
Equipment No.	104	Osawatomie	
Recorded By	Gary Windisch		
Witnessed By	Bob Eberhart		
RUN	BORE-HOLE RECORD		CASING RECORD
No.	BIT	FROM	TO
One	8.75"	0.0	6.00"
Two	5.625"	20.0	2.875"

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.



Comments

Drilling Contractor :
Dale Jackson Production Company

Database File: bakr7hn.db
Dataset Pathname: pass1
Presentation Format: gr-n-ccl
Dataset Creation: Tue Aug 16 14:07:46 2011 by Log Warrior Version 6.6
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
150	Gamma Ray	300

100	Neutron	1800
-----	---------	------

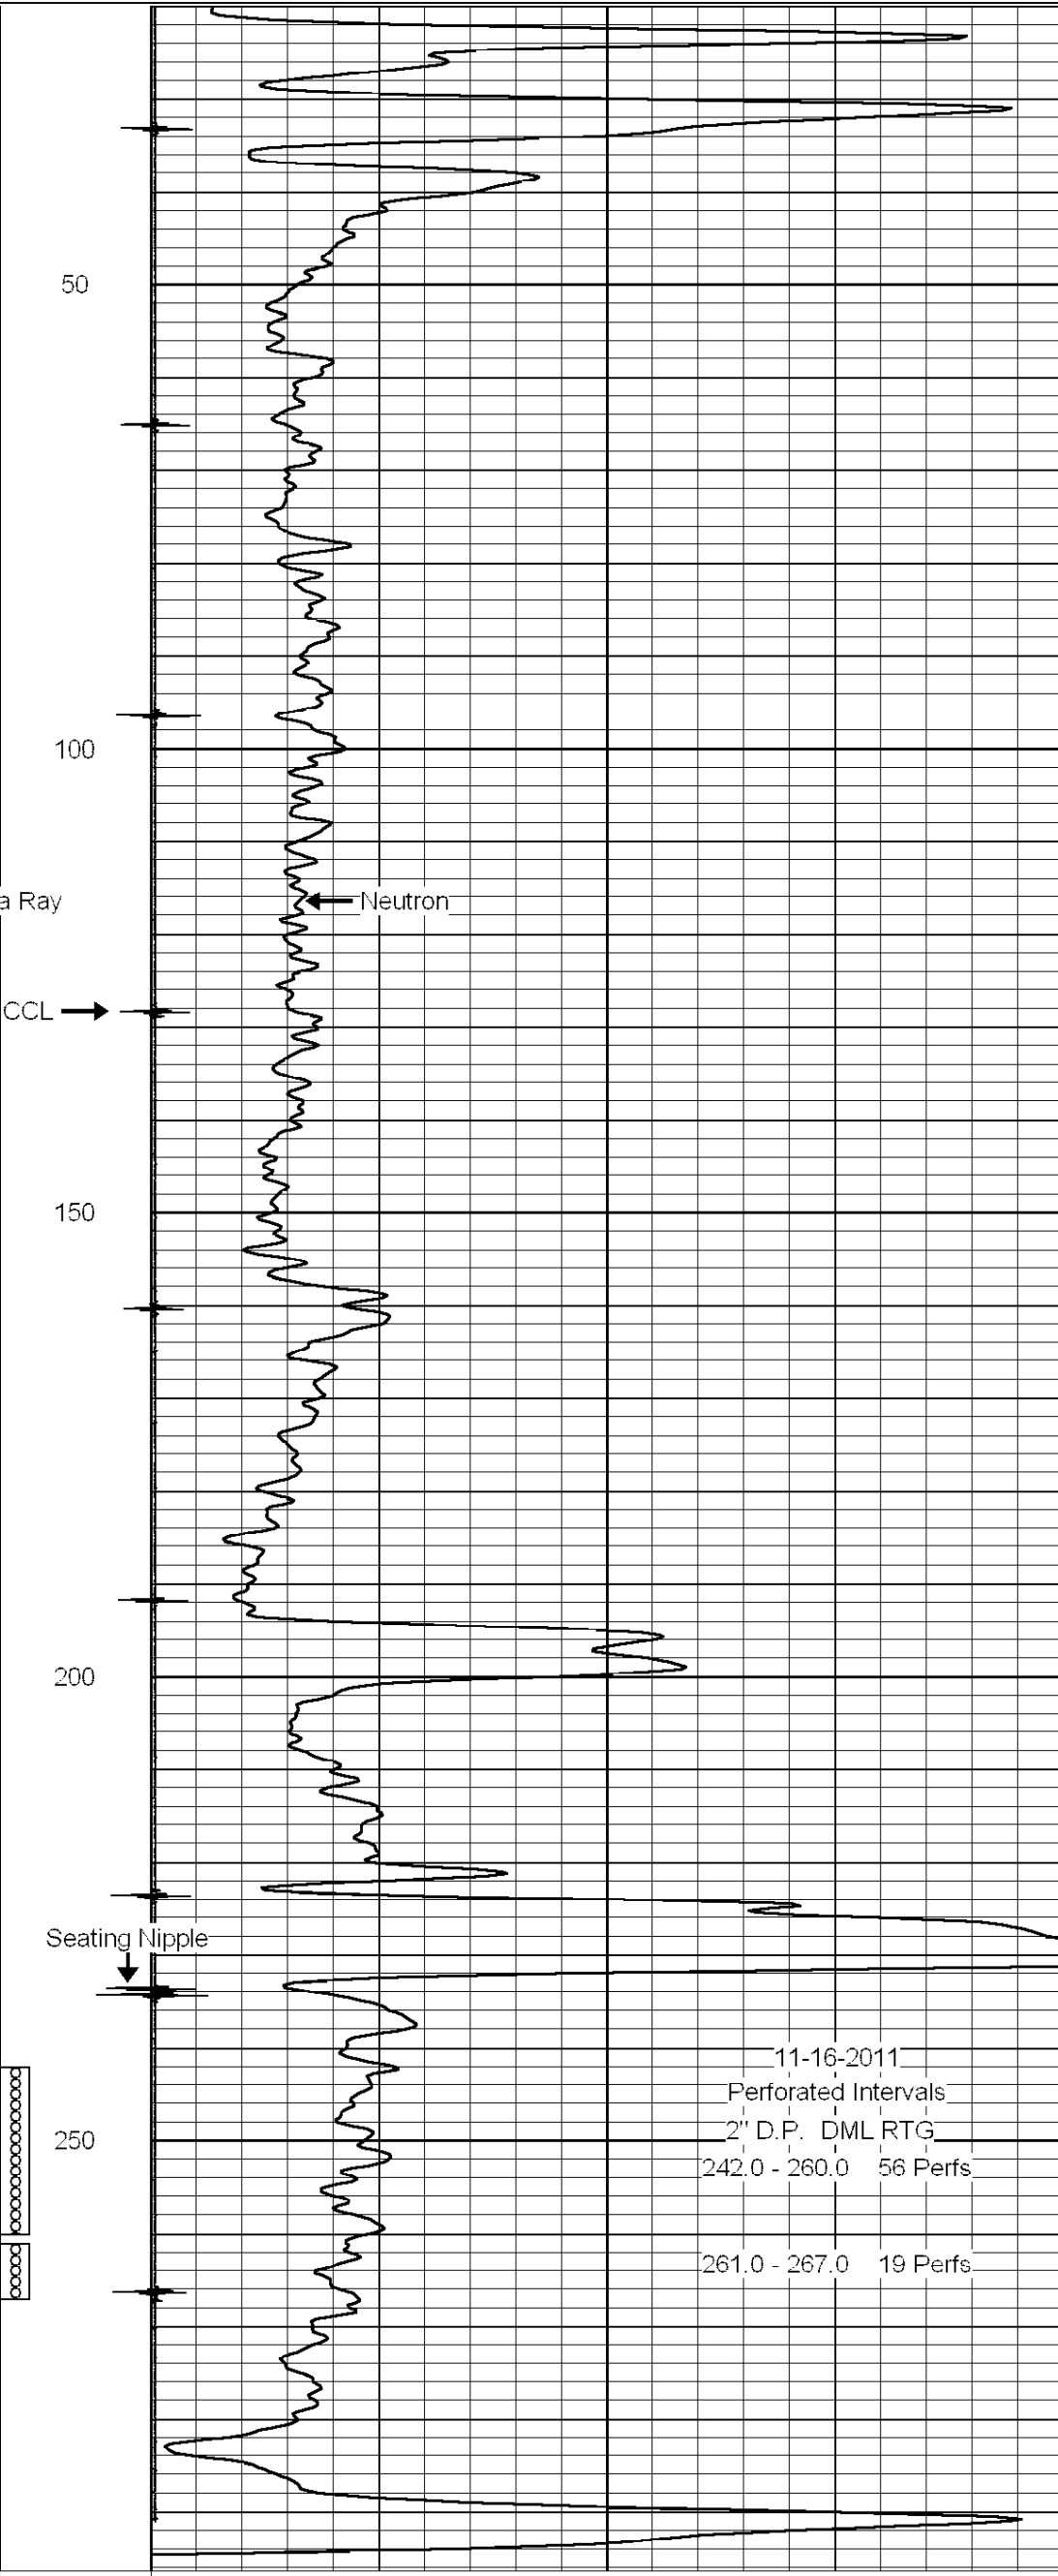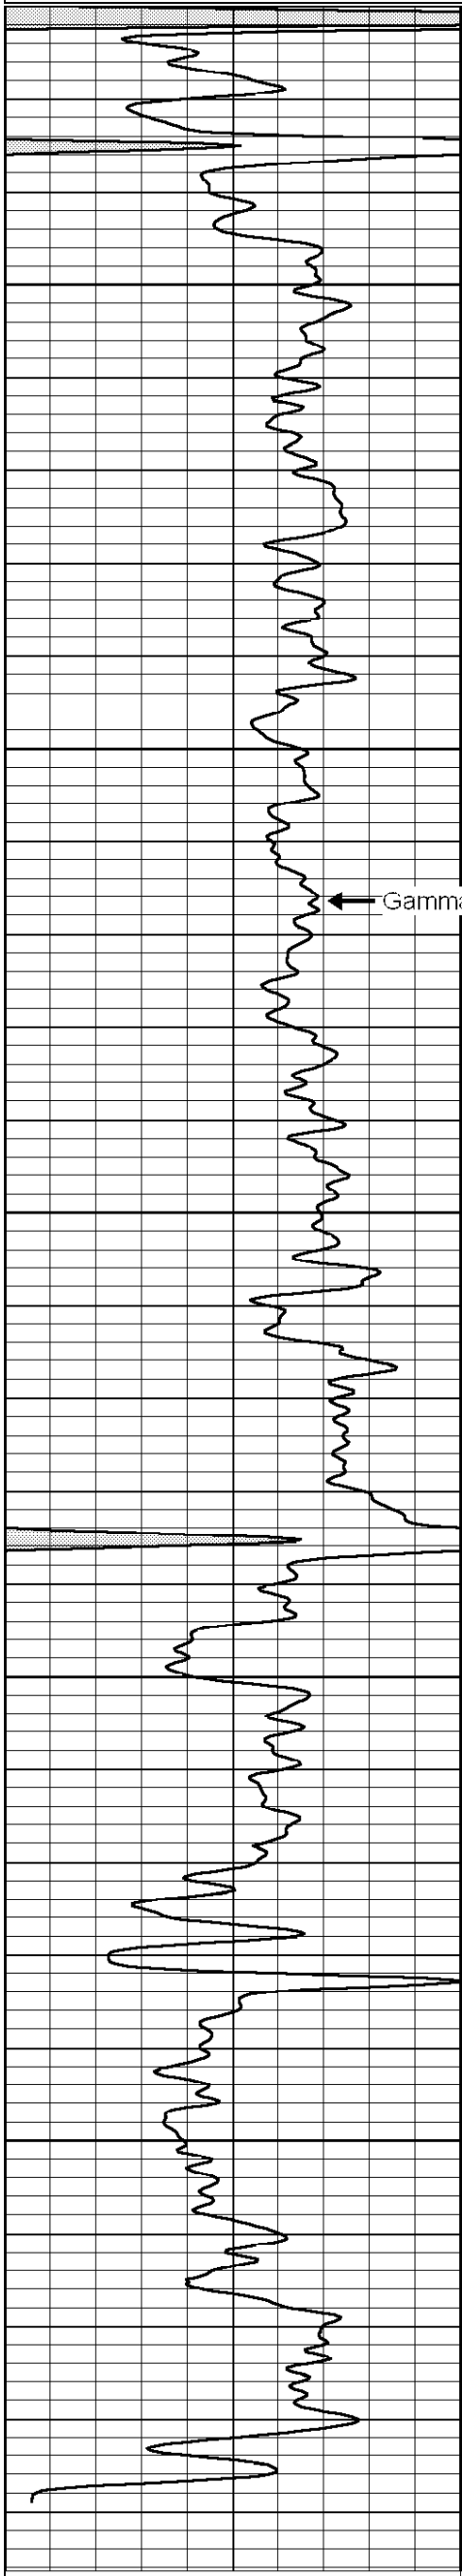

11-16-2011
Perforated Intervals
2" D.P. DML RTG
242.0 - 260.0 56 Perfs
261.0 - 267.0 19 Perfs

0	Gamma Ray	150
150	Gamma Ray	300

100	Neutron	1800
-----	---------	------