

KANSAS CORPORATION COMMISSION  
OIL & GAS CONSERVATION DIVISION  
**WELL PLUGGING APPLICATION**  
Please TYPE Form and File ONE Copy

Form CP-1  
September 2003  
This Form must be Typed  
Form must be Signed  
All blanks must be Filled

API # 15 - 007-22768-00-00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued,

indicate original spud or completion date 9/8/03

Well Operator: Woolsey Operating Company LLC KCC License #: 33168 1/04

Address: 125 N. Market, Suite 1000 City: Wichita

State: KS Zip Code: 67202-1775 Contact Phone: (620) 886 - 5606

Lease: Bennett Well #: 1 Sec. 30 Twp. 32 S. R. 11  East  West

NE - NW - NW - SE Spot Location / QQQQ County: Barber

2420' Feet (in exact footage) From  North /  South (from nearest outside section corner) Line of Section (Not Lease Line)

2150' Feet (in exact footage) From  East /  West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One:  Oil Well  Gas Well  D&A  Cathodic  Water Supply Well

SWD Docket # \_\_\_\_\_  ENHR Docket # \_\_\_\_\_  Other: **RECEIVED**

Conductor Casing Size: none Set at: \_\_\_\_\_ Cemented with: MAR 23 2005 Sacks

Surface Casing Size: 10 3/4" Set at: 267' Cemented with: 175 **KCC WICHITA** Sacks

Production Casing Size: 4 1/2" Set at: 4826' Cemented with: 150 Sacks

List (ALL) Perforations and Bridgeplug Sets: Perforations from 4566' to 4576' - CIBP @ 4450' - perforations from 4282' to 4283' & 4316' to 4330'.

Elevation: 1565' ( G.L. /  K.B.) T.D.: 5368' PBTD: 4450' Anhydrite Depth: \_\_\_\_\_ (Stone Corral Formation)

Condition of Well:  Good  Poor  Casing Leak  Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): Sand back to 4200', place 4 sx on top w/ dump bailer. 1st plug @ 600' circ through tubing 10 sx gel & 50 sx 60/40 6% gel. 2nd plug @ 300' circ 75 sx same cmt. 3rd plug @ 40' circ 20 sx same cmt to surface. Cut & cap 10 3/4" 3' below ground level.

Is Well Log attached to this application as required?  Yes  No Is ACO-1 filed?  Yes  No

If not explain why? \_\_\_\_\_

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: Carl W. Durr

Phone: (620) 886 - 5606 ext 27

Address: P.O. Box 168 City / State: Medicine Lodge, KS 67104

Plugging Contractor: Clarke Corp. KCC License #: 422270 5105 4/05


Address: Medicine Lodge, KS 107 W. Fowler Phone: (620) 886 - 5665

Proposed Date and Hour of Plugging (if known?): \_\_\_\_\_

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 3/22/05 Authorized Operator / Agent: Carl W. Durr (Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

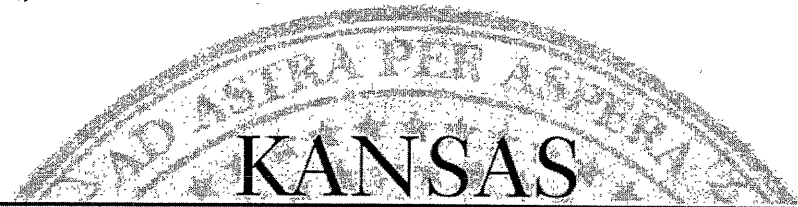

CORPORATION COMMISSION

Kathleen Sebelius, Governor    Brian J. Moline, Chair    Robert E. Krehbiel, Commissioner    Michael C. Moffet, Commissioner

**NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)**

Woolsey Operating Company, LLC  
125 N. Market, Suite 1000  
Wichita, KS 67202-1775

March 24, 2005

Re: BENNETT #1  
API 15-007-22768-00-00  
NENWNWSE 30-32S-11W, 2420 FSL 2150 FEL  
BARBER COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

**Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.**

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

**This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.**

Sincerely

David P. Williams  
Production Supervisor

District: #1  
210 E Frontview, Suite A  
Dodge City, KS 67801  
(620) 225-8888