

**KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
WELL PLUGGING APPLICATION**

Please TYPE Form and File ONE Copy

Form CP-1
September 2003
**This Form must be Typed
Form must be Signed
All blanks must be Filled**

API # 15 - 047-20672-00-00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued,

indicate original spud or completion date _____.

Well Operator: Marlin Oil Corporation KCC License #: 9228 12/05

Address: P.O. Box 14630 (Owner/Company Name) City: Oklahoma City (Operator's)

State: Oklahoma Zip Code: 73113 Contact Phone: (405) 478 - 1900

Lease: BELCHER Well #: 1 Sec. 16 Twp. 26 S. R. 18 East West

NE/4 - SW/4 - NW/4 Spot Location / QQQQ County: Edwards

1650 Feet (in exact footage) From North / South (from nearest outside section corner) Line of Section (Not Lease Line)

990 330 Feet (in exact footage) From East / West (from nearest outside section corner) Line of Section (Not Lease Line)

KCC - 3-25-05 - 4KA - Per RB DMS,

Check One: Oil Well Gas Well D&A Cathodic Water Supply Well

SWD Docket # _____ ENHR Docket # _____ Other: _____

Conductor Casing Size: _____ Set at: _____ Cemented with: _____ Sacks

Surface Casing Size: 8-5/8" Set at: 372' Cemented with: 275 Sacks

Production Casing Size: 4-1/2" Set at: 4849' Cemented with: 150 Sacks

List (ALL) Perforations and Bridgeplug Sets: Perforations: 4682-4704'; 4329-4331'; 4282-4287'; 4228-4232'.

CIBP set at 4650'

Elevation: 2185/2149' (G.L. / K.B.) T.D.: 4868' P.B.T.D.: 4650' Anhydrite Depth: 1240'
(Stone Corral Formation)

Condition of Well: Good Poor Casing Leak Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): Displace 20sx cement plug w/ mud to plug perms at 4228-4331'.

Cut off 4-1/2" casing as deep as possible. Place 75sx cement plug from 422 to 322' and a 10sx cement plug from 34-4'. Weld on ID cover plate.

RECEIVED

Is Well Log attached to this application as required? Yes No Is ACO-1 filed? Yes No

MAR 24 2005

If not explain why? _____

KCC WICHITA

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: Dick Lynn

Marlin Oil Corp. Phone: (405) 818 - 8738

Address: PO Box 14630 City / State: Oklahoma City, OK. 73113

Plugging Contractor: Sargent and Horton Plugging, INC. KCC License #: 31151

Address: Route 1, Box 49BA, Tyrone, OK 73951 Phone: (580) 854 - 6515

Proposed Date and Hour of Plugging (if known?): _____


Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 3/21/05 Authorized Operator / Agent: _____


(Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

1/04

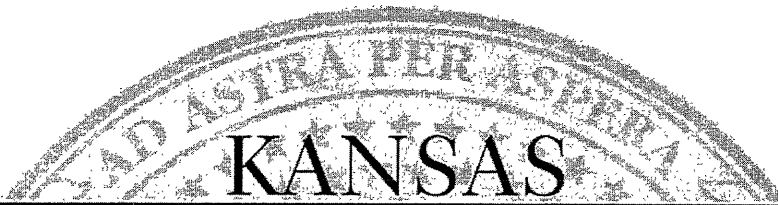

CORPORATION COMMISSION

Kathleen Sebelius, Governor Brian J. Moline, Chair Robert E. Krehbiel, Commissioner Michael C. Moffet, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

Marlin Oil Corporation
PO Box 14630
Oklahoma City, OK 73113-0630

March 25, 2005

Re: BELCHER #1
API 15-047-20672-00-00
NESWNW 16-26S-18W, 1650 FNL 990 FWL
EDWARDS COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

Sincerely

David P. Williams
Production Supervisor

District: #1
210 E Frontview, Suite A
Dodge City, KS 67801
(620) 225-8888