



SUPERIOR
Hays,
Kansas

MICRO
LOG

Company	RED OAK ENERGY, INC.	Company	RED OAK ENERGY, INC.
Well	SCHUSTER #1	Well	SCHUSTER #1
Field	WILDCAT	Field	WILDCAT
County	SEDGWICK	County	SEDGWICK
State	KANSAS	State	KANSAS
Location:	API # : 15-173-21006-0000 990' FSL & 1980' FEL N/2 - SW - SE	Other Services CDL/CNL/PE DIL/SONIC	
Permanent Datum	GROUND LEVEL	Elevation	1320
Log Measured From	KELLY BUSHING 8' A.G.L.		
Drilling Measured From	KELLY BUSHING		
SEC 8	TWP 29S	RGE 3W	
Date	10/20/11		
Run Number	TWO		
Depth Driller	4360		
Depth Logger	4360		
Bottom Logged Interval	4337		
Top Log Interval	2800		
Casing Driller	8 5/8" @ 289'		
Casing Logger	284		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 6,000 PPM	
Density / Viscosity	9.145		
pH / Fluid Loss	10.5/10.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.600 @ 84F		
Rmt @ Meas. Temp	.450 @ 84F		
Rmc @ Meas. Temp	.720 @ 84F		
Source of Rmt / Rmc	MEASUREMENT		
Rm @ BHT	.424 @ 119F		
Time Circulation Stopped	6 HOURS		
Time Logger on Bottom	6:45 P.M.		
Maximum Recorded Temperature	119F		
Equipment Number	4010		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	TIM PRIEST	NATHAN CALDWELL	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING SUPERIOR WELL SERVICE HAYS, KANSAS (785) 628-6395
DIRECTIONS
VIOLA, KS. 3N. OF HWY 42, 1 1/2W., N. INTO






SUPERIOR
Hays,
Kansas



MAIN SECTION


Database File: 007466pe.db
 Dataset Pathname: pass7.3
 Presentation Format: micro
 Dataset Creation: Thu Oct 20 22:46:38 2011 by Calc Open-Cased 110302
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

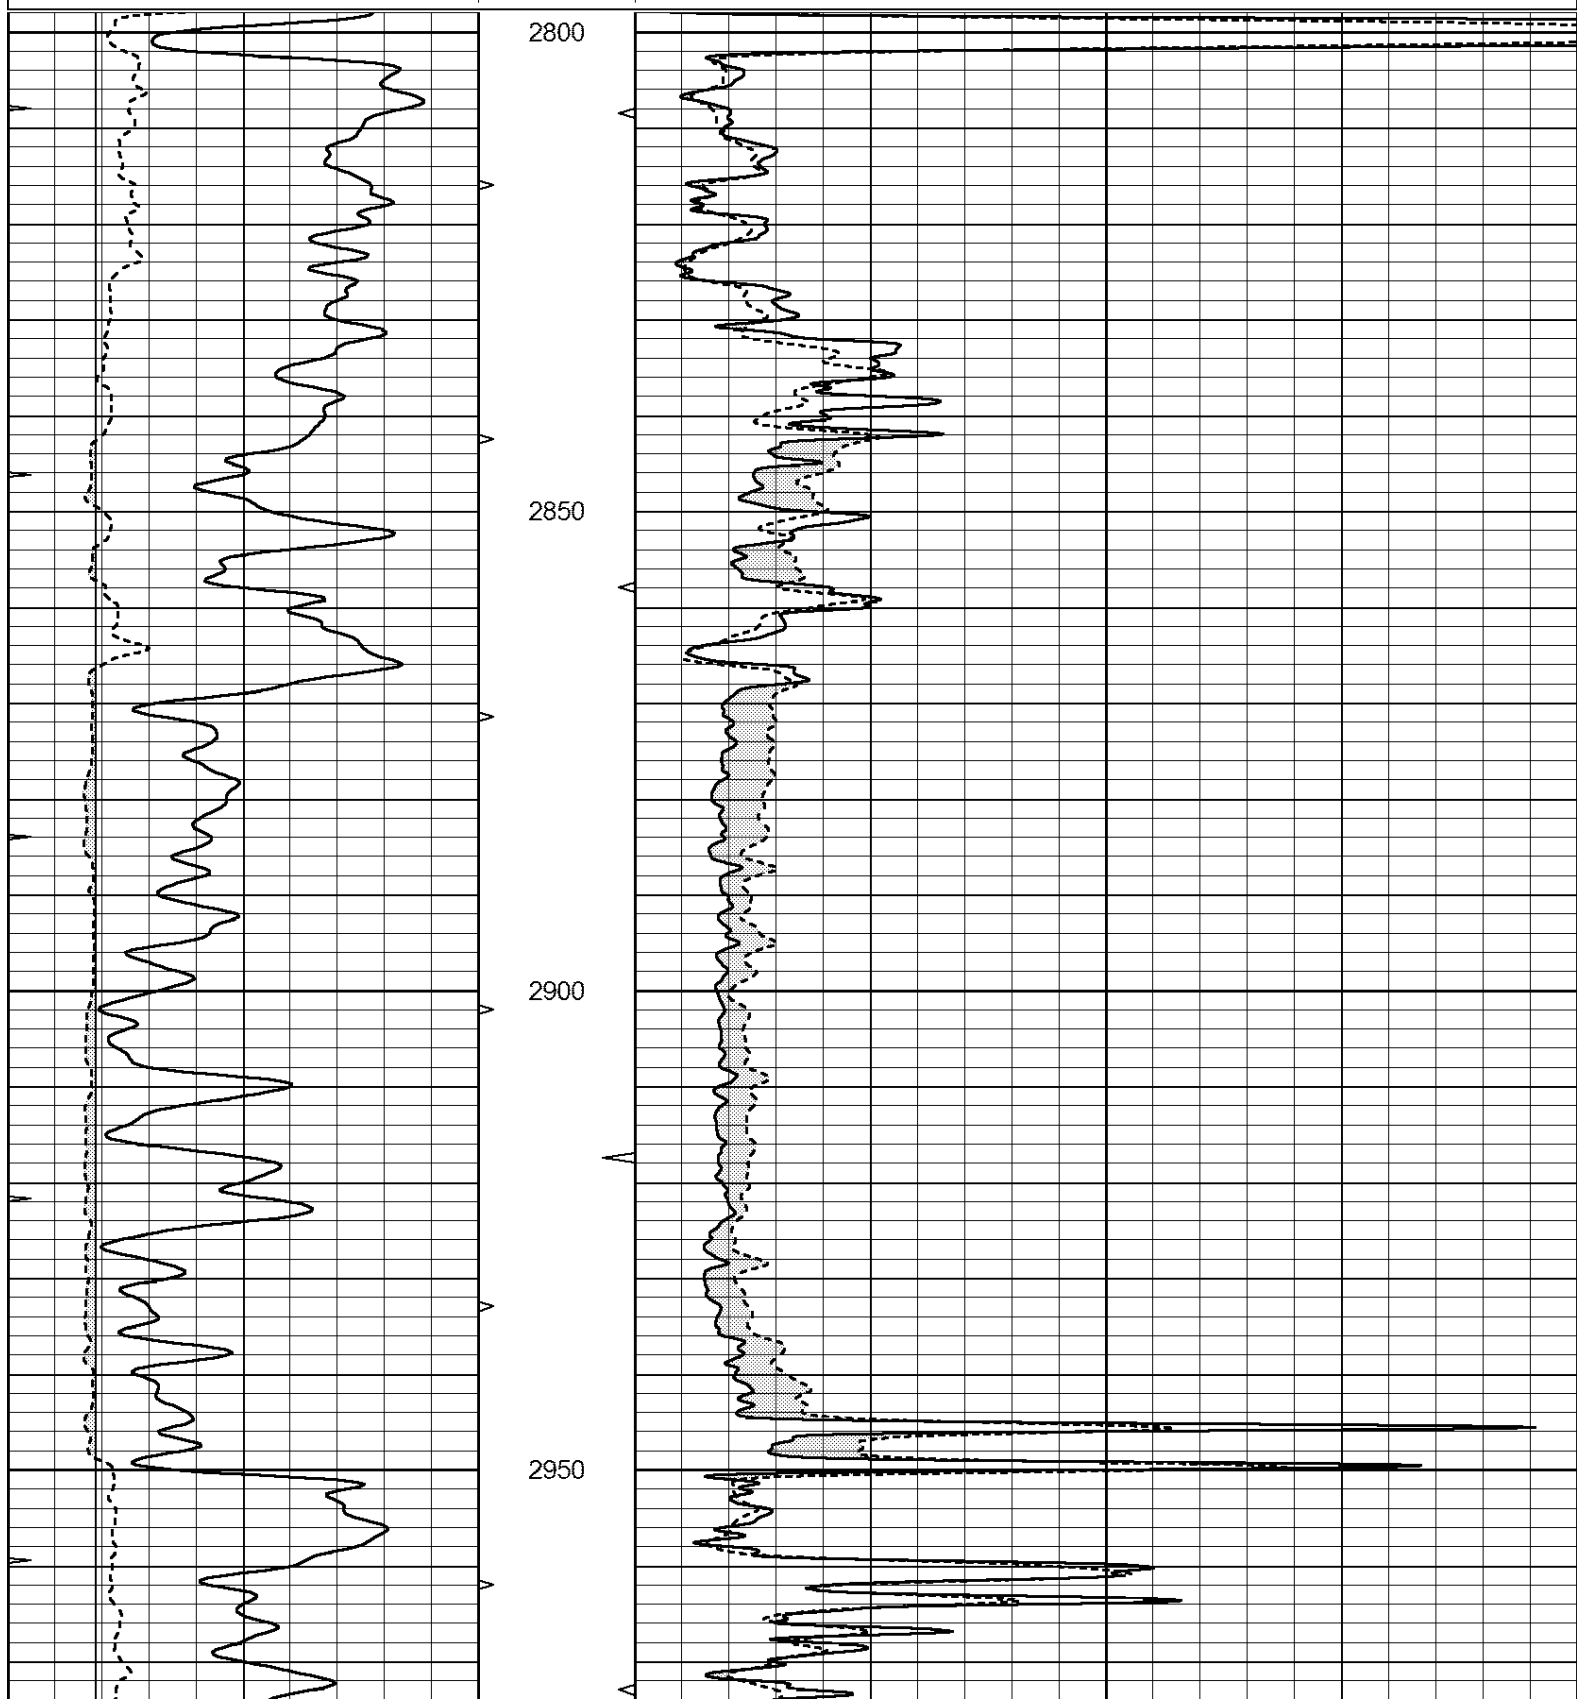

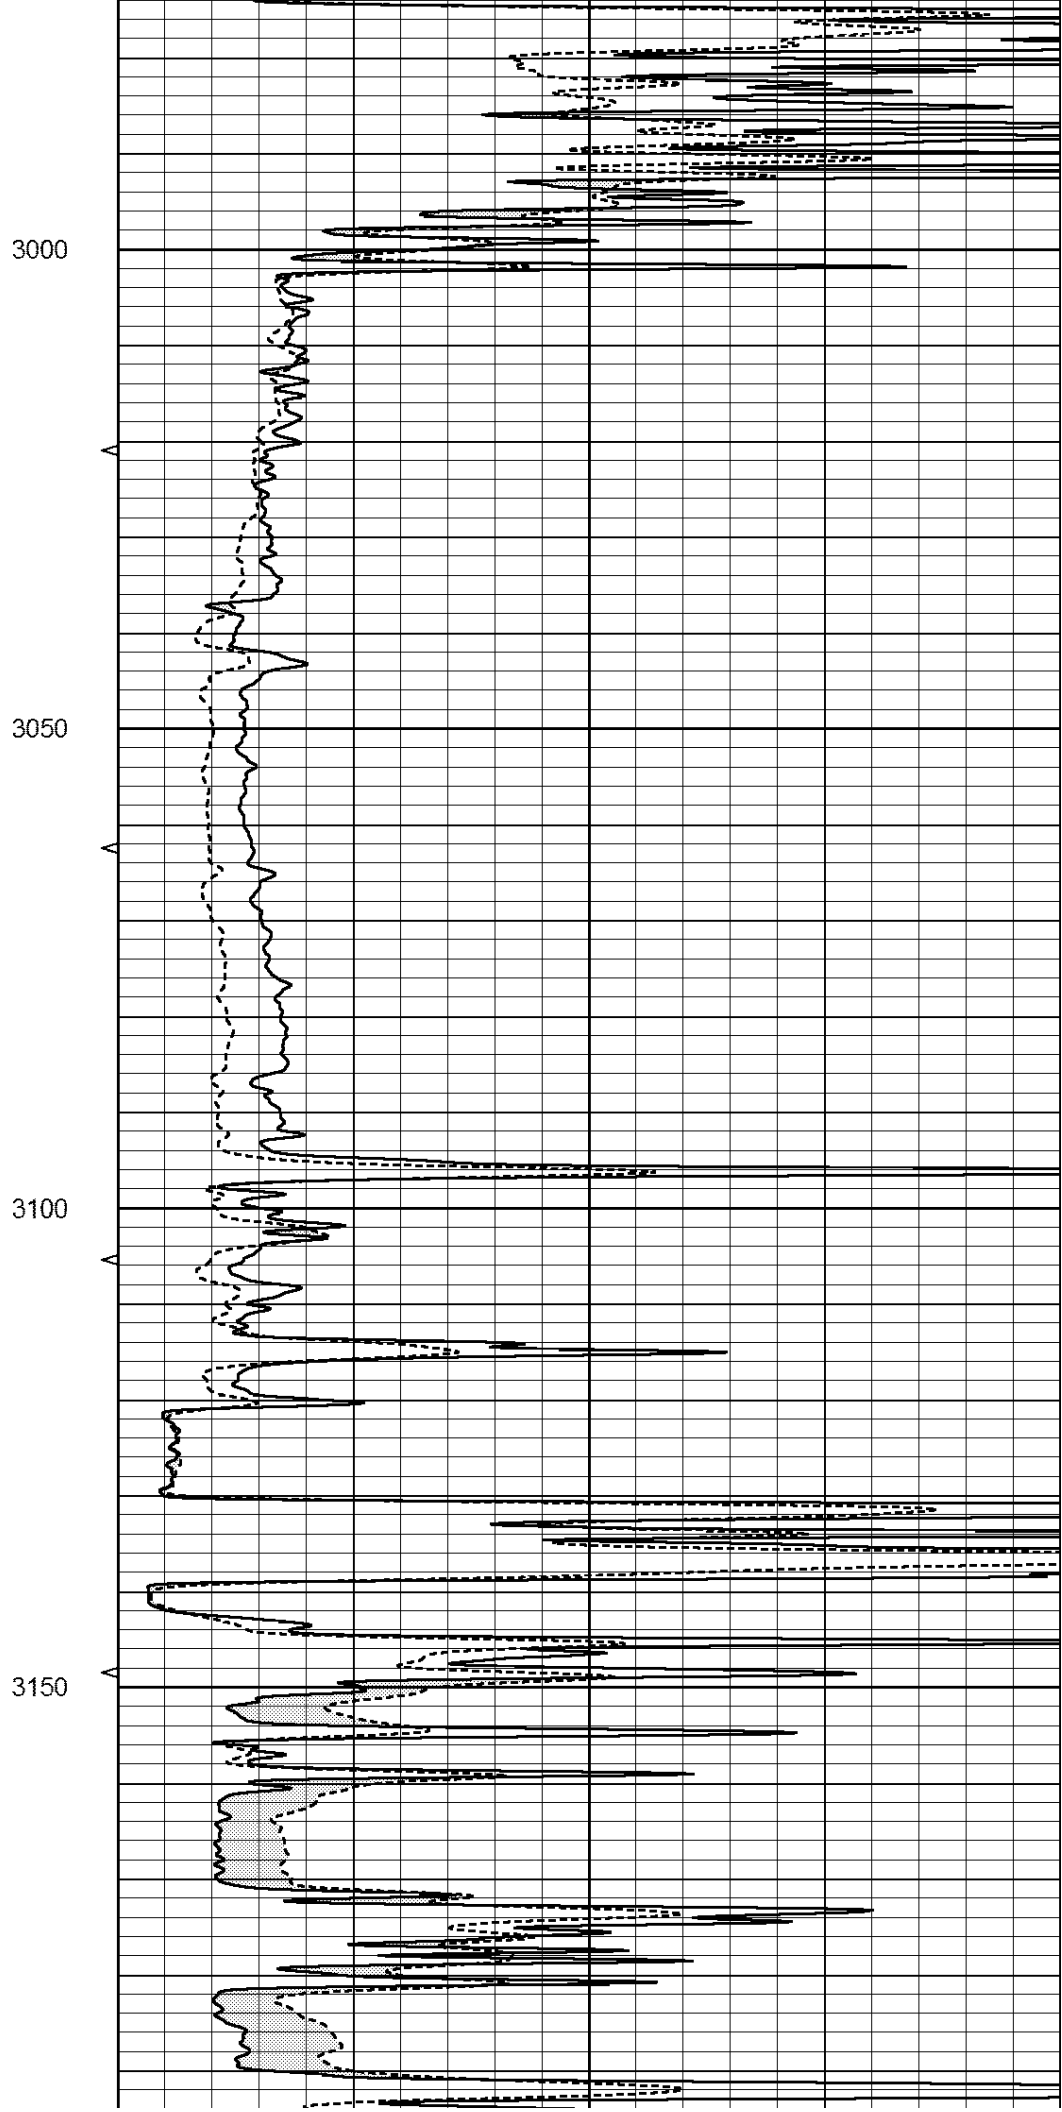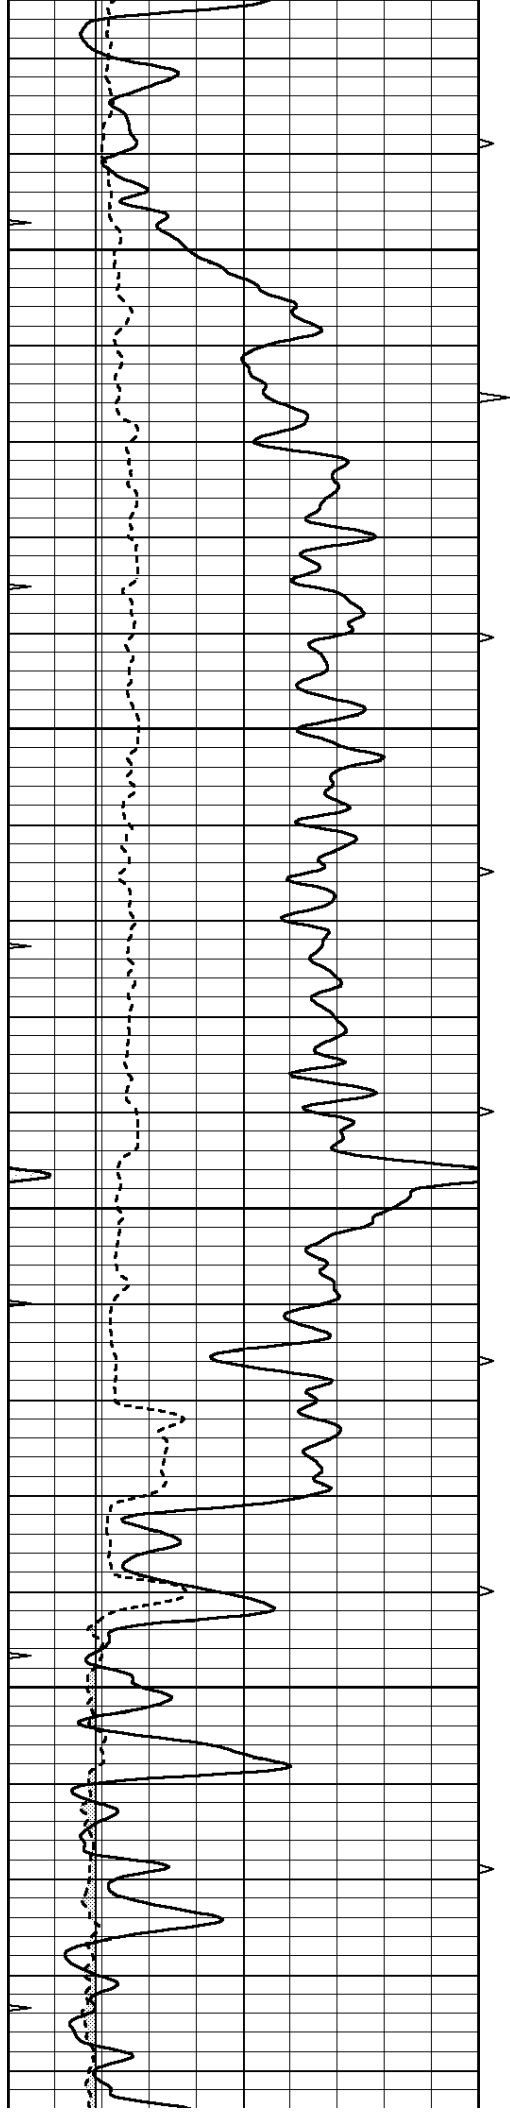

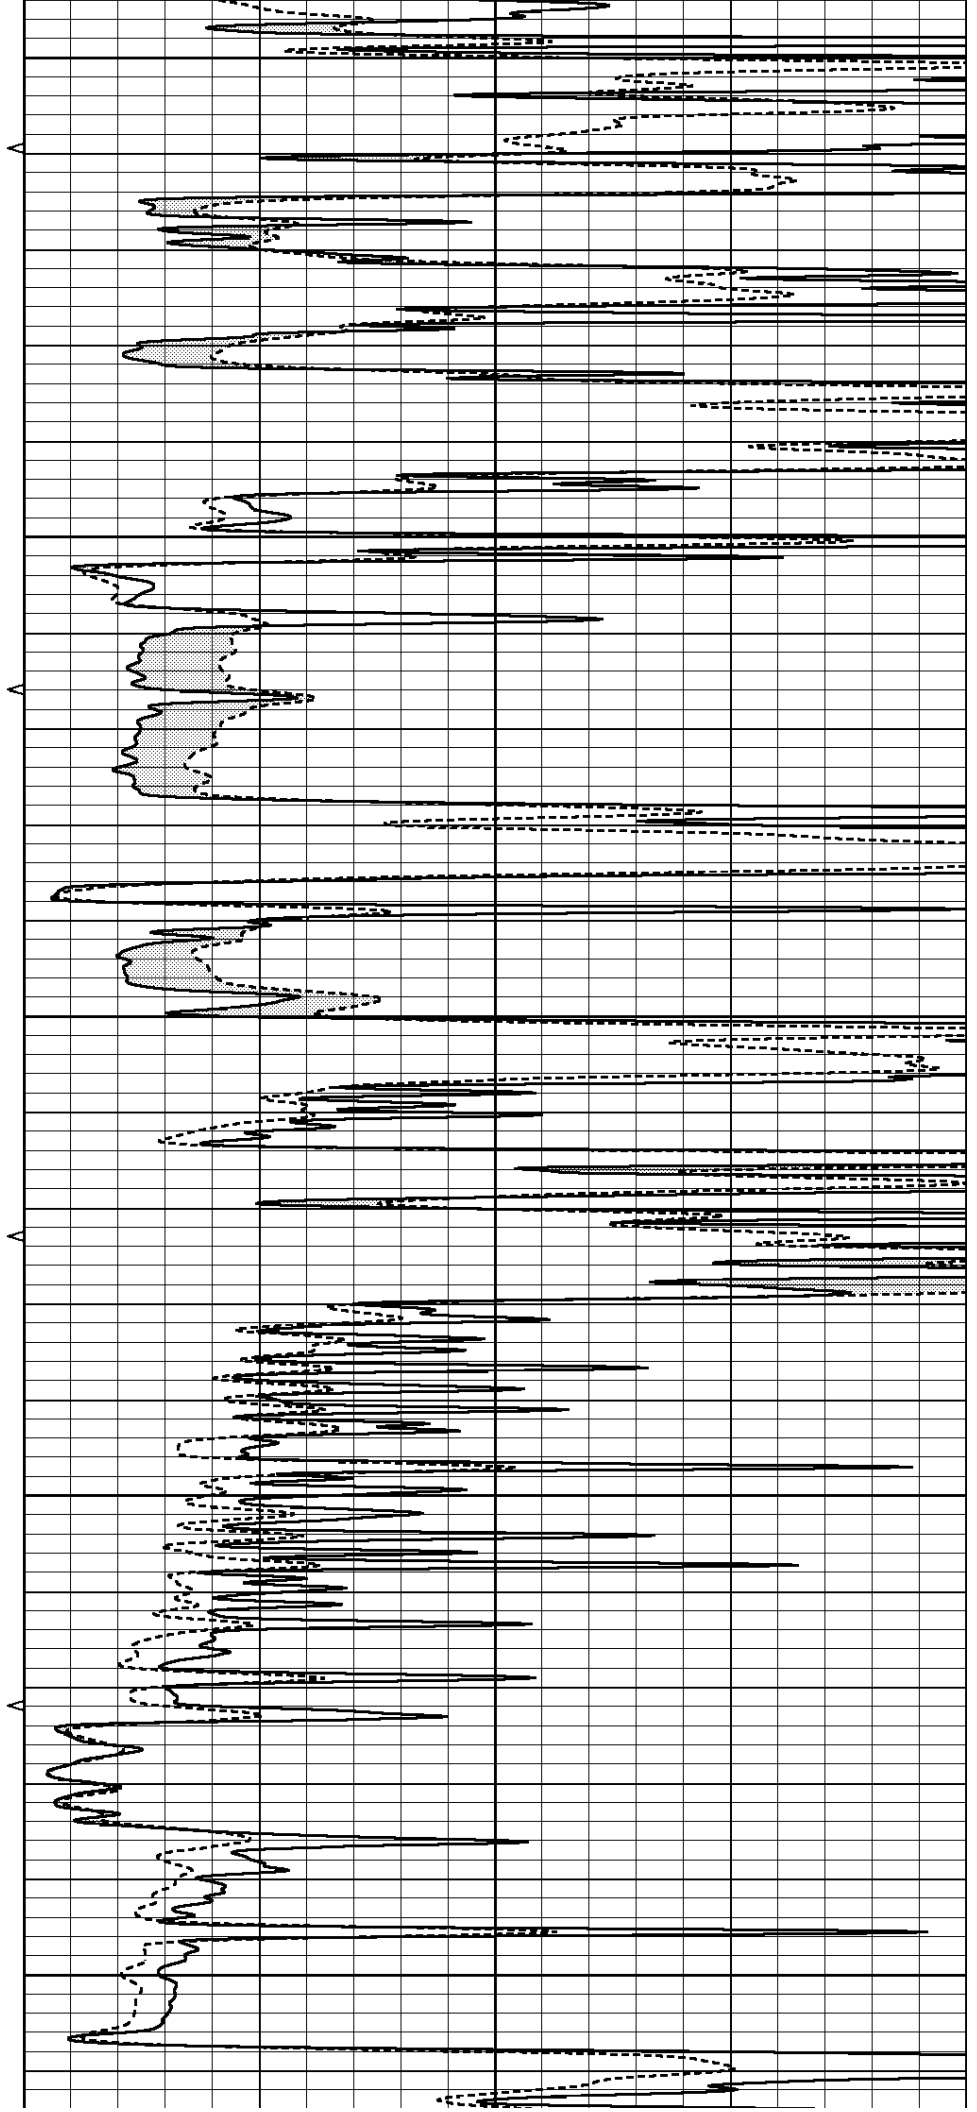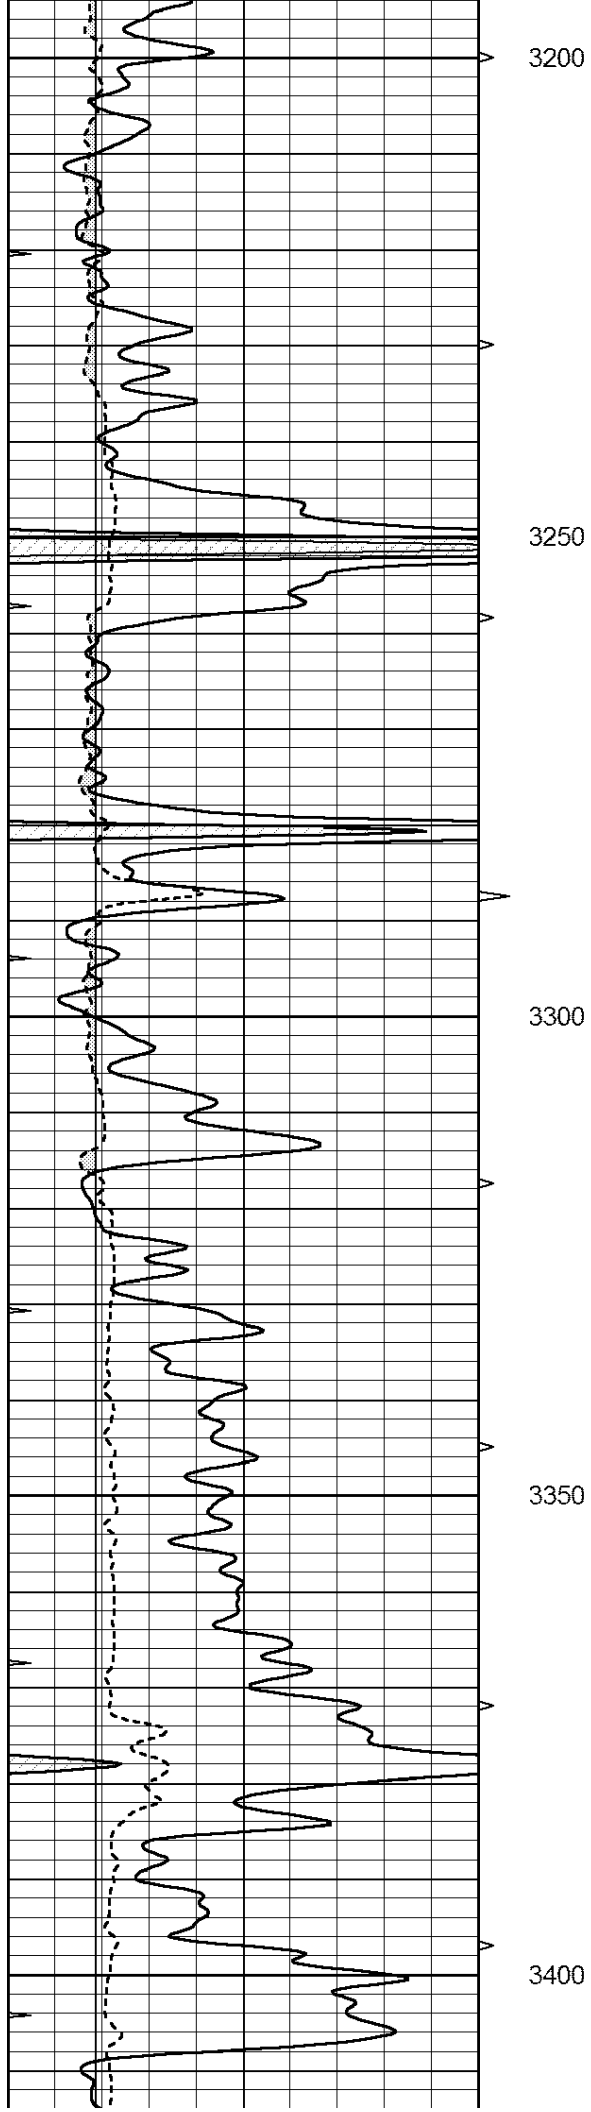

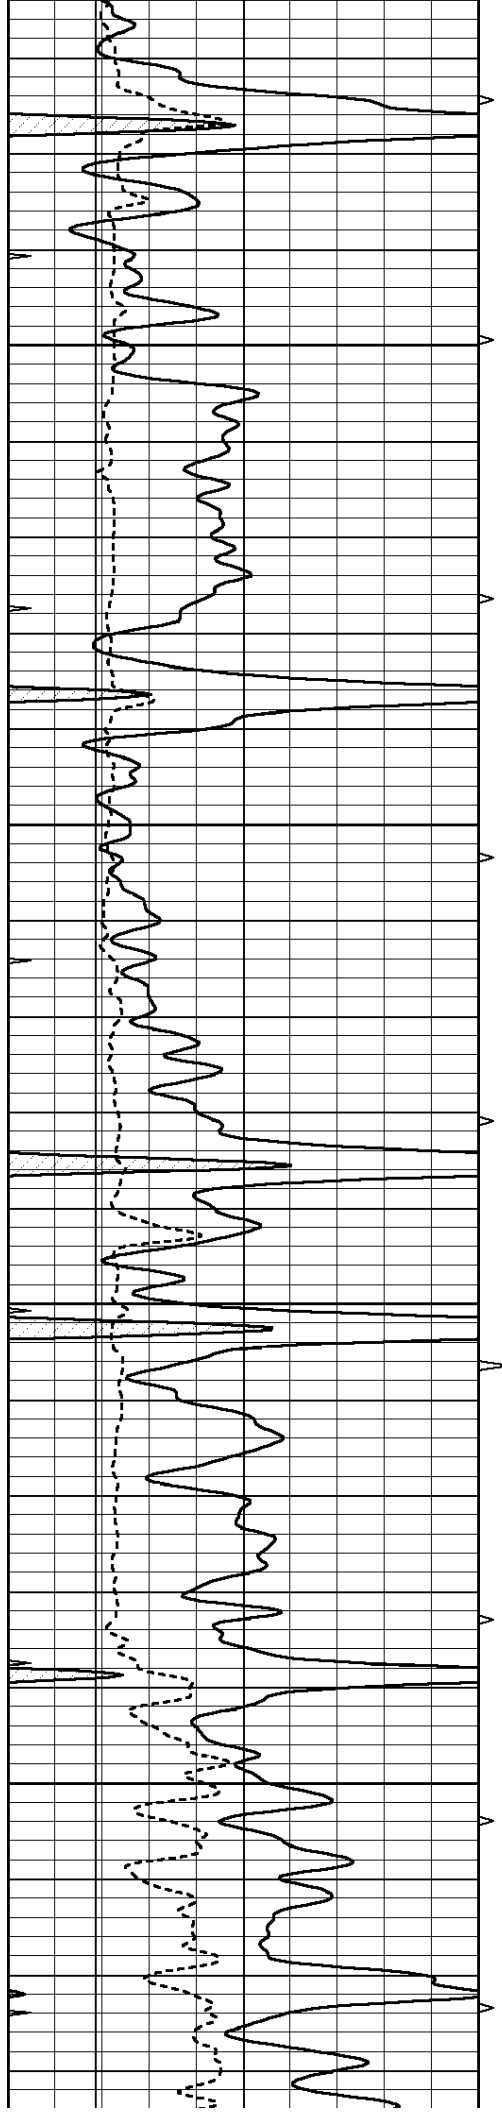



3450



3500


3550



3600

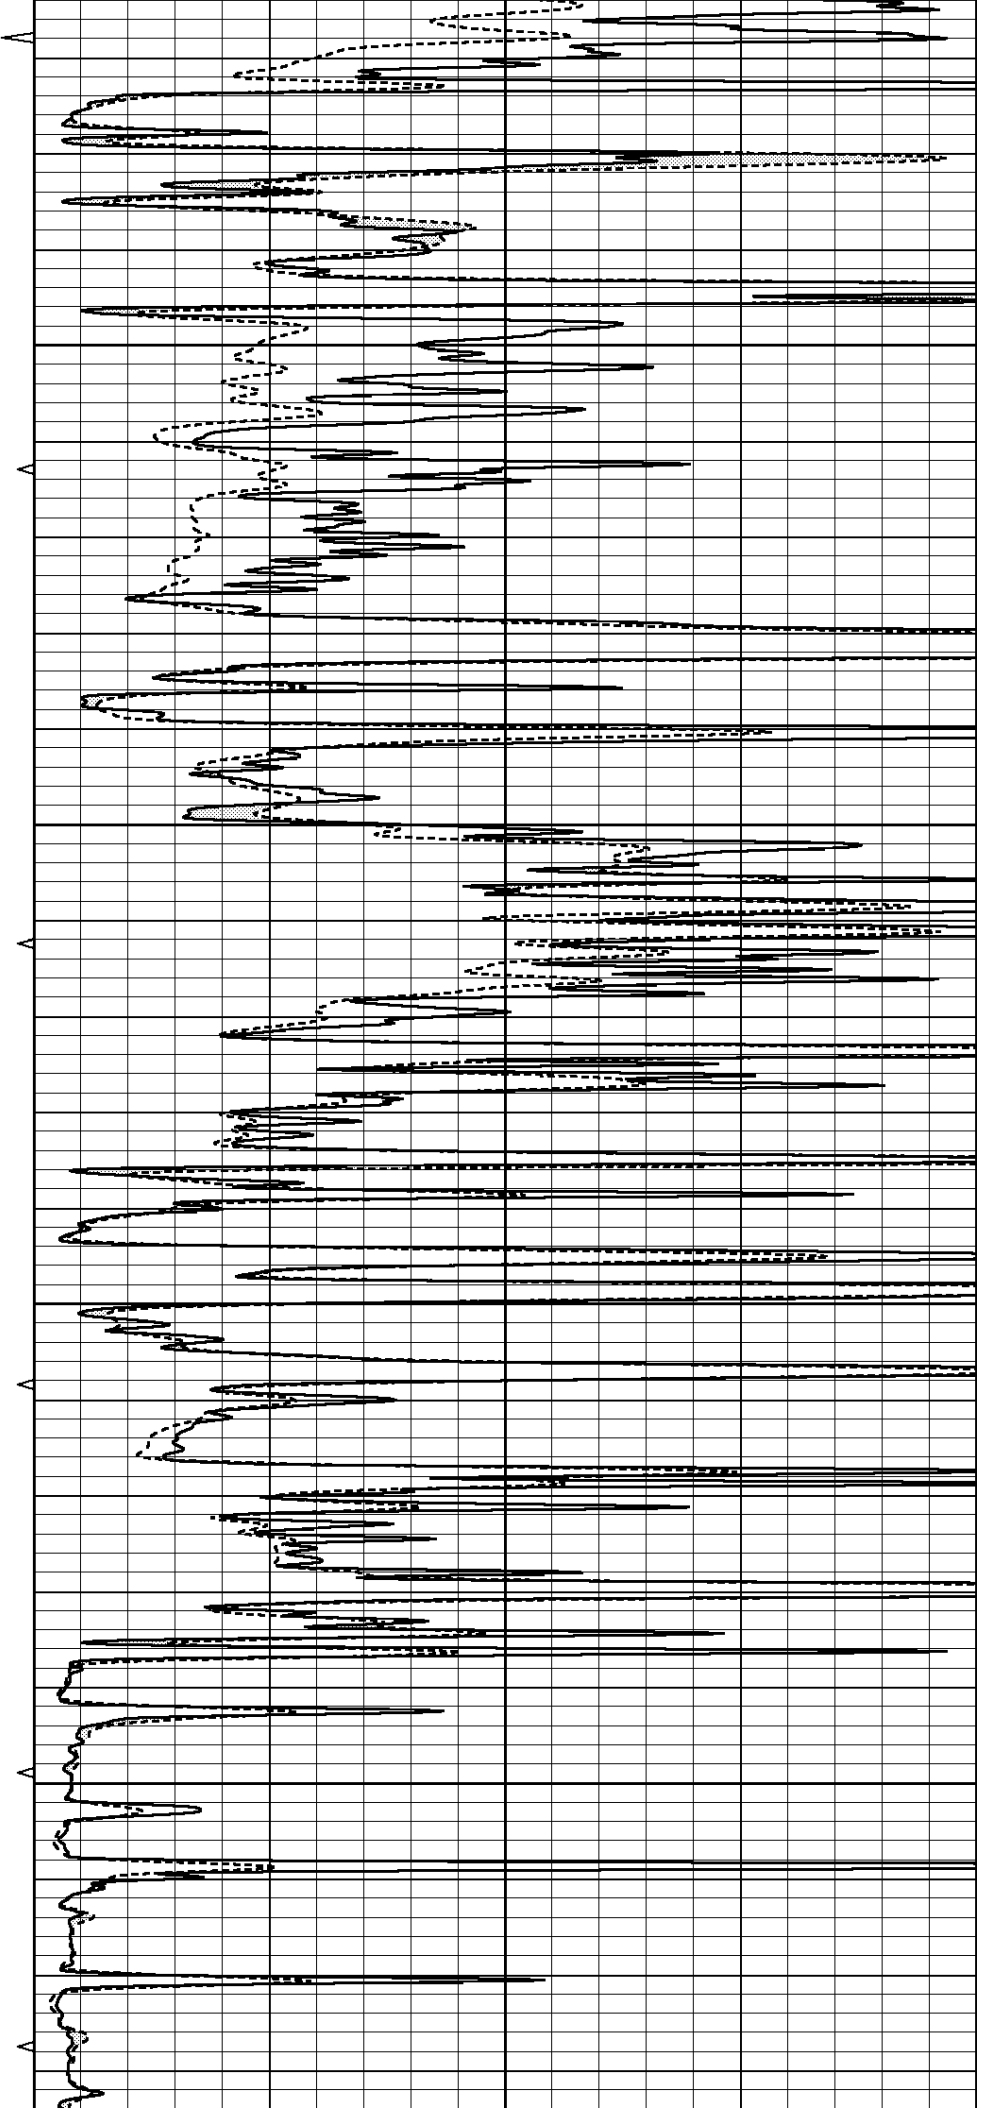

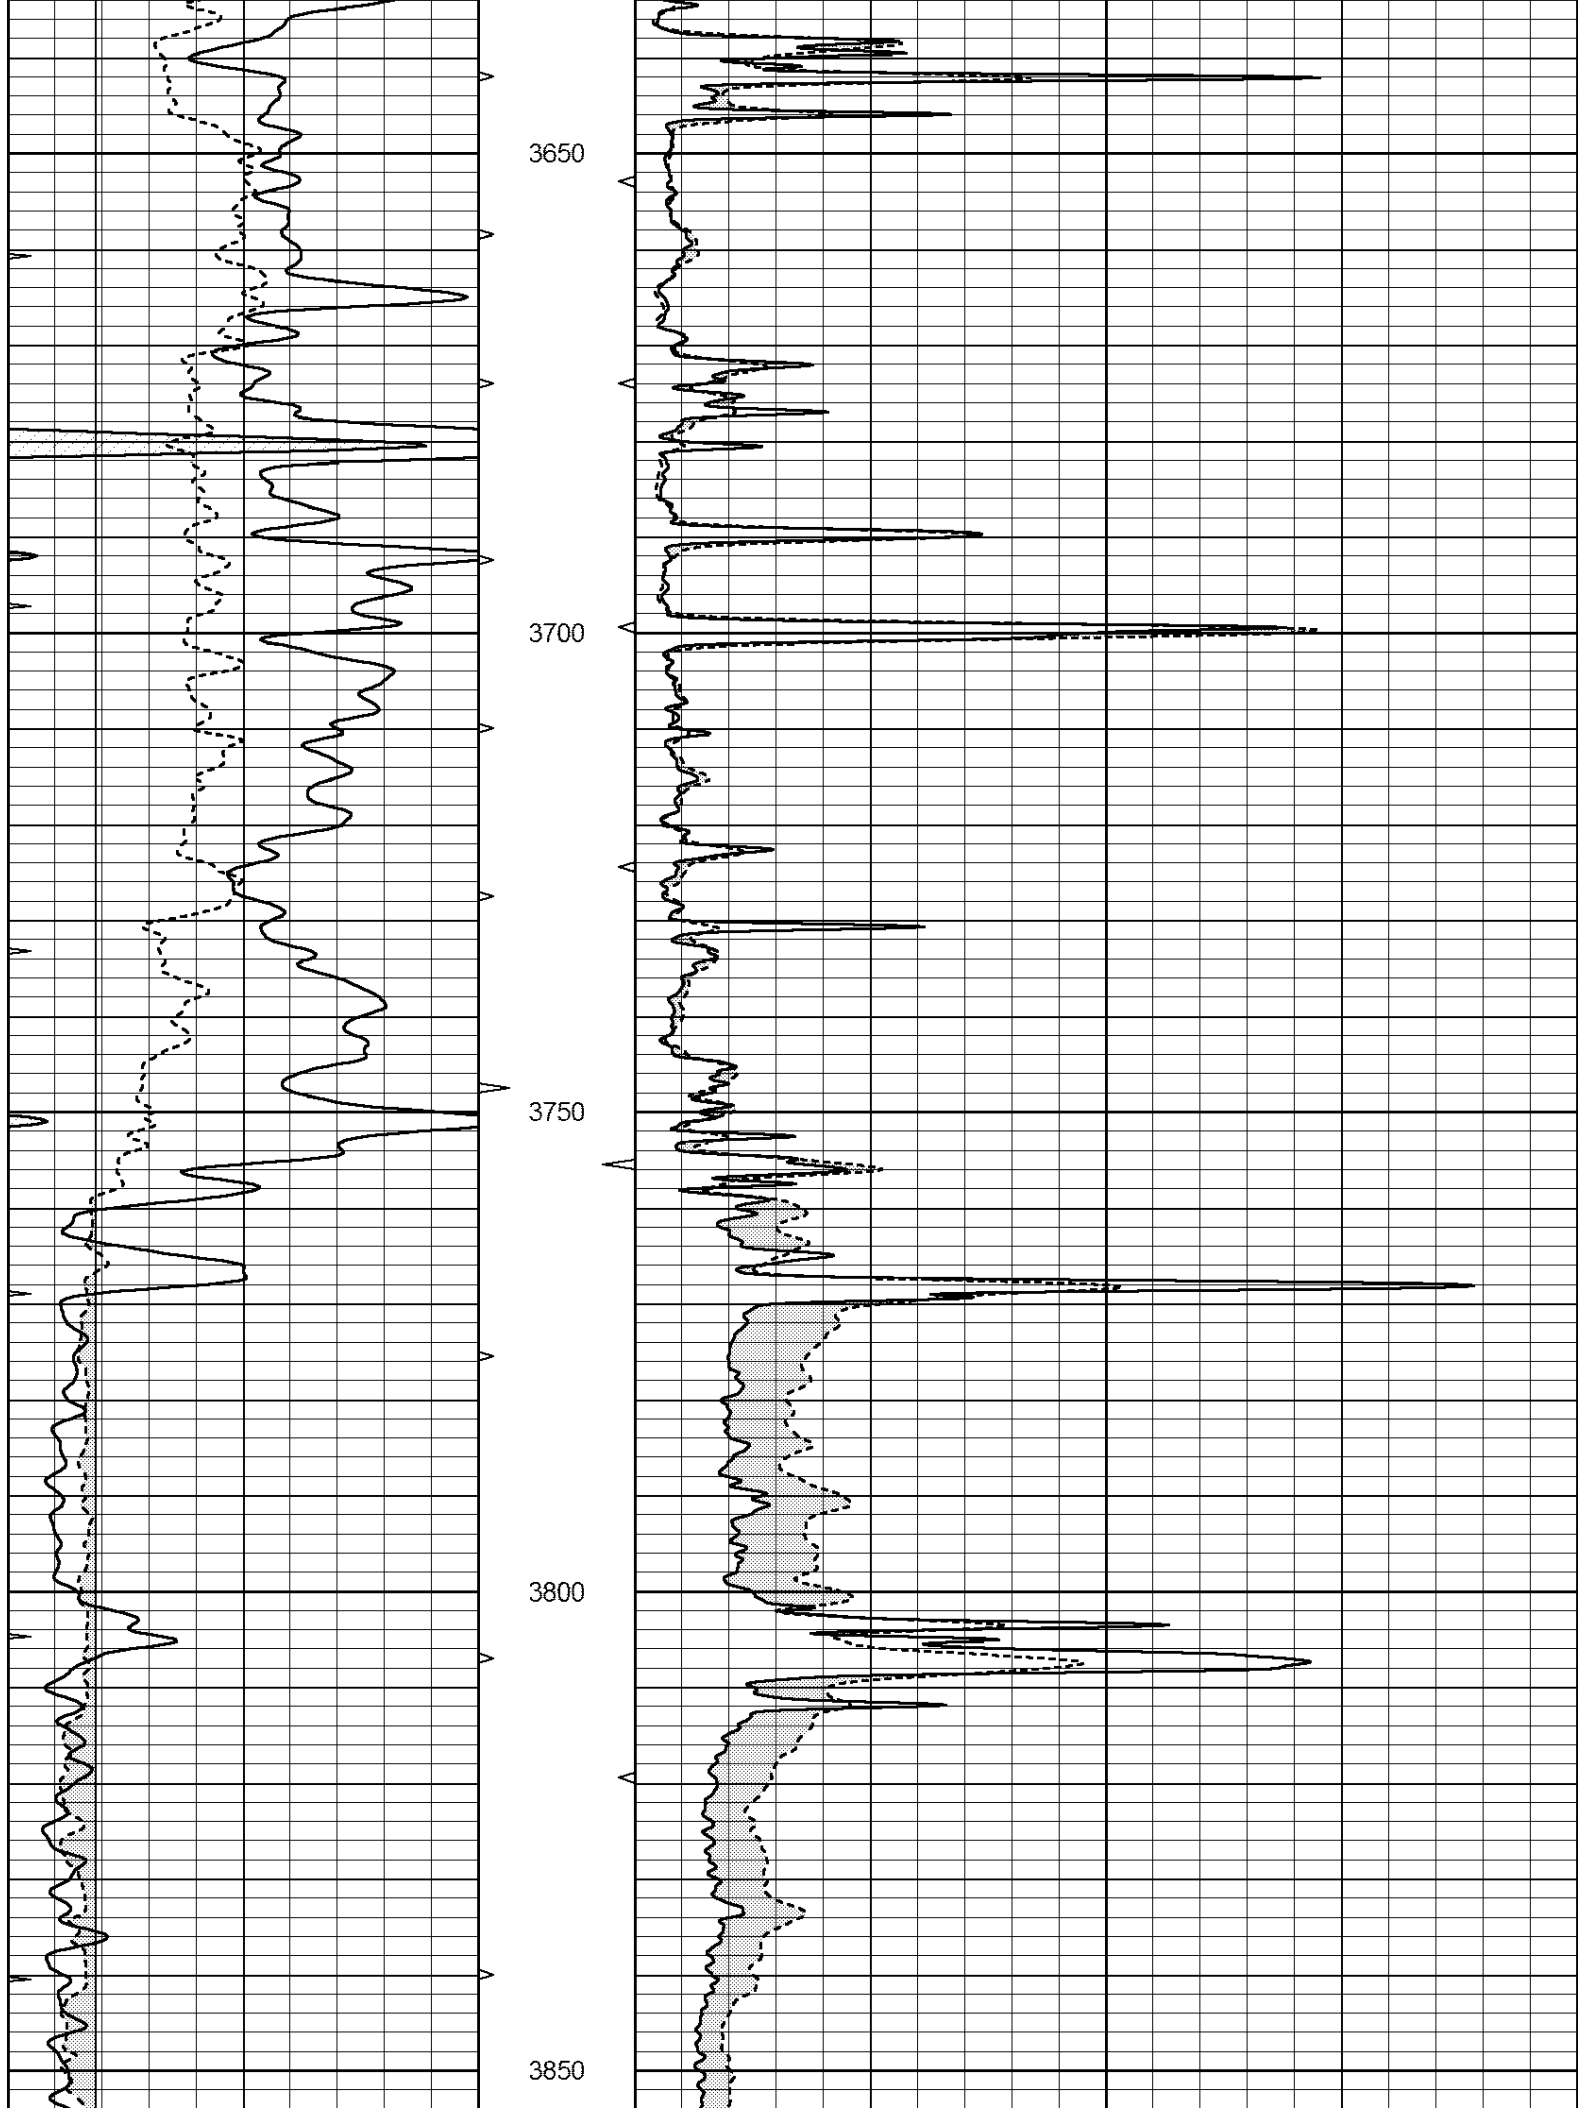

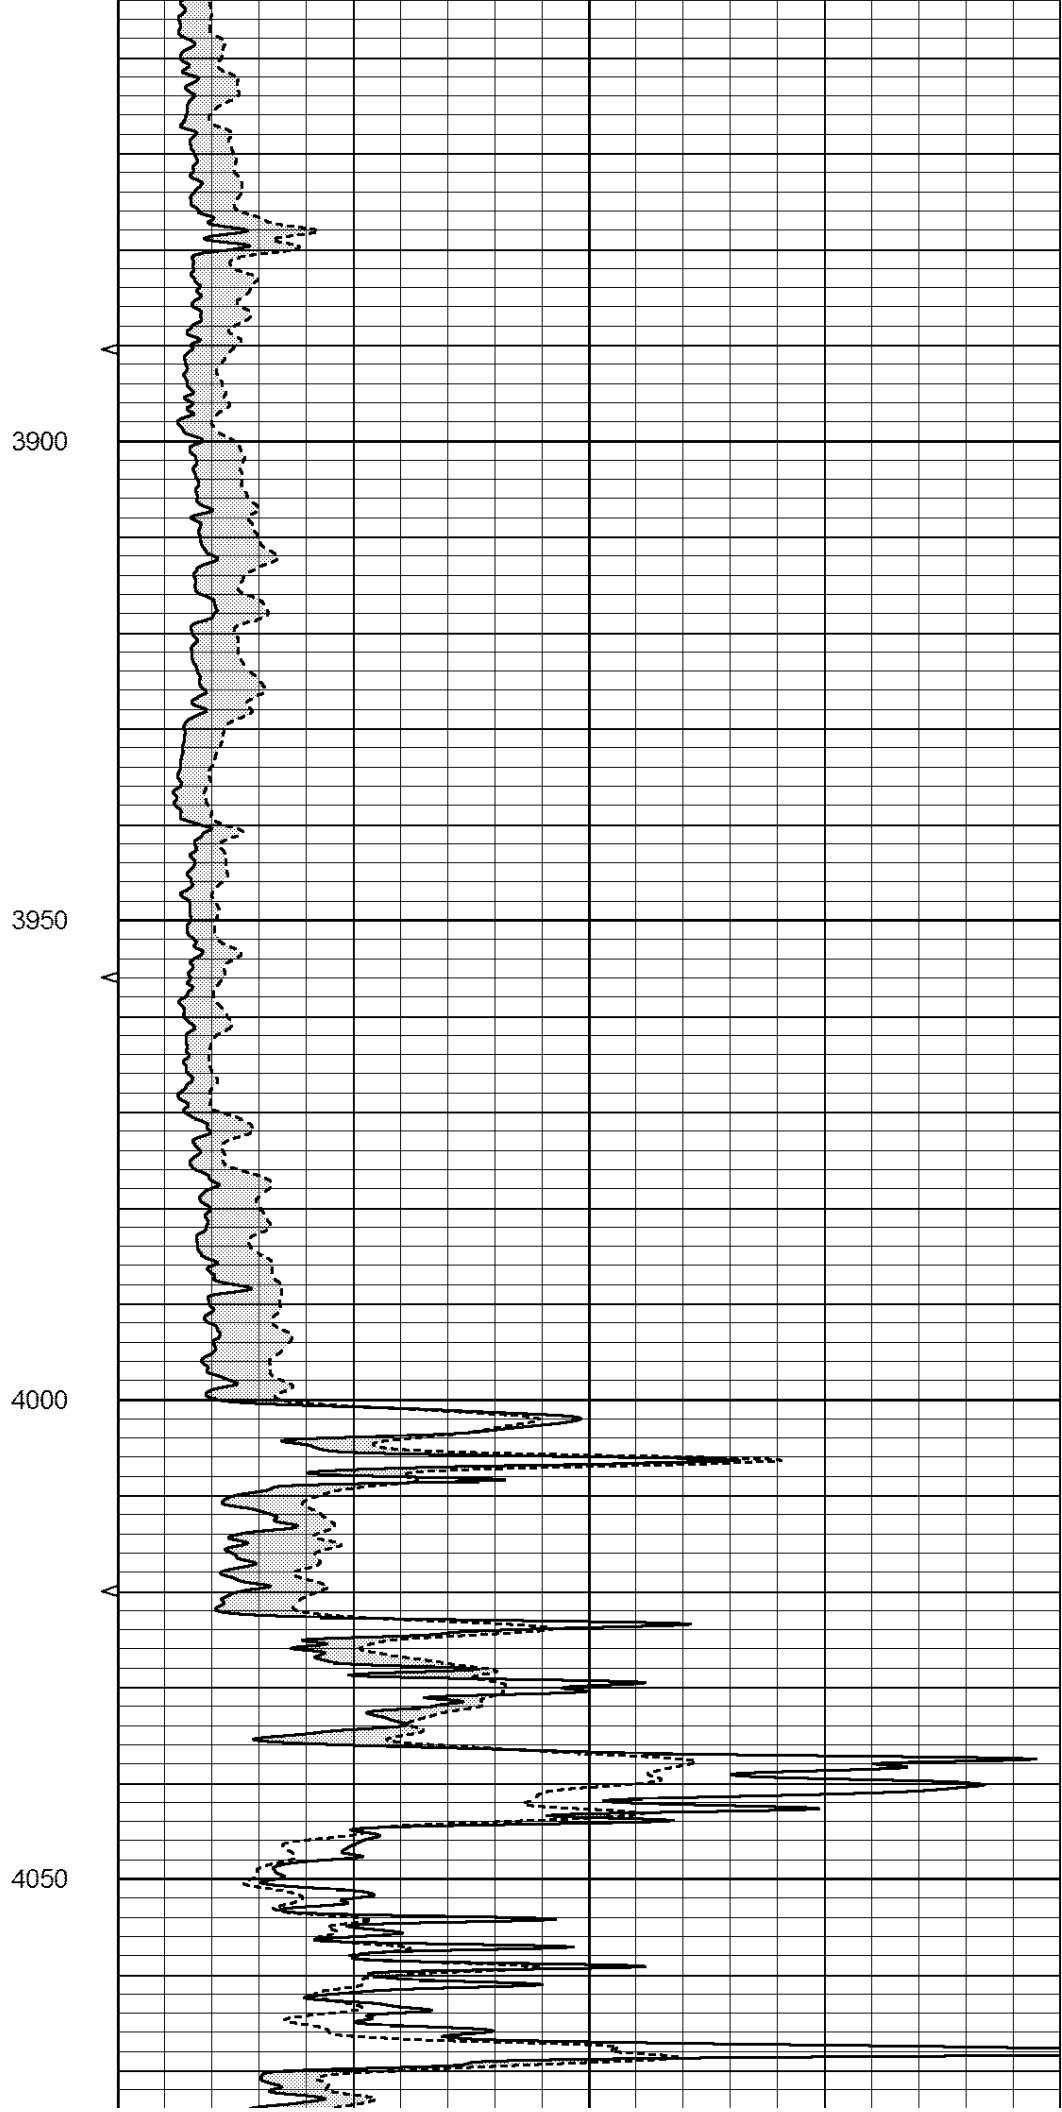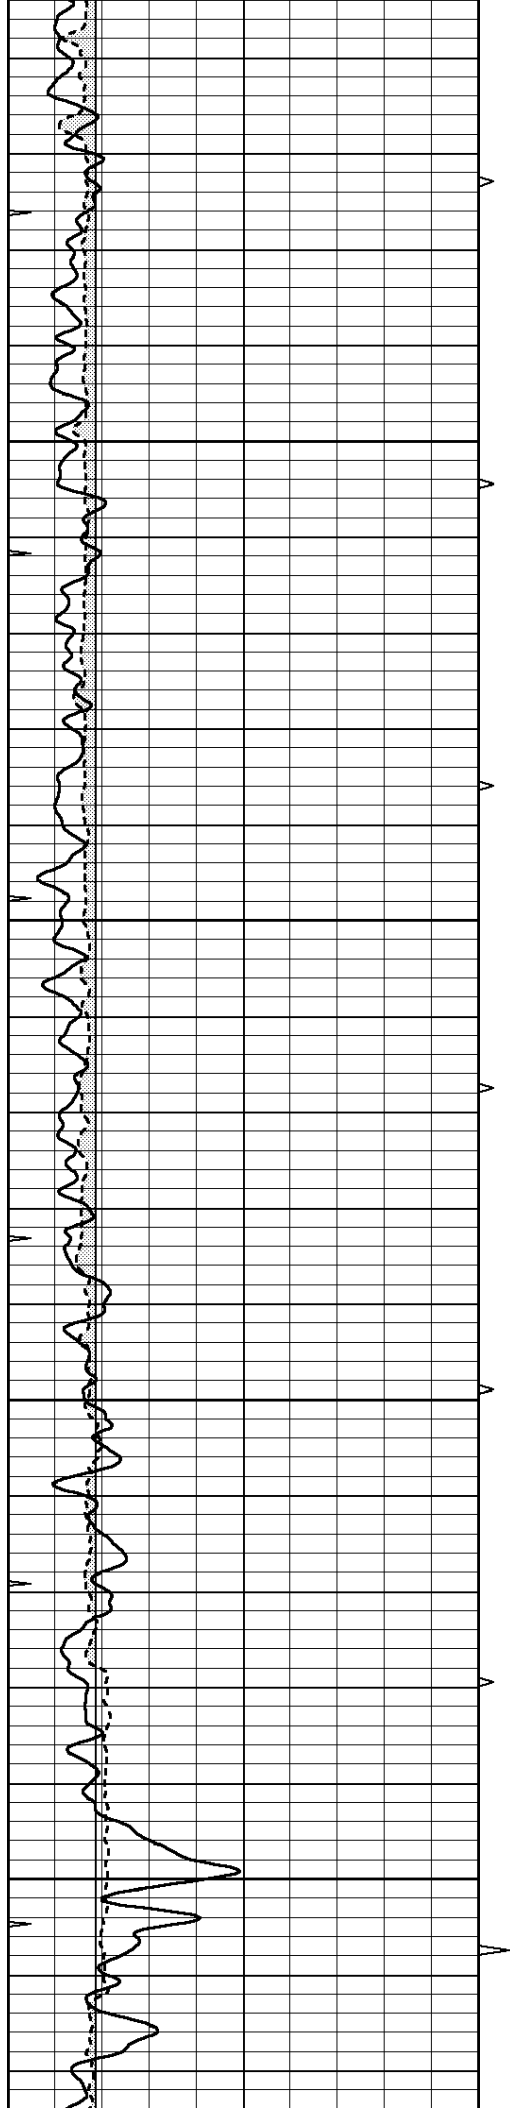

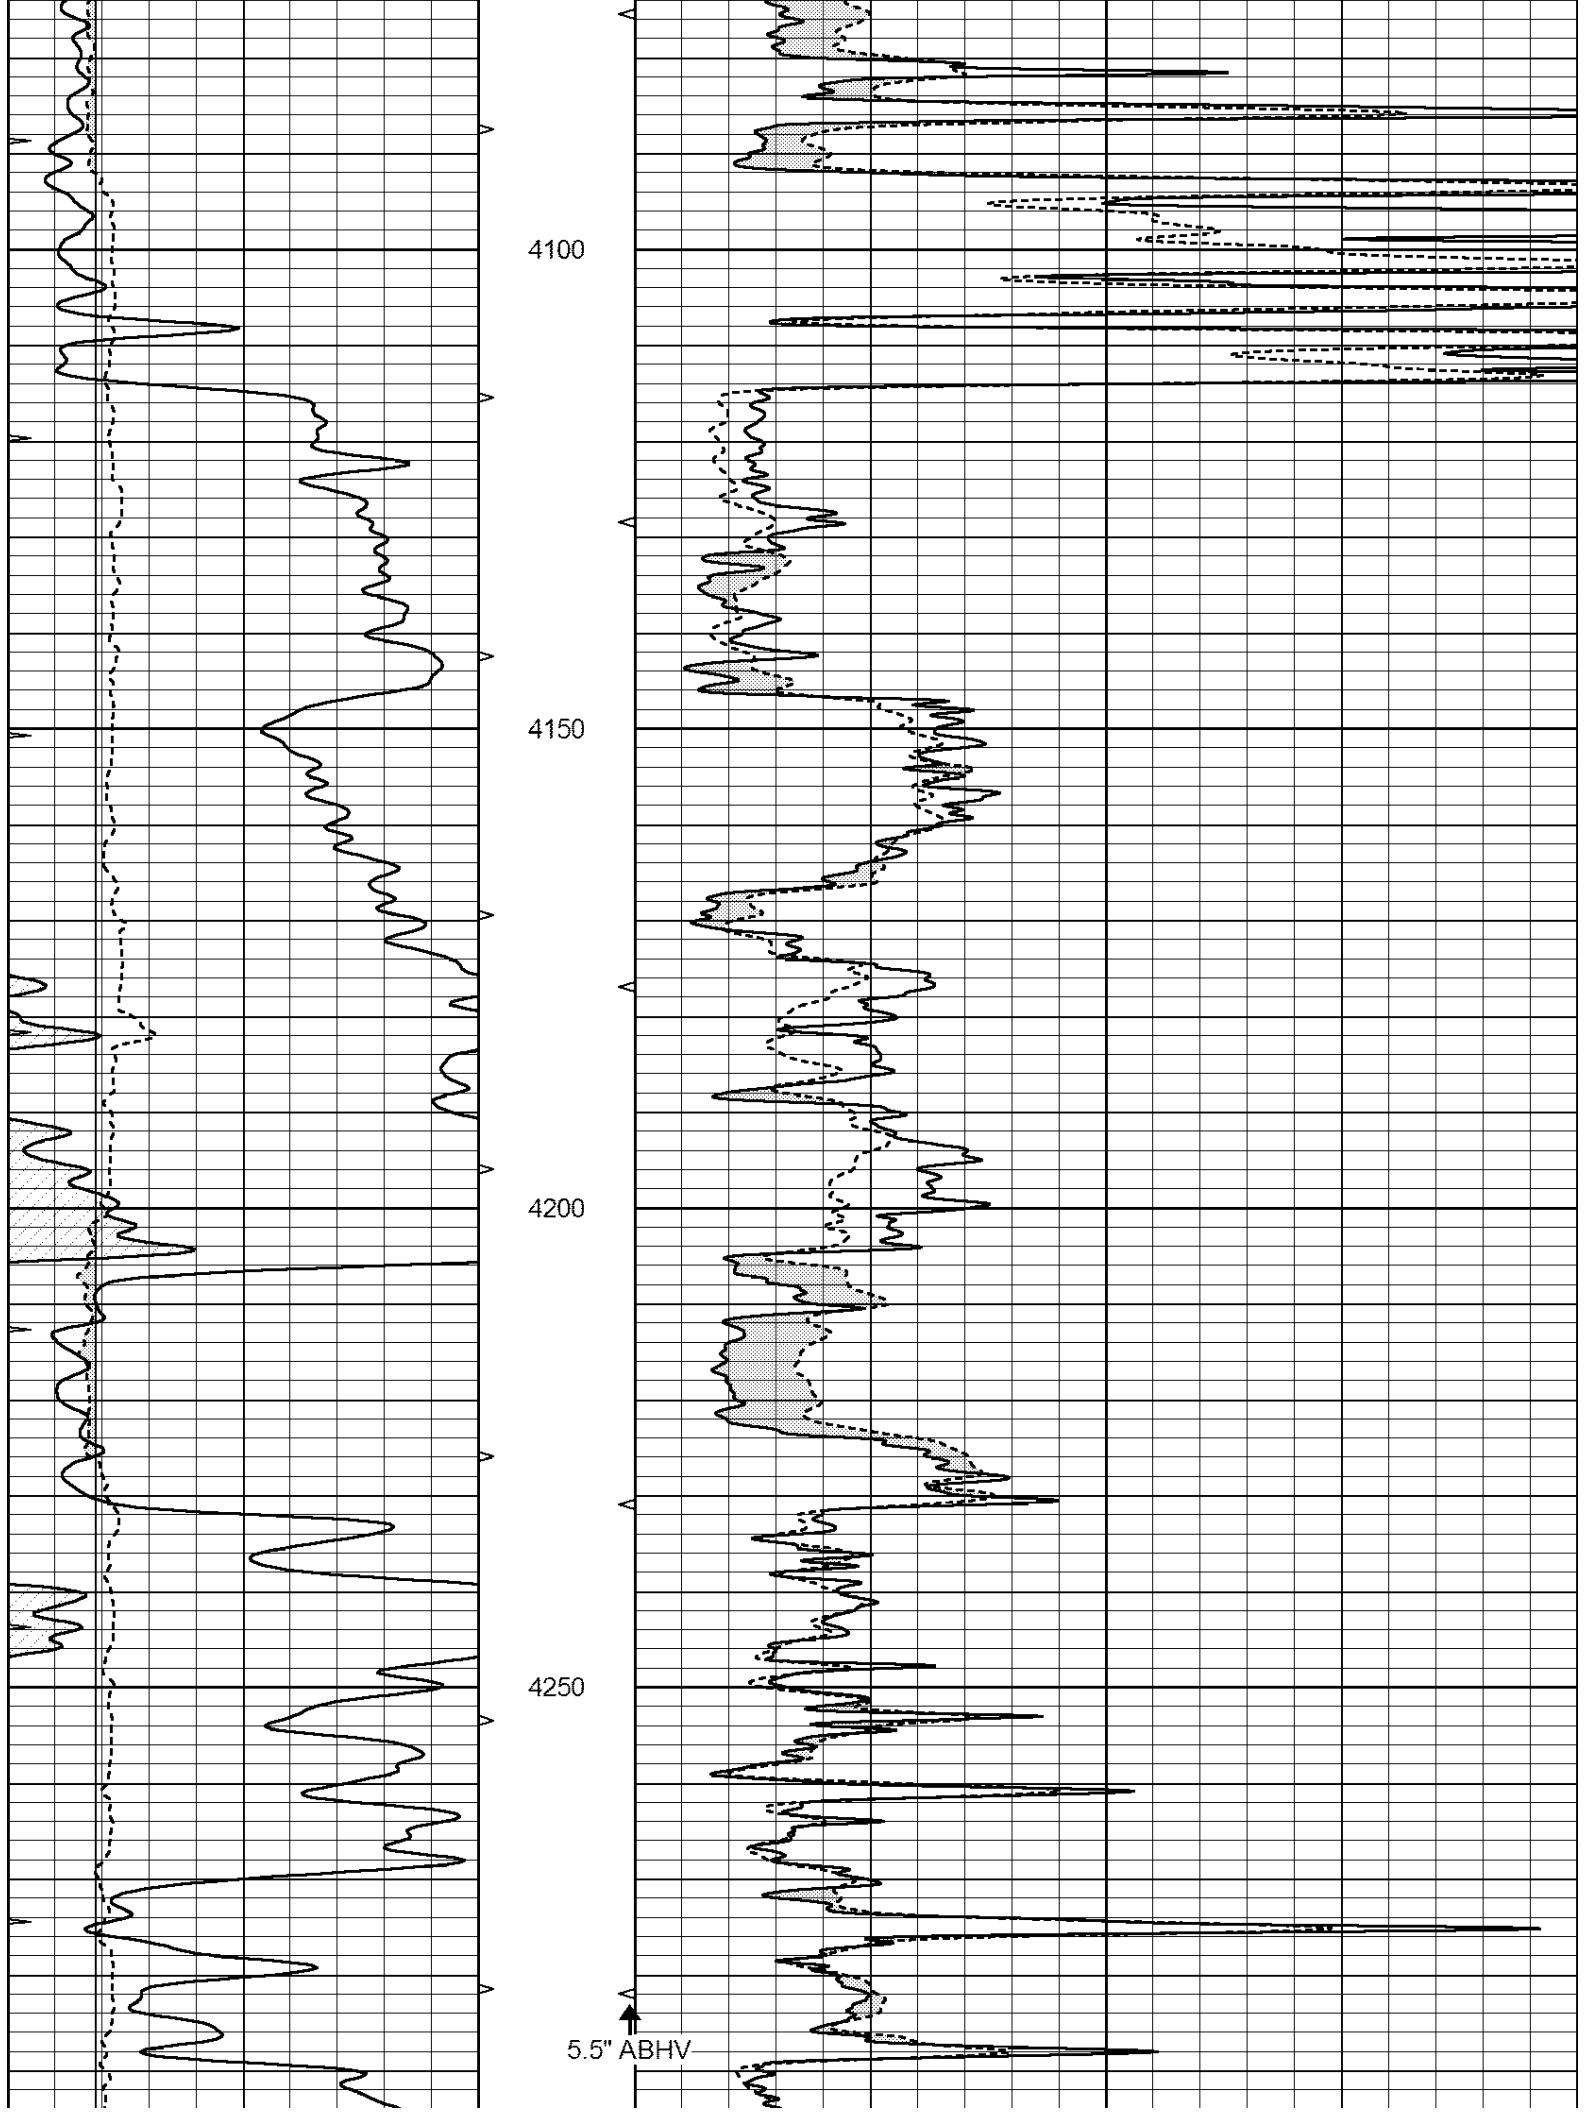

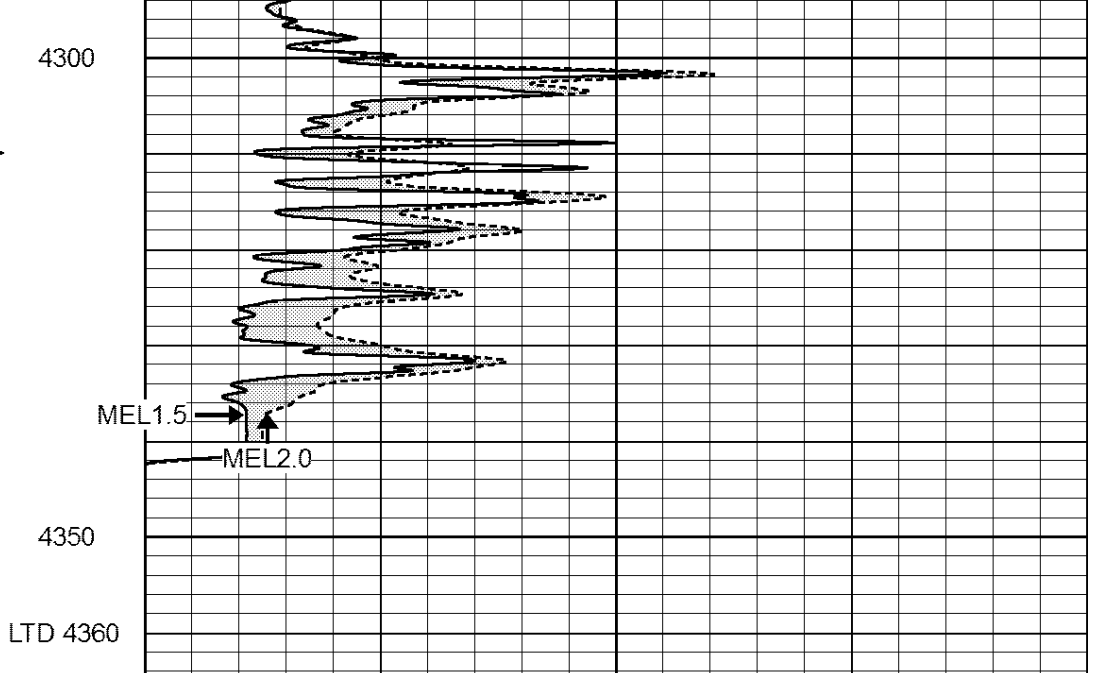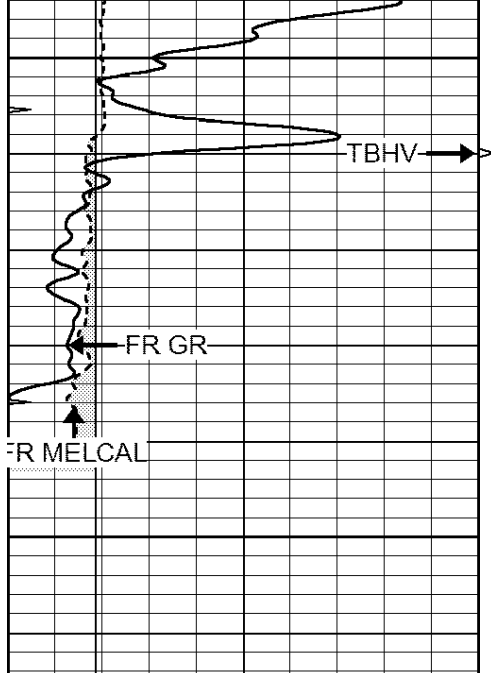

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		







SUPERIOR
Hays,
Kansas


REPEAT SECTION

Database File: 007466pe.db
Dataset Pathname: pass6.2
Presentation Format: micro
Dataset Creation: Thu Oct 20 22:50:18 2011 by Calc Open-Cased 110302
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

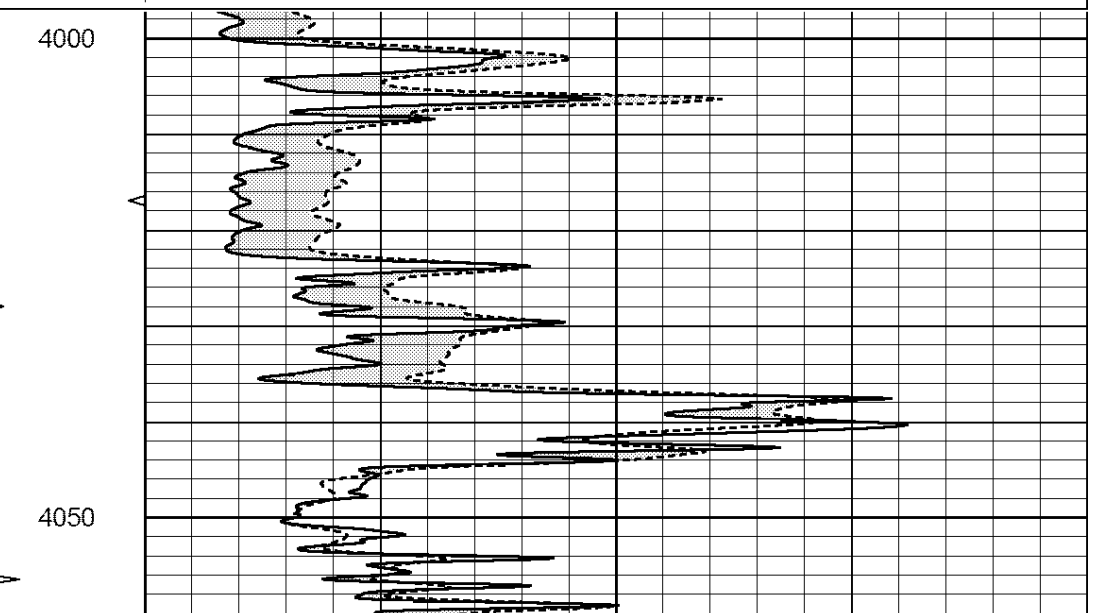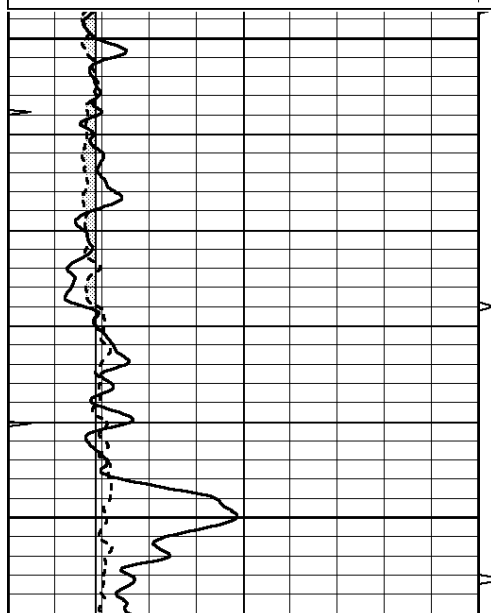

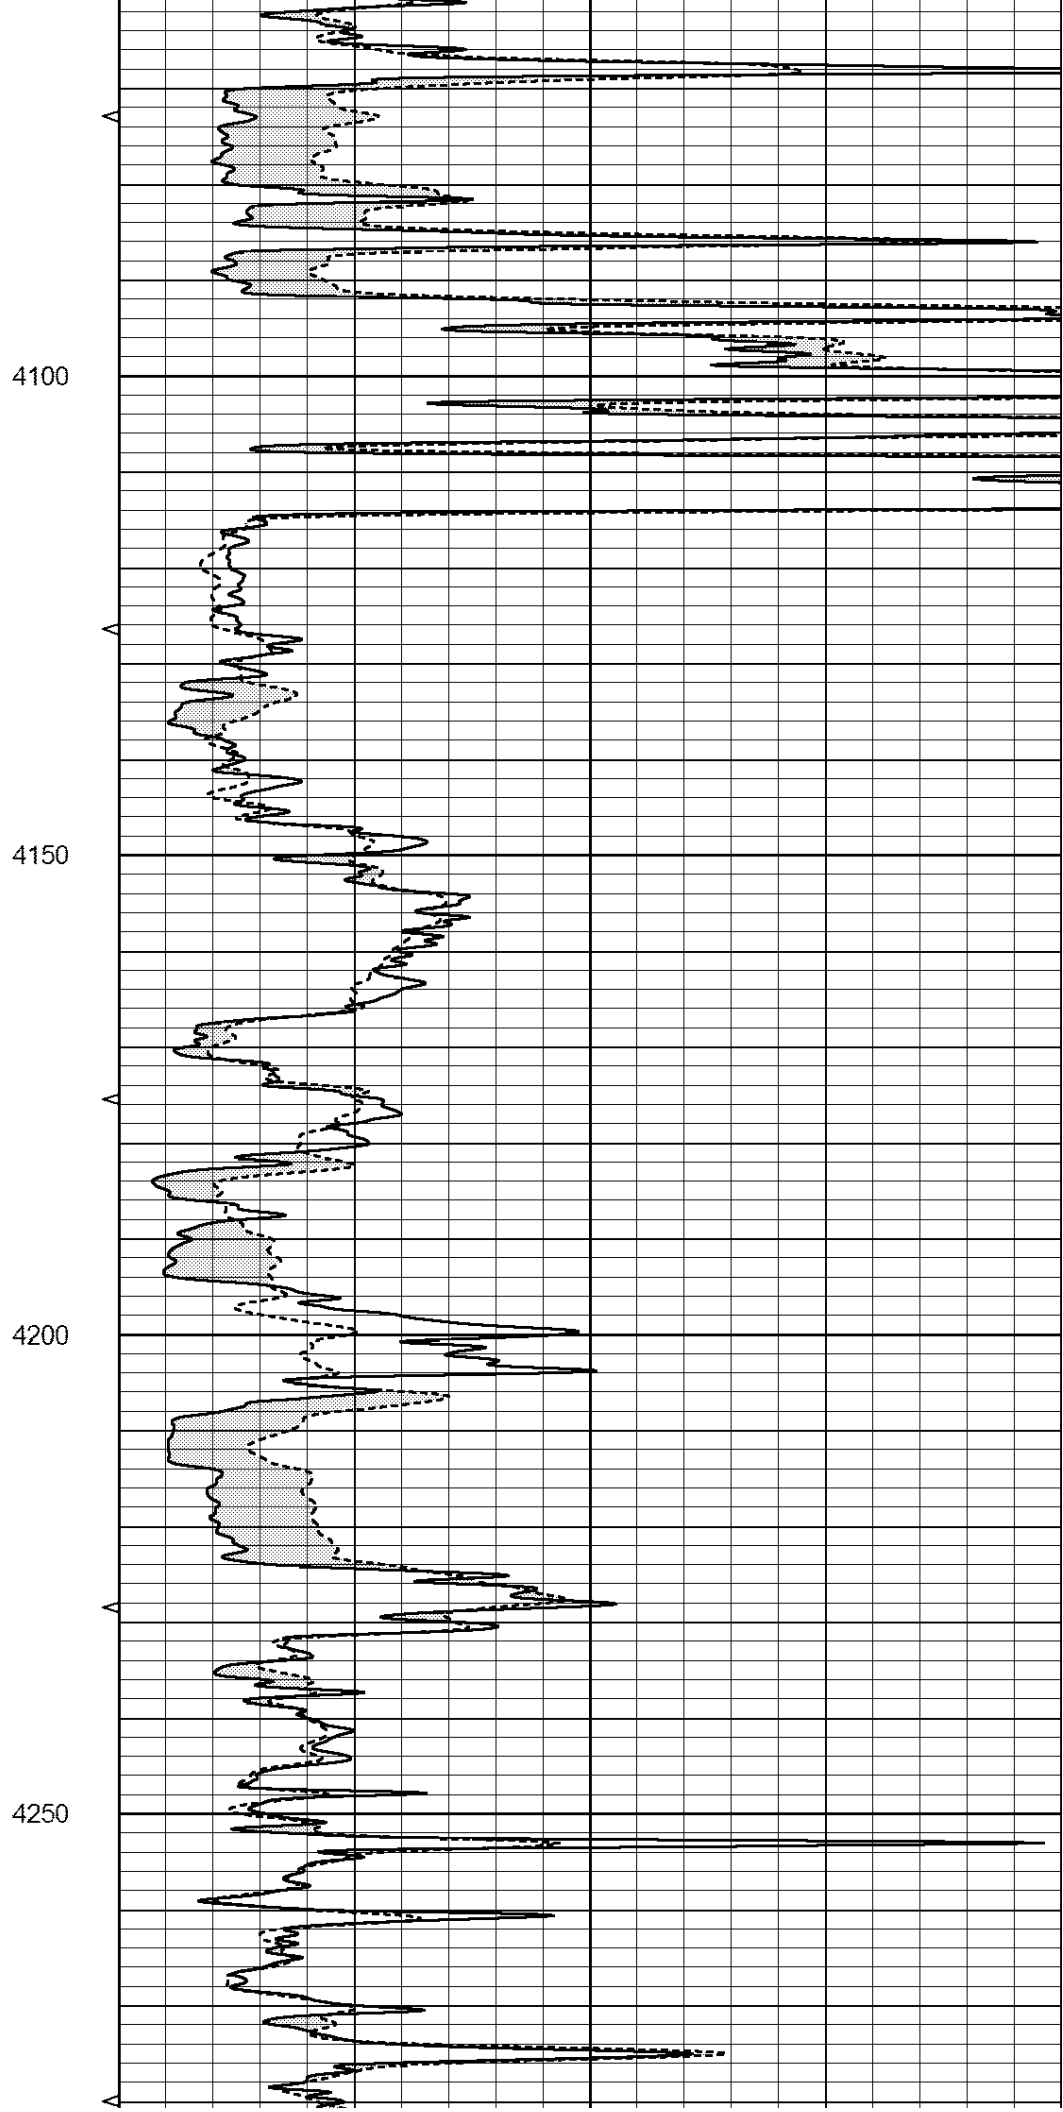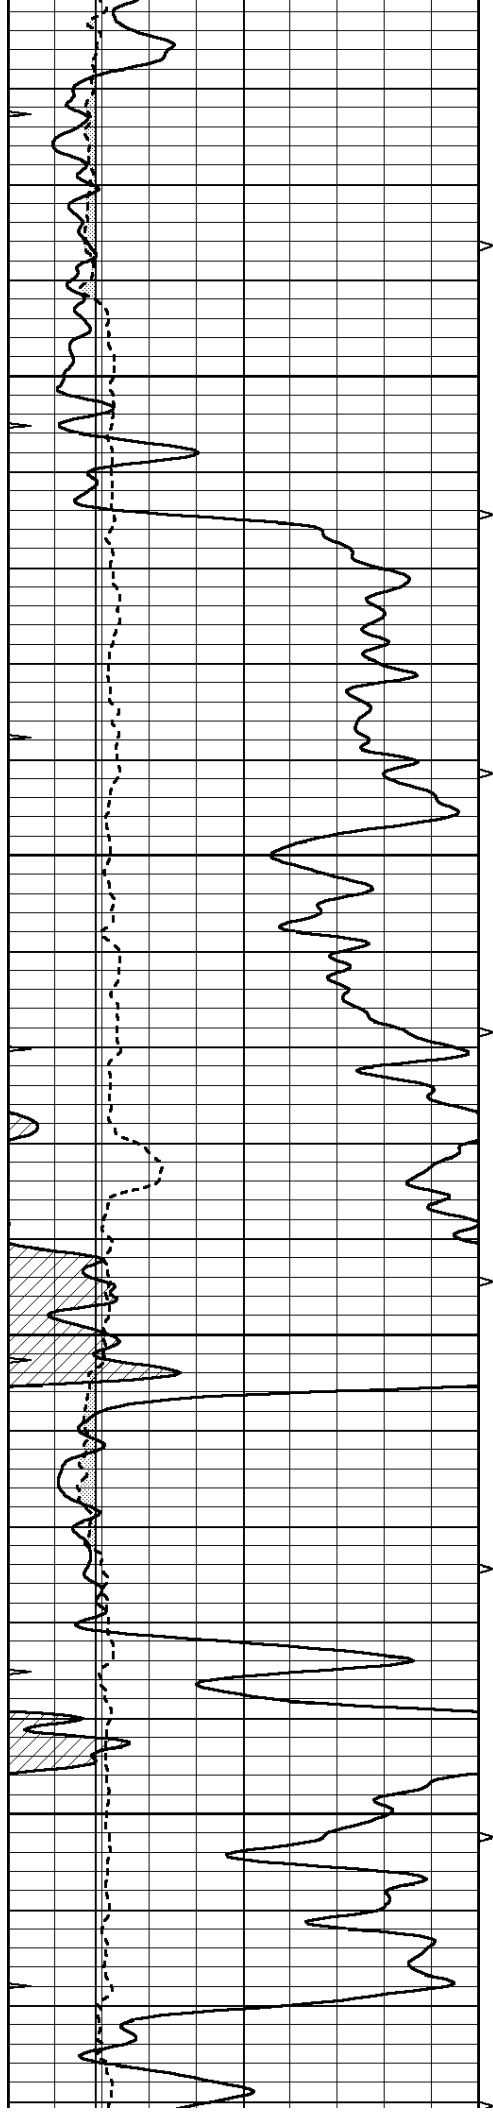

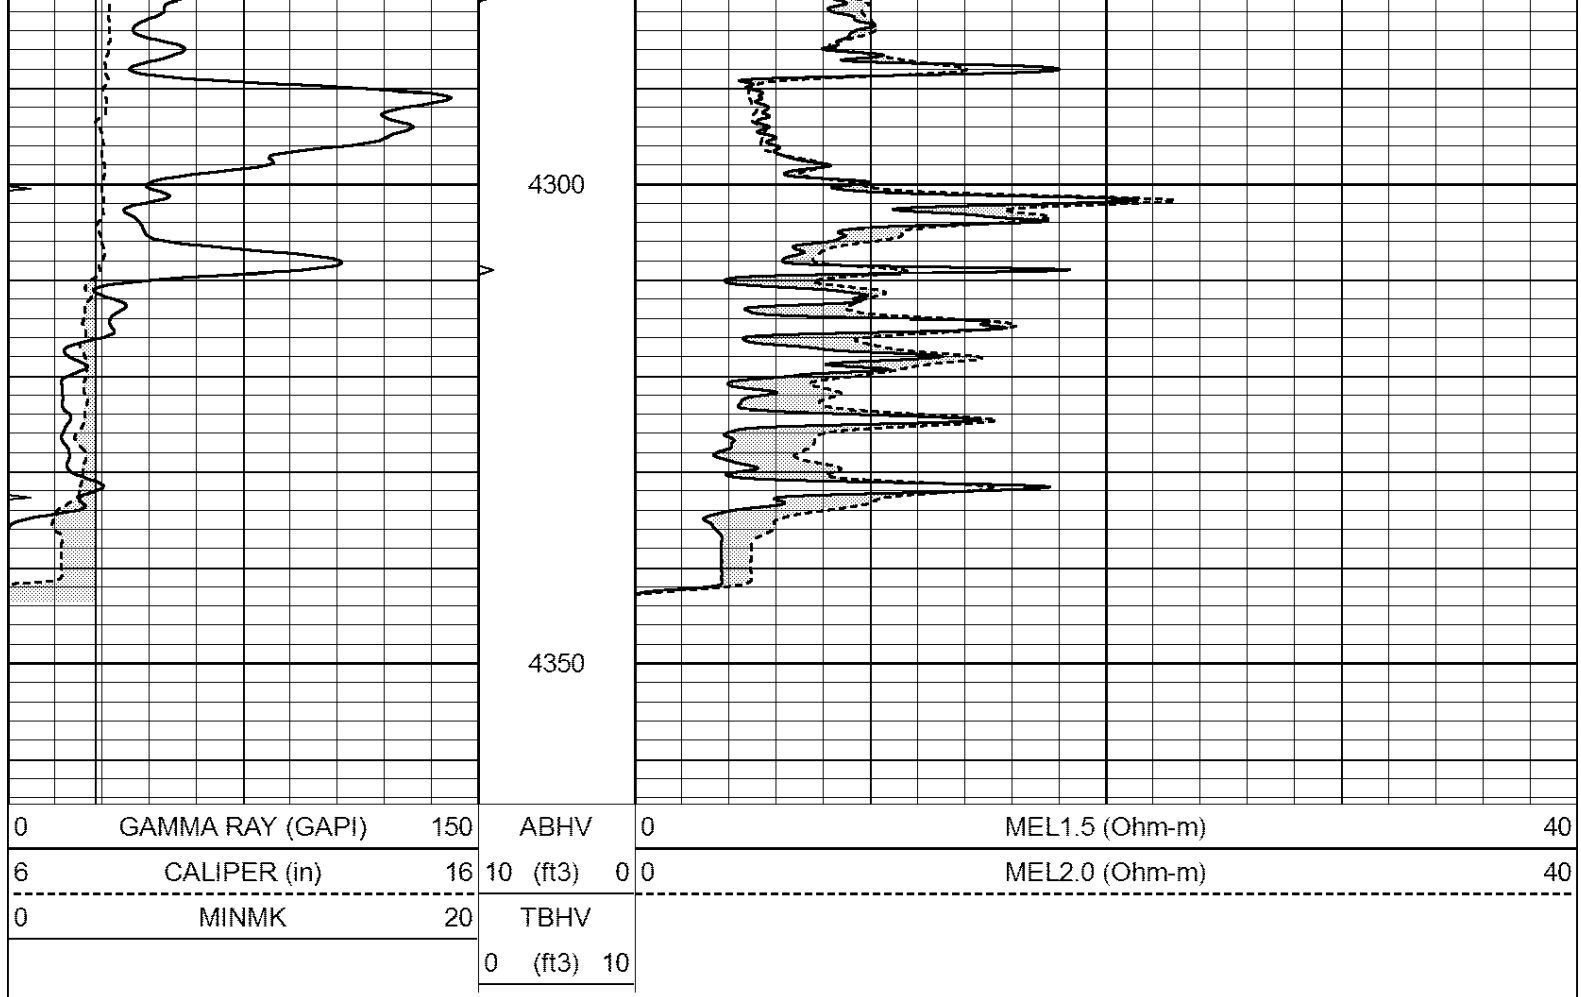

Calibration Report			
Database File:	007466pe.db		
Dataset Pathname:	pass7.3		
Dataset Creation:	Thu Oct 20 22:46:38 2011 by Calc Open-Cased 110302		
MICRO Calibration Report			
Serial Number:	MICRO5		
Tool Model:	PROBE		
Performed:	Thu Oct 20 21:20:33 2011		
Caliper Calibration:	Gain=3.527	Offset=-3.572	
	Low Cal	High Cal	
References	8.100	15.000	
Readings	3.309	5.265	
1.5" Calibration:	Gain=25.000	Offset=0.000	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.009	0.990	
2" Calibration:	Gain=54.000	Offset=-0.800	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.000	0.929	
Gamma Ray Calibration Report			
Serial Number:	GR3		
Tool Model:	OPEN		
Performed:	Thu Oct 20 21:55:19 2011		

Calibrator Value:	200.0	GAPI
Background Reading:	3.0	cps
Calibrator Reading:	186.0	cps
Sensitivity:	1.9500	GAPI/cps