

LEASE NAME Loeffler

WELL NUMBER 2

2970 Ft. from S Section Line

4290 Ft. from E Section Line

SEC. 32 TWP. 6S RGE. 20 (S) or (W)

COUNTY Rooks

Date Well Completed 6/22/85

Plugging Commenced 6/22/85

Plugging Completed 6/22/85

TYPE OR PRINT
 NOTICE: Fill out completely
 and return to Cons. Div.
 office within 30 days.

LEASE OPERATOR Black Diamond Oil, Inc.

ADDRESS 1105 E. 30th, Hays, Kansas 67601

PHONE#(913) 625-5891 OPERATORS LICENSE NO. 7076

Character of Well D&A

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Did you notify the KCC/KDHE Joint District Office prior to plugging this well? Yes

Which KCC/KDHE Joint Office did you notify? 6

Is ACO-1 filed? No If not, is well log attached? Yes

Producing Formation _____ Depth to Top _____ Bottom _____ T.D. 3775'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out
		-0-	201	8-5/8"	201	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet each set.

Mud laden fluid 3775' - 1900'
20 sks cement @ 1900' 10 sks cement @ 40'
100 sks cement @ 1175' 10 sks cement in rat hole
40 sks cement @ 250'

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Emphasis Oil Operations License No. RECEIVED

Address Box 506, Russell, Kansas 67665 STATE CORPORATION COMMISSION


STATE OF Kansas COUNTY OF Russell, ss.

JUL 01 1985
 7-1-85

Kyle B. Branum (Employee of Operator) of CONSERVATION DIVISION of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

(Signature) [Signature]

(Address) Box 506, Russell, Ks. 67665



SUBSCRIBED AND SWORN TO before me this 28th day of June, 19 85

Glenda R. Tiffin
 Notary Public

My Commission Expires: February 6, 1988

15-163-22696-00-00

EMPHASIS OIL OPERATIONS

P. O. Box 506
Russell, KS 67665

DRILLERS LOG

OPERATOR: Black Diamond Oil, Inc.
1105 E. 30th, Suite A
Hays, KS 67601

CONTRACTOR: Emphasis Oil Operations
Box 506
Russell, KS 67665

LEASE: Loeffler WELL #2

LOCATION: SE SW NW
Section 32-6S-20W
Rooks County, Kansas

Rotary Total Depth: 3775'

Elevation: 2286' K.B.

Commenced: 6/17/85

Completed: 6/22/85

Casing: 8-5/8" @ 201' w/150 sks cement

Status: Dry Hole

DEPTHS & FORMATIONS

(All measurements from K.B.)

Top Soil & Sand	30'	Anhydrite	1920'
Sand & Shale	1398'	Shale & Sand	2255'
Cedar Hills Sand	1611'	Shale	3184'
Shale	1790'	Shale & Lime (R.T.D.)	3775'
Shale & Sand	1887'		


RECEIVED
STATE CORPORATION COMMISSION

JUL 01 1985

CONSERVATION DIVISION
Wichita, Kansas


STATE OF KANSAS)
 ss
COUNTY OF RUSSELL)


Kyle B. Branum, of Emphasis Oil Operations, states that the above and foregoing is a true and correct log of the above captioned well, to the best of his knowledge.

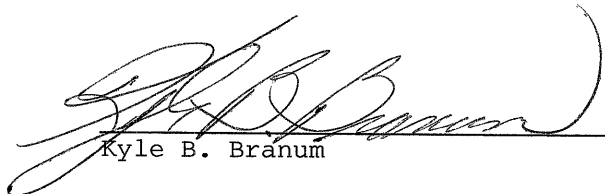
Kyle B. Branum

Subscribed and sworn to before me this 28th of June, 1985.

My Commission Expires: February 6, 1988.




Glenda R. Tiffin, Notary Public