



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.		Company Larson Engineering, Inc.	
15-101-22,304-00-00		Well Whiting-Dutoit No.1-29	
Field Wildcat		County Lane State Kansas	
Location S2 SW SW SW 67' FSL & 330' FWL		Other Services CNL/CDL DIL	
Sec: 29 Twp: 19S Rge: 29W		Elevation	
Permanent Datum Ground Level		K.B. 2898	
Log Measured From Kelly Bushing		D.F. 2891	
Drilling Measured From Kelly Bushing		G.L. 2891	
Date	8/27/2011		
Run Number	Two		
Depth Driller	4650		
Depth Logger	4648		
Bottom Logged Interval	4647		
Top Log Interval	3600		
Casing Driller	8.625 @ 260		
Casing Logger	262		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity,ppm CL	2,300		
Density / Viscosity	9.3 51		
pH / Fluid Loss	10.5 7.6		
Source of Sample	Flowline		
Rm @ Meas. Temp	.9 @ 75		
Rmf @ Meas. Temp	.68 @ 75		
Rmc @ Meas. Temp	1.22 @ 75		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.55 @ 123		
Operating Rig Time	3 1/2 Hours		
Max Rec. Temp. F	123		
Equipment Number	17		
Location	Hays		
Recorded By	C. Desai		
Witnessed By	Vern Schrag		


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858
Dighton KS,
W to Bison Rd,
3 S to 130 Rd,
3/4 W, N Into

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

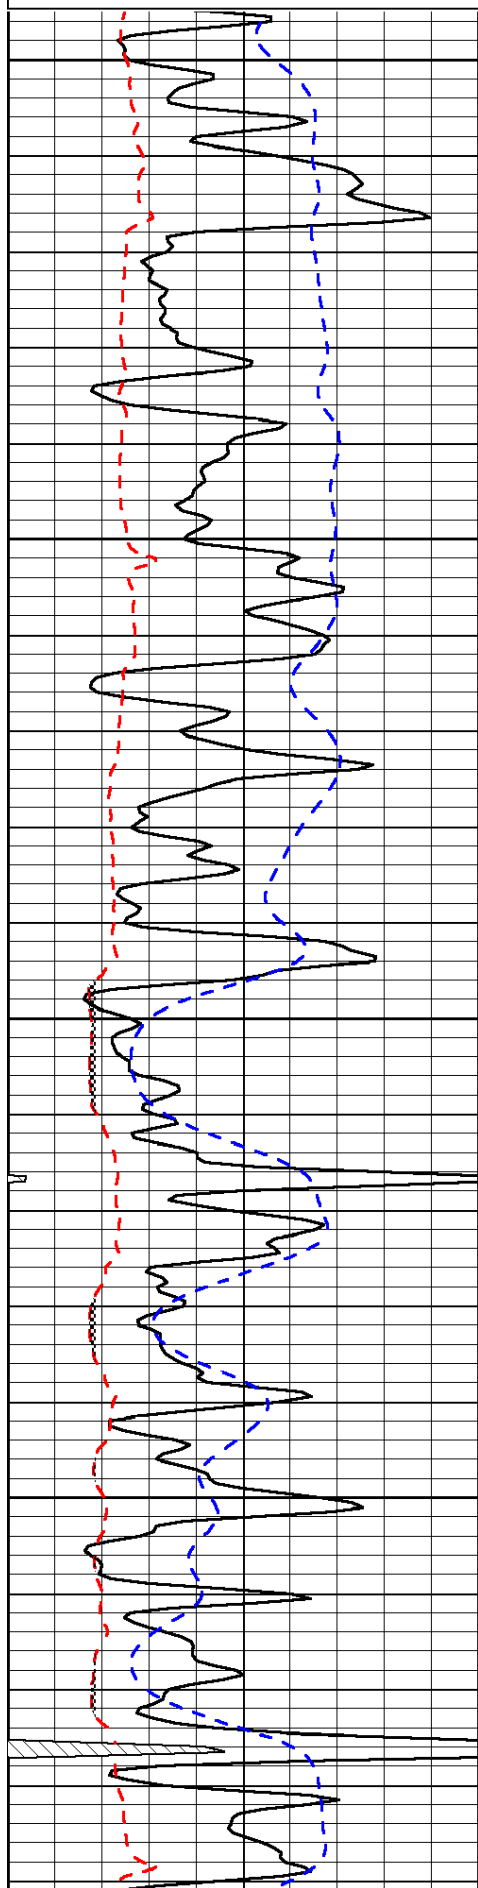

3600


3650


3700

3750

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

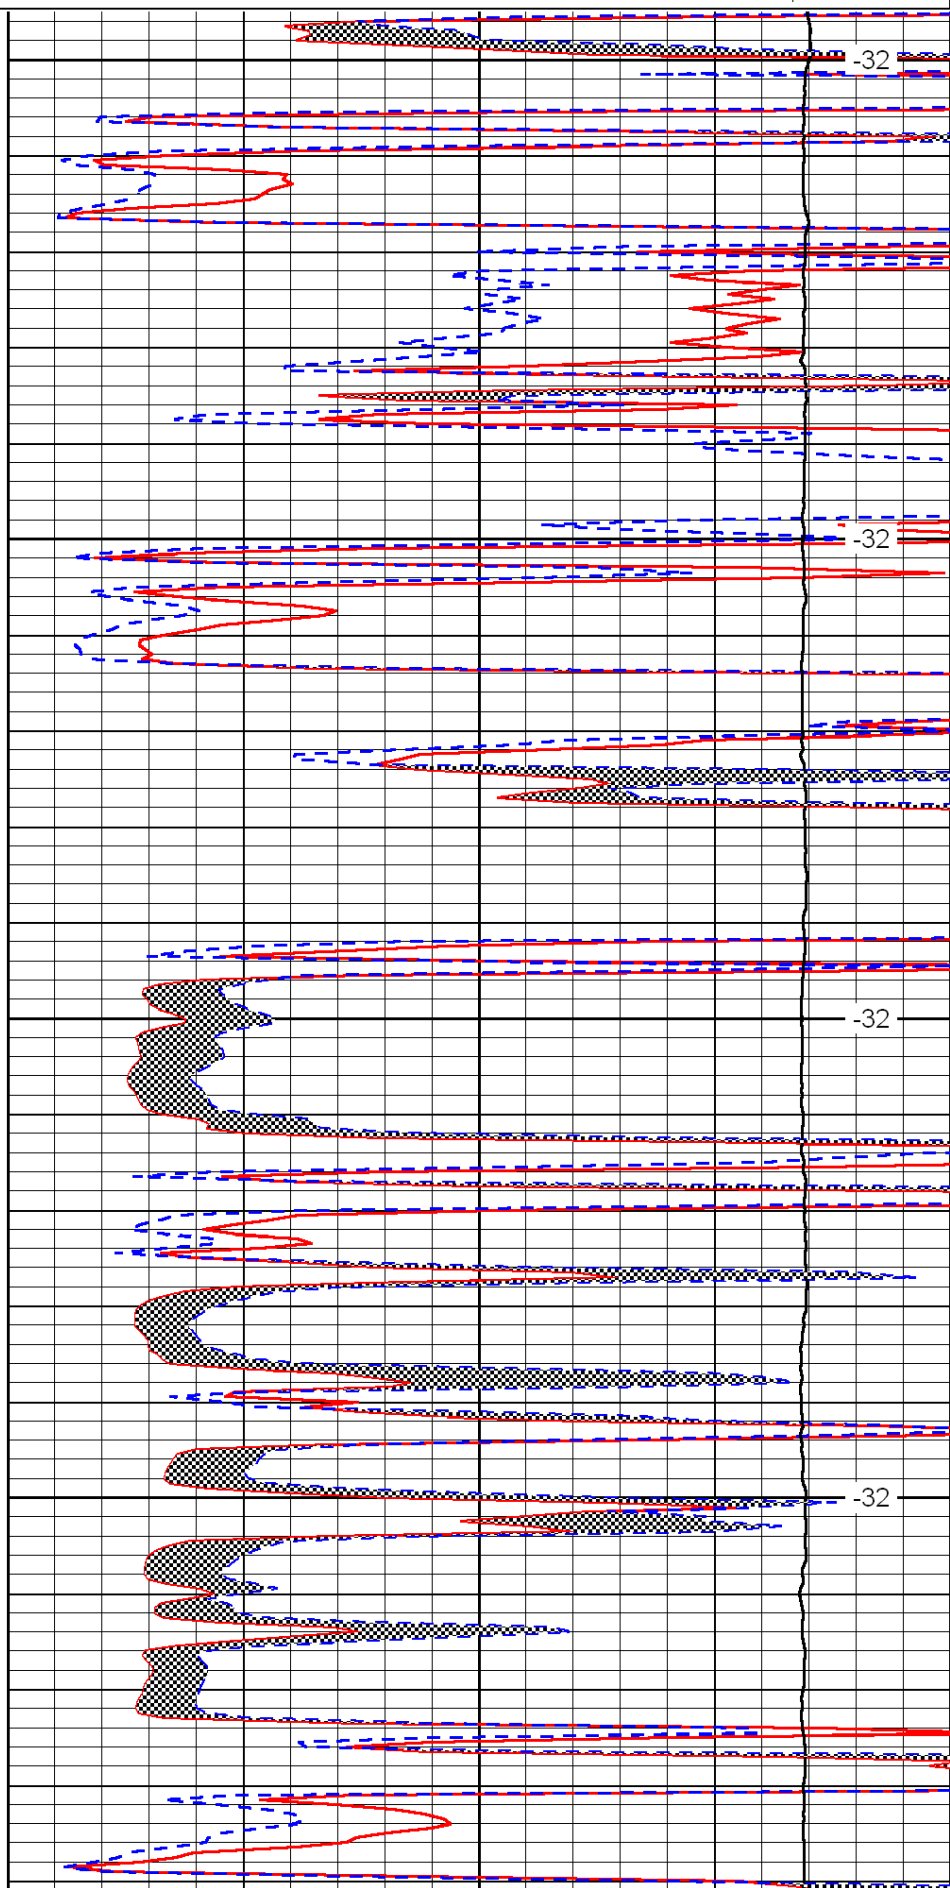

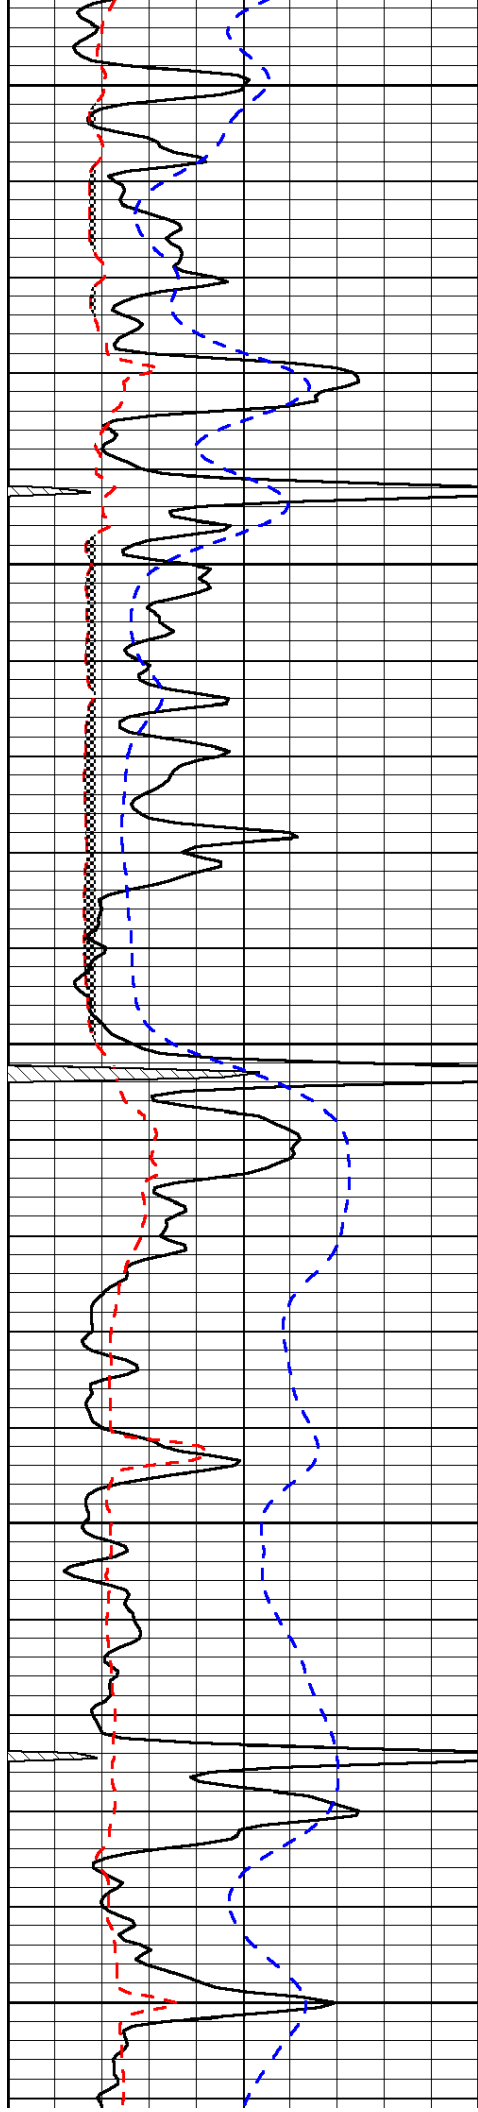


3800


3850

3900

3950

4000

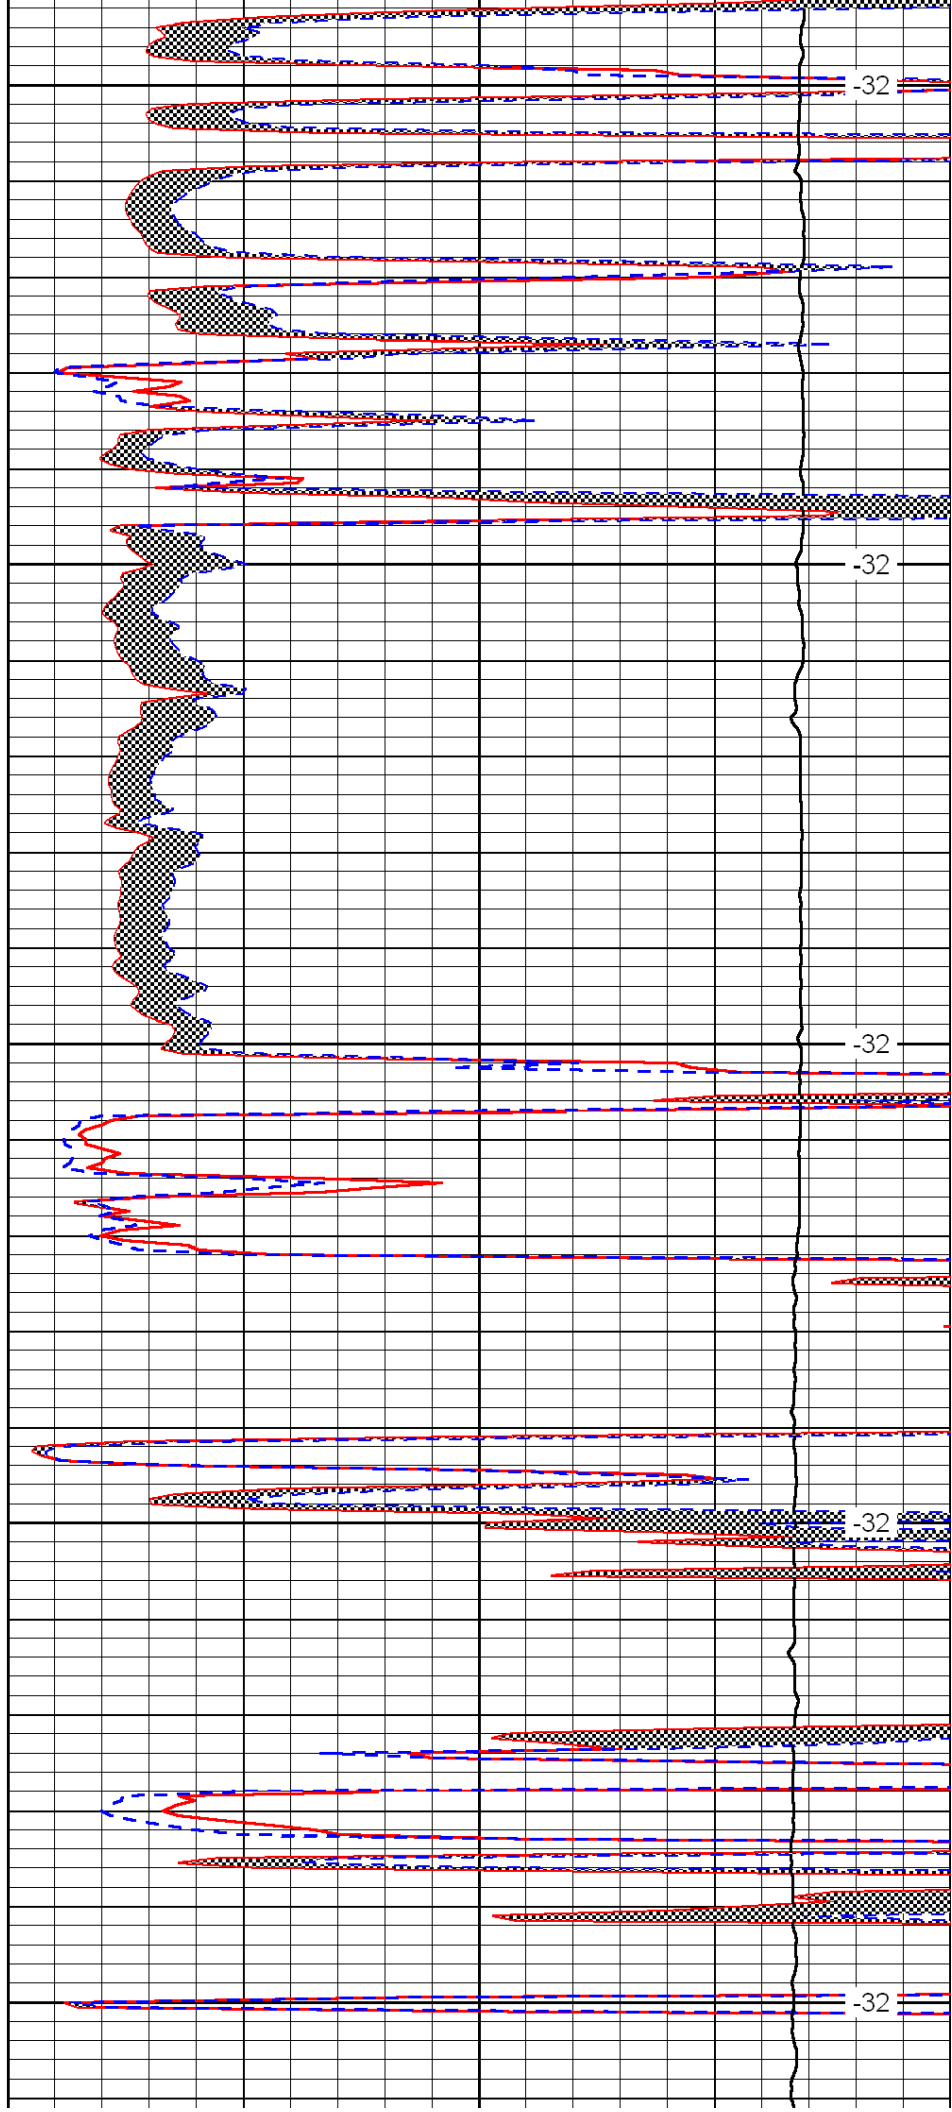

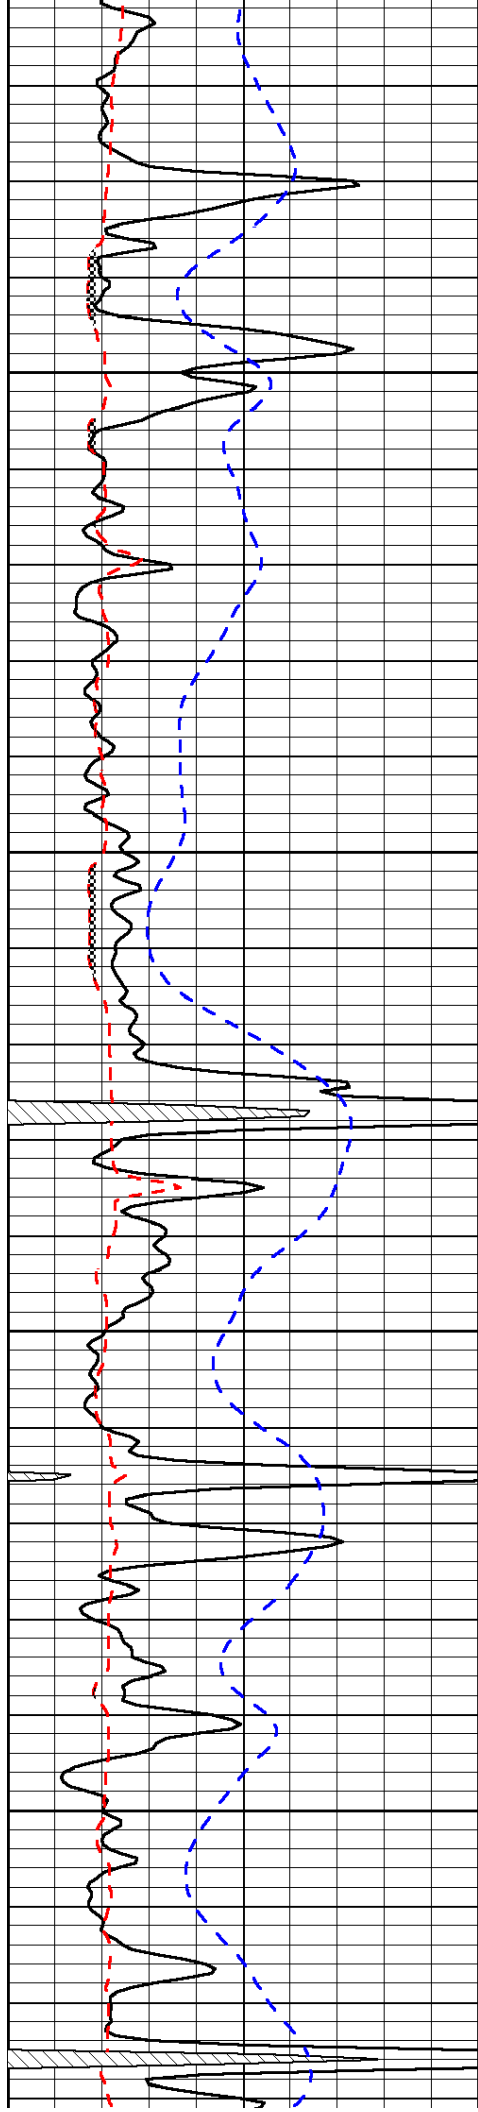



4050

4100

4150

4200

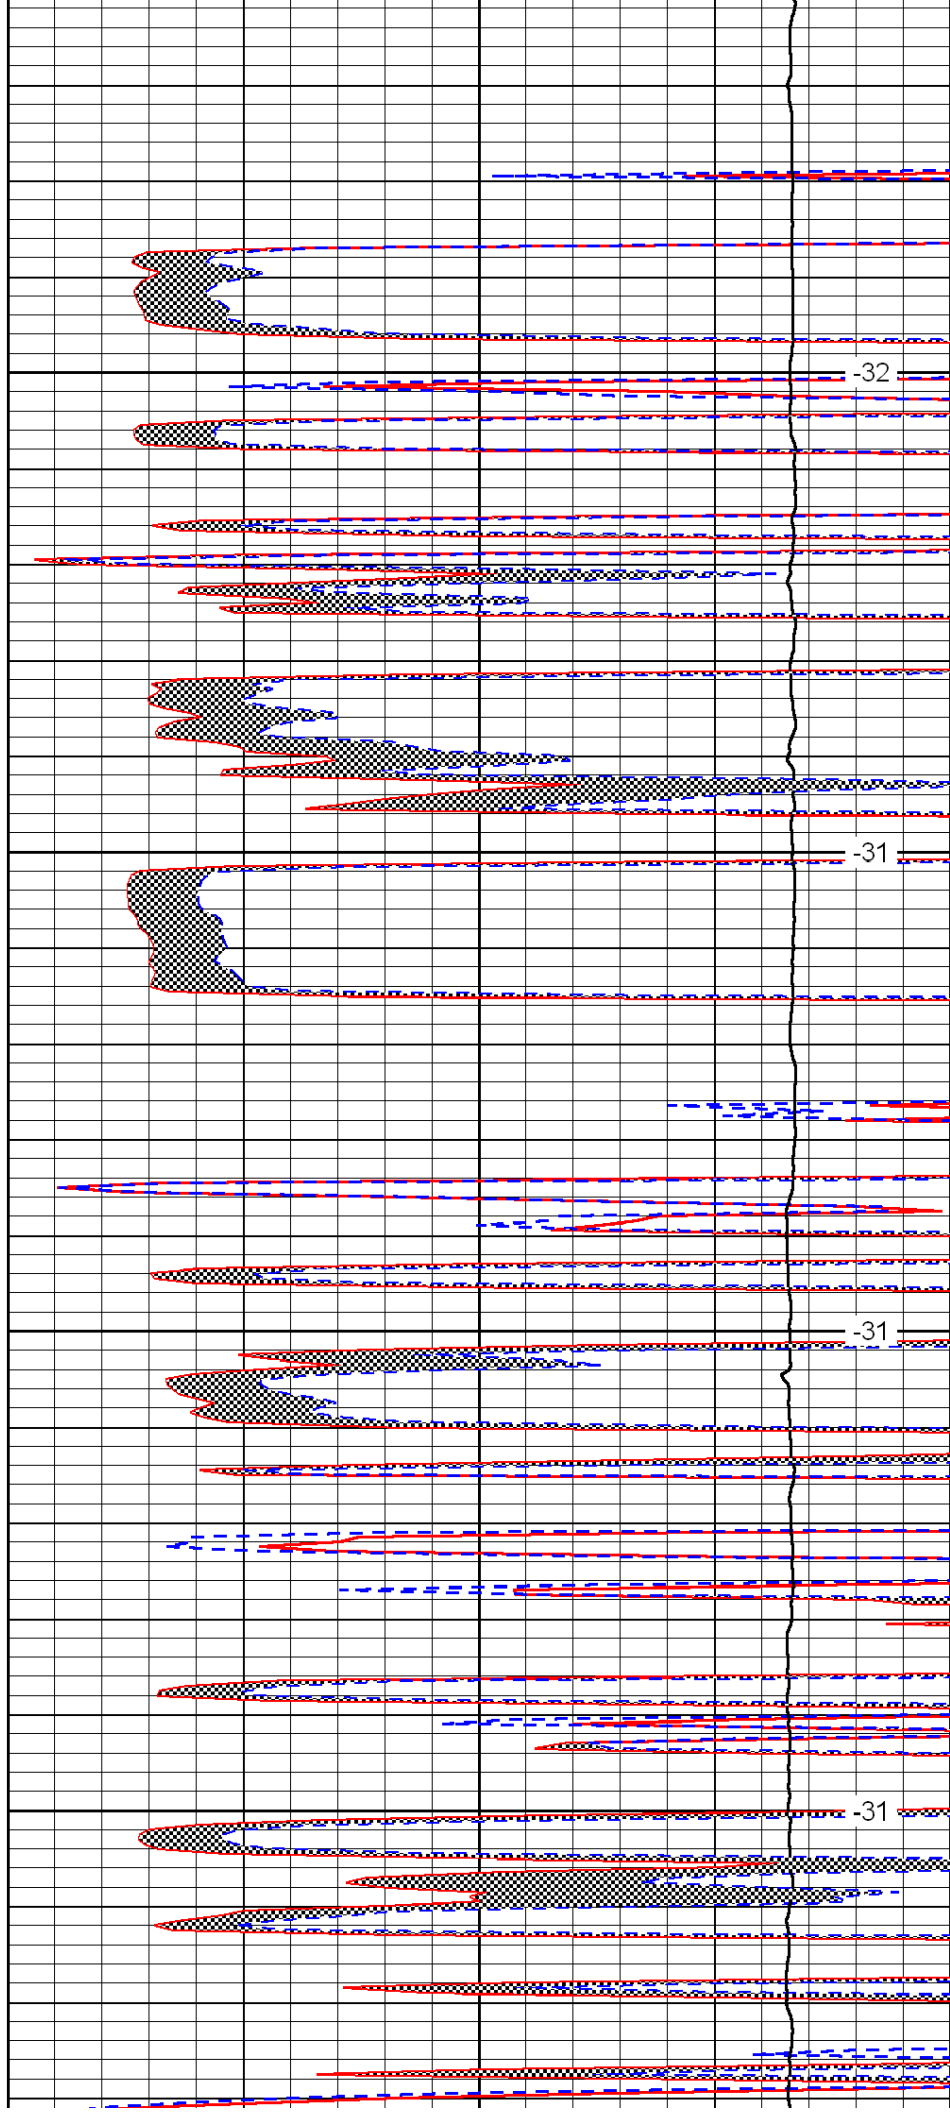

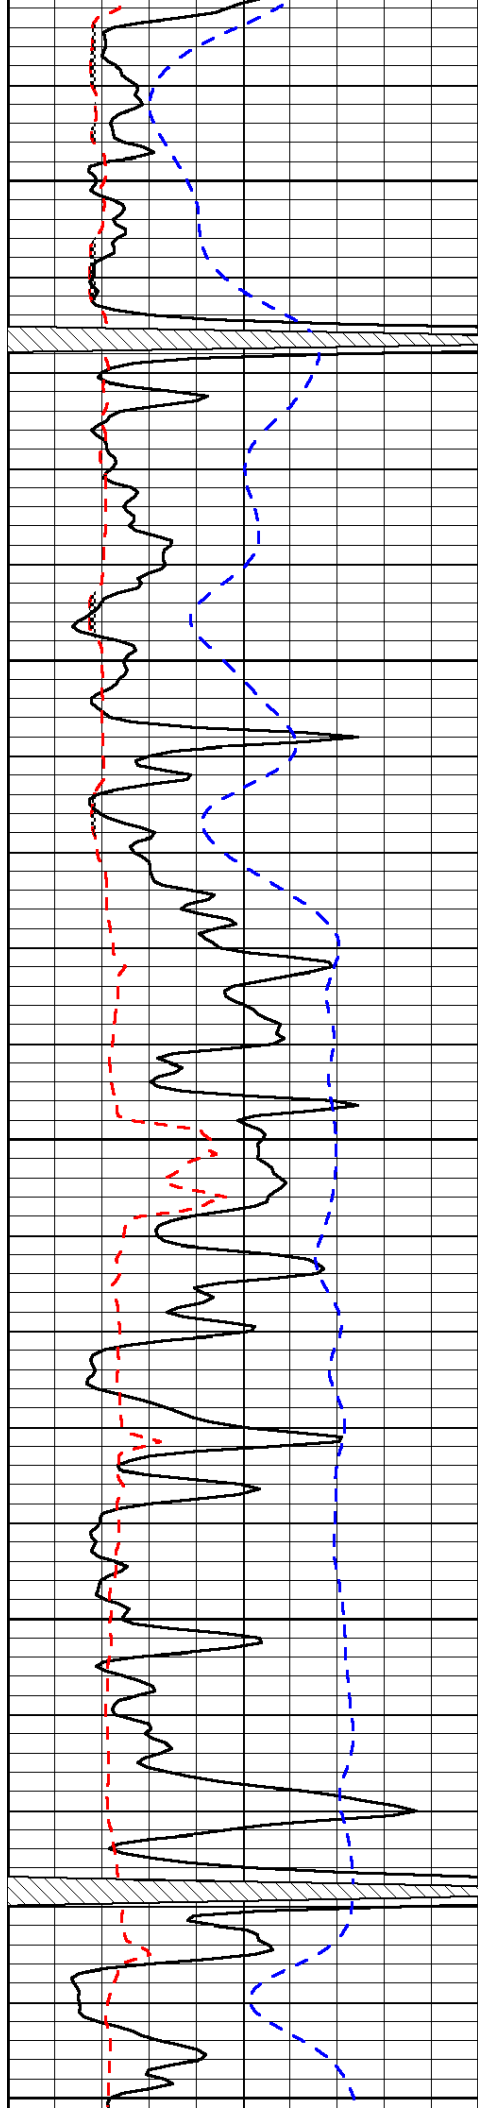


4250

4300

4350

4400

4450

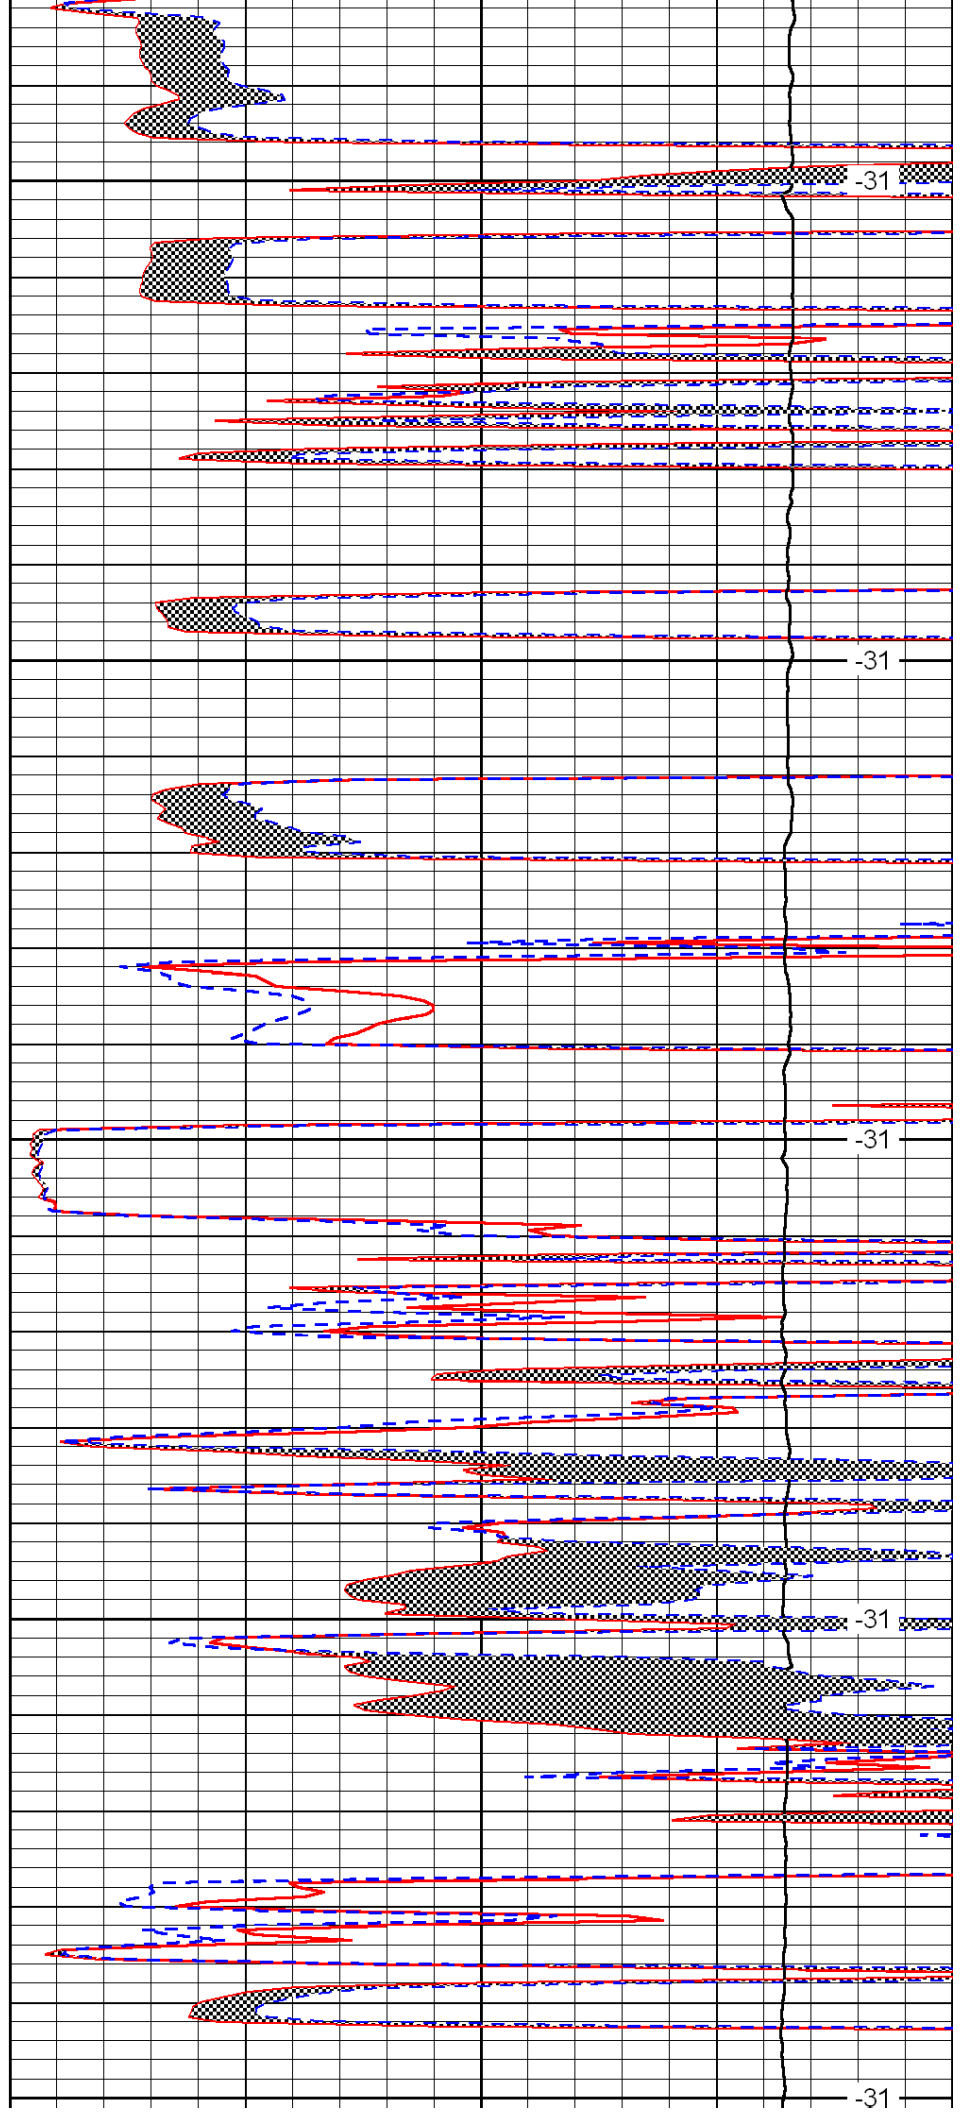

-31

-31

-31

-31

-31

