



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company Novy Oil&Gas, Inc.		
	Well Diana No.1		
	Field Sterling SW		
	County Reno	State	Kansas
15-155-21,576-00-00	Location	S/2 N/2 SW 1650' FSL & 1320' FWL	
	Sec: 17	Twp: 22S	Rge: 8W
Permanent Datum	Ground Level	Elevation	Other Services
Log Measured From	Kelly Bushing	7	CNL/CDL
Drilling Measured From	Kelly Bushing	Ft. Above Perm. Datum	DIL
Date	8/22/2011		
Run Number	Two		
Depth Driller	3638		
Depth Logger	3633		
Bottom Logged Interval	3632		
Top Log Interval	2600		
Casing Driller	8.625 @ 263		
Casing Logger	263		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity,ppm CL	13,500		
Density / Viscosity	9.1 51		
pH / Fluid Loss	10.0 11.2		
Source of Sample	Flowline		
Rm @ Meas. Temp	.19 @ 74		
Rmf @ Meas. Temp	.14 @ 74		
Rmc @ Meas. Temp	.26 @ 74		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.13 @ 112		
Operating Rig Time	3 1/2 Hours		
Max Rec. Temp. F	112		
Equipment Number	17		
Location	Hays		
Recorded By	C. Desaire		
Witnessed By	Dave Goldak		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858
Sterling KS,
4 1/2 S to 82 Rd,
1 3/4 W to Peace Rd,
1/2 S, E Into

Database File: c:\warrior\data\novy_diana no.1\novyhd.db
Dataset Pathname: dil/novystk
Presentation Format: micro
Dataset Creation: Mon Aug 22 15:20:46 2011
Charted by: Depth in Feet scaled 1:240

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

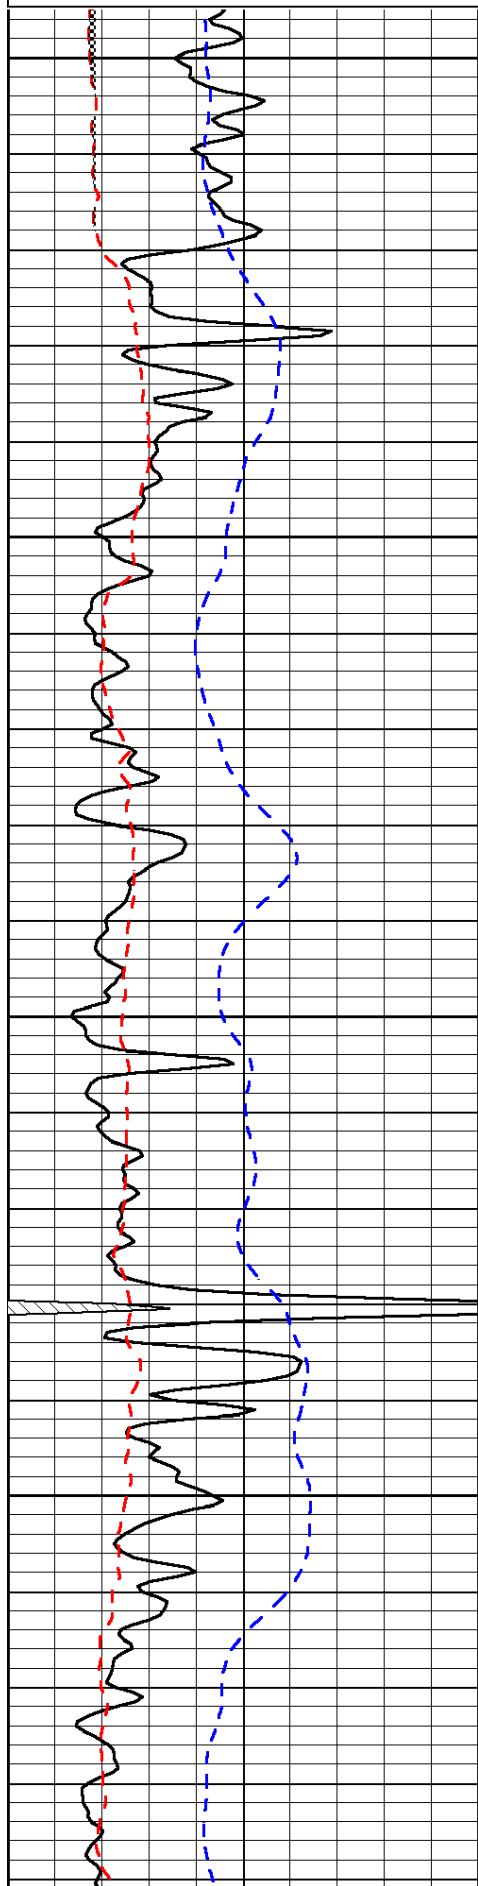

2600


2650

2700

2750

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

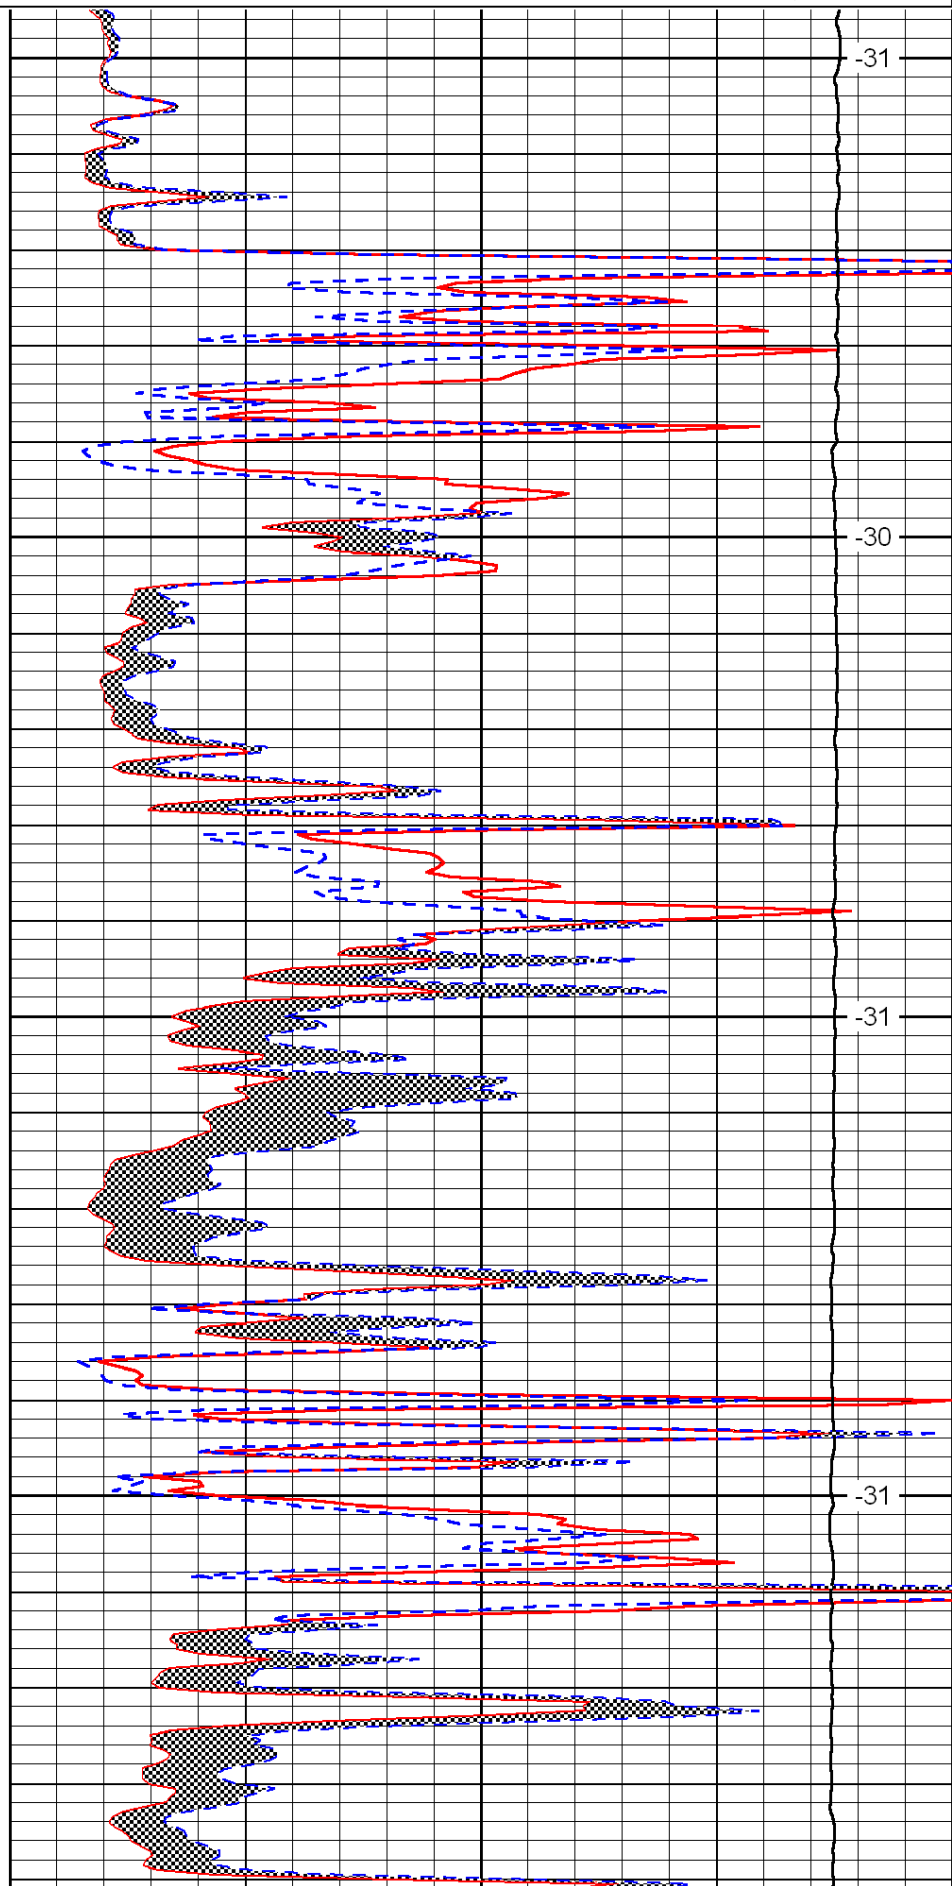


-31

-30

-31

-31

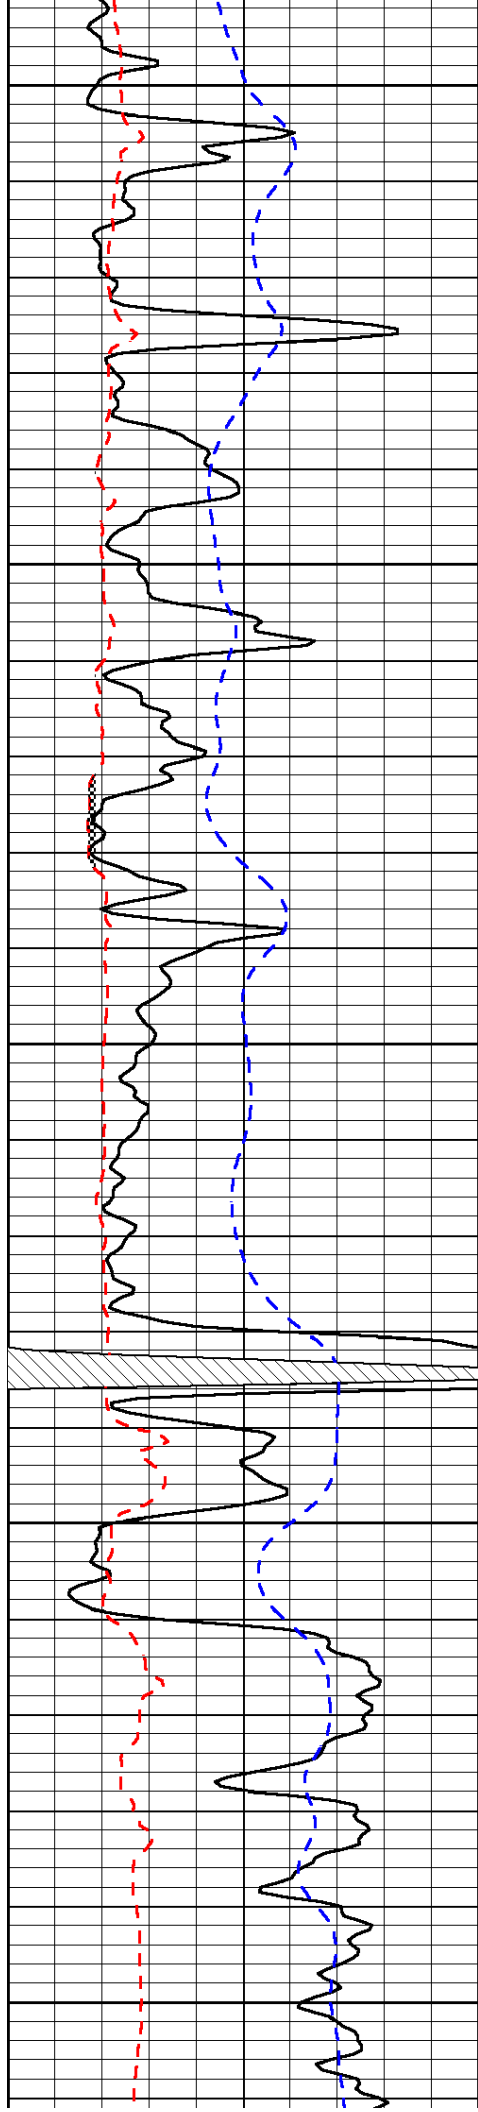


2800

2850

2900

2950

3000

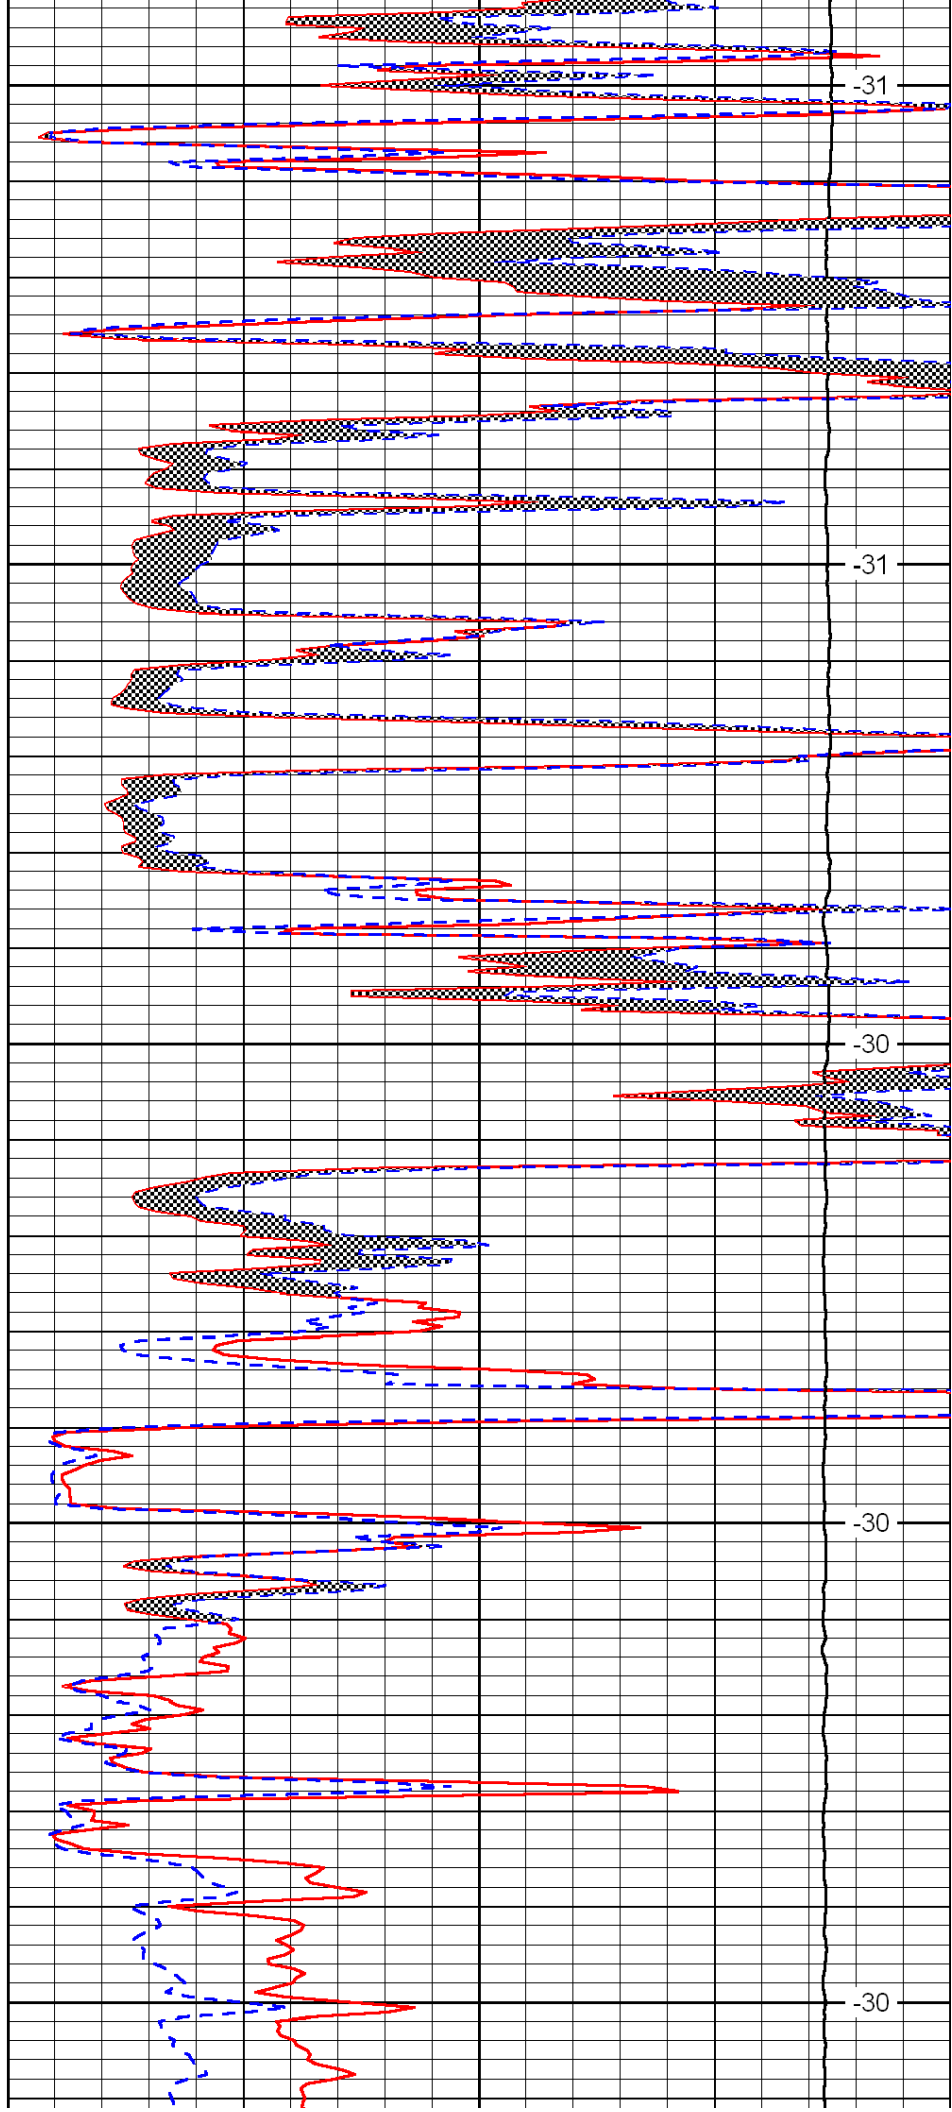


-31

-31

-30

-30

-30

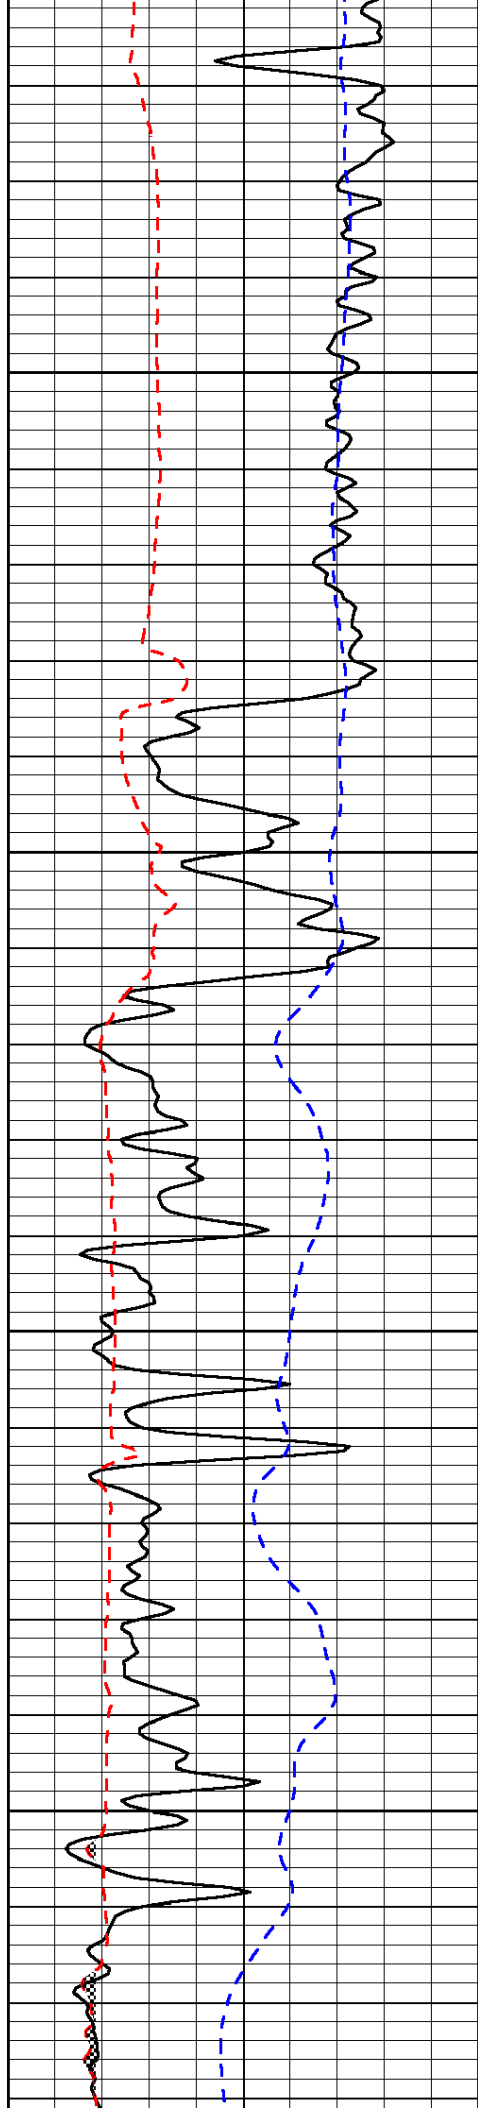

3050

3100

3150


3200


-30

-30

-30

-30

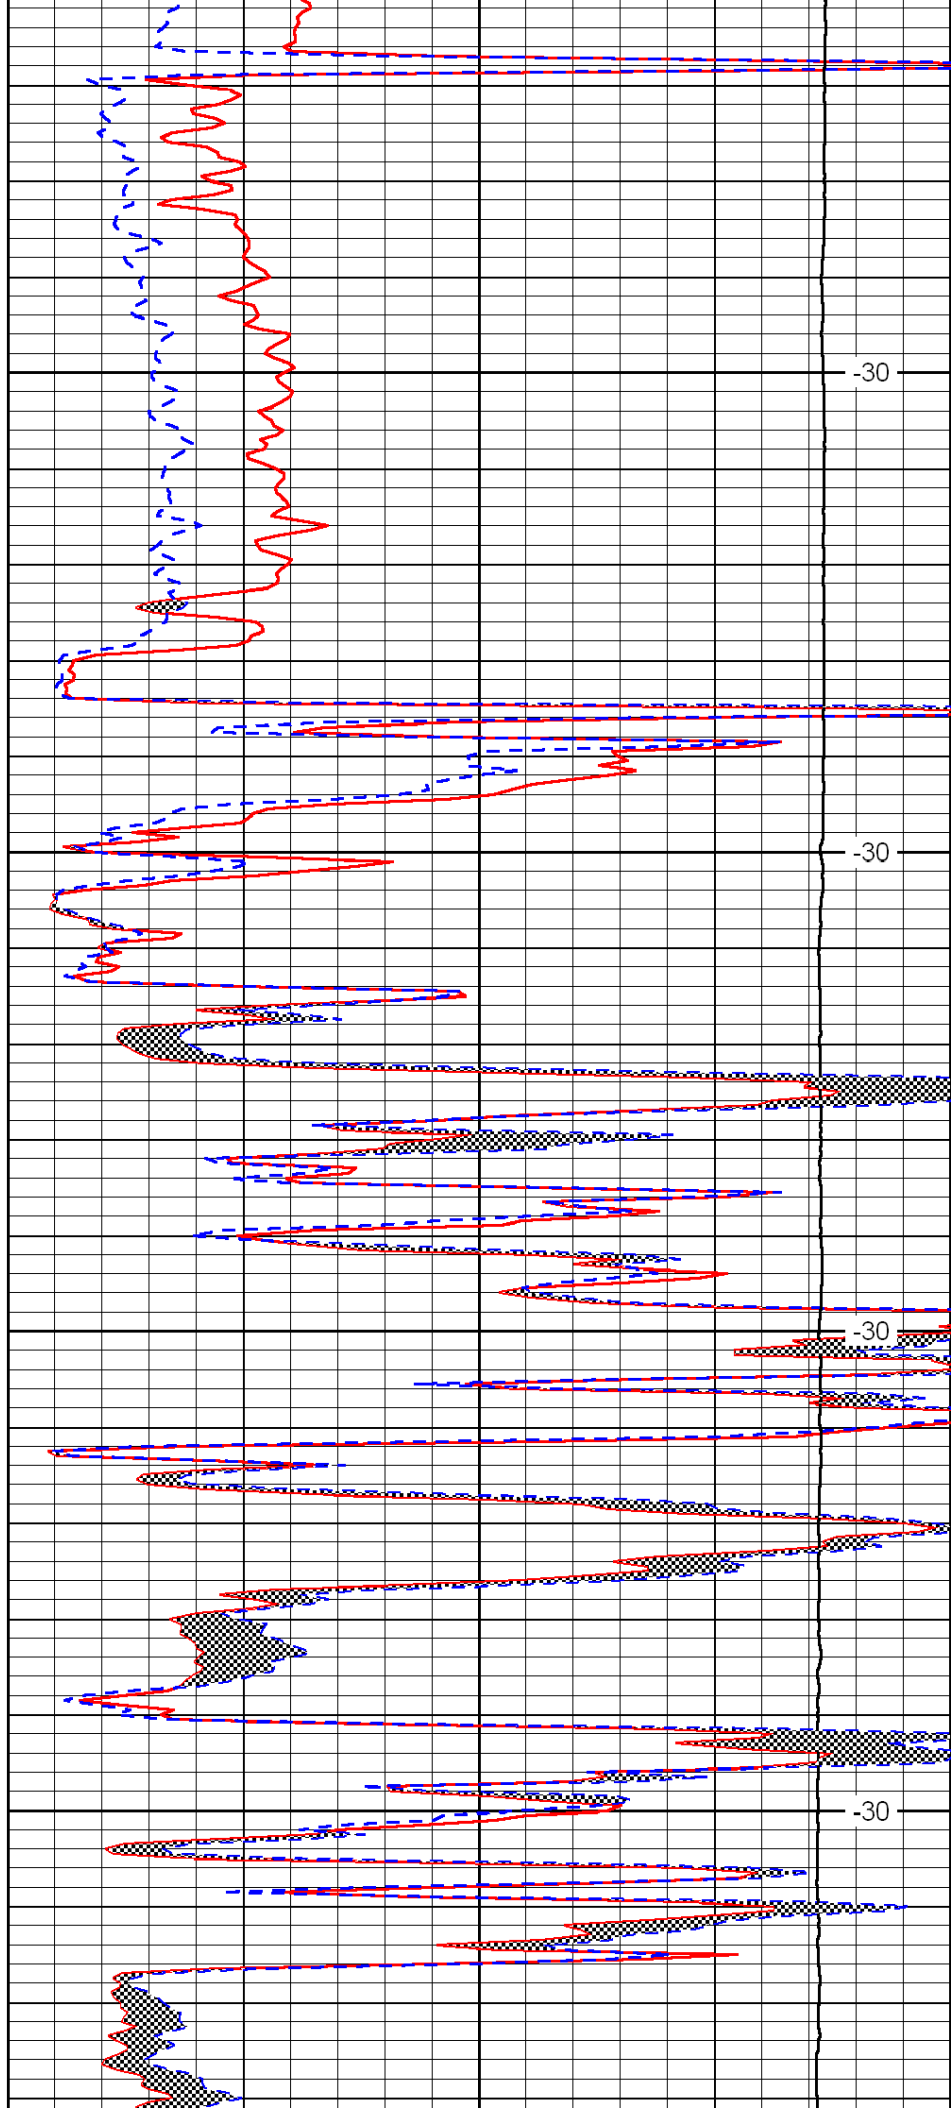

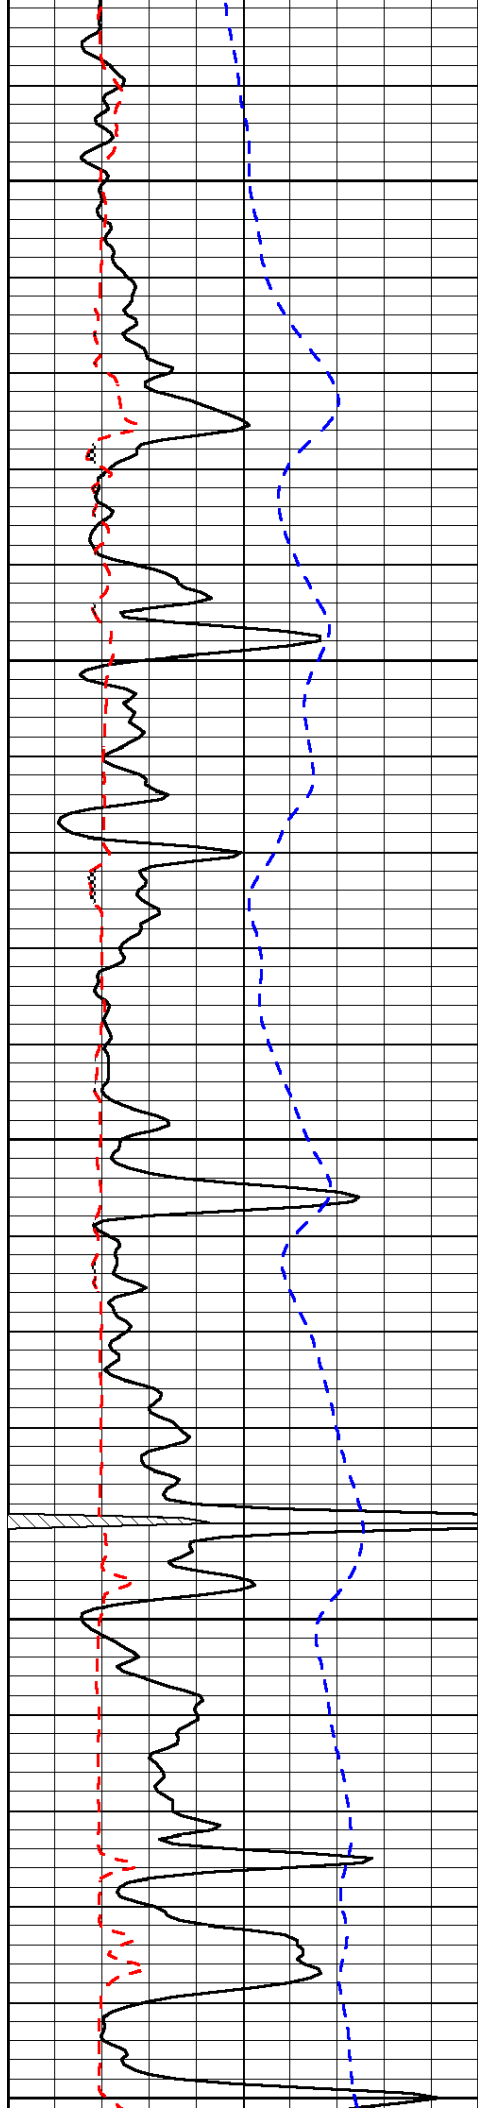


3250

3300

3350

3400

3450

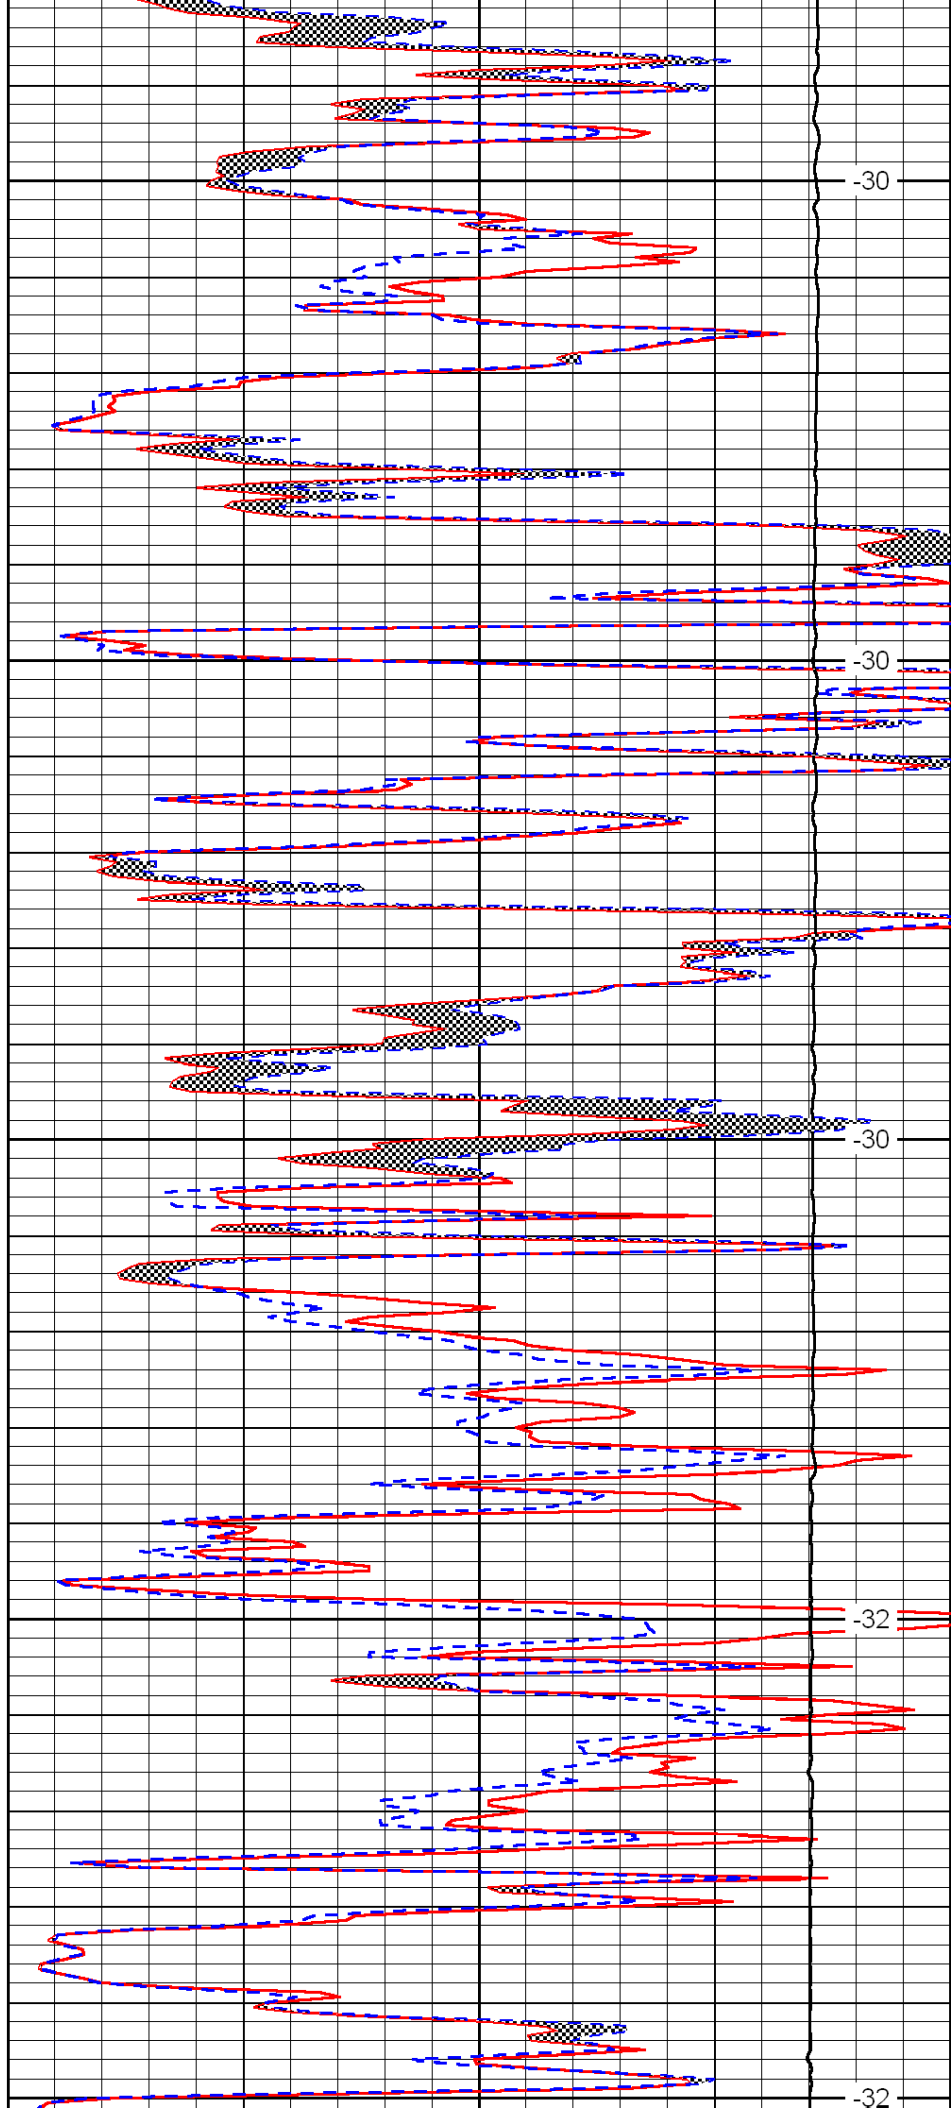

-30

-30

-30

-32

-32

