



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company Molitor Oil, Inc.			
	Well Cross No.3			
	Field Spivey-Grabs- Basil			
	County	Kingman	State	Kansas
	Location	NE NE NE NE 660' FNL & 660' FEL		
	Sec: 31	Twp: 29S	Rge: 8W	Other Services CNL/CDL DIL
Permanent Datum	Ground Level	Elevation 1560	Elevation	
Log Measured From	Kelly Bushing	10 Ft. Above Perm. Datum	K.B. 1570	
Drilling Measured From	Kelly Bushing		D.F. 1560	
			G.L. 1560	
Date	7/21/2011			
Run Number	Two			
Depth Driller	4547			
Depth Logger	4547			
Bottom Logged Interval	4546			
Top Log Interval	2200			
Casing Driller	8.625 @ 221			
Casing Logger	222			
Bit Size	7.875			
Type Fluid in Hole	Chemical			
Salinity,ppm CL	4.000			
Density / Viscosity	9.4 50			
pH / Fluid Loss	9.5 9.0			
Source of Sample	Flowline			
Rm @ Meas. Temp	.75 @ 91			
Rmf @ Meas. Temp	.56 @ 91			
Rmc @ Meas. Temp	1.01 @ 91			
Source of Rmf / Rmc	Charts			
Rm @ BHT	.55 @ 123			
Operating Rig Time	4 1/2 Hours			
Max Rec. Temp. F	123			
Equipment Number	17			
Location	Hays			
Recorded By	C. Desai			
Witnessed By	Max Lovely			

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Zenda, 3 N to 110 Rd,
3 E, S Into

Database File: c:\warrior\data\molitor_cross no.3\molitorhd.db
Dataset Pathname: dil/molstk
Presentation Format: micro
Dataset Creation: Thu Jul 21 18:43:32 2011
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

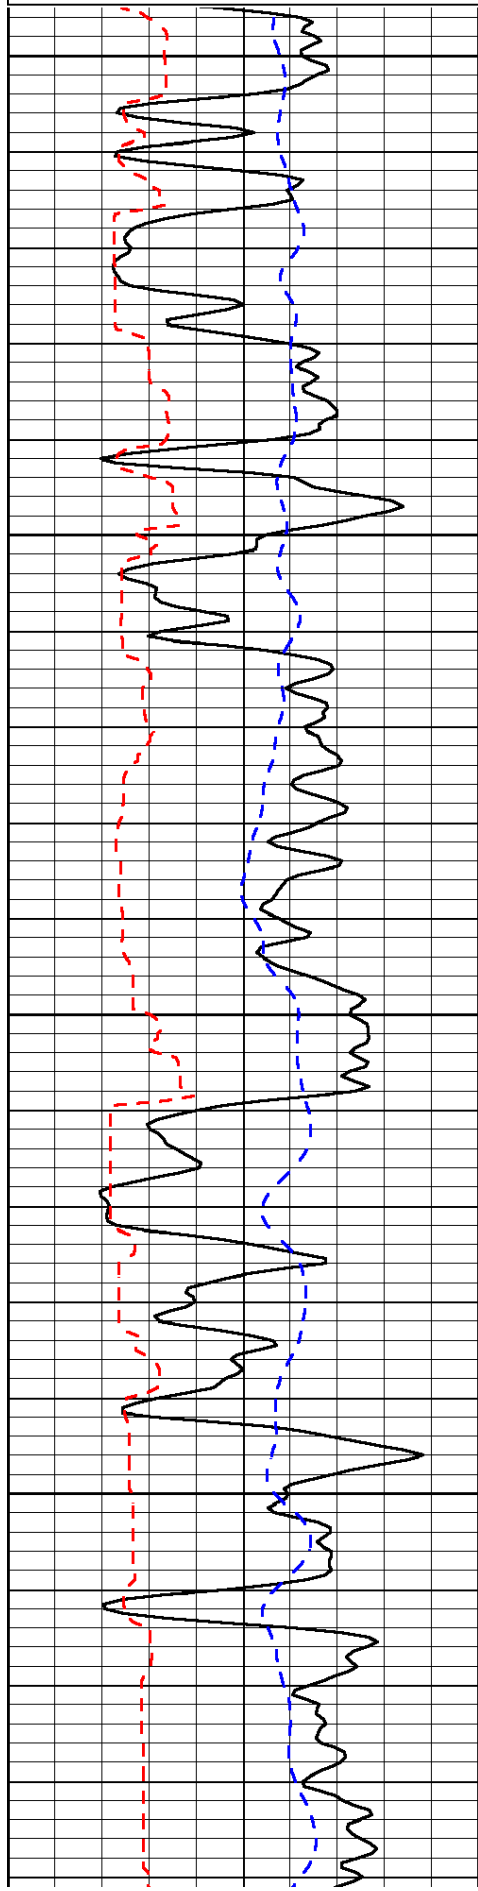


2200

2250

2300

2350

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

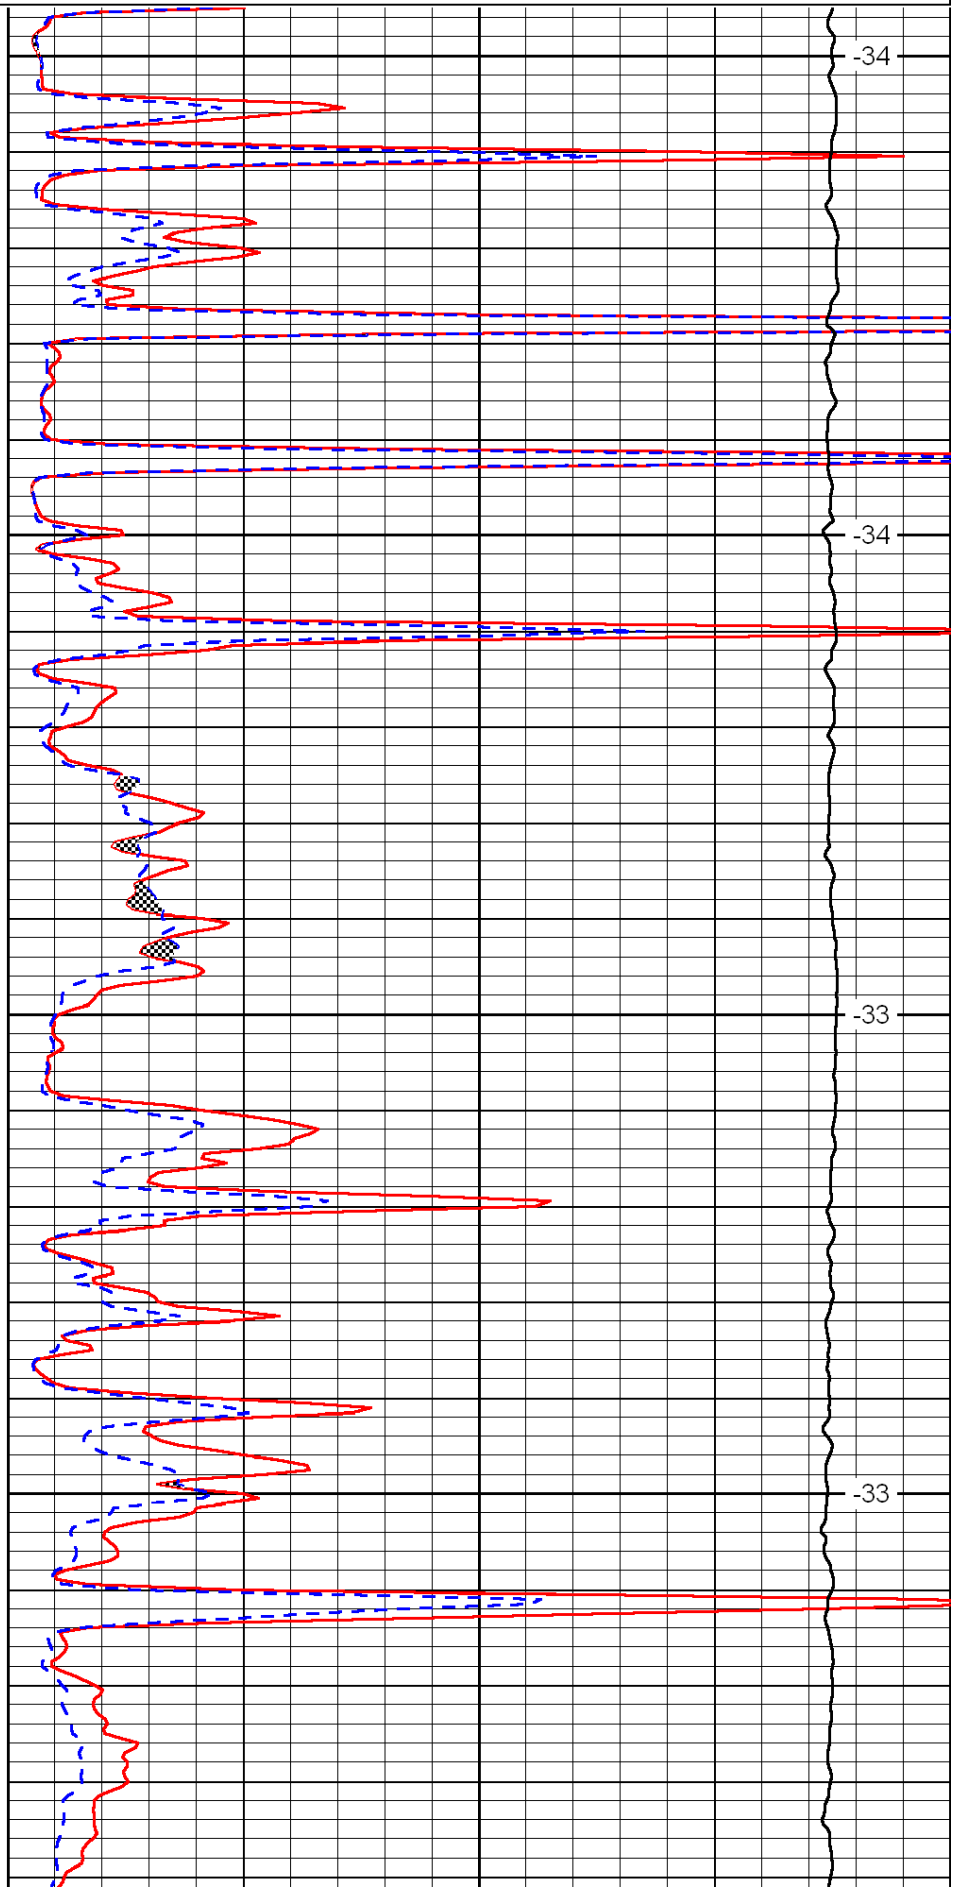



-34


-34

-33

-33

LSPD

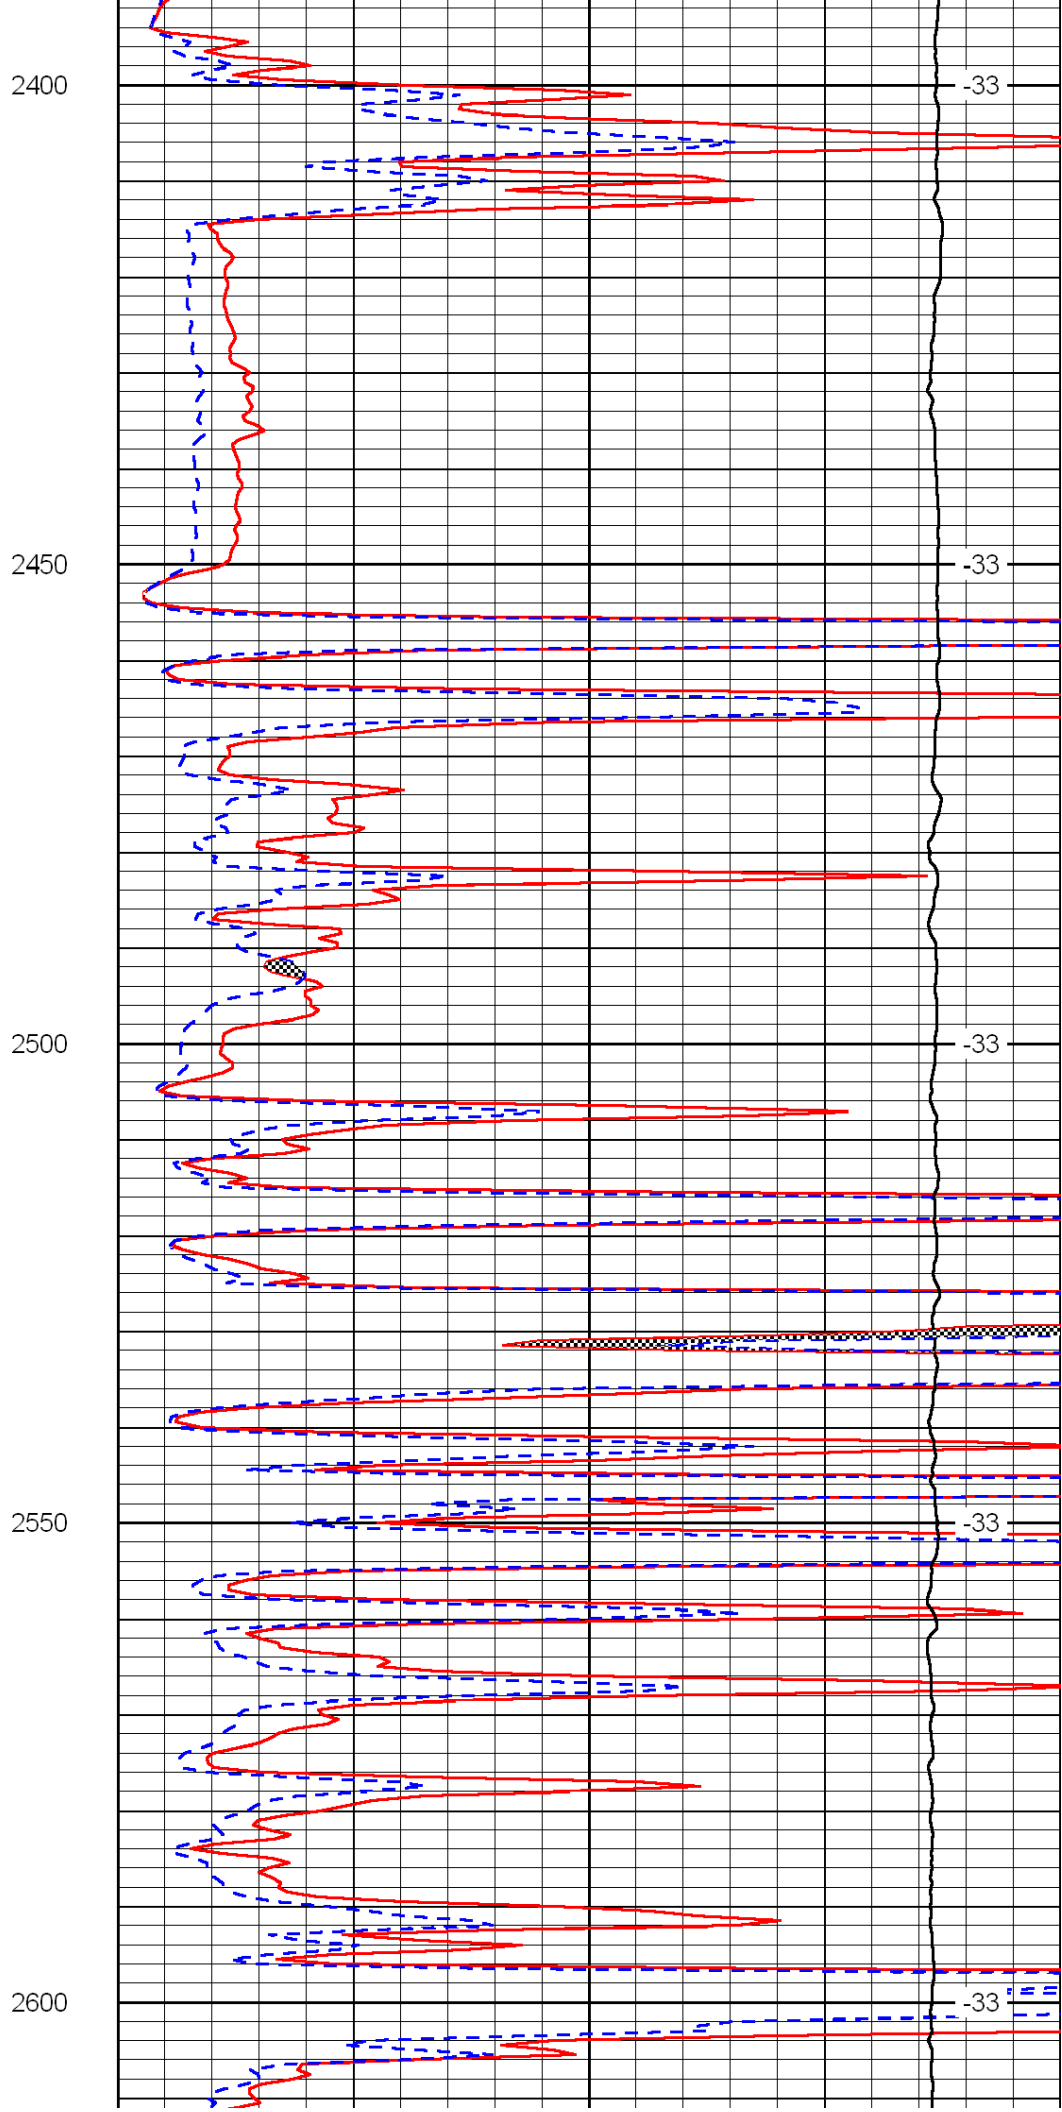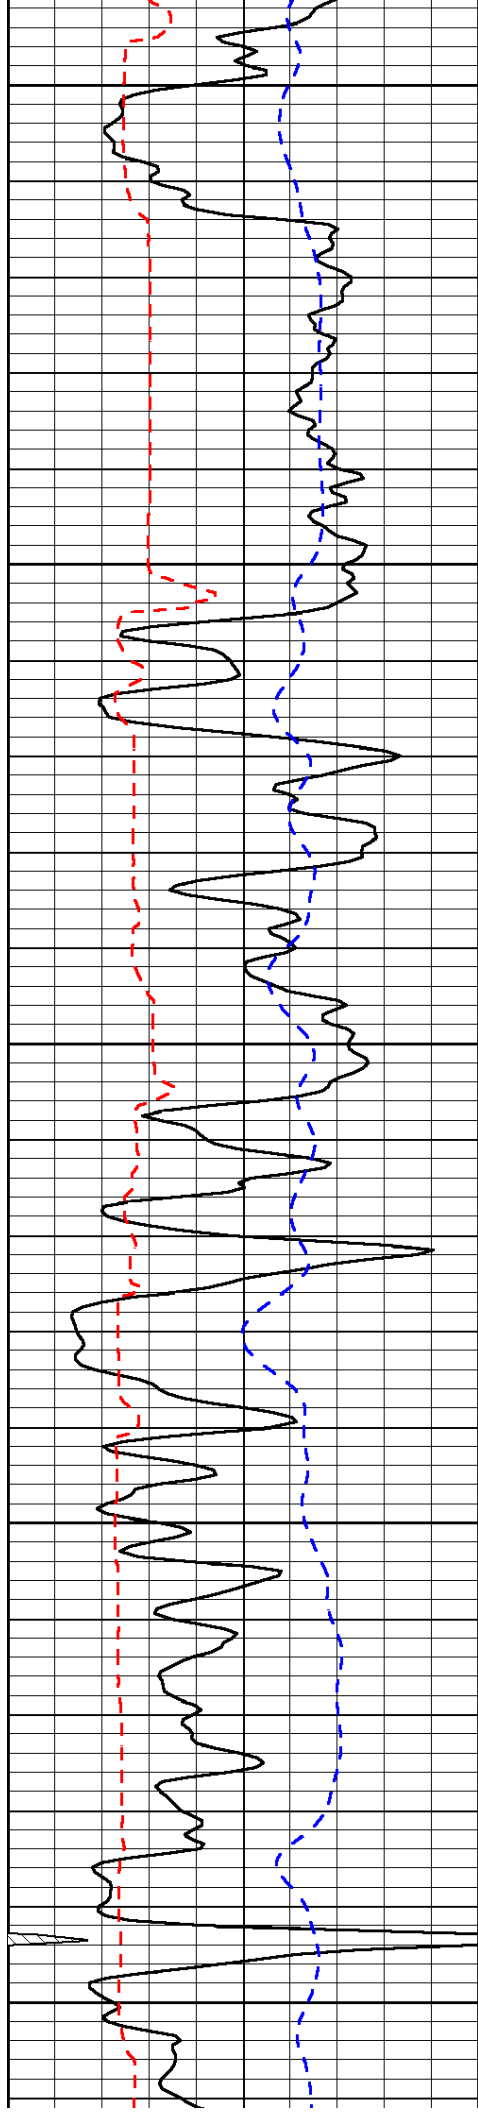

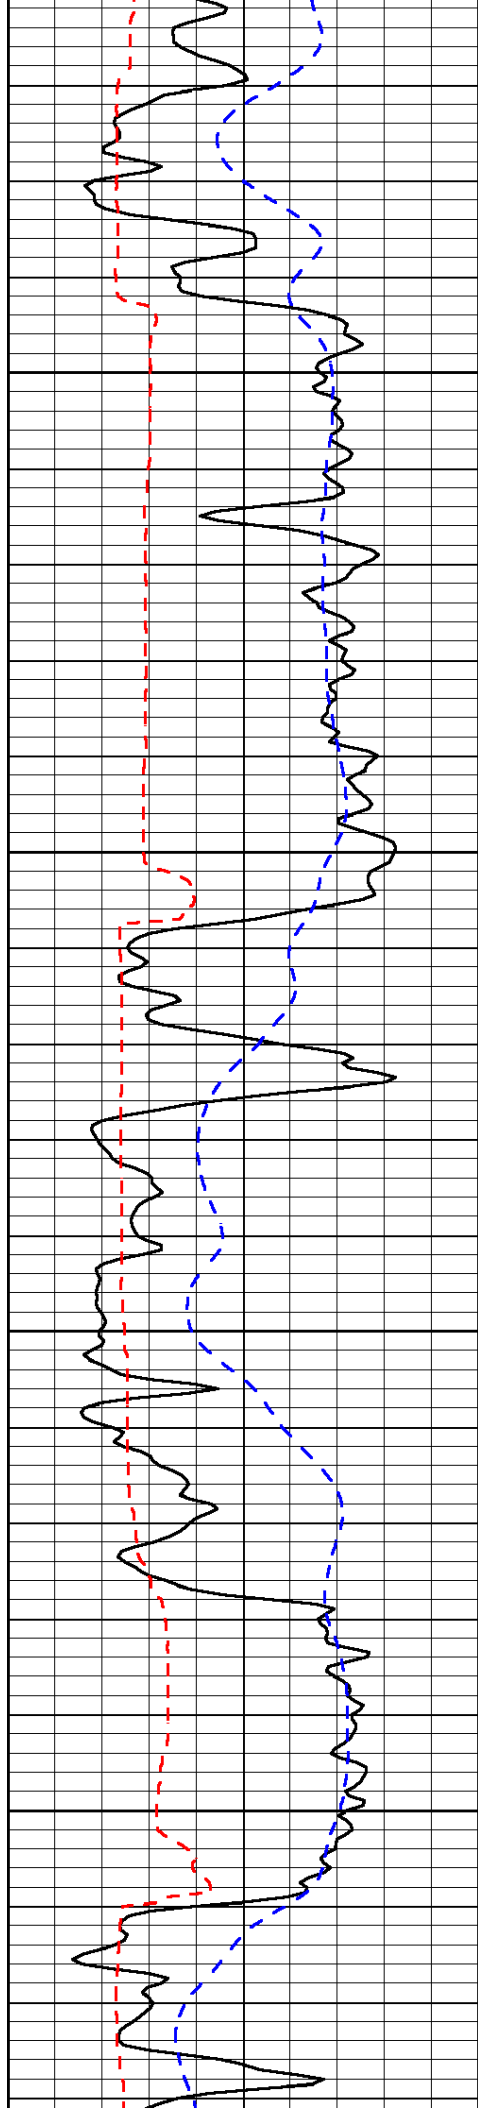




2650


2700

2750

2800

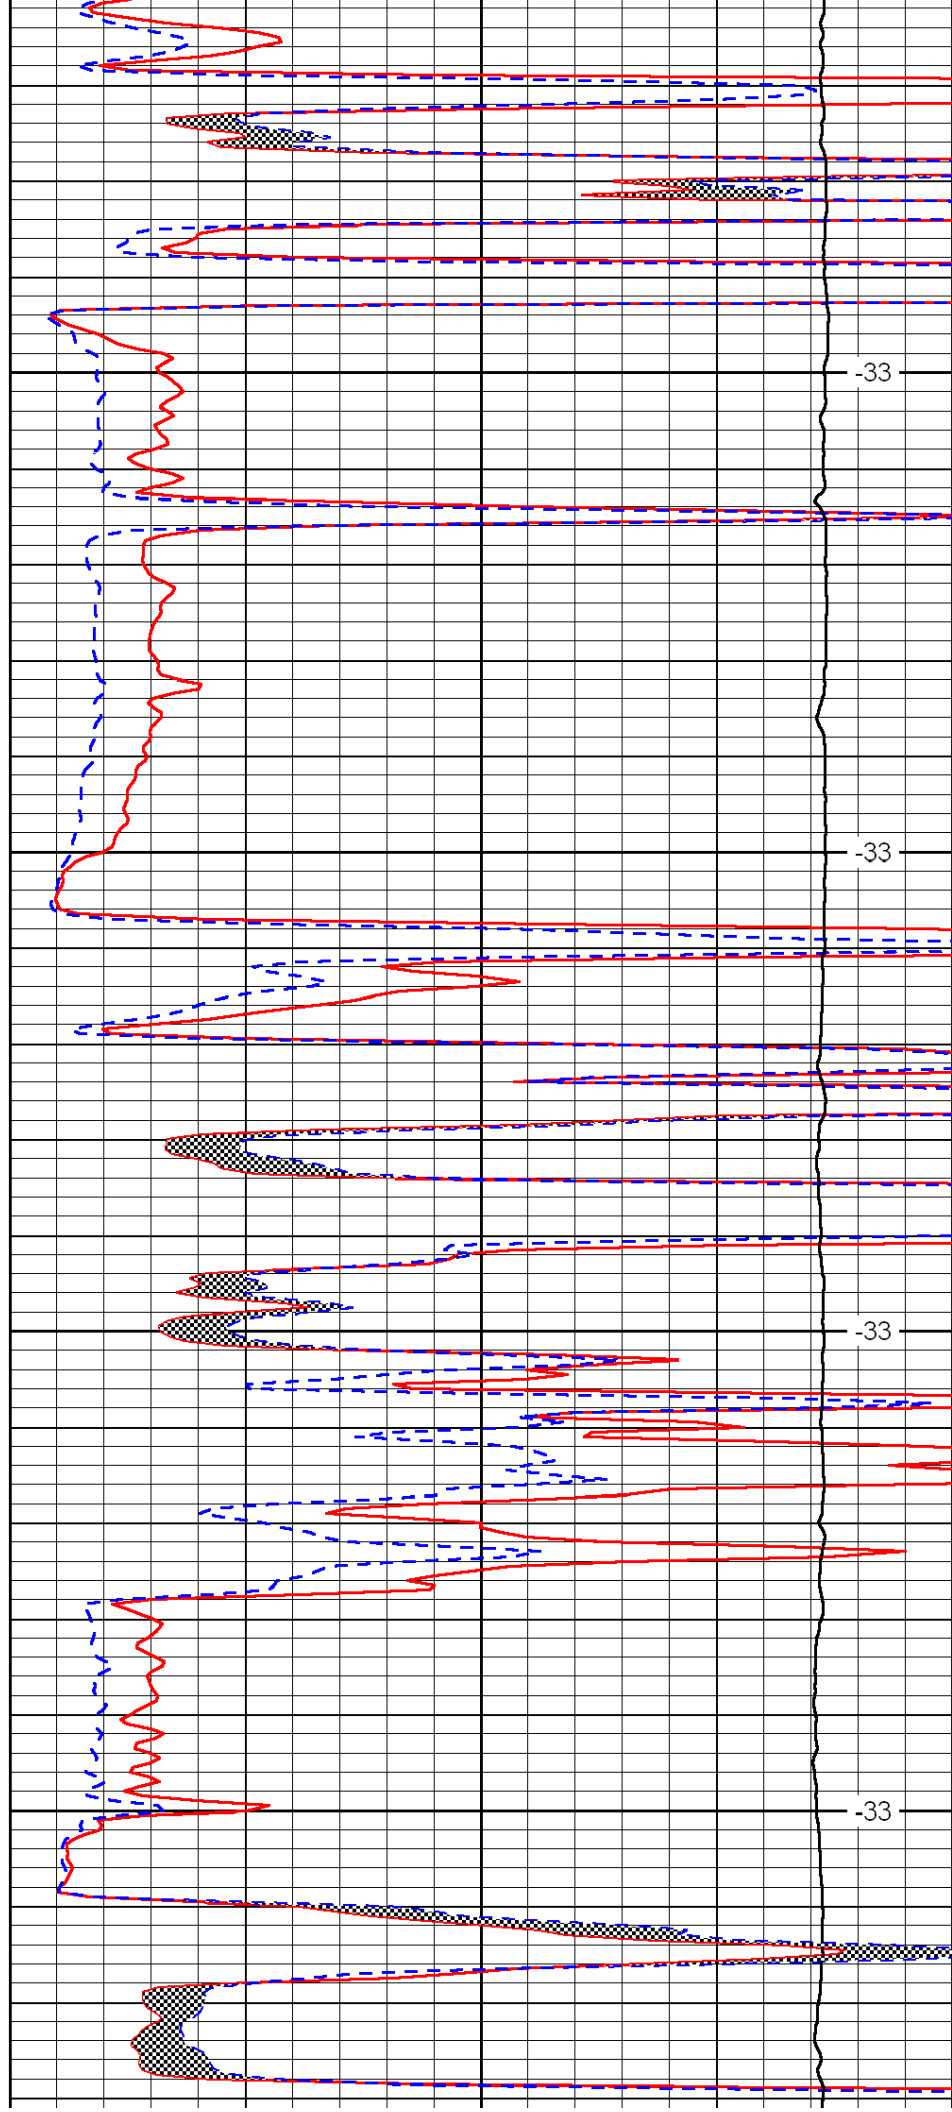

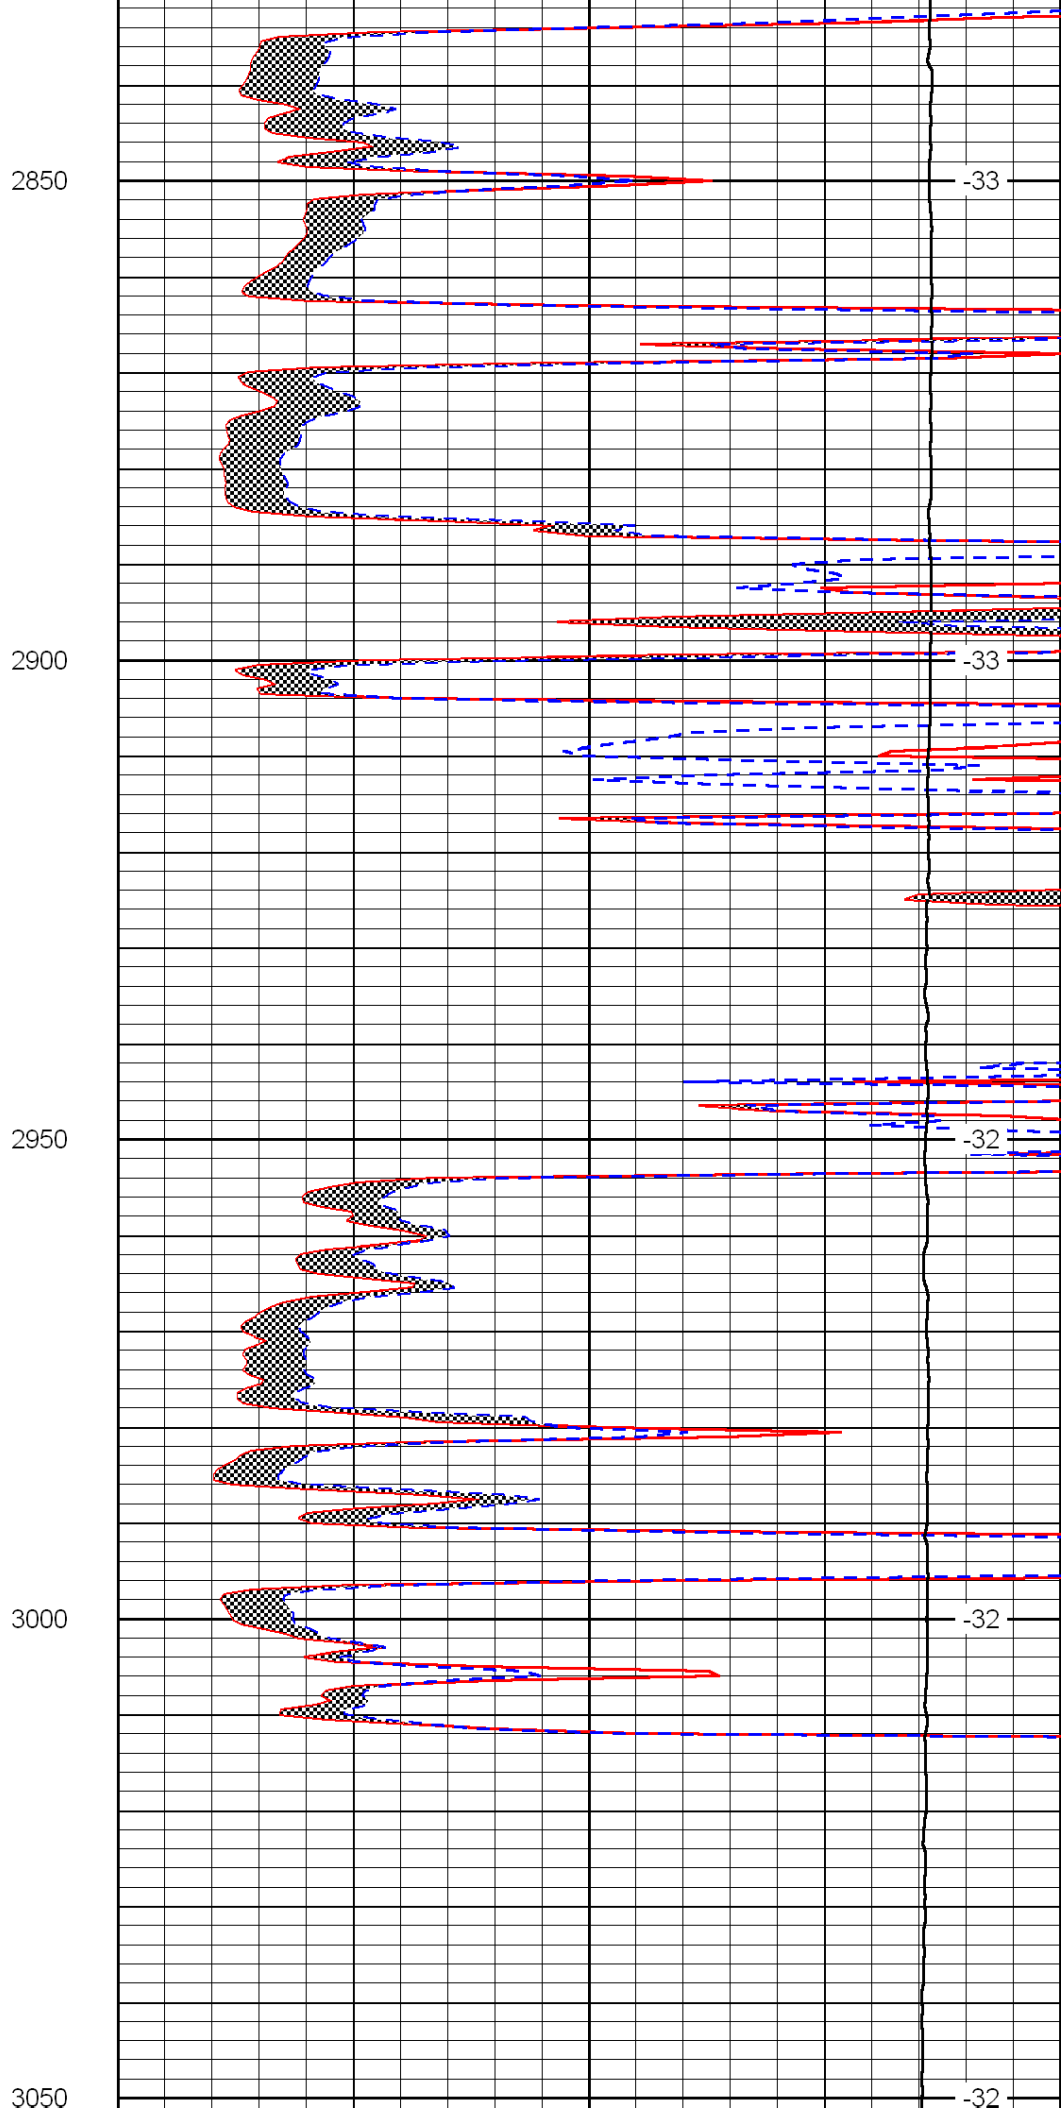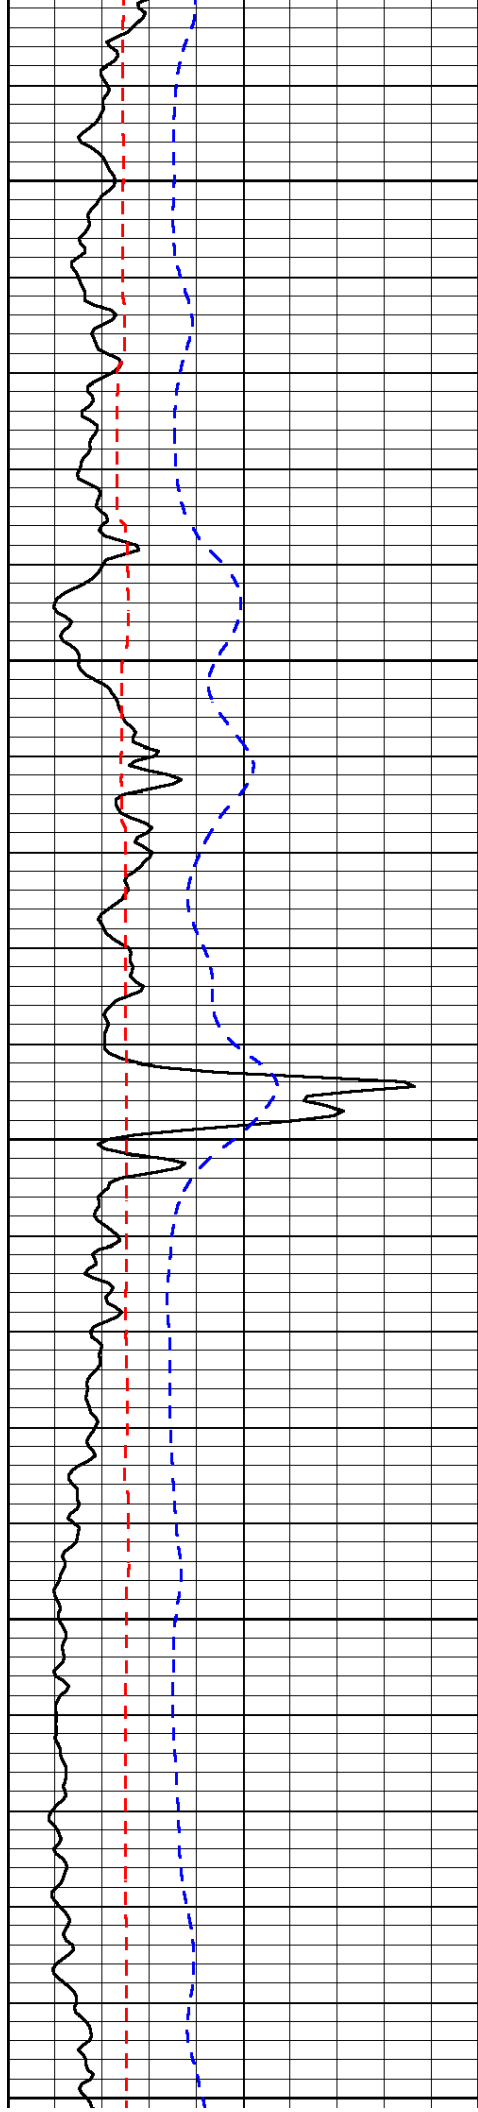

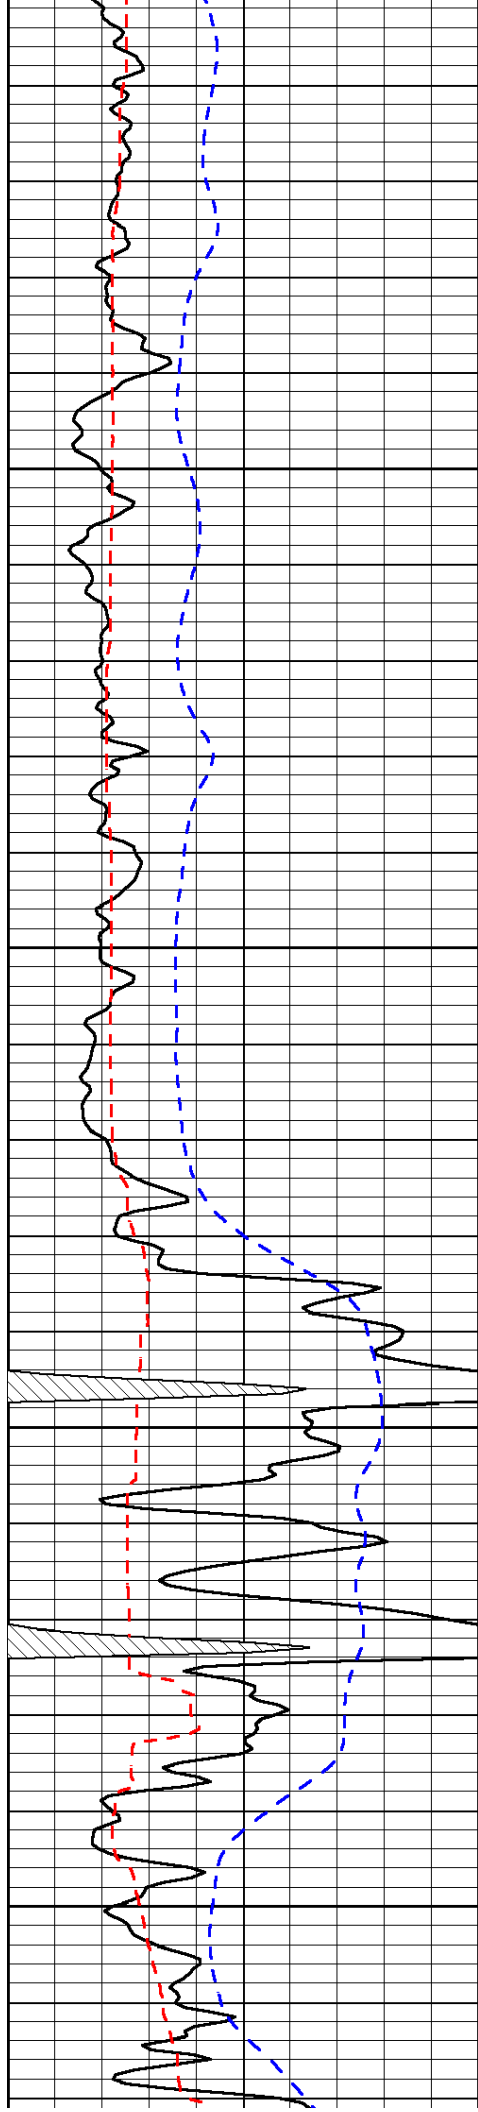


3100

3150

3200

3250

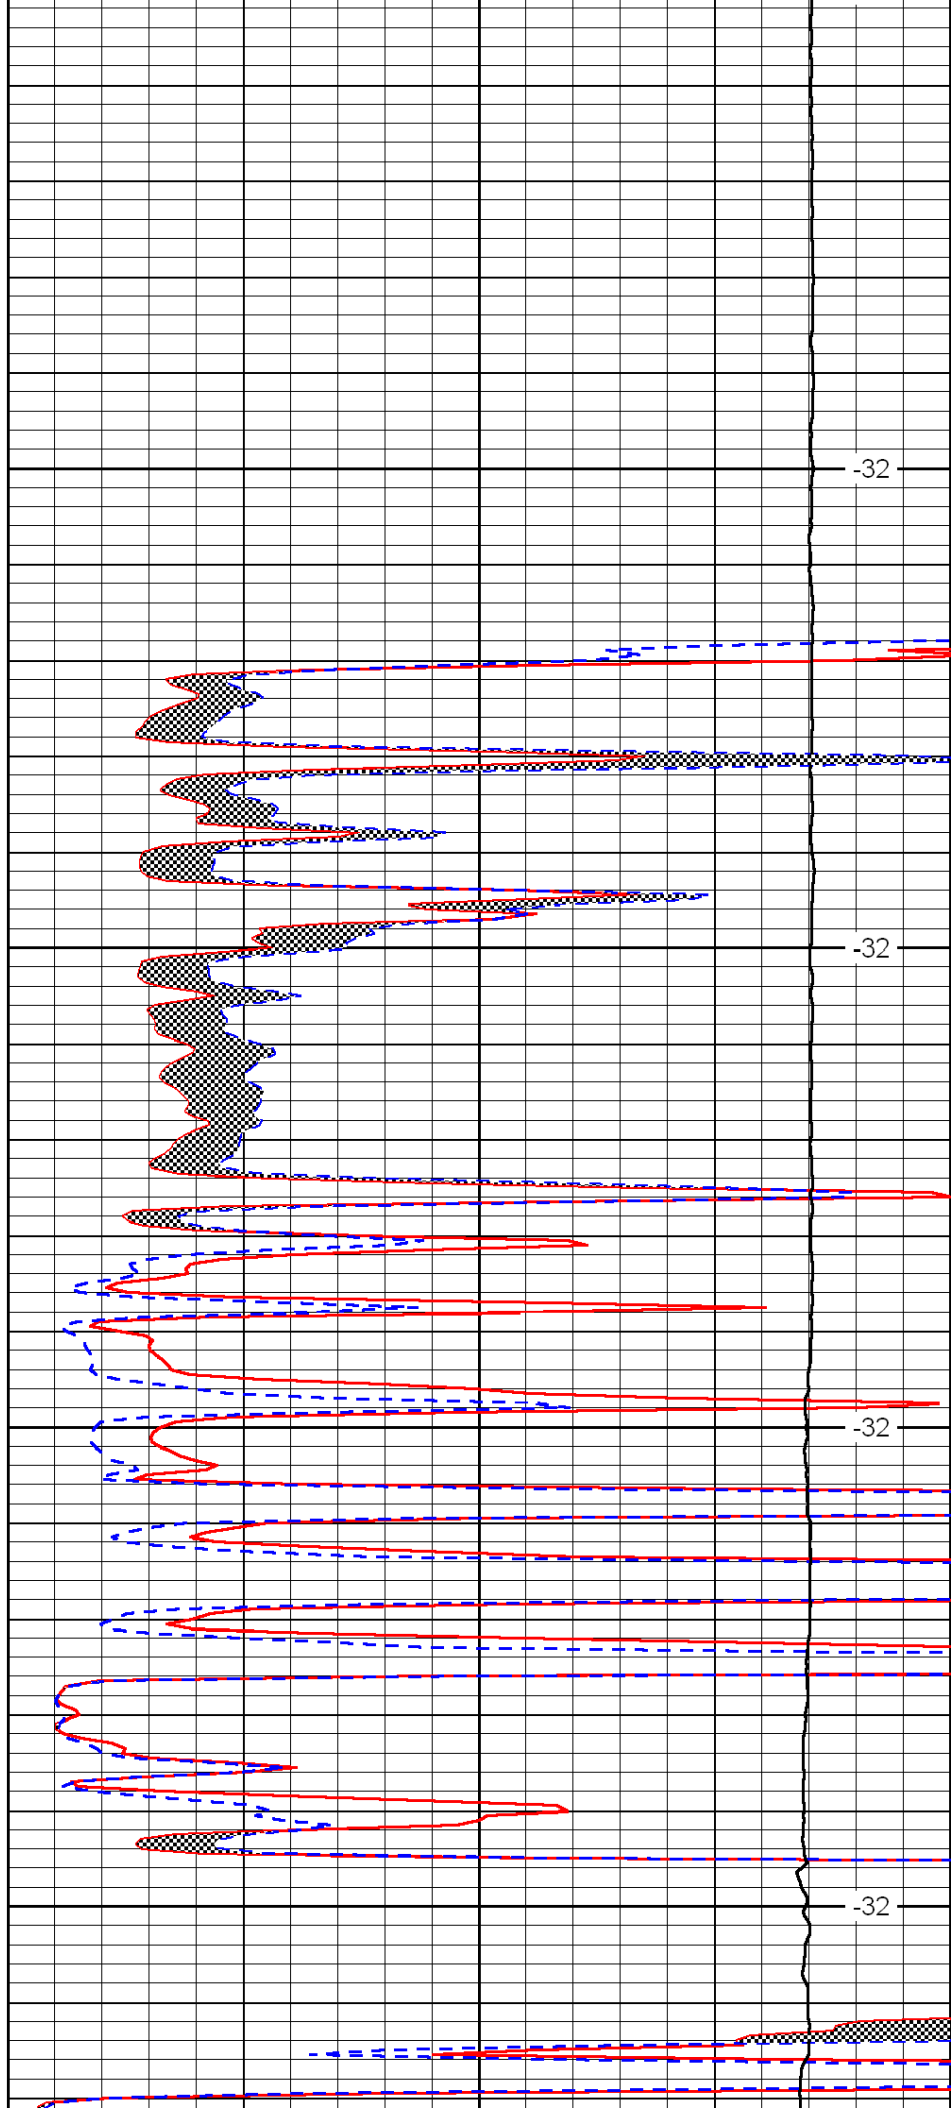


-32

-32

-32

-32

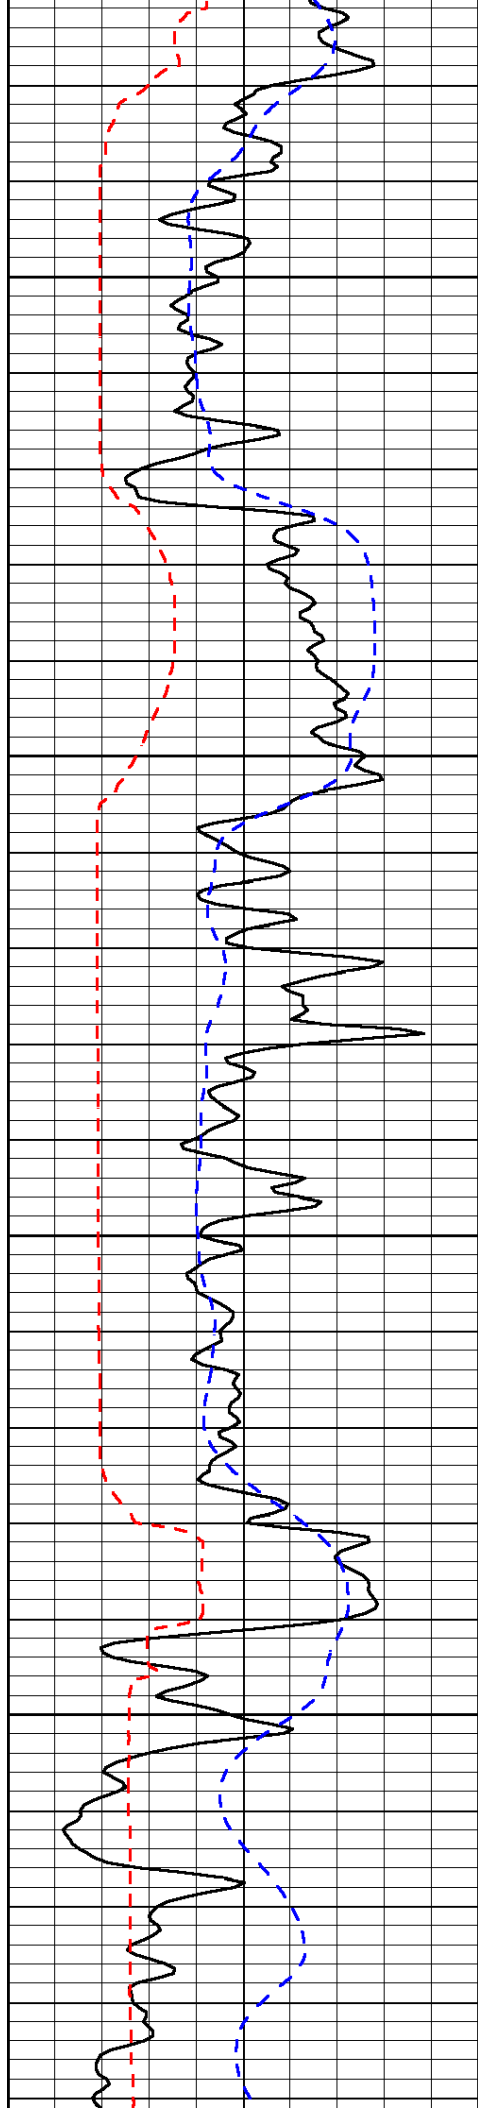


3300

3350

3400

3450

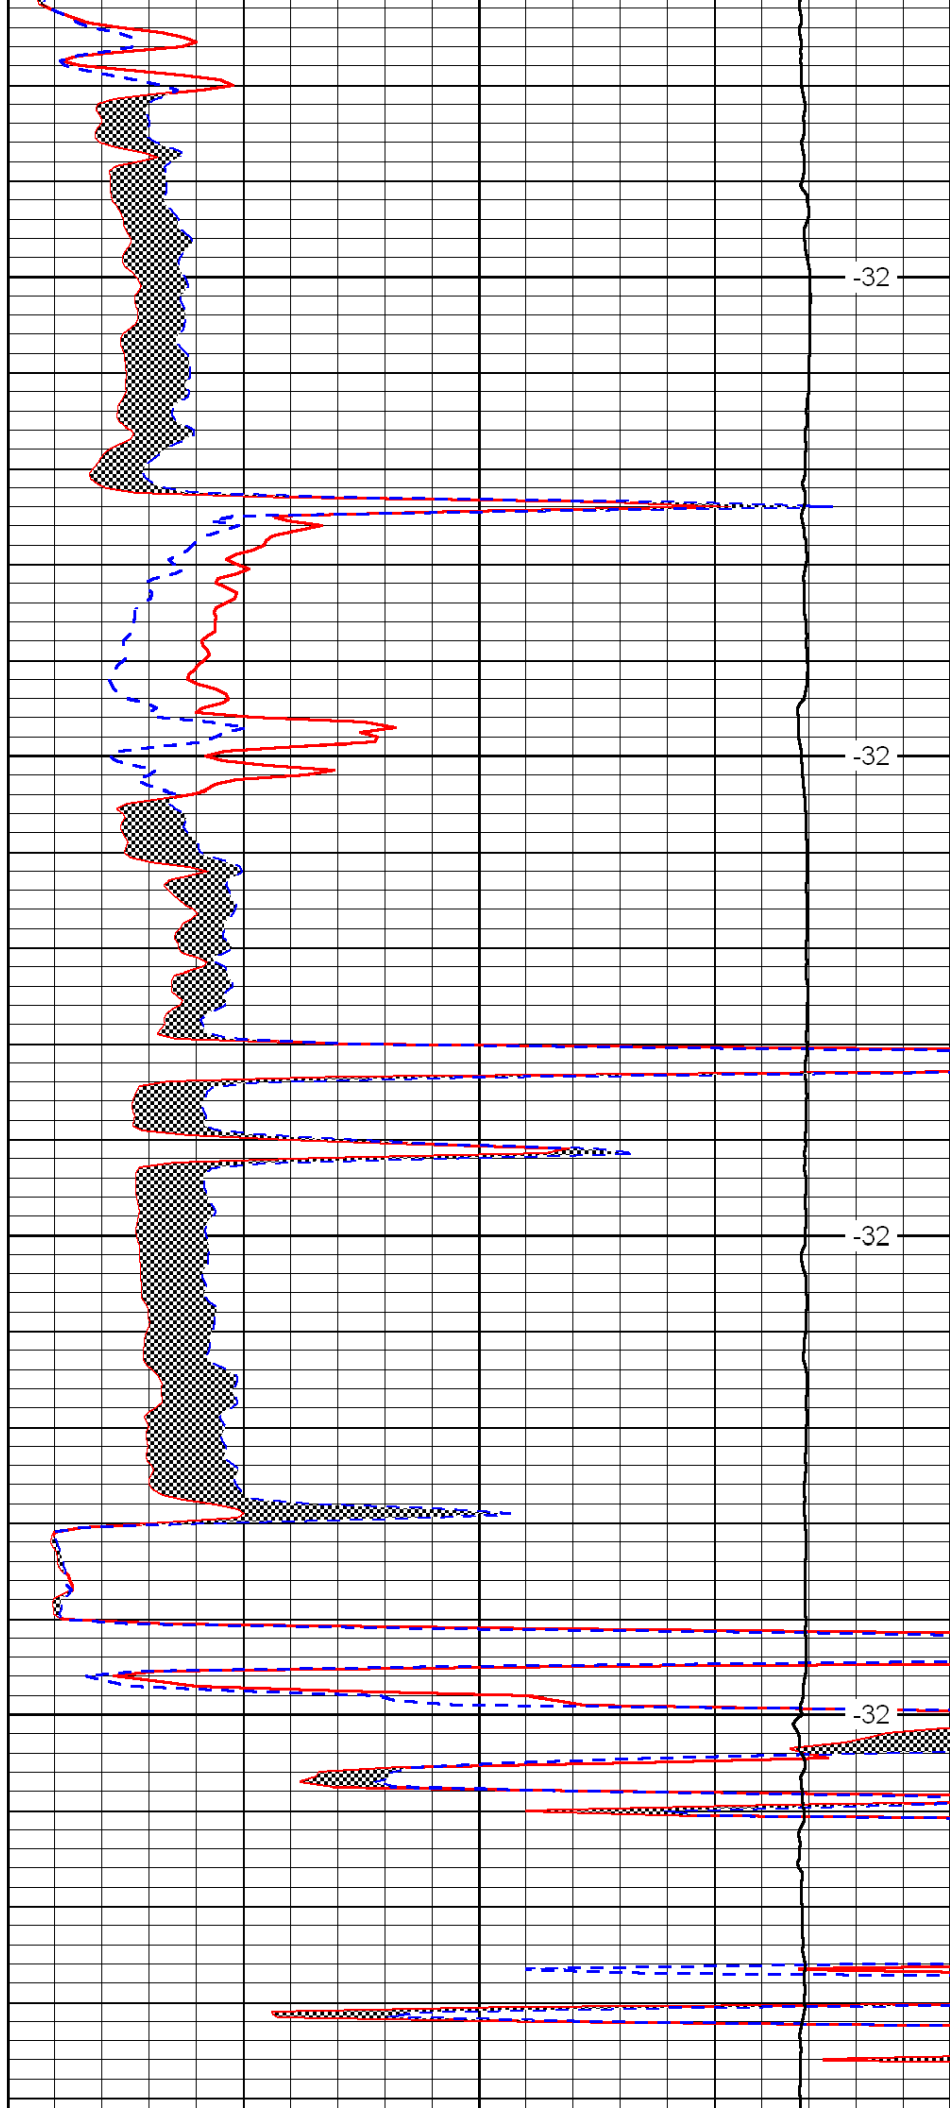


-32

-32

-32

-32

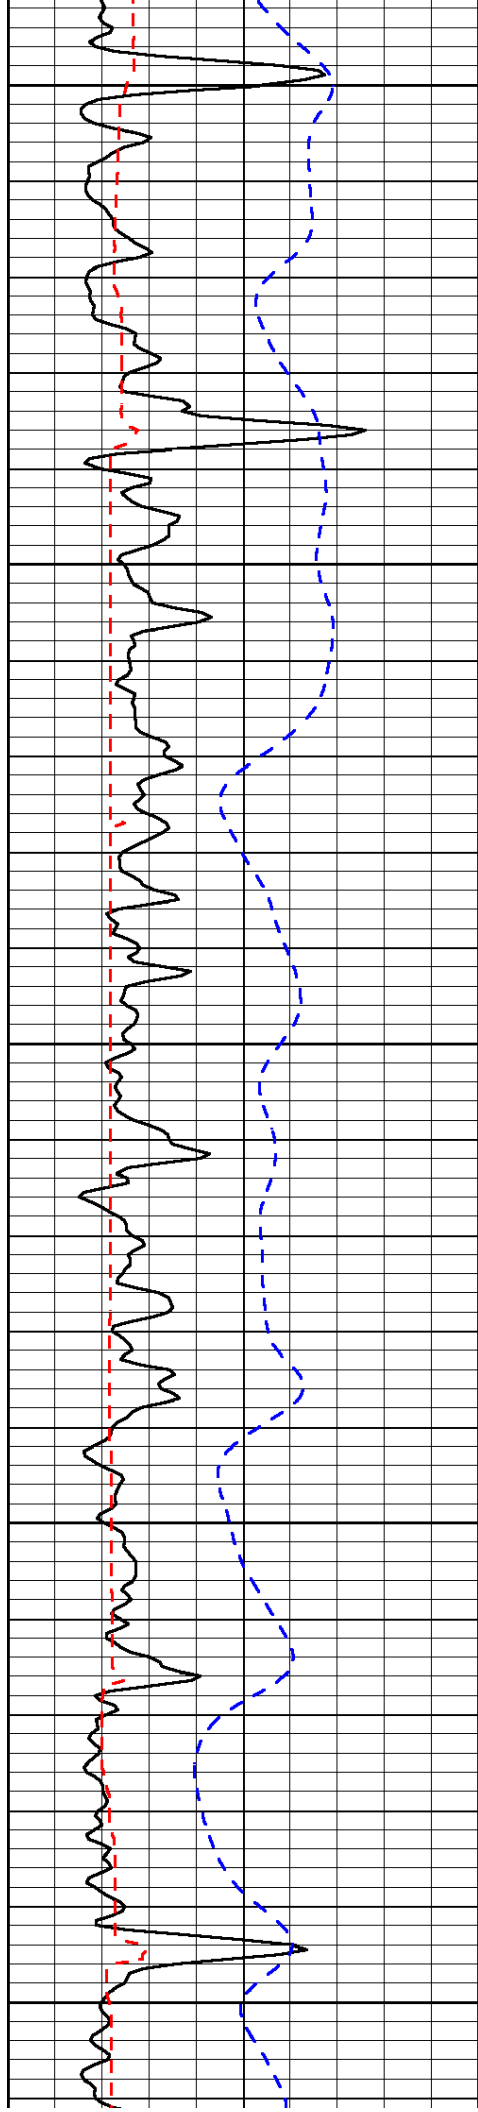


3500


3550

3600

3650

3700

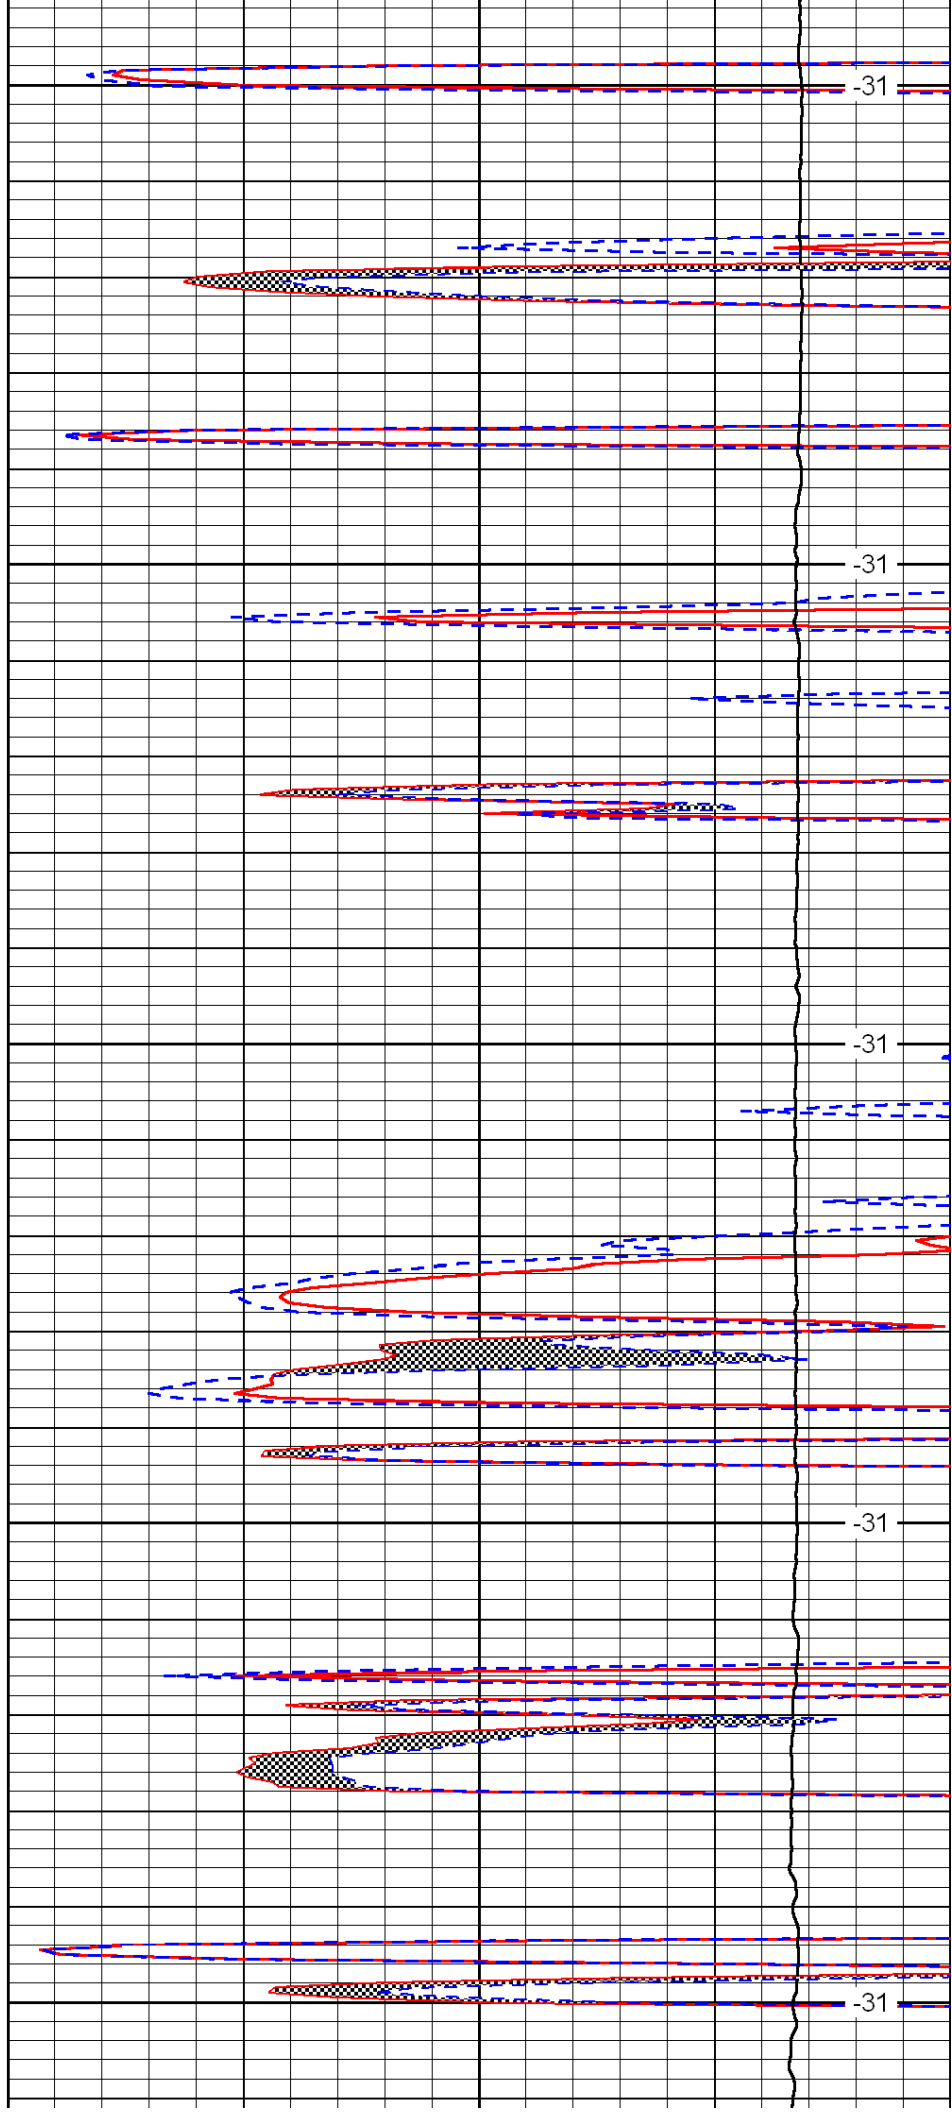

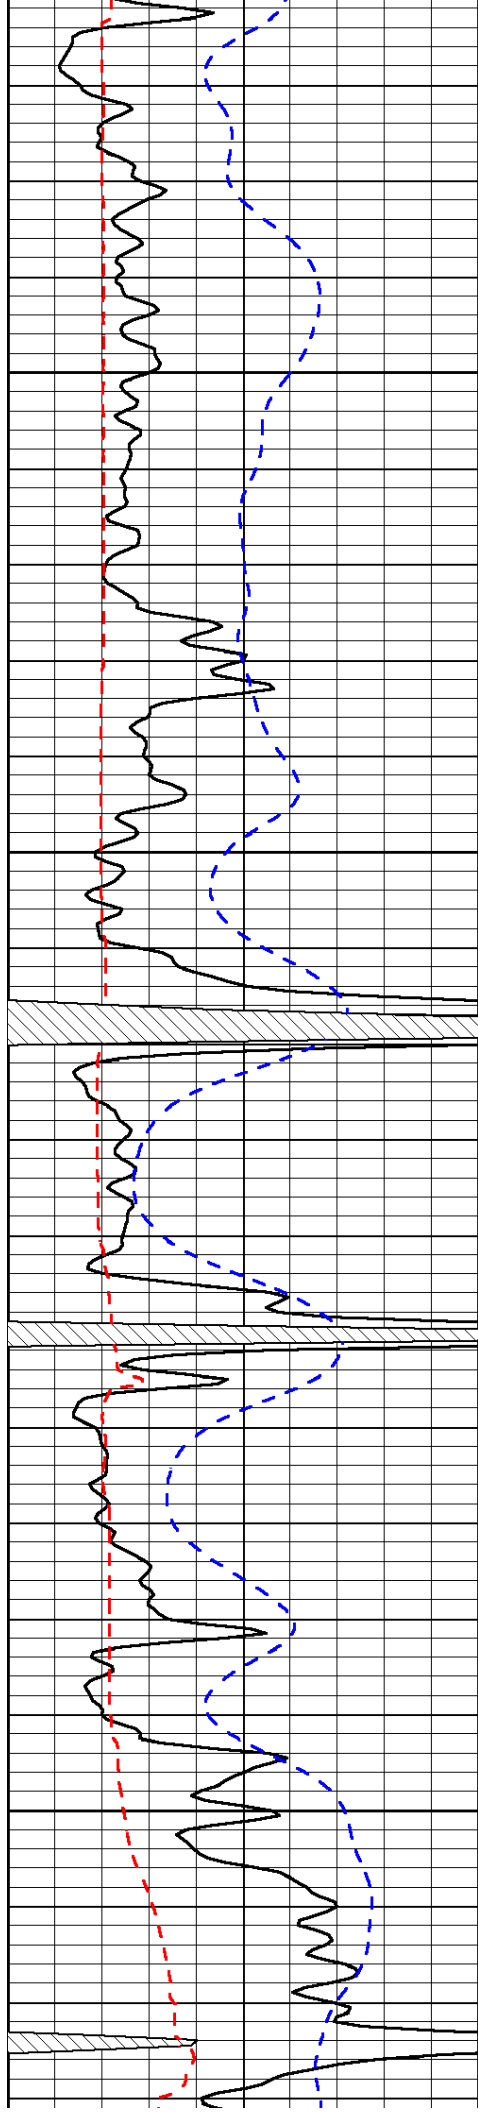


3750

3800

3850

3900

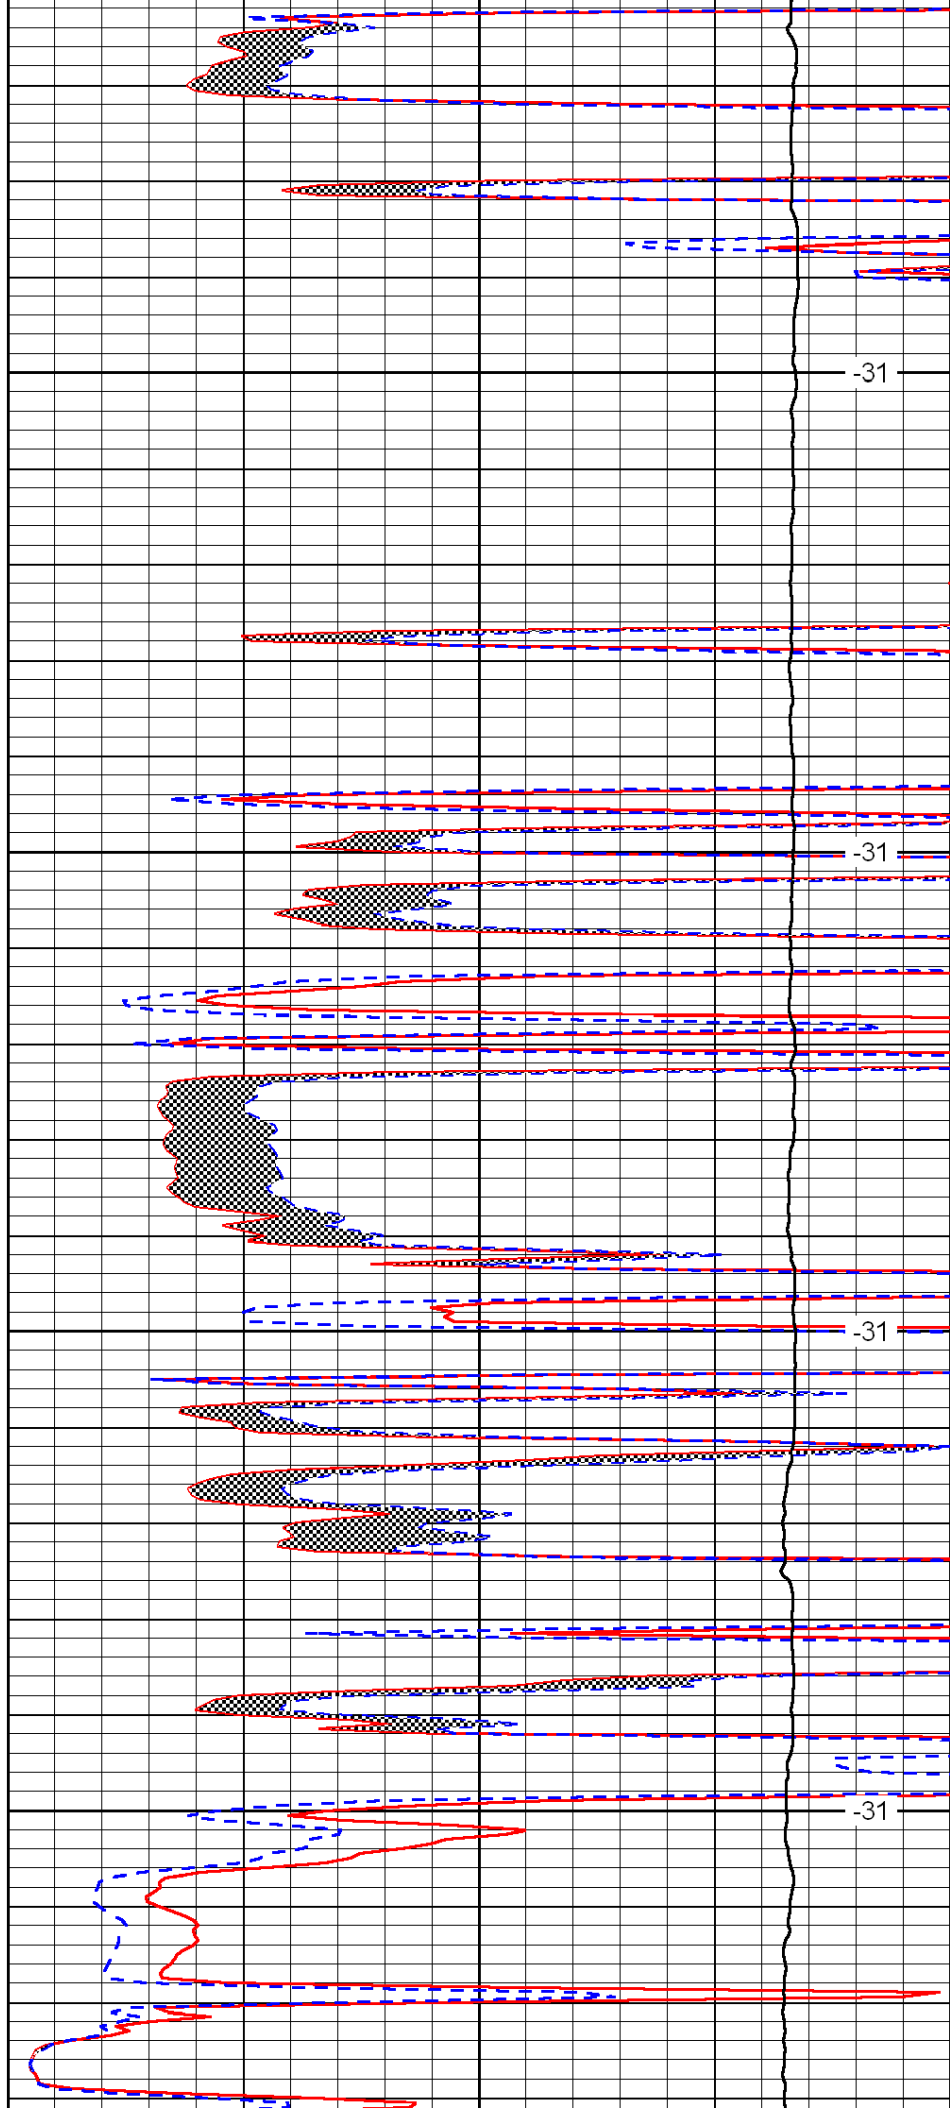


-31

-31

-31

-31

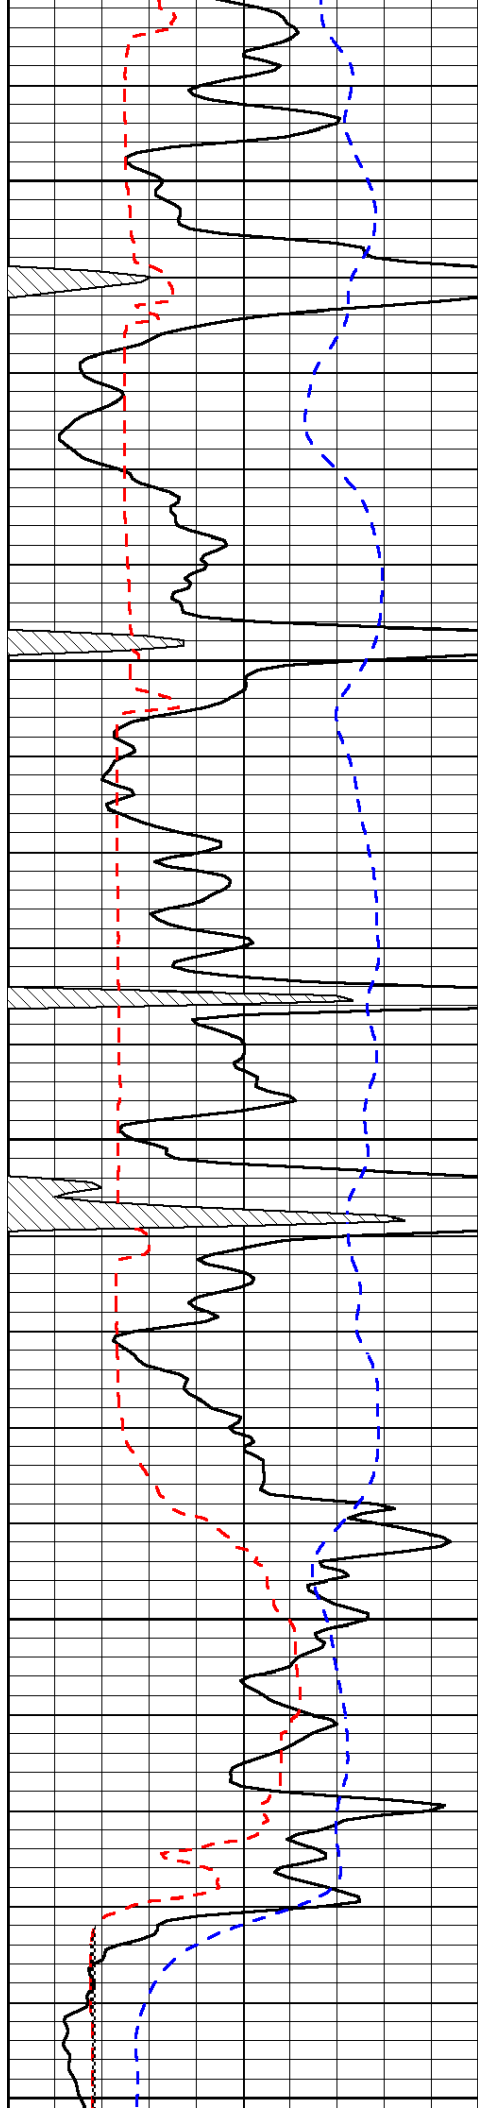


3950


4000

4050

4100

4150

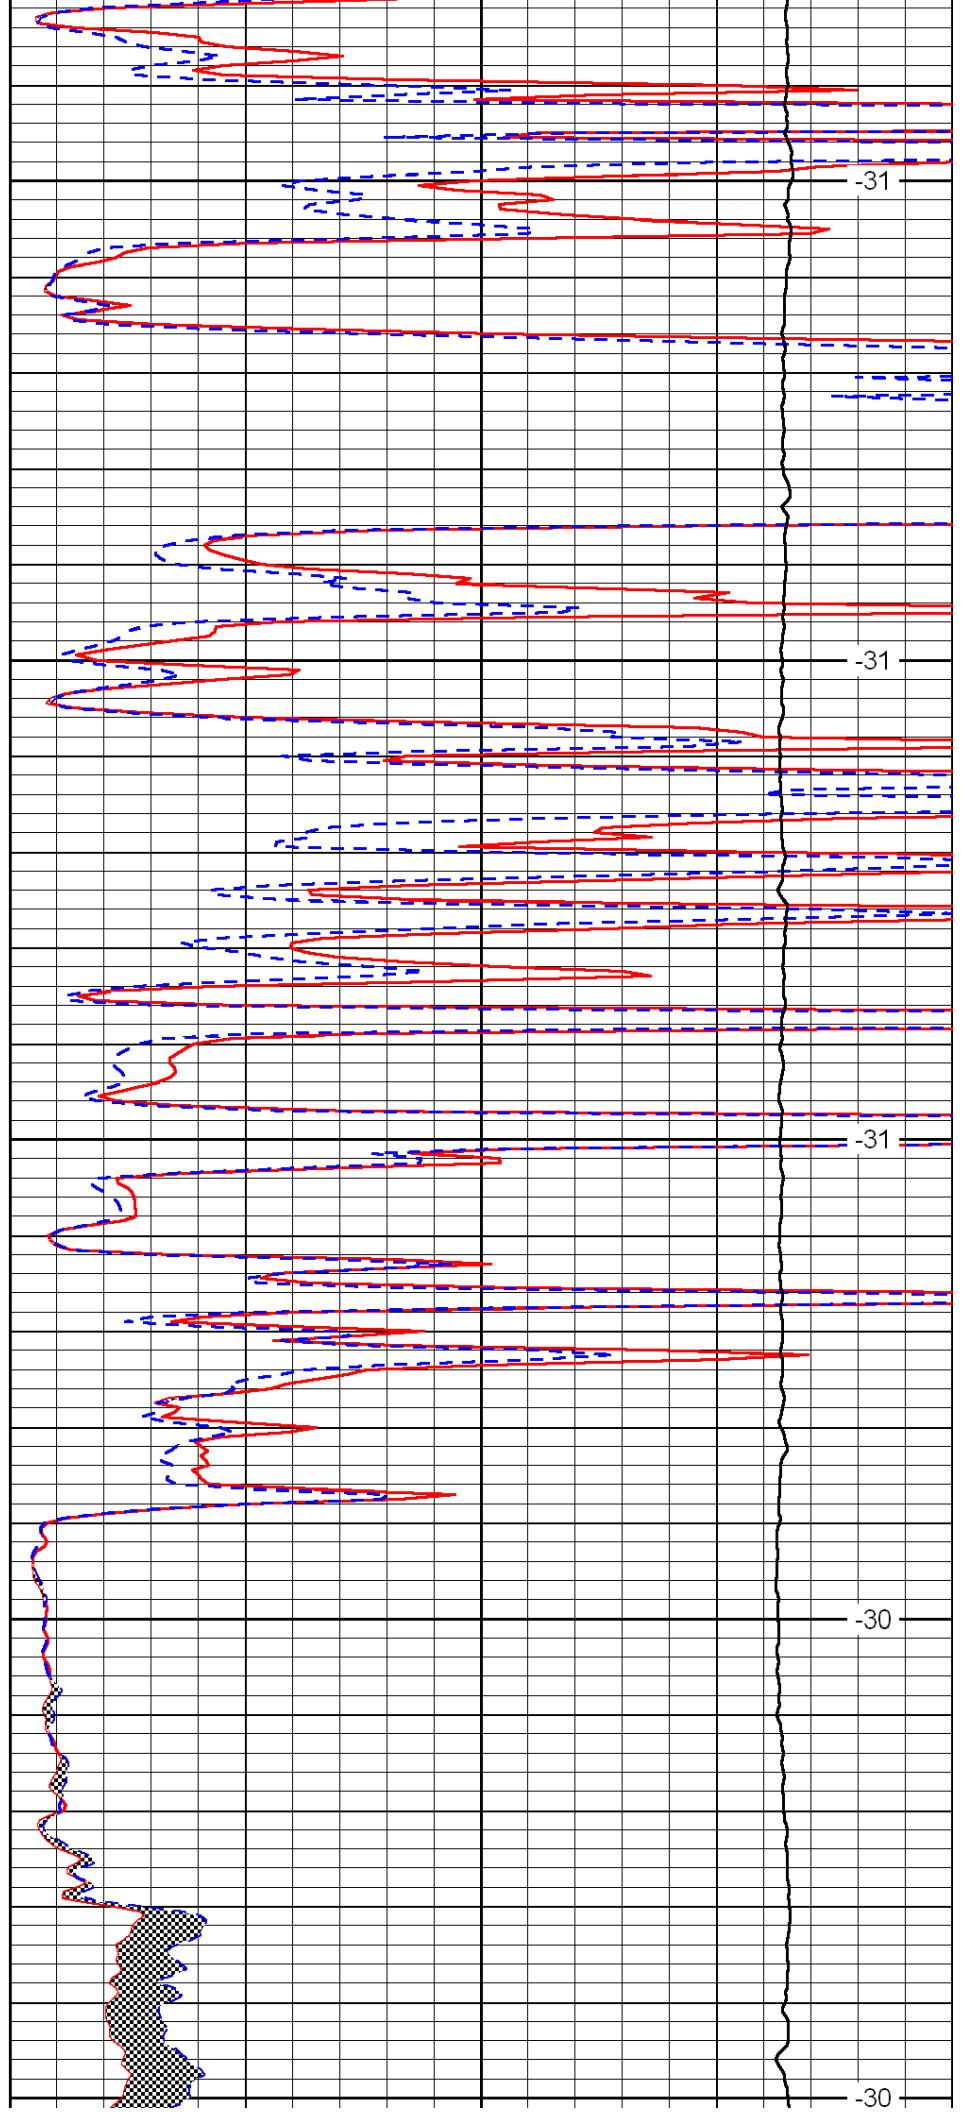

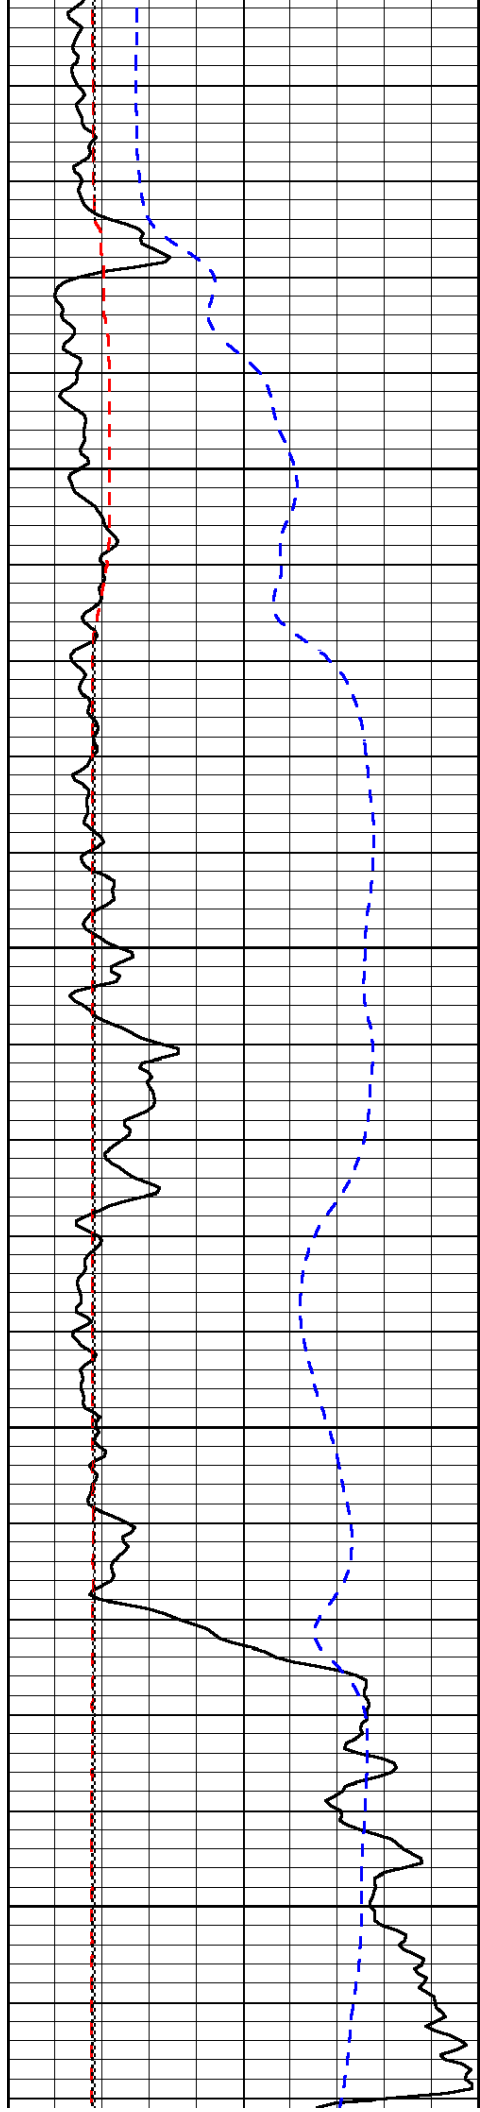


4200

4250

4300

4350


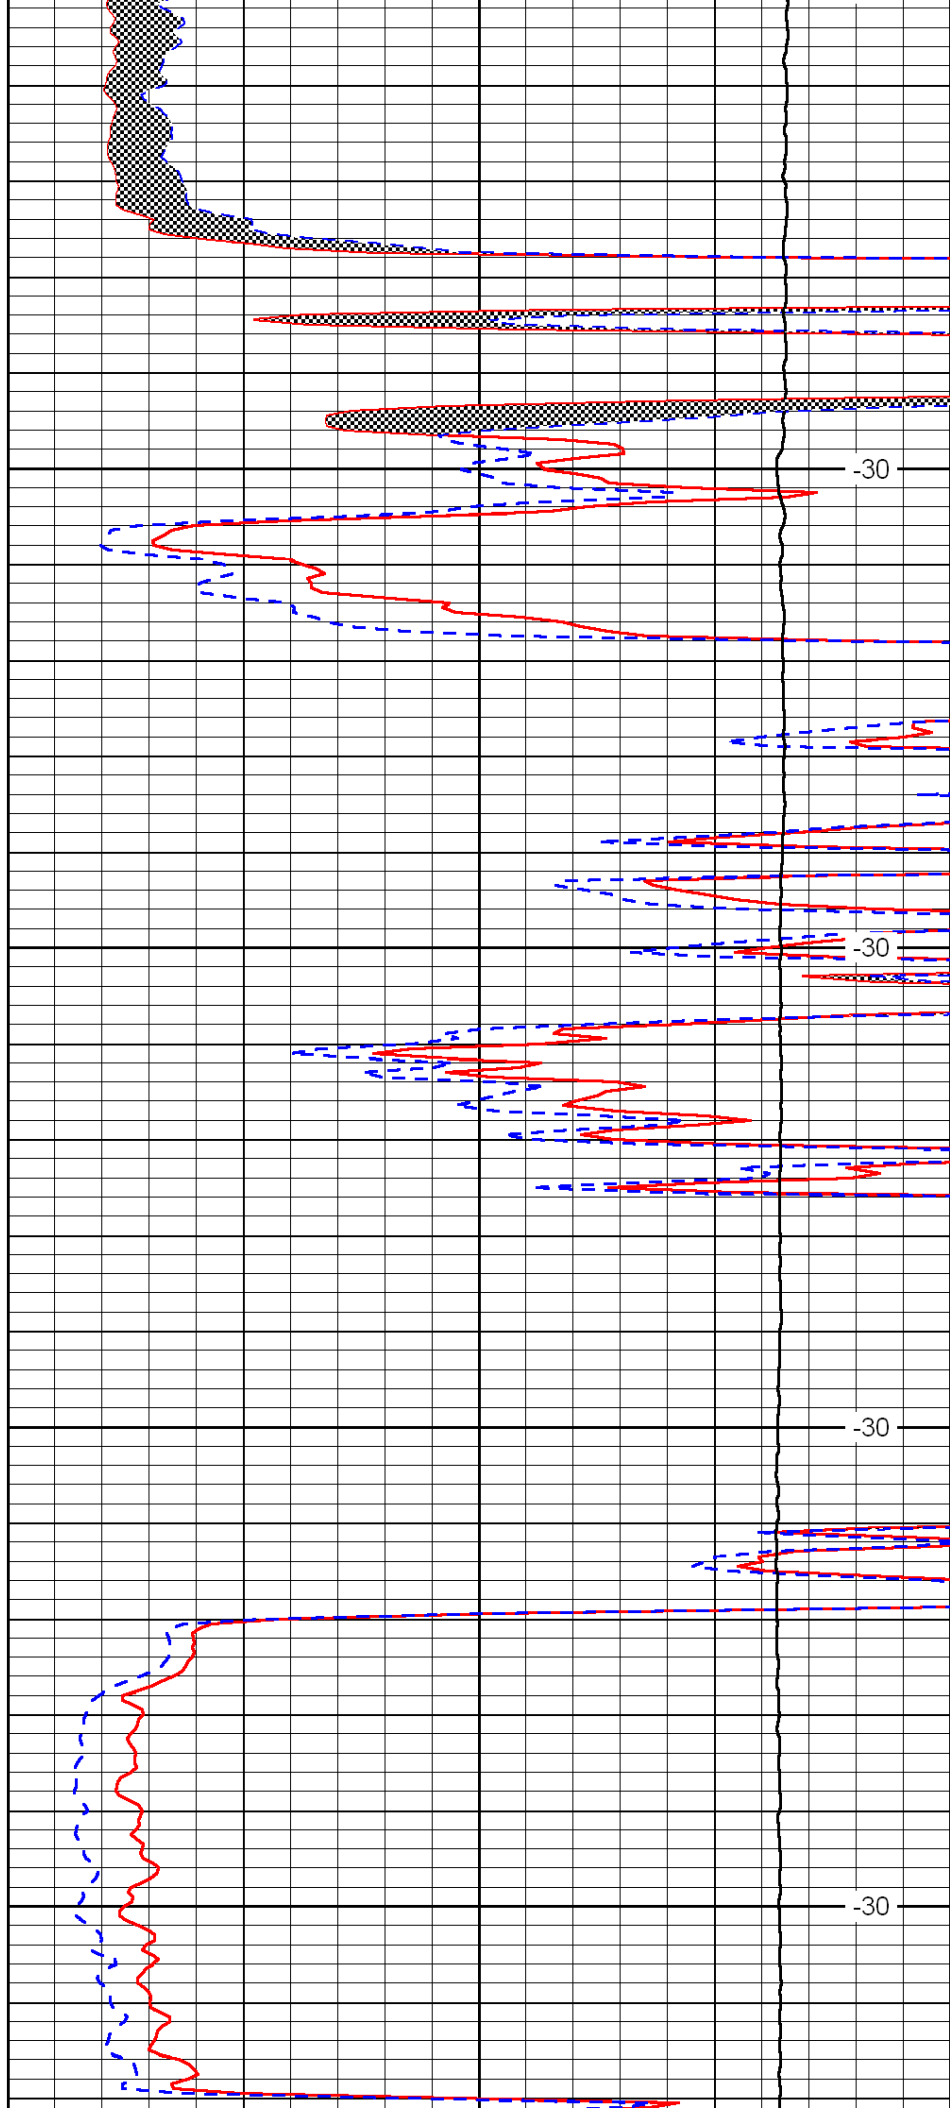


-30

-30

-30

-30

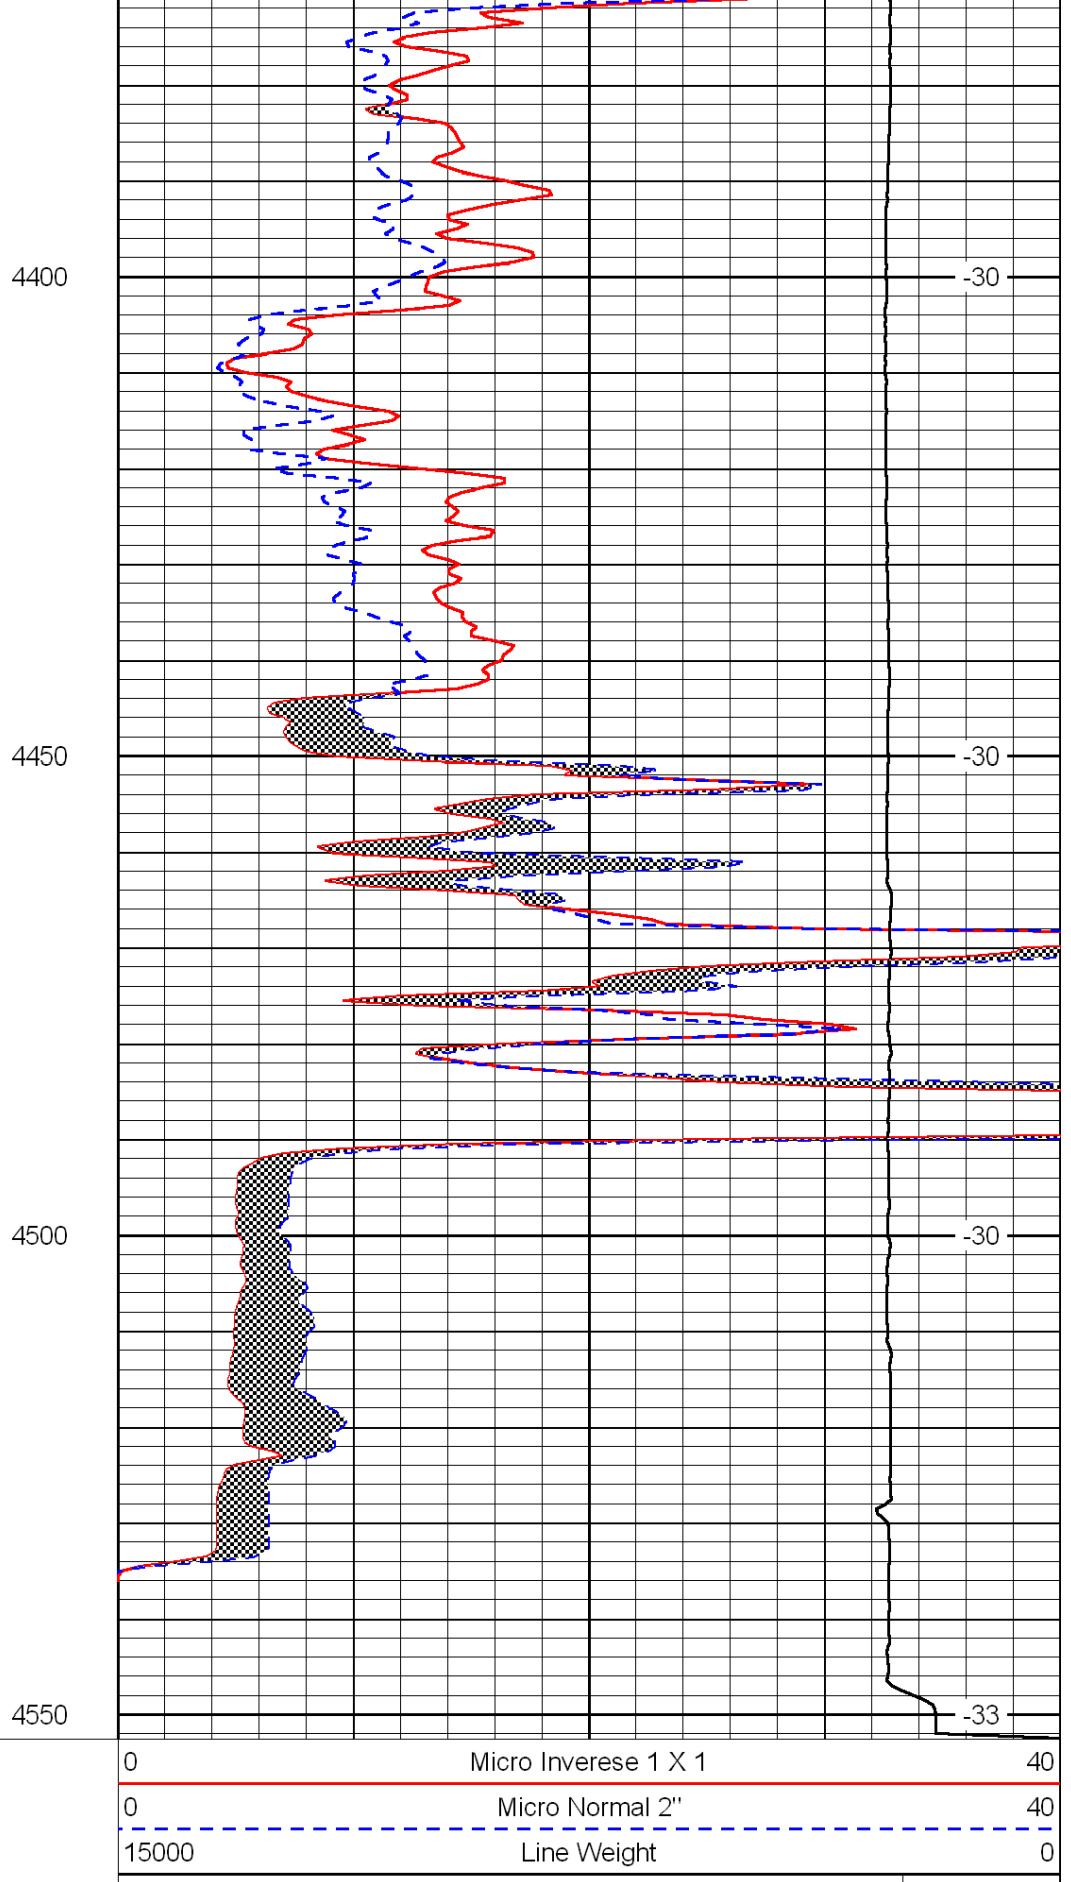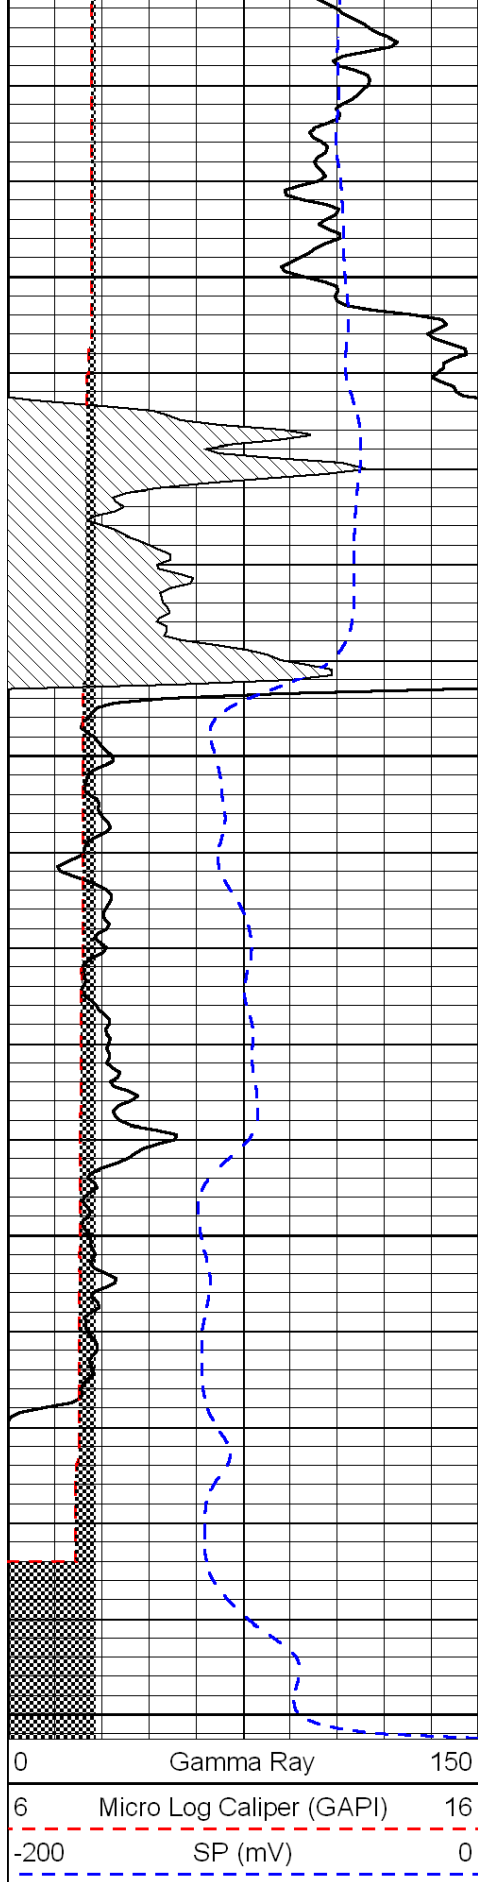

LSPD