




Weatherford

COMPACT PHOTO DENSITY COMPENSATED NEUTRON MICRORESISTIVITY LOG

COMPANY O'BRIEN ENERGY RESOURCES CORP.
 WELL EAGLE # 1-10
 FIELD NOVINGER SOUTHWEST
 PROVINCE/COUNTY MEADE
 COUNTRY/STATE U.S.A. / KANSAS
 LOCATION 660' FNL & 1980' FWL



SEC TWP RGE Other Services
 10 34S 30W MAI/MFE
 API Number 15-119-21298
 Permit Number

Permanent Datum G.L., Elevation 2681 feet
 Log Measured From KB
 Drilling Measured From K.B. @ 12 FEET

Elevations: feet
 KB 2693.00
 DF 2691.00
 GL 2681.00

| | |
|------------------------|----------------------|
| Date | 13-OCT-2011 |
| Run Number | ONE |
| Depth Driller | 6300.00 feet |
| Depth Logger | 6292.00 feet |
| First Reading | 6269.00 feet |
| Last Reading | 2500.00 feet |
| Casing Driller | 1505.00 feet |
| Casing Logger | 1500.00 feet |
| Bit Size | 7.875 inches |
| Hole Fluid Type | CHEMICAL |
| Density / Viscosity | 9.10 lb/USg 60.00 CP |
| PH / Fluid Loss | 11.00 6.80 ml/30Min |
| Sample Source | MML DOWNHOLE |
| Rm @ Measured Temp | 0.90 @ 82.0 ohm-m |
| Rmf @ Measured Temp | 0.72 @ 82.0 ohm-m |
| Rmc @ Measured Temp | 1.08 @ 82.0 ohm-m |
| Source Rmf / Rmc | CALC CALC |
| Rm @ BHT | 0.60 @125.0 ohm-m |
| Time Since Circulation | 5 HOURS |
| Max Recorded Temp | 126.00 deg F |
| Equipment Name | COMPACT |
| Equipment / Base | 13096 LIB |
| Recorded By | A. GIAMBALVO |
| Witnessed By | ROGER PEARSON |
| S.O. / JOB # | 3531163 |

| BOREHOLE RECORD | | | Last Edited: 13-OCT-2011 18:11 |
|--------------------|--------------------|------------------|--------------------------------|
| Bit Size inches | Depth From feet | Depth To feet | |
| 7.875 | 1500.00 | 6292.00 | |

| CASING RECORD | | | | |
|---------------|----------------|--------------------|--------------------|---------------------|
| Type | Size inches | Depth From feet | Shoe Depth feet | Weight pounds/ft |
| SURFACE | 8.625 | 0.00 | 1500.00 | 24.00 |

REMARKS

Tools Run: MAI, MPD, MCG, MDN, MFE, MML,
 Hardware: MPD: 8 inch profile plate used. MAI and MFE: 0.5 inch standoffs used. MDN: Dual Eccentralizer used.
 2.71 G/CC Limestone density matrix used to calculate porosity.
 Borehole rugosity, tight pulls, and washouts will affect data quality.
 All intervals logged and scaled per customer's request.
 Annular volume with 4.5 inch production casing = 888 Cubic Feet
 Service order #3531163
 Rig: Duke #6
 Engineer: A. Giambalvo, W. Stambaugh
 Operator(s): N. Adame

All interpretations are opinions based on inferences from electrical or other measurements and we cannot, and do not, guarantee the accuracy or correctness of any interpretations, and we shall not, except in the case of gross or wilful negligence on our part, be liable or responsible for any loss, costs, damages or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions in our price schedule.

5 INCH MAIN


Depth Based Data - Maximum Sampling Increment 10.0cm


Plotted on 29-DEC-2011 10:38


Filename: C:\Users\Joe\AppData\Local\Temp\Weatherford PreView\O'Brien Eagle # 1-10_004.dta



Recorded on 13-OCT-2011 15:17


System Versions: Logged with 11.03.4044 Plotted with 12.01.3513

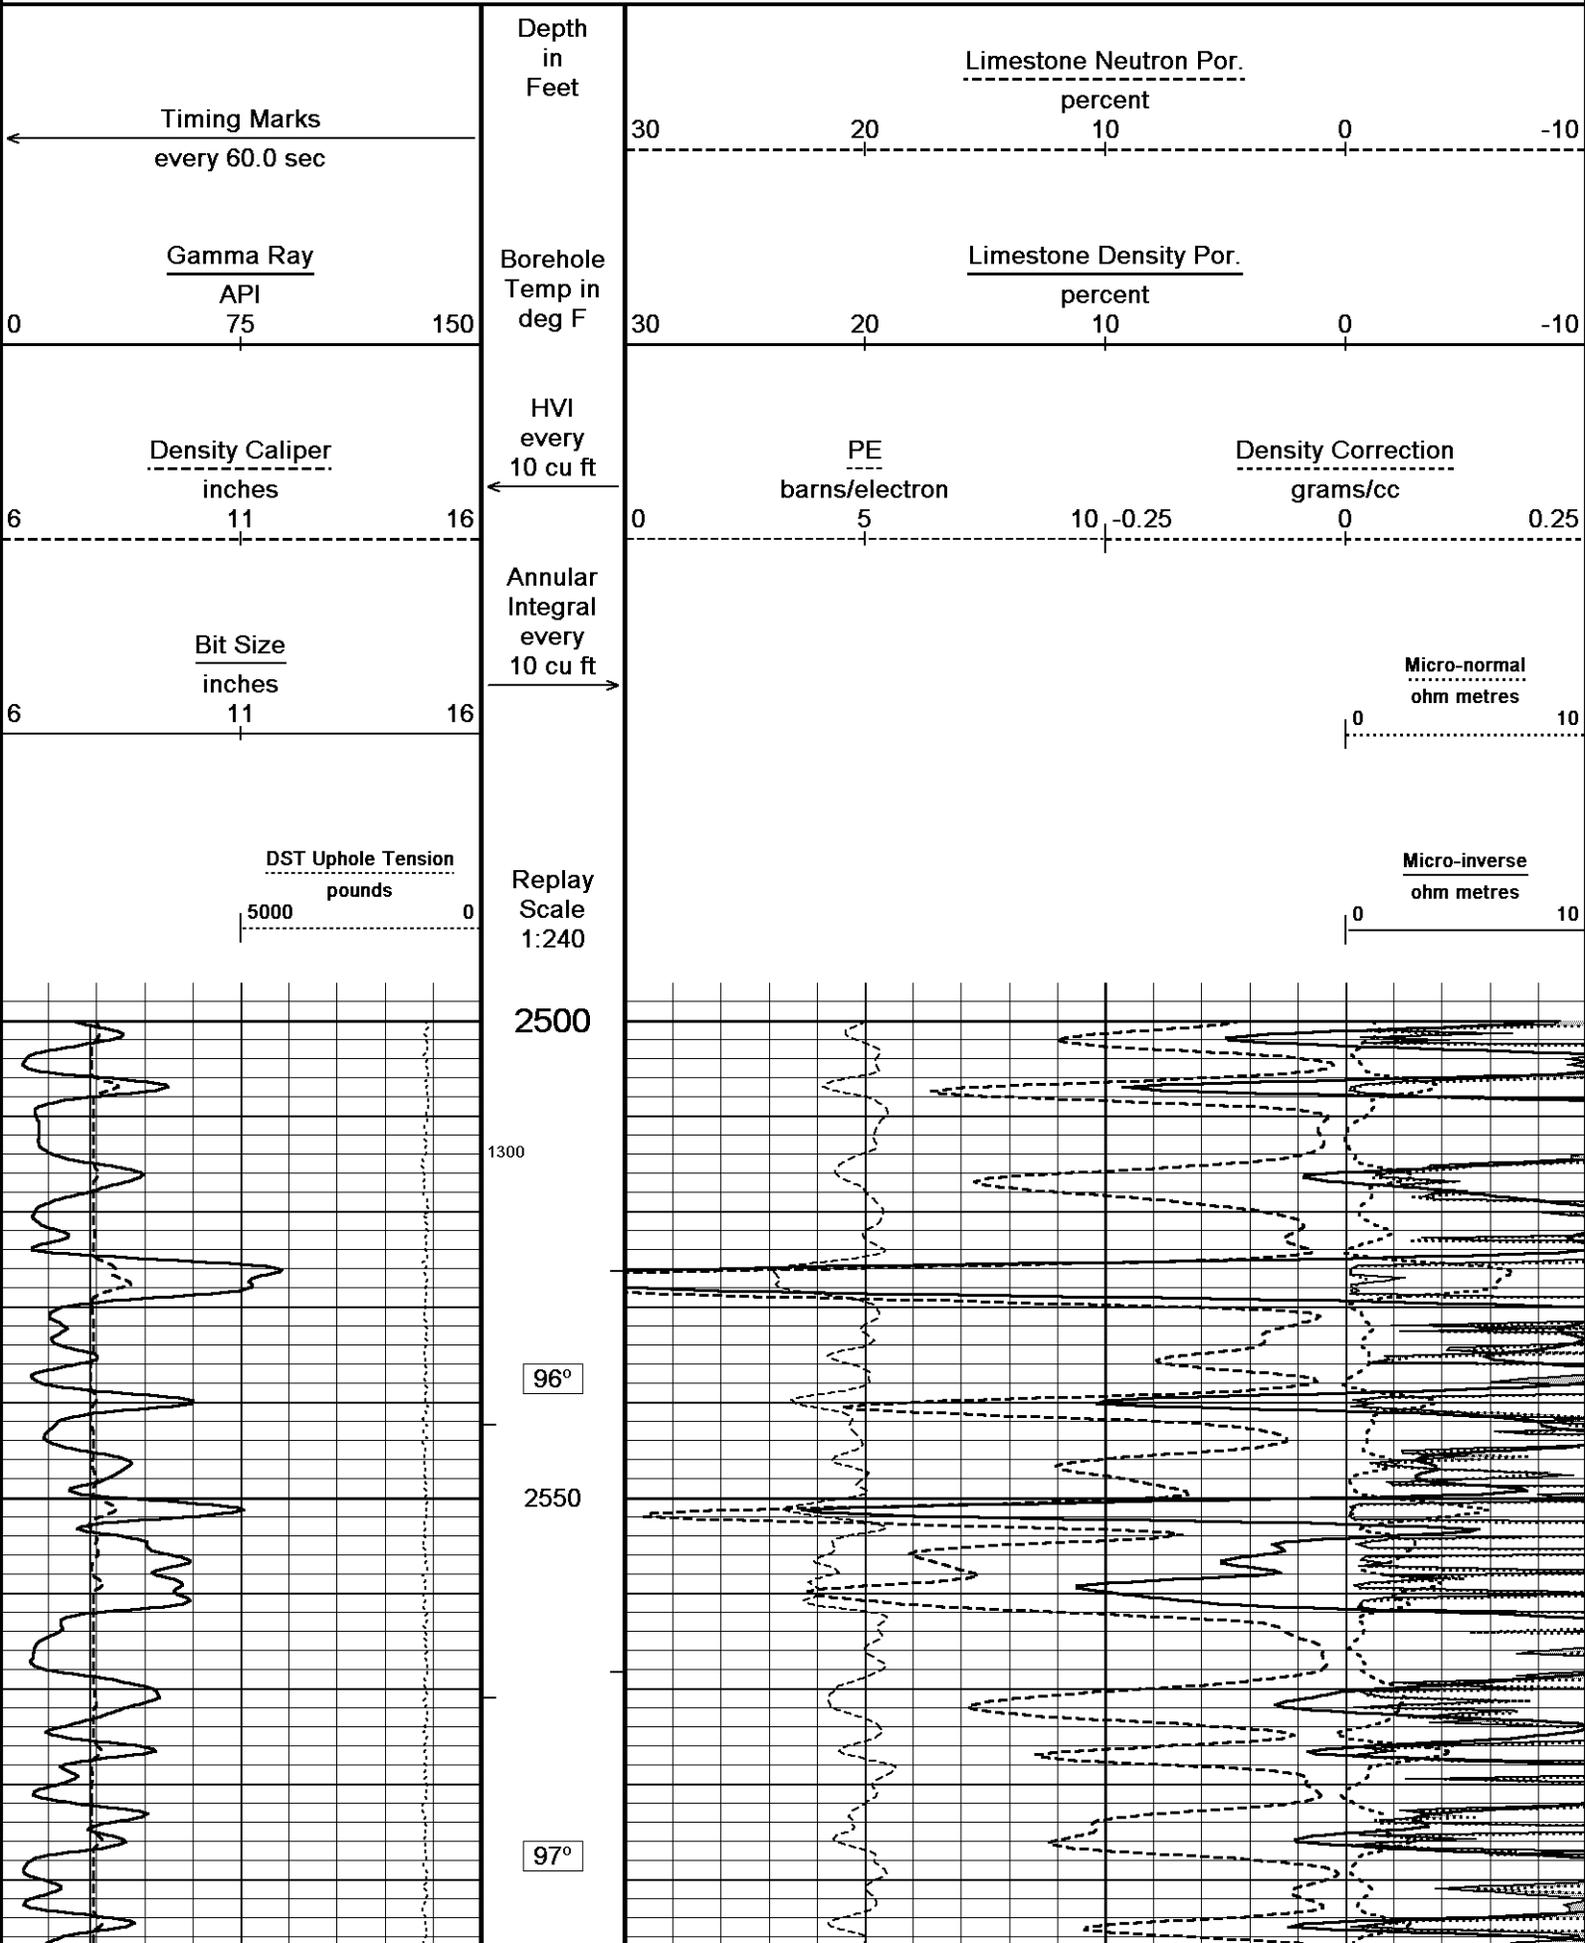

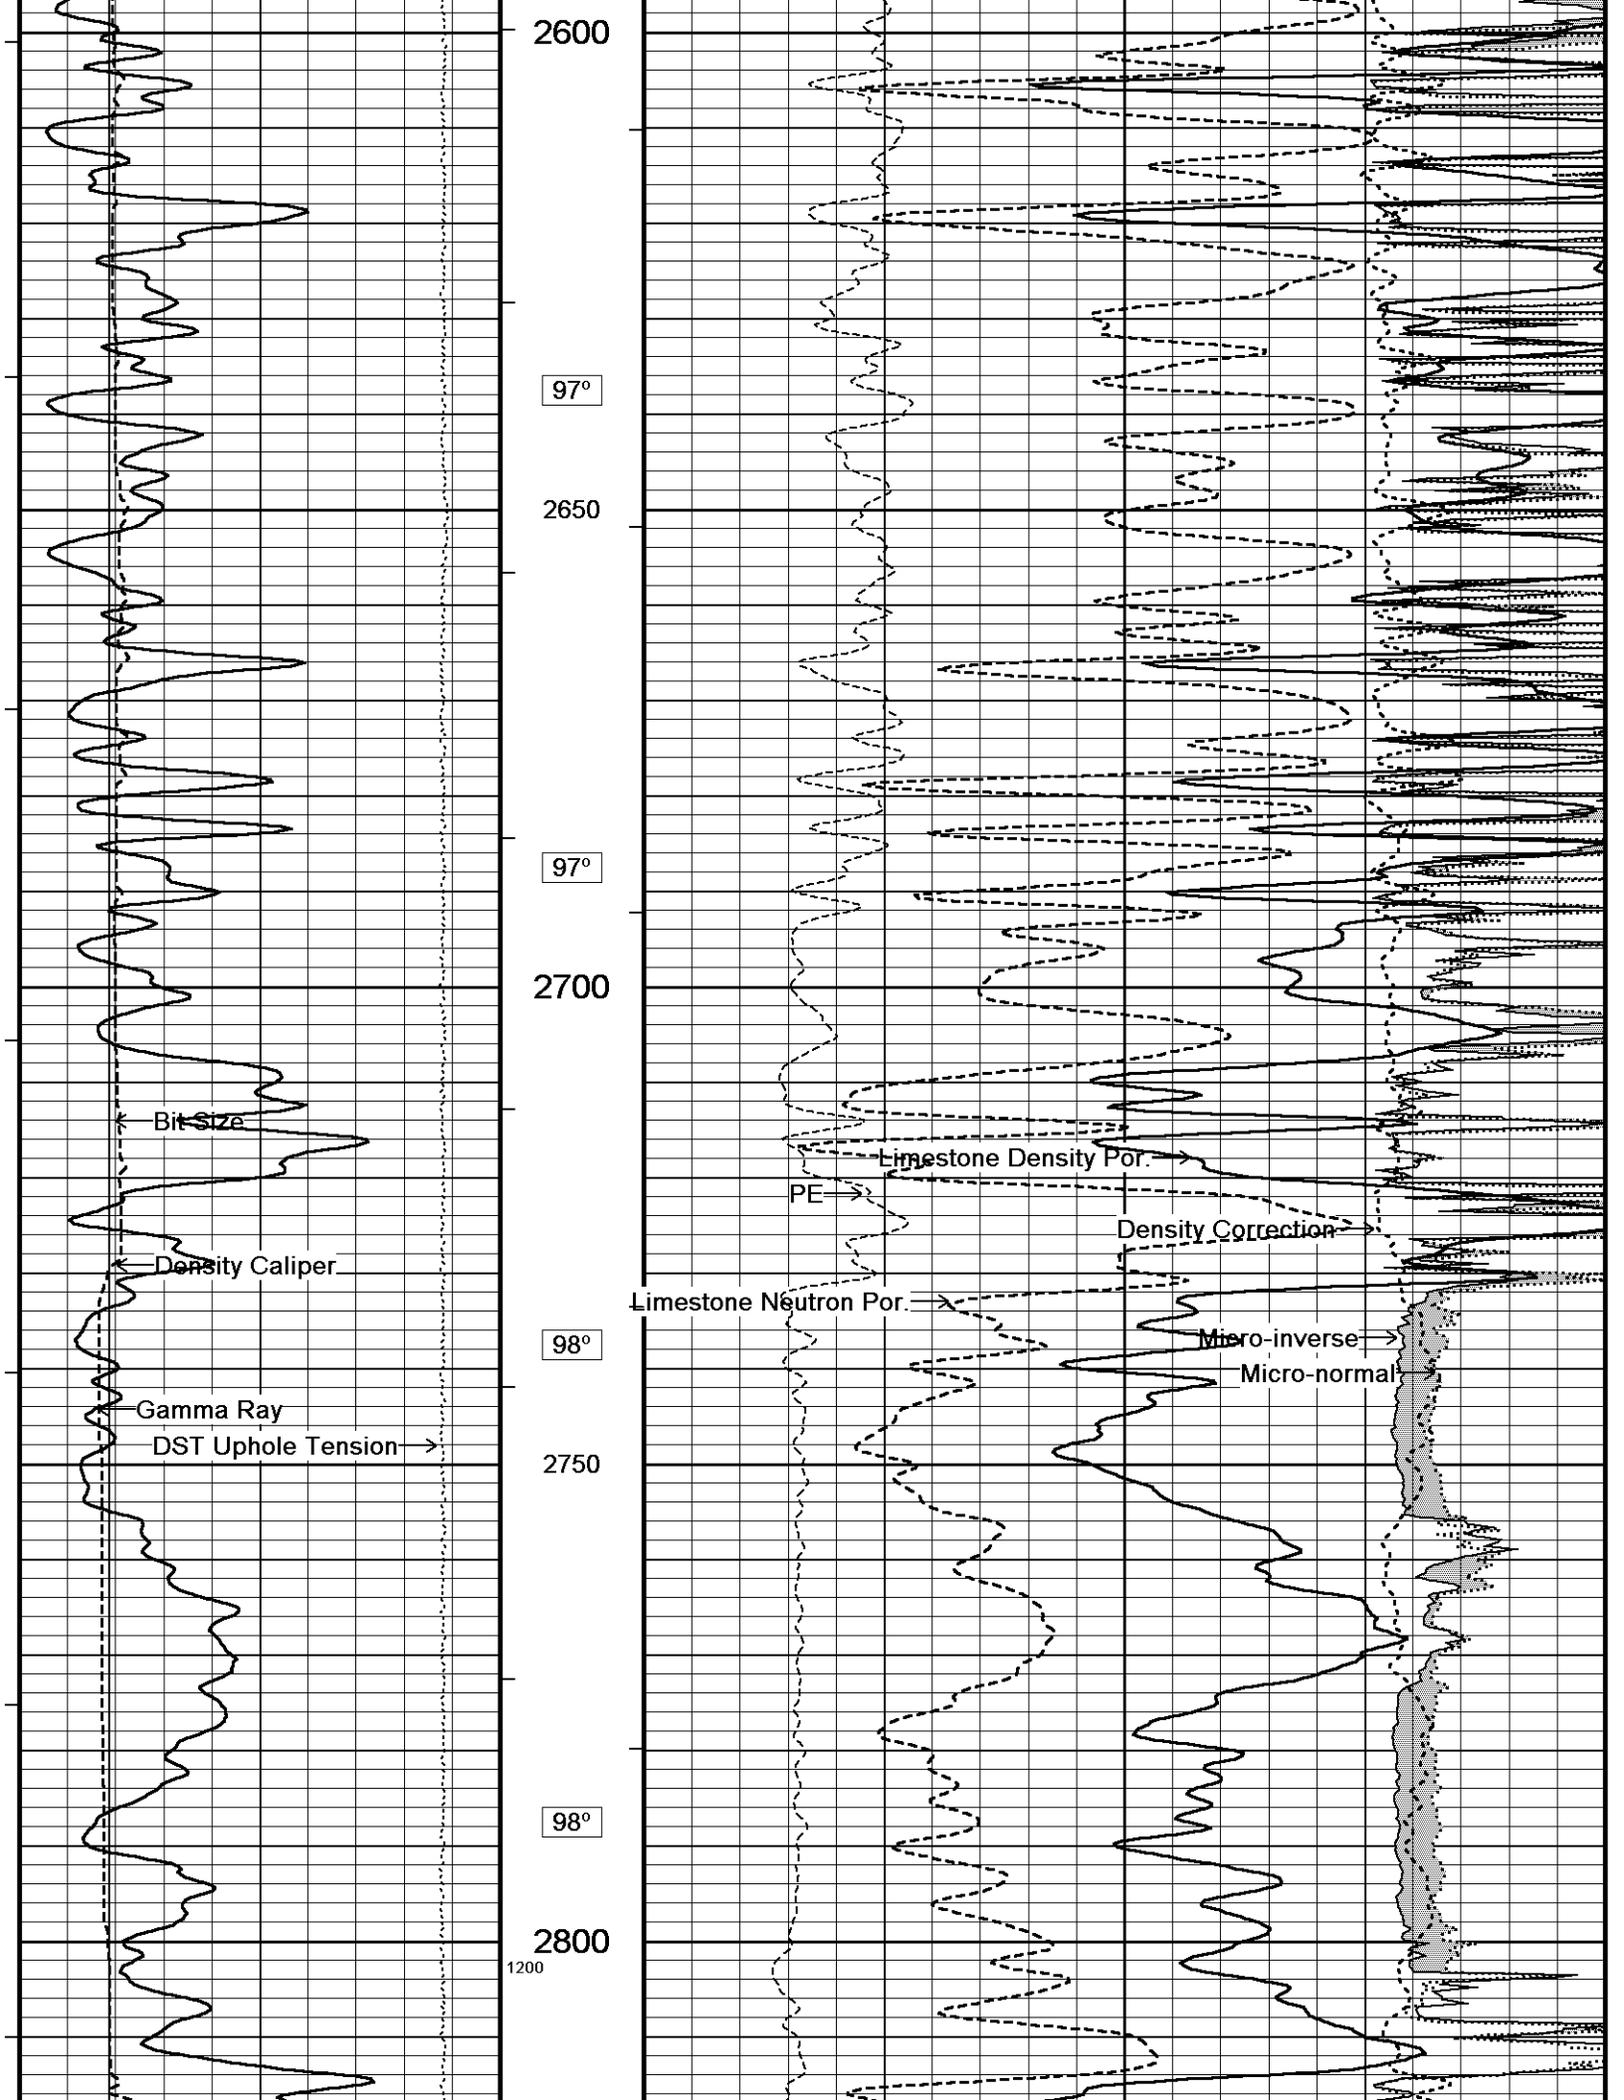

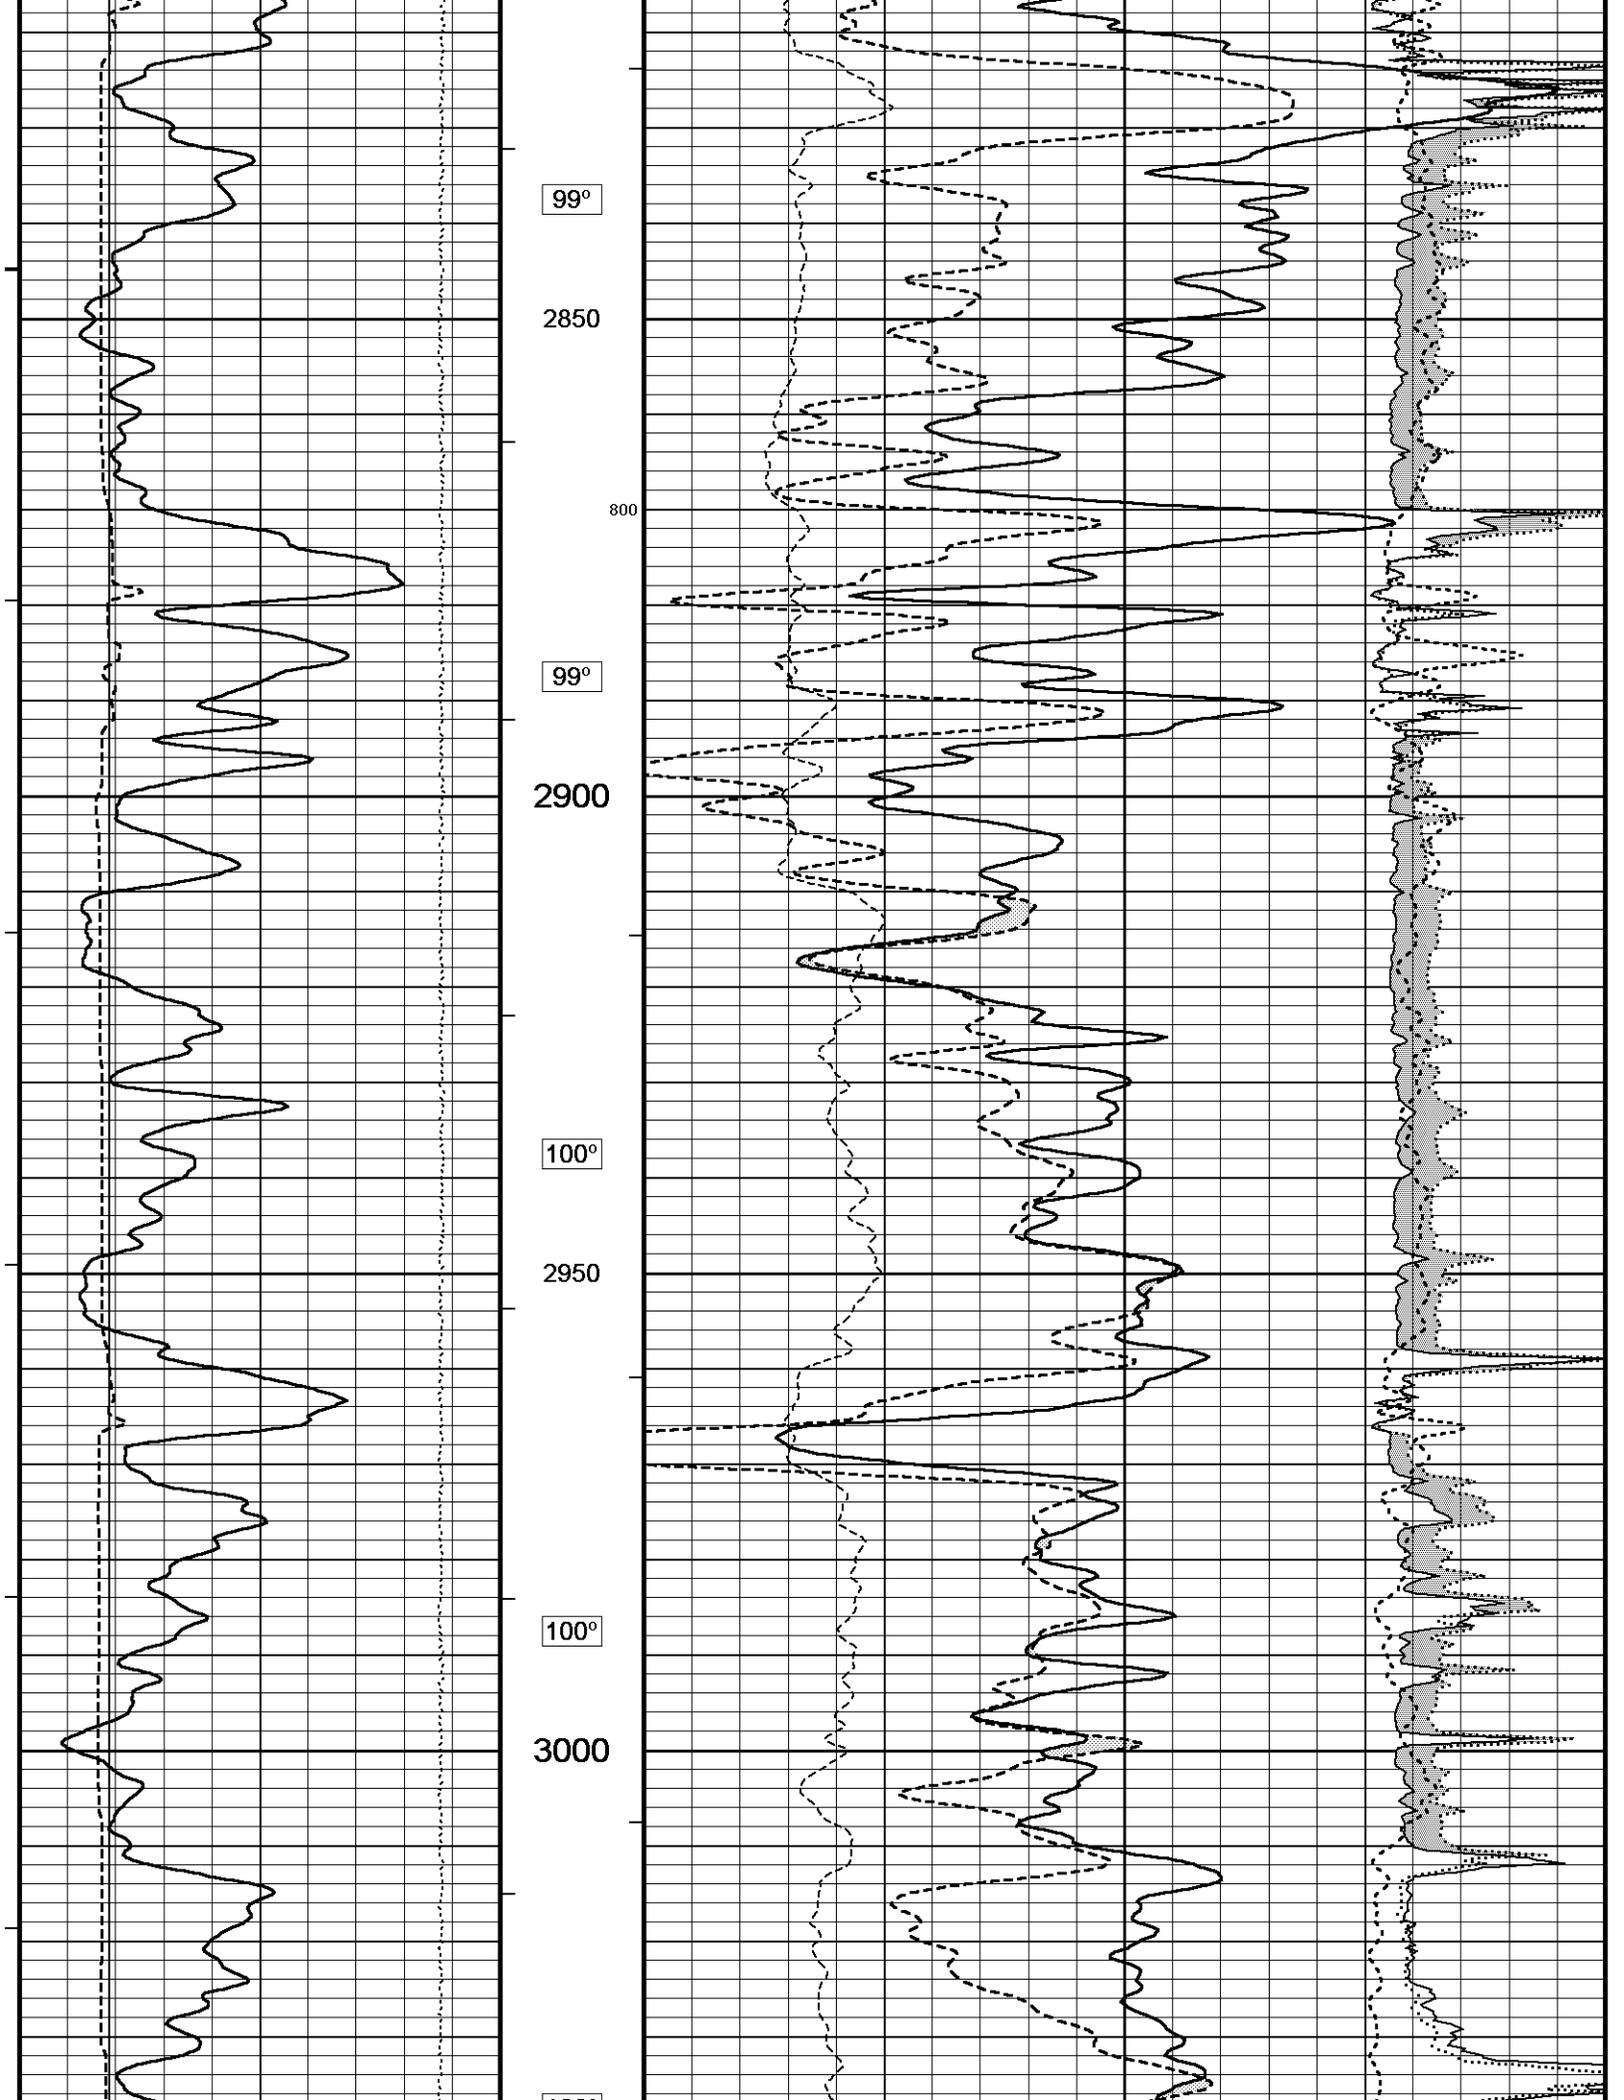

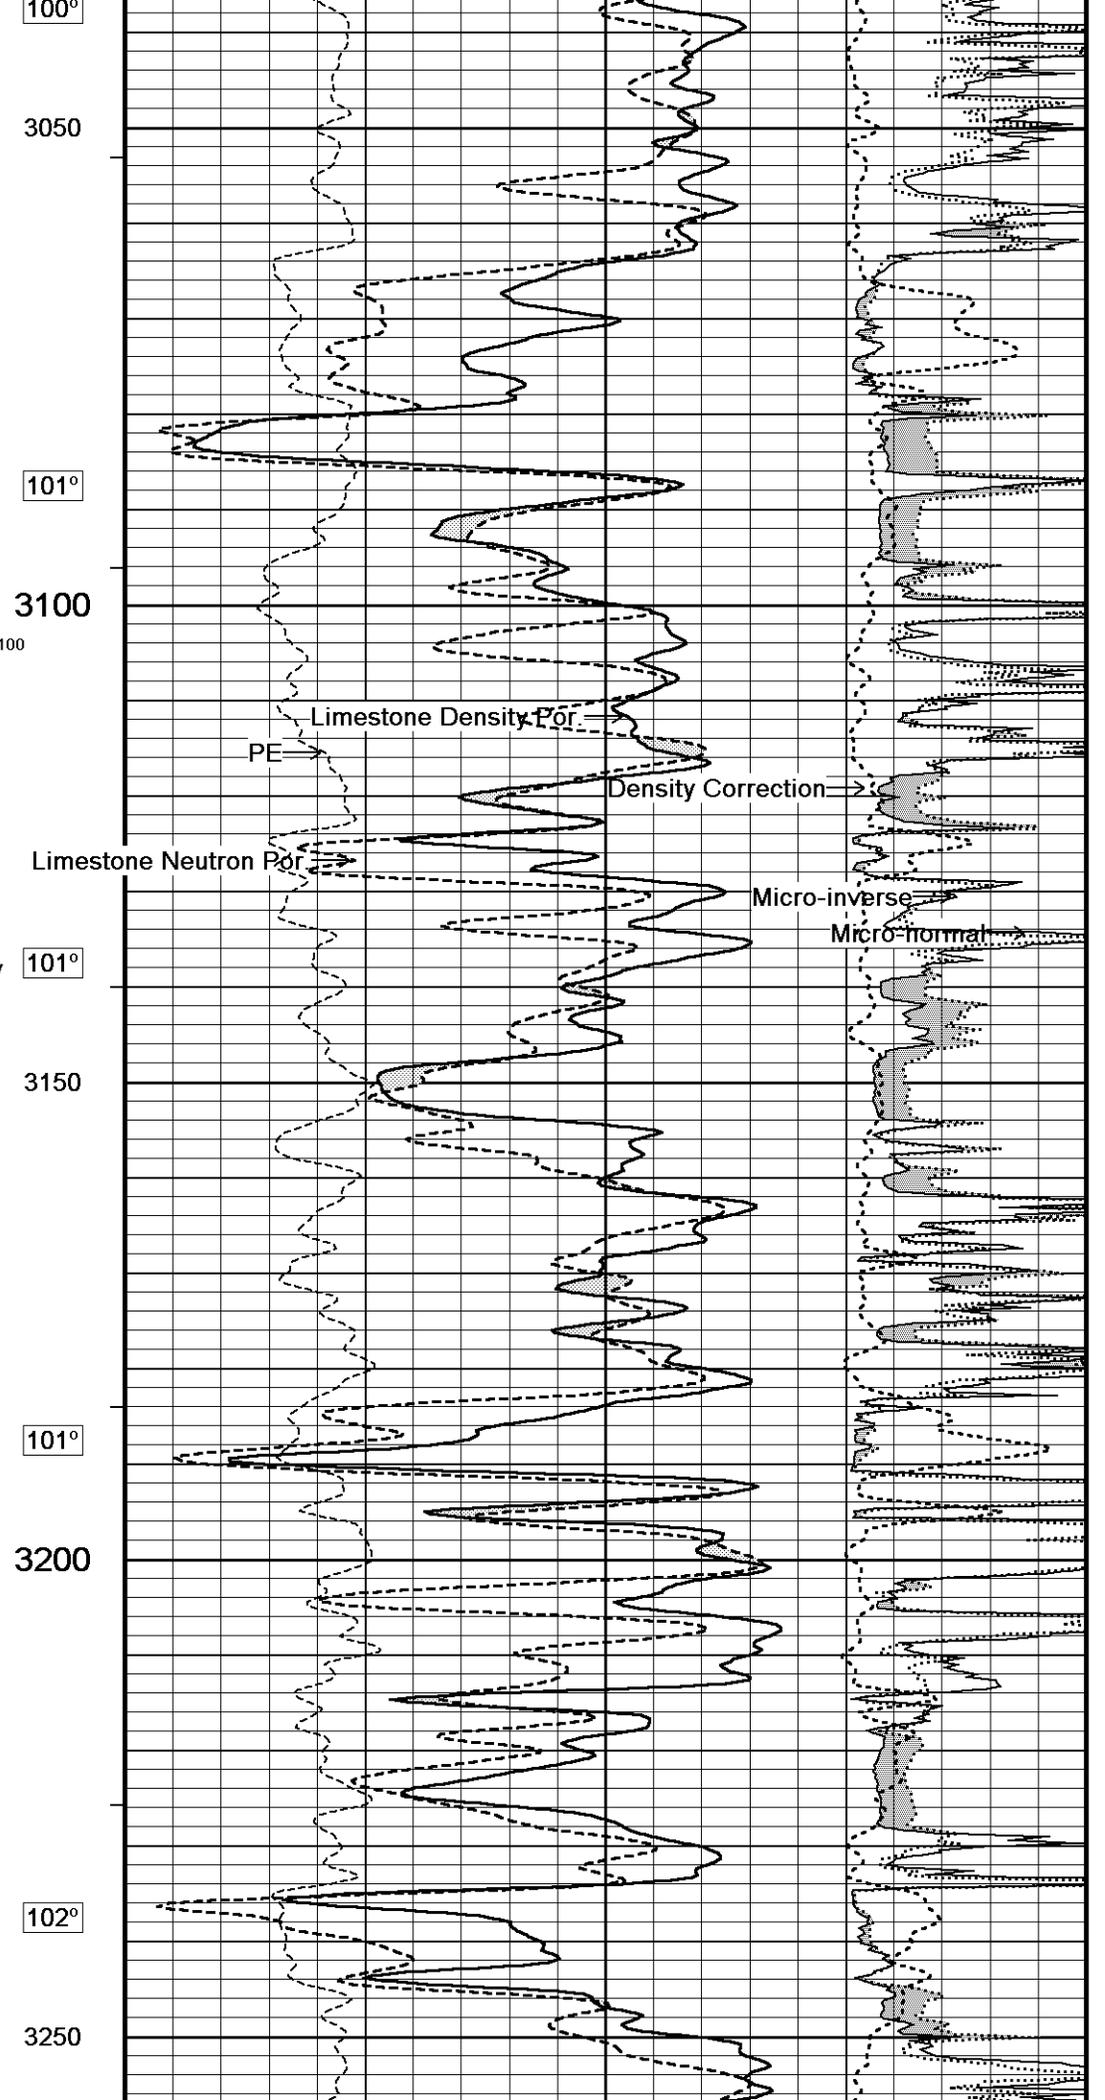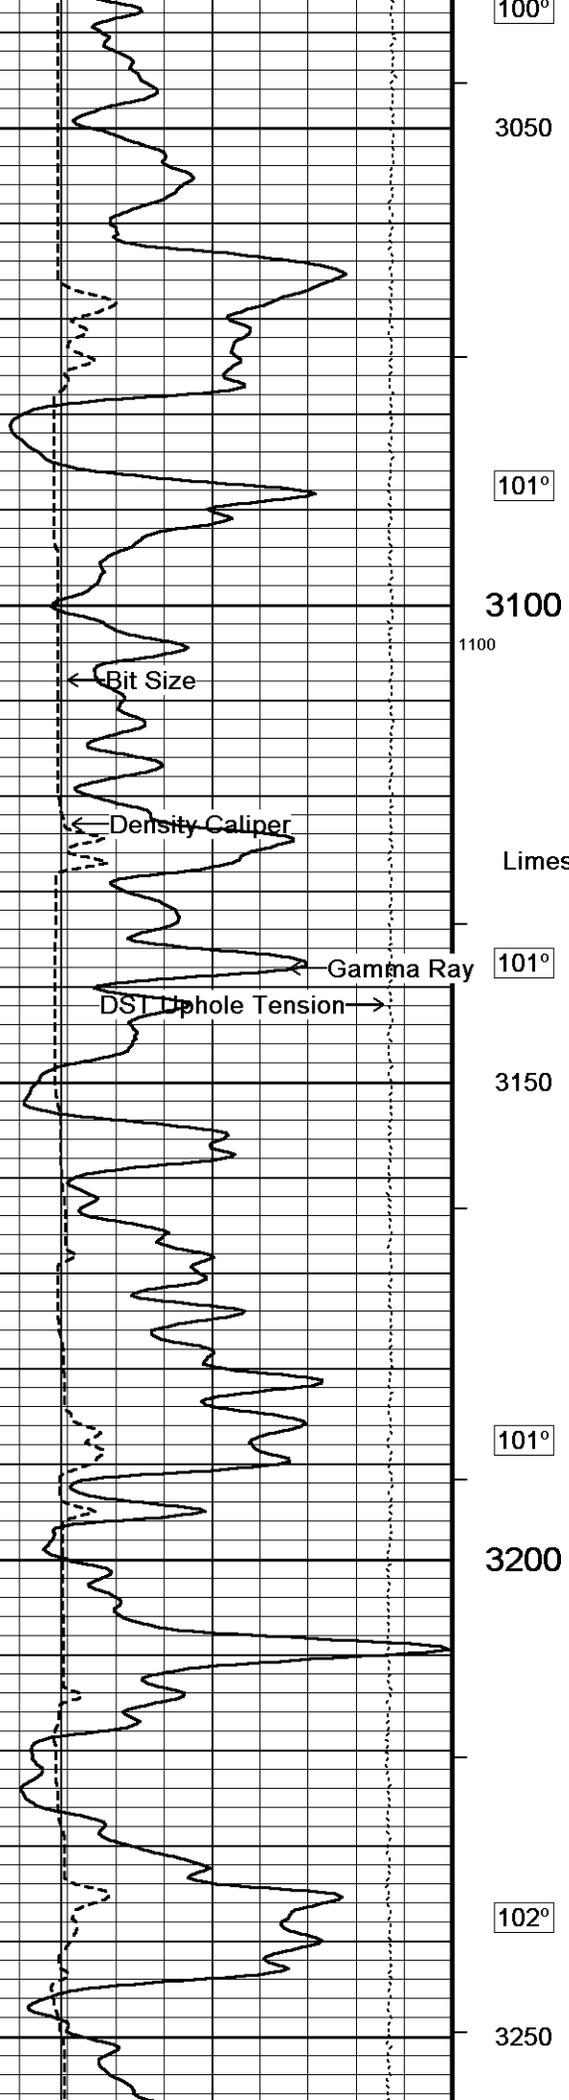

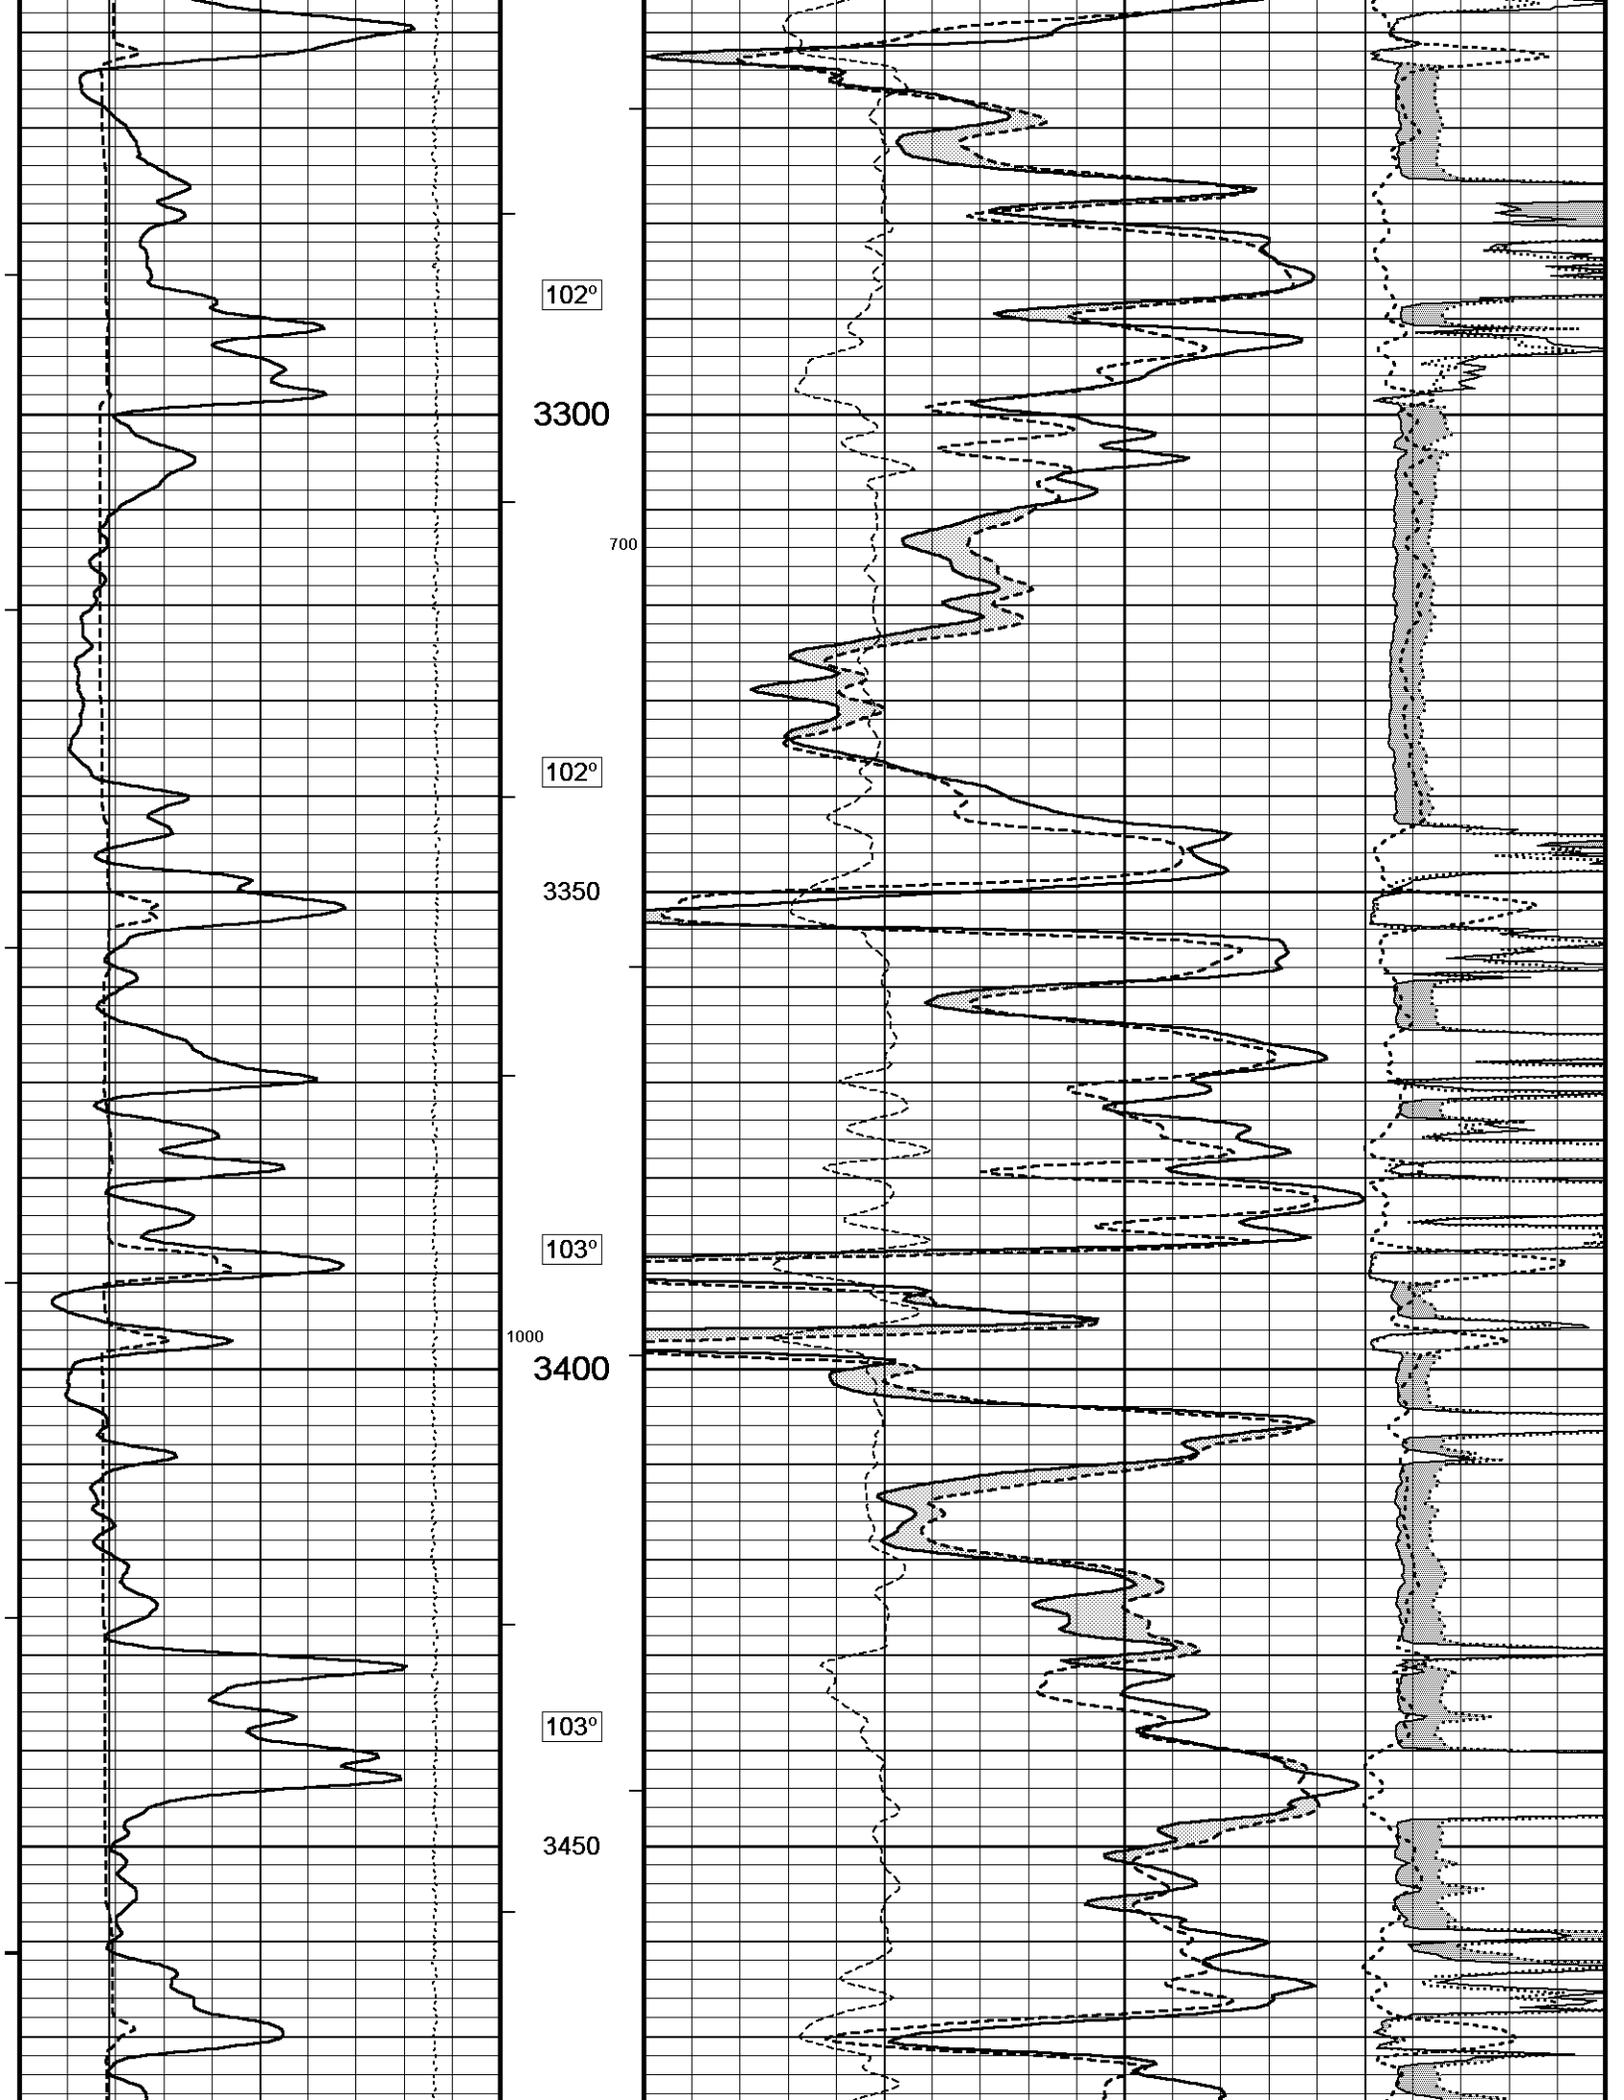

102°

3300

700

102°


3350


103°


1000
3400


103°


3450

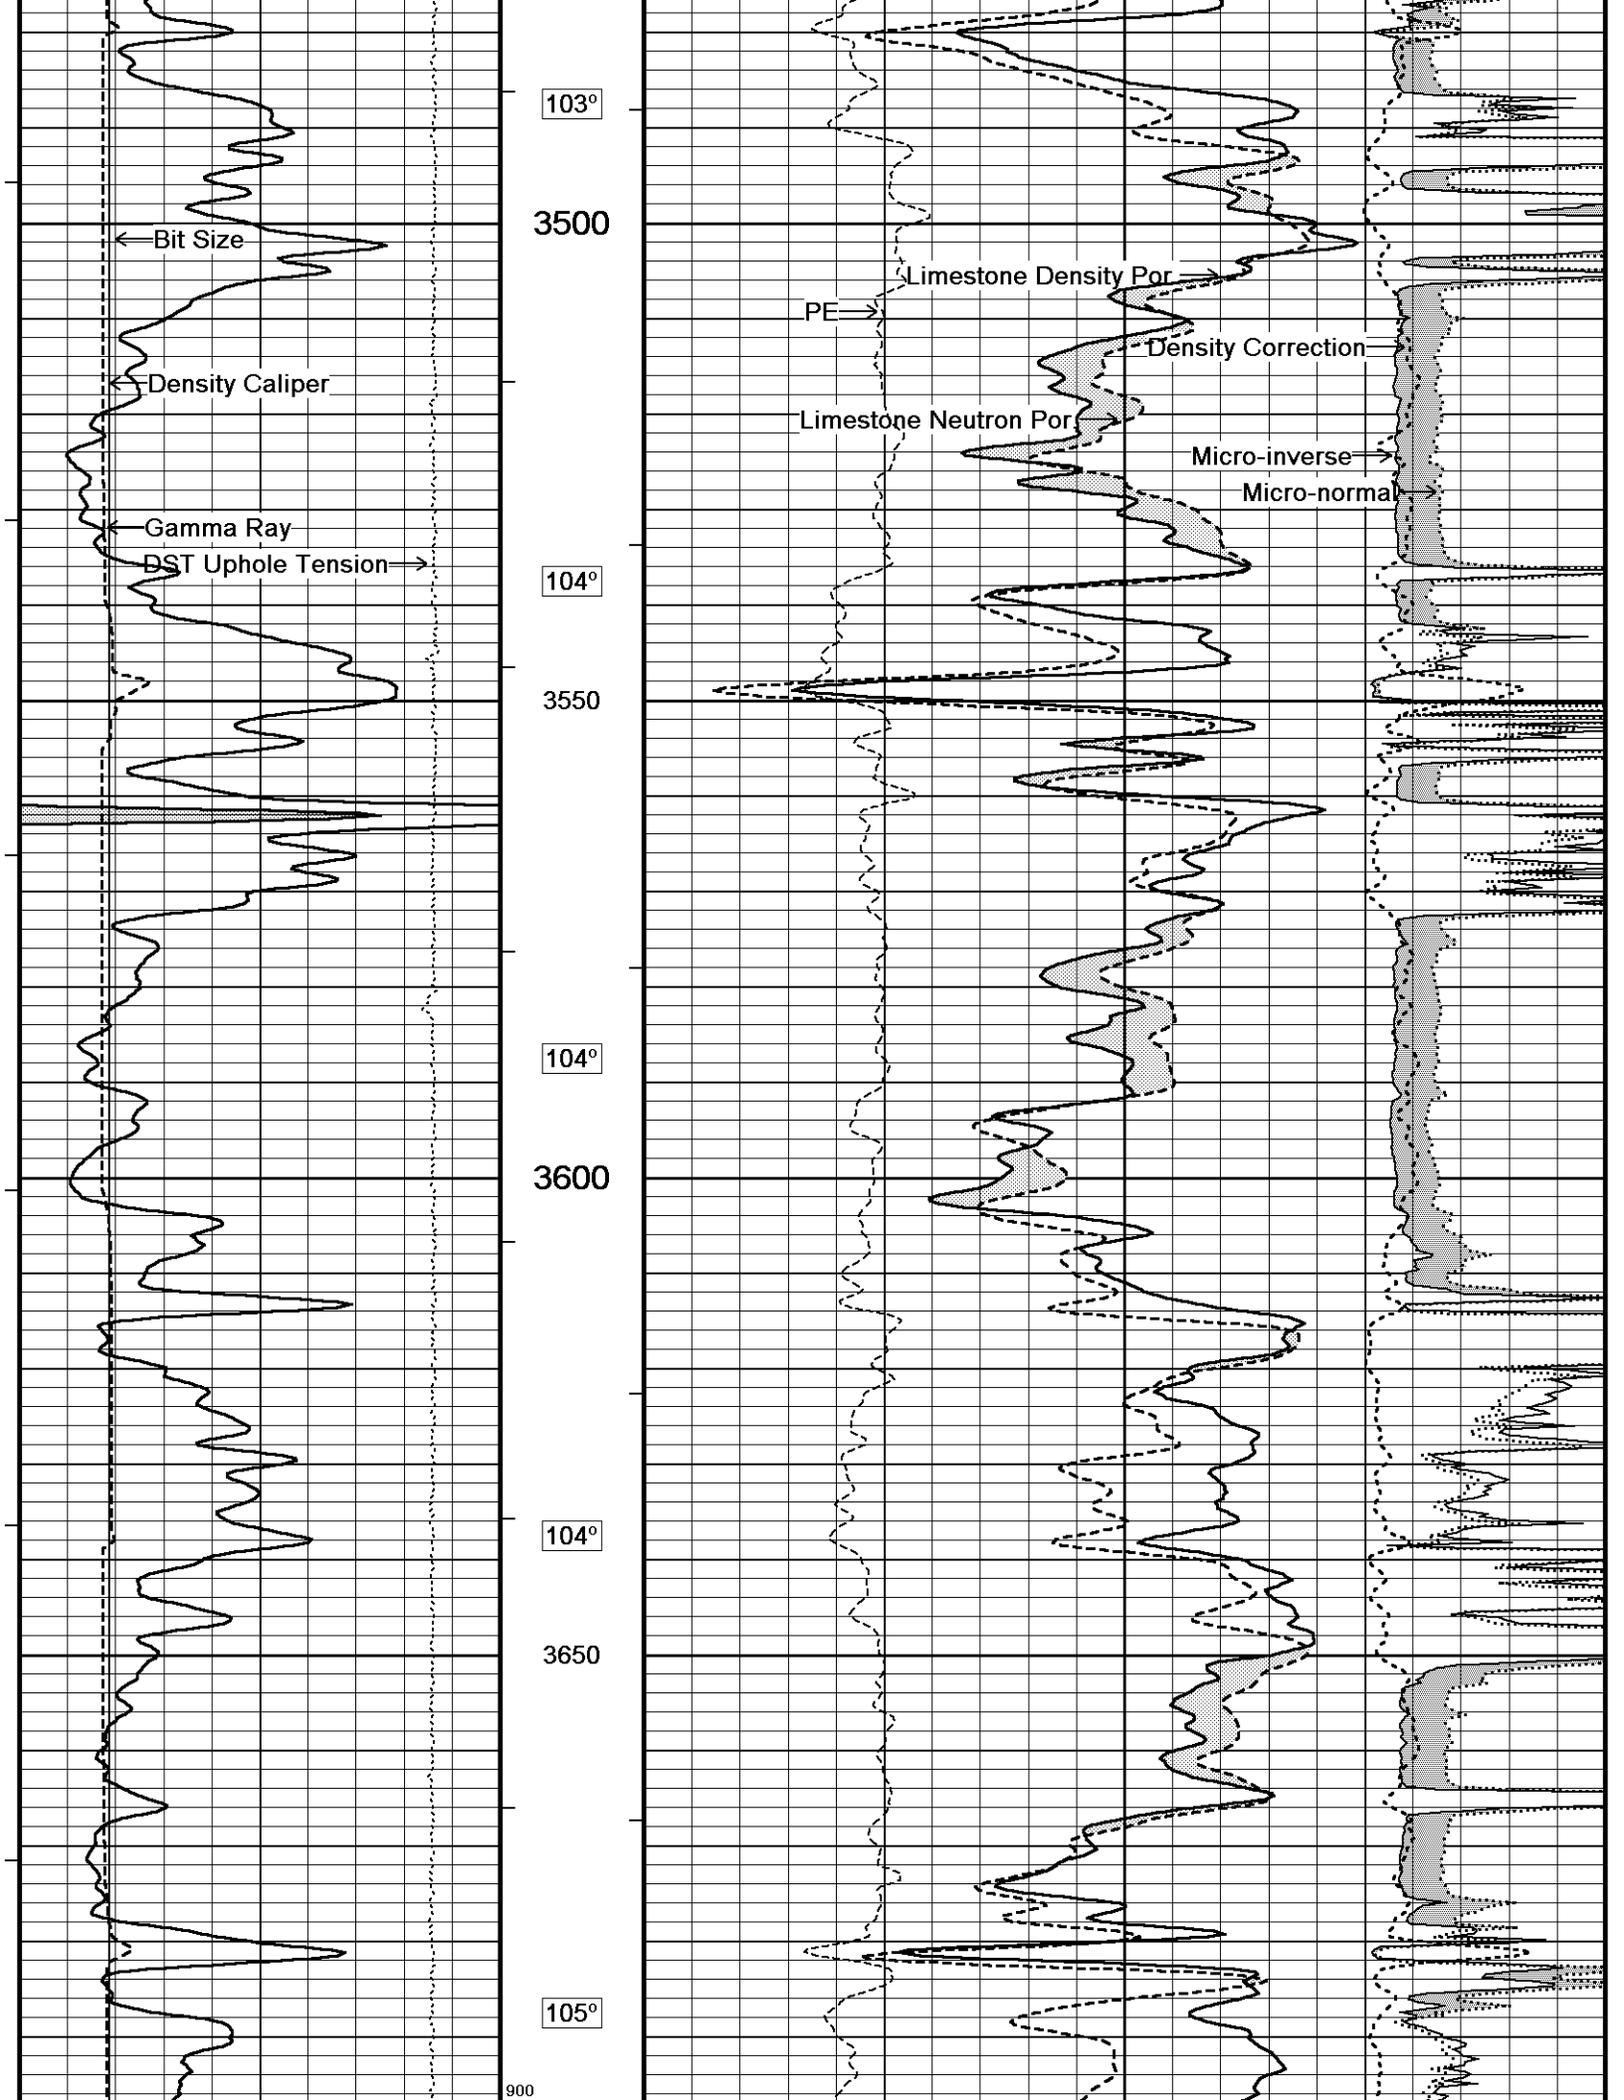


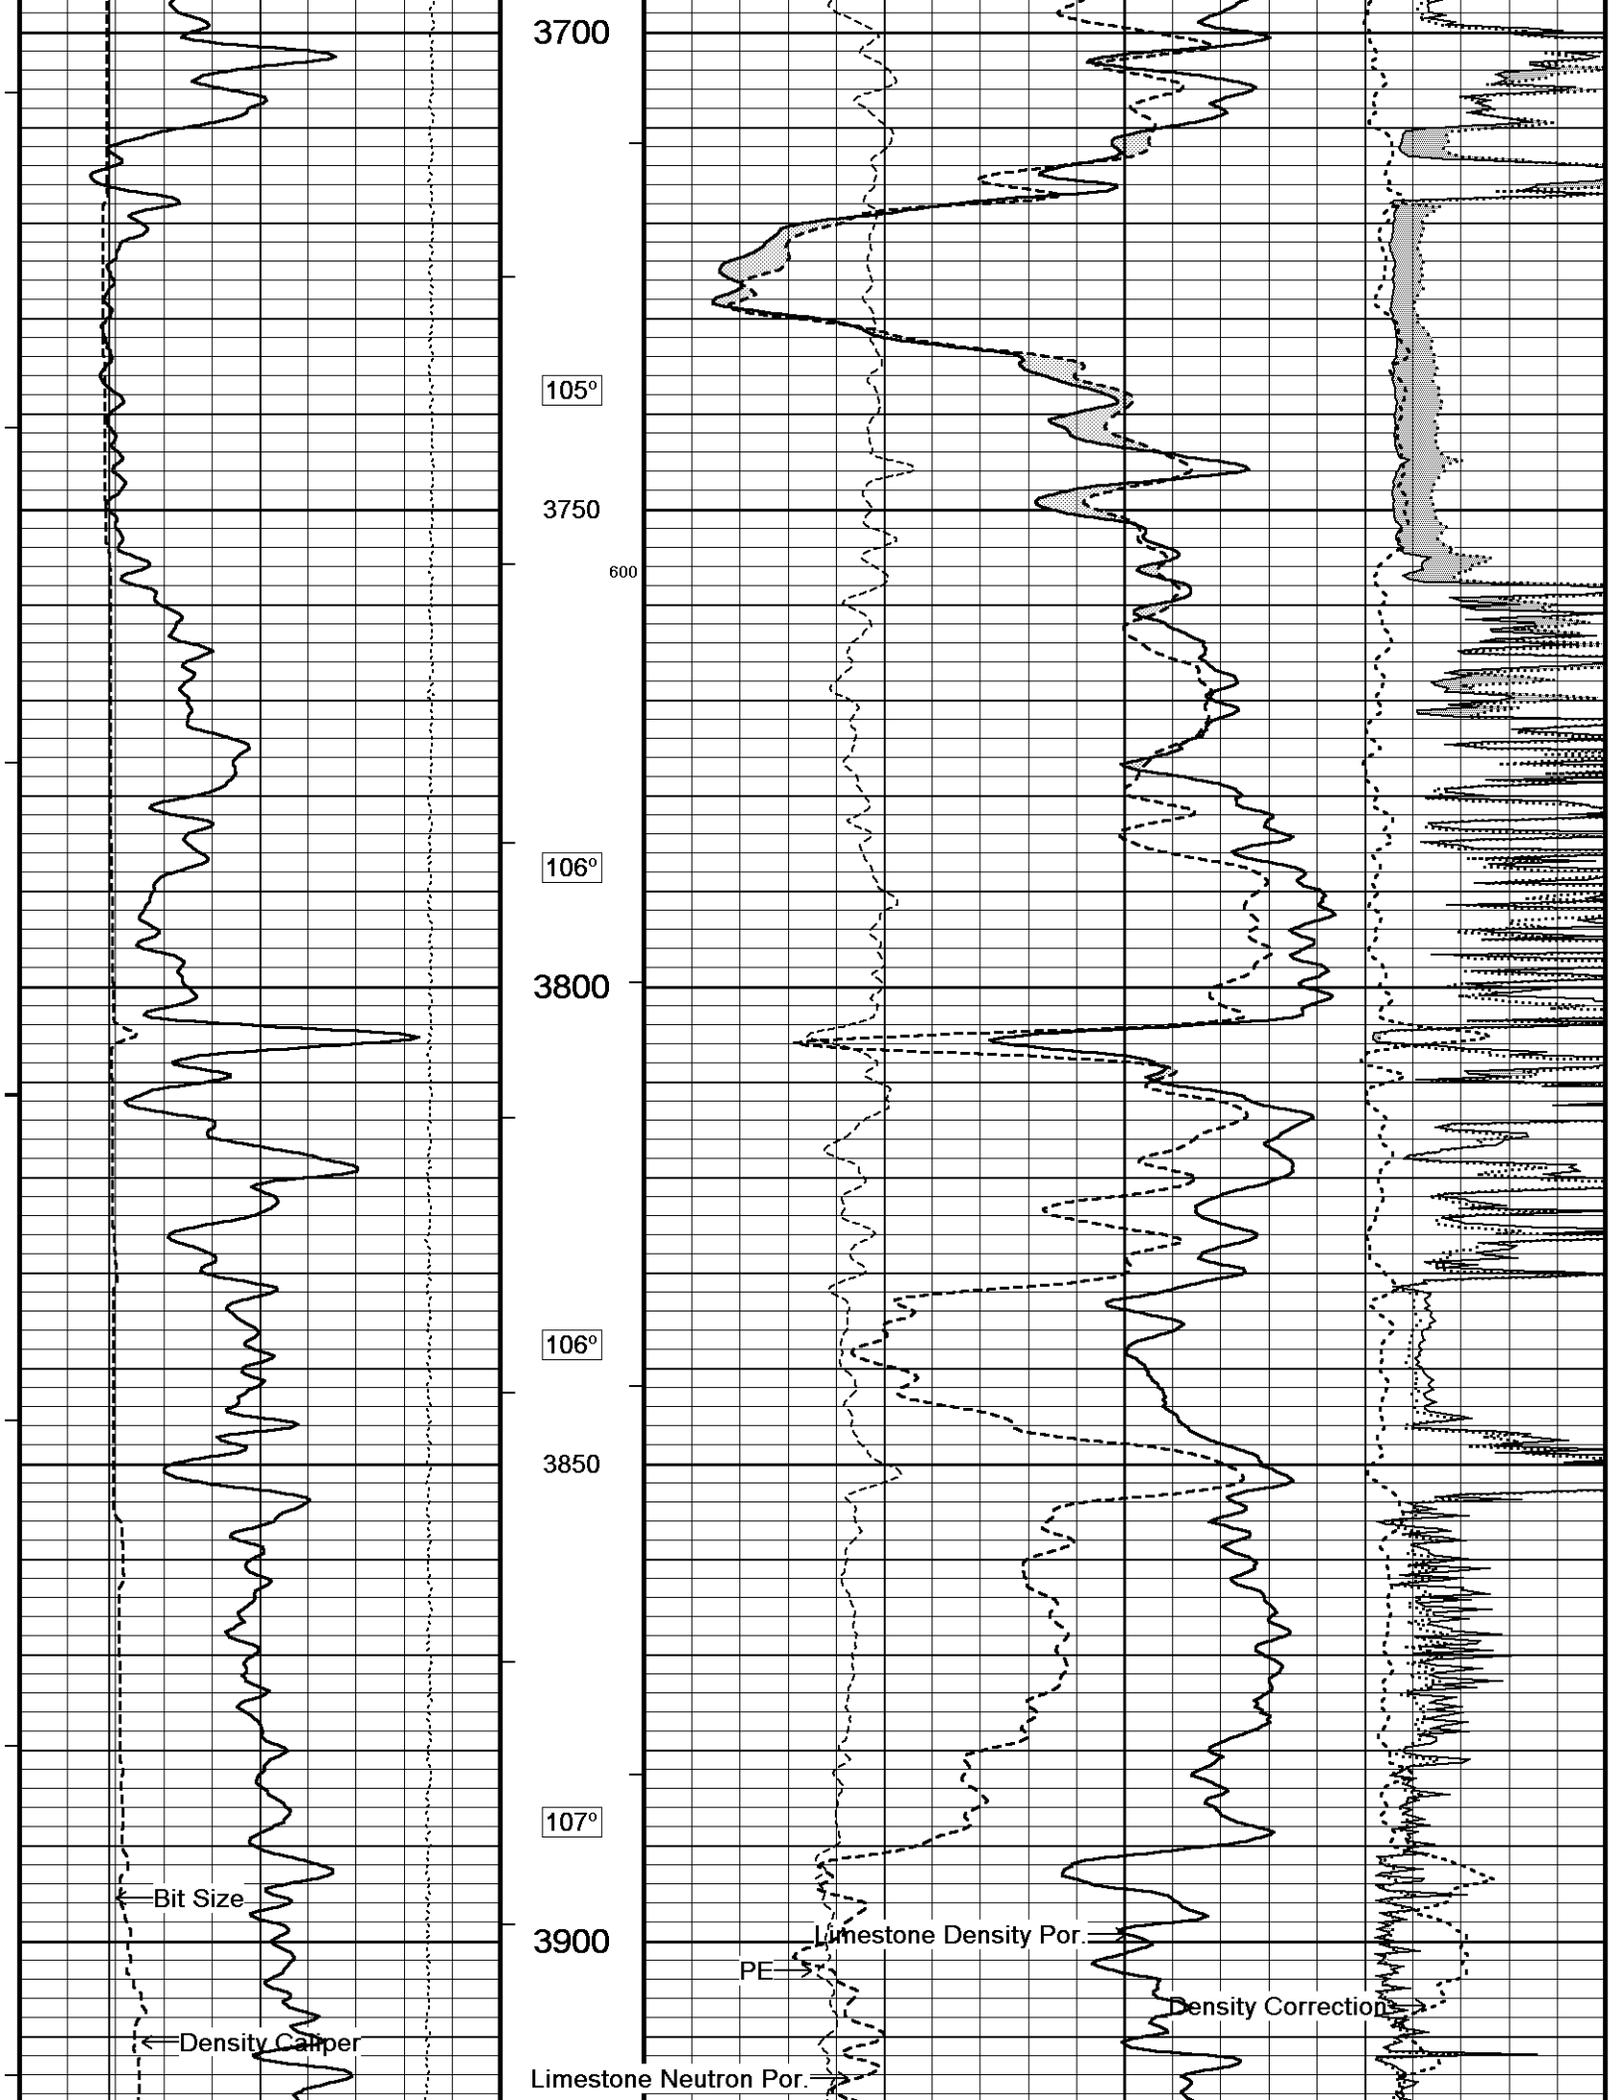


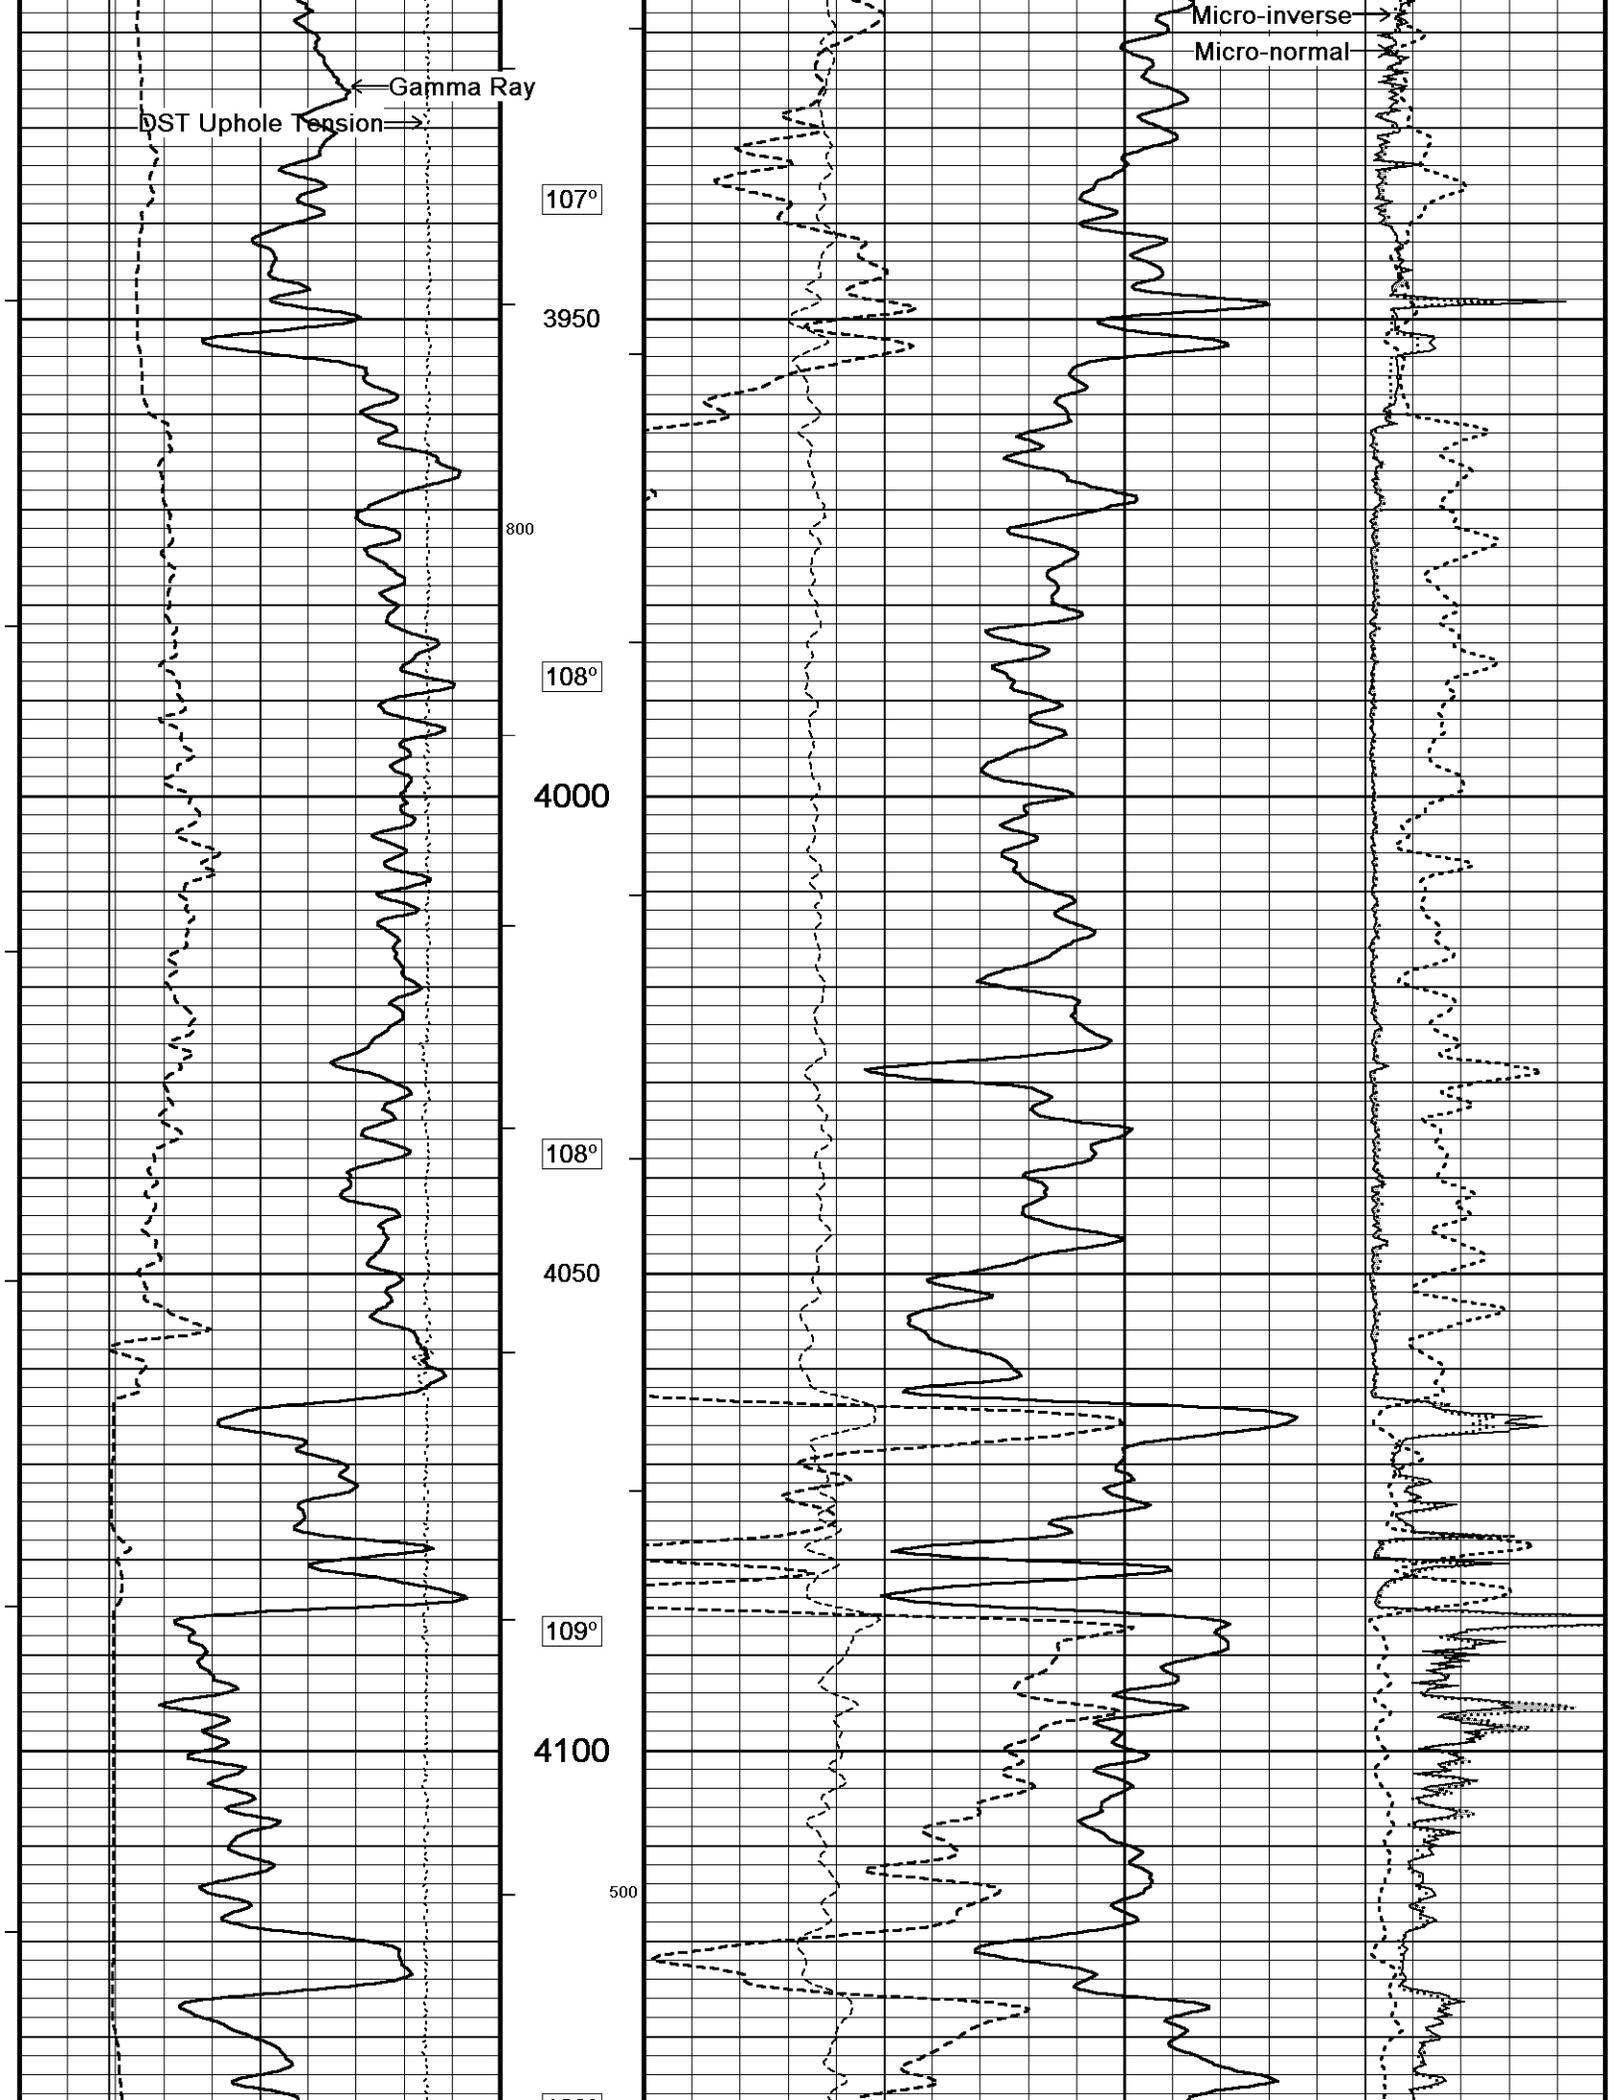


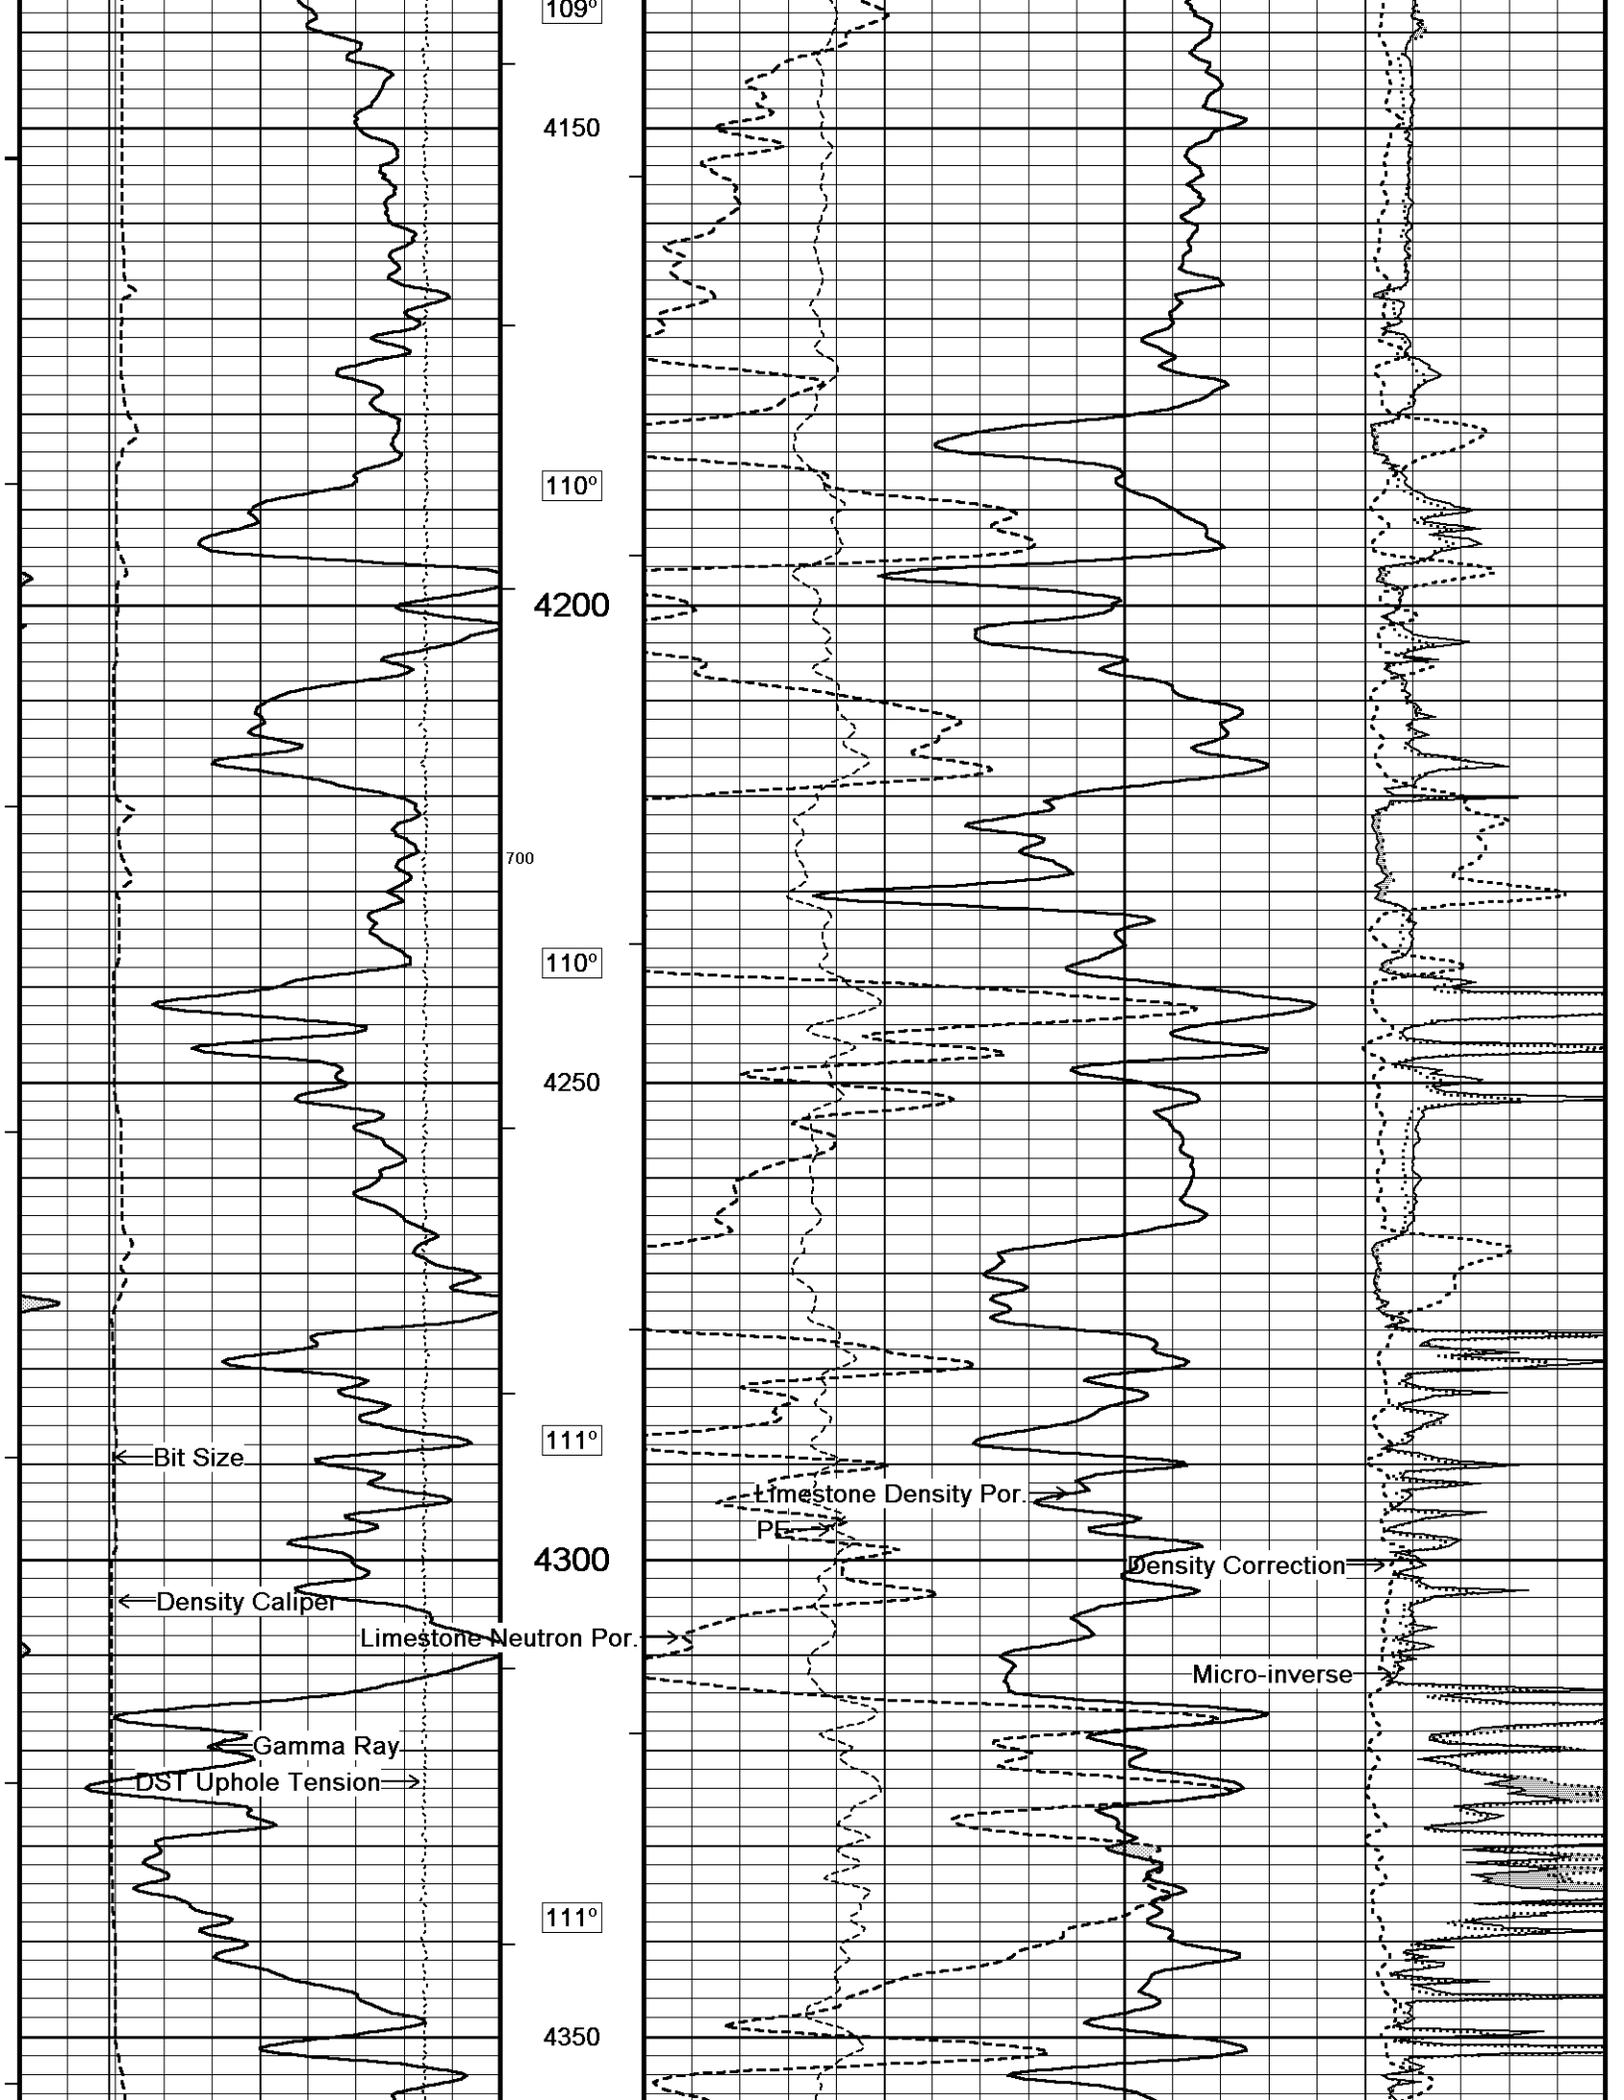


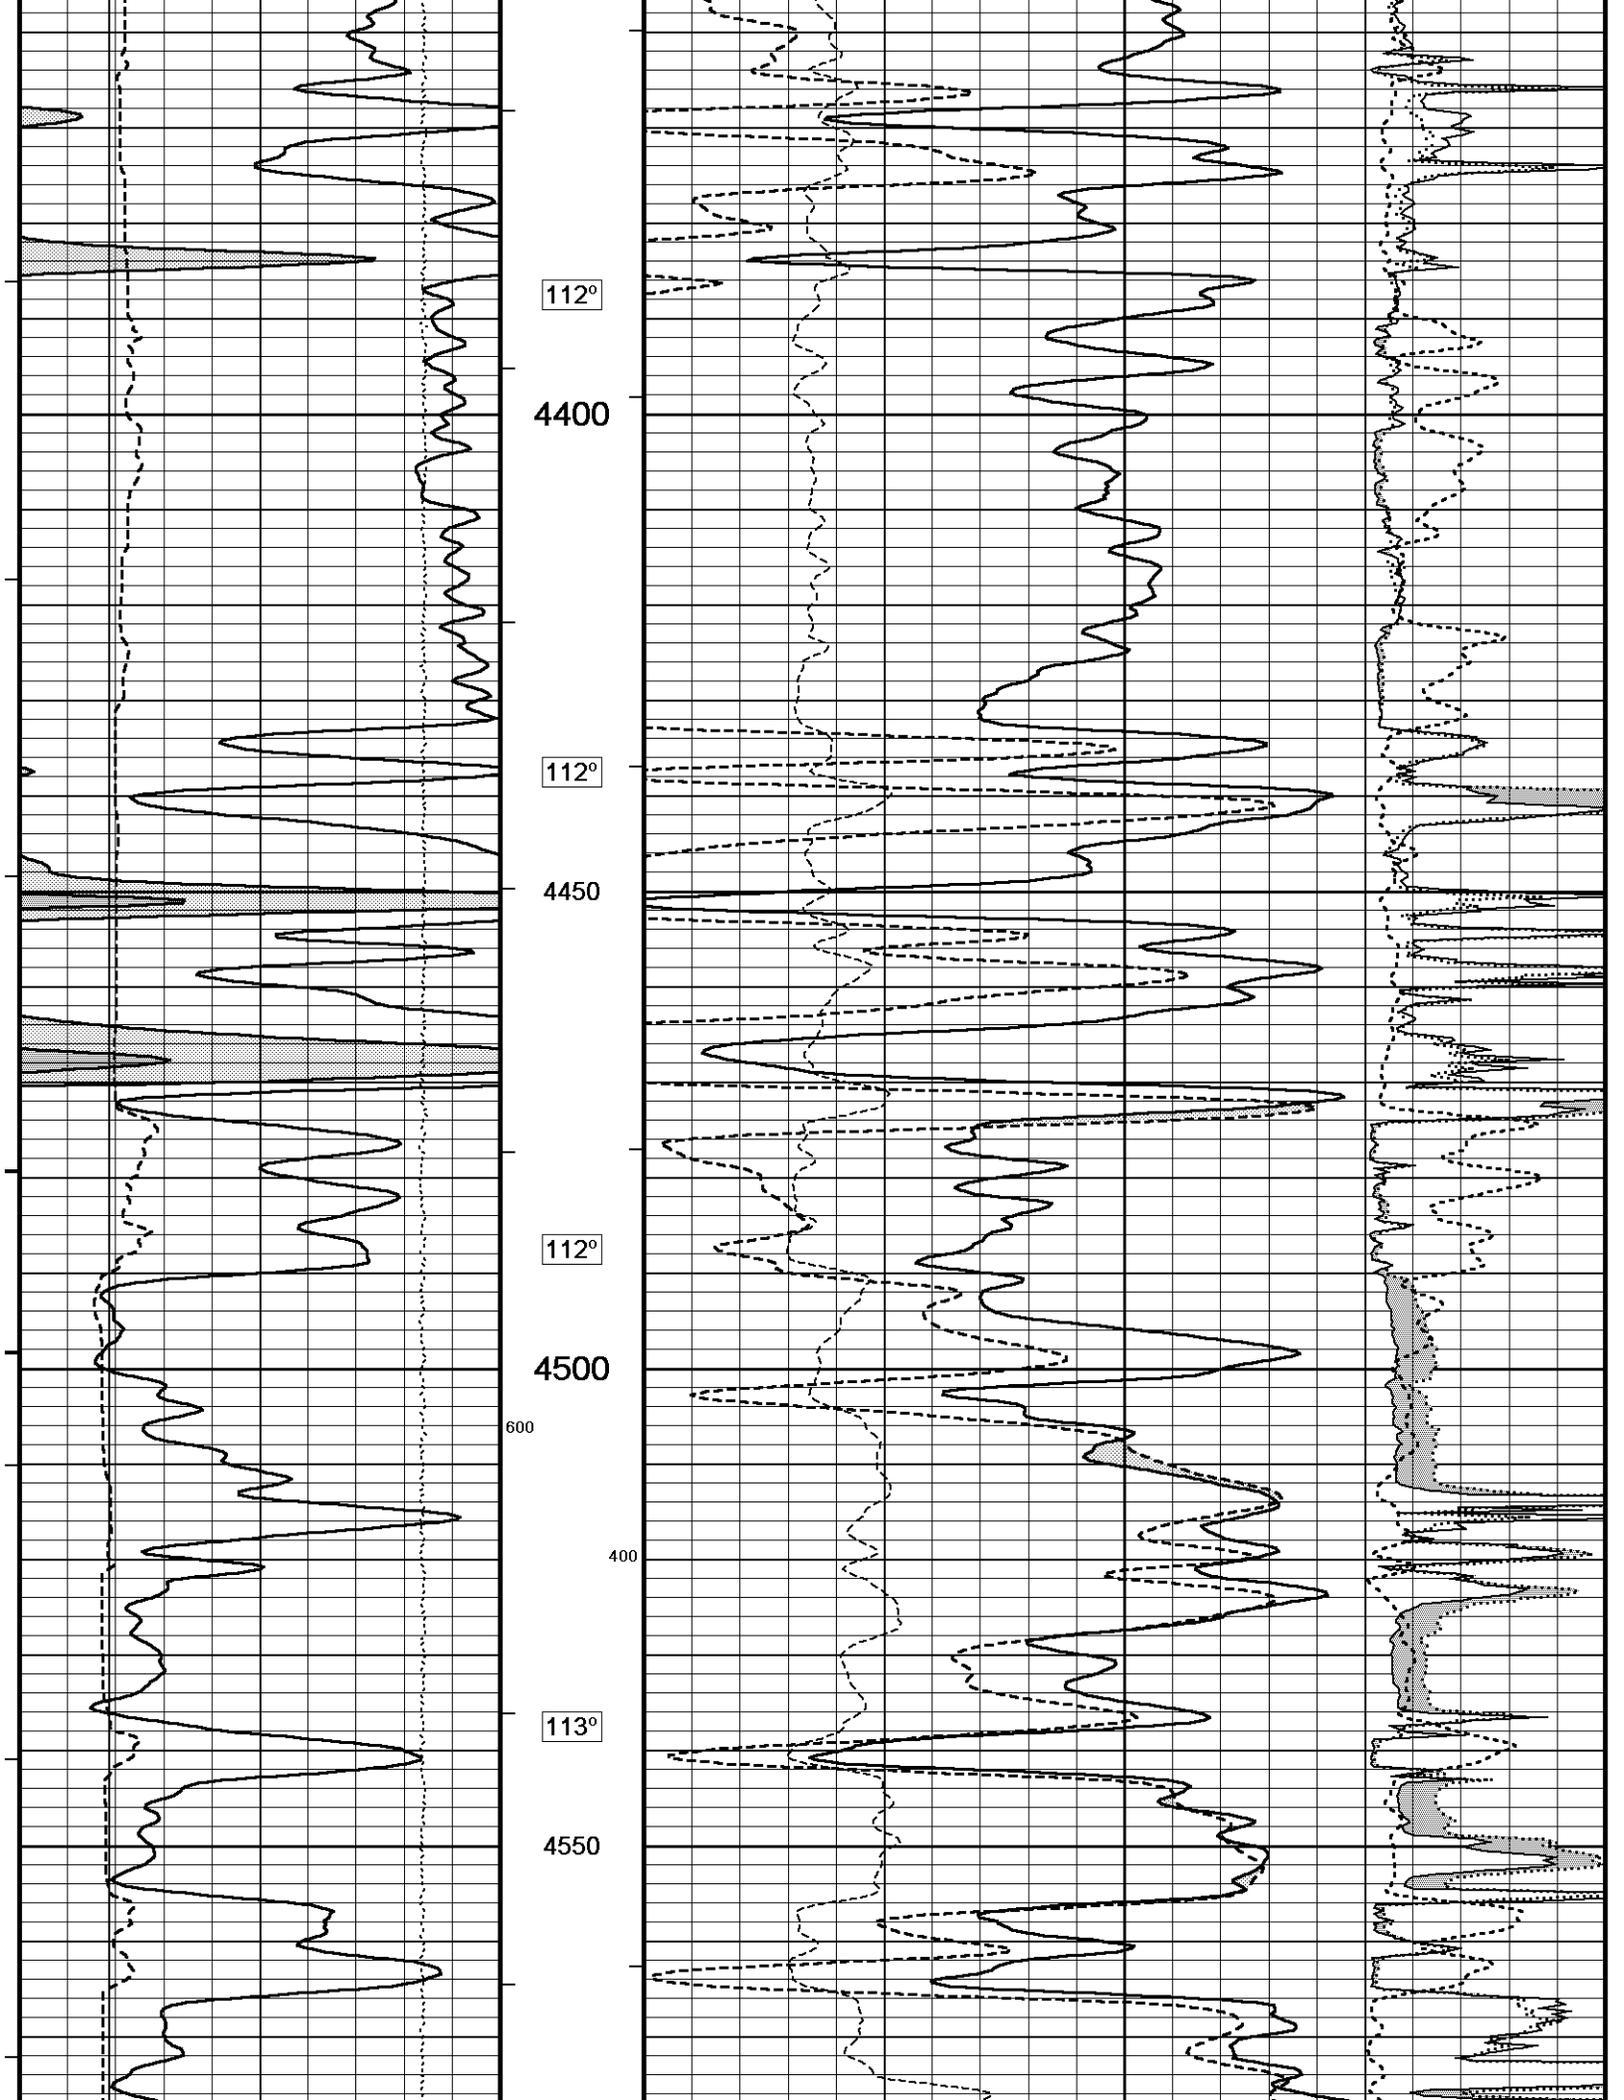


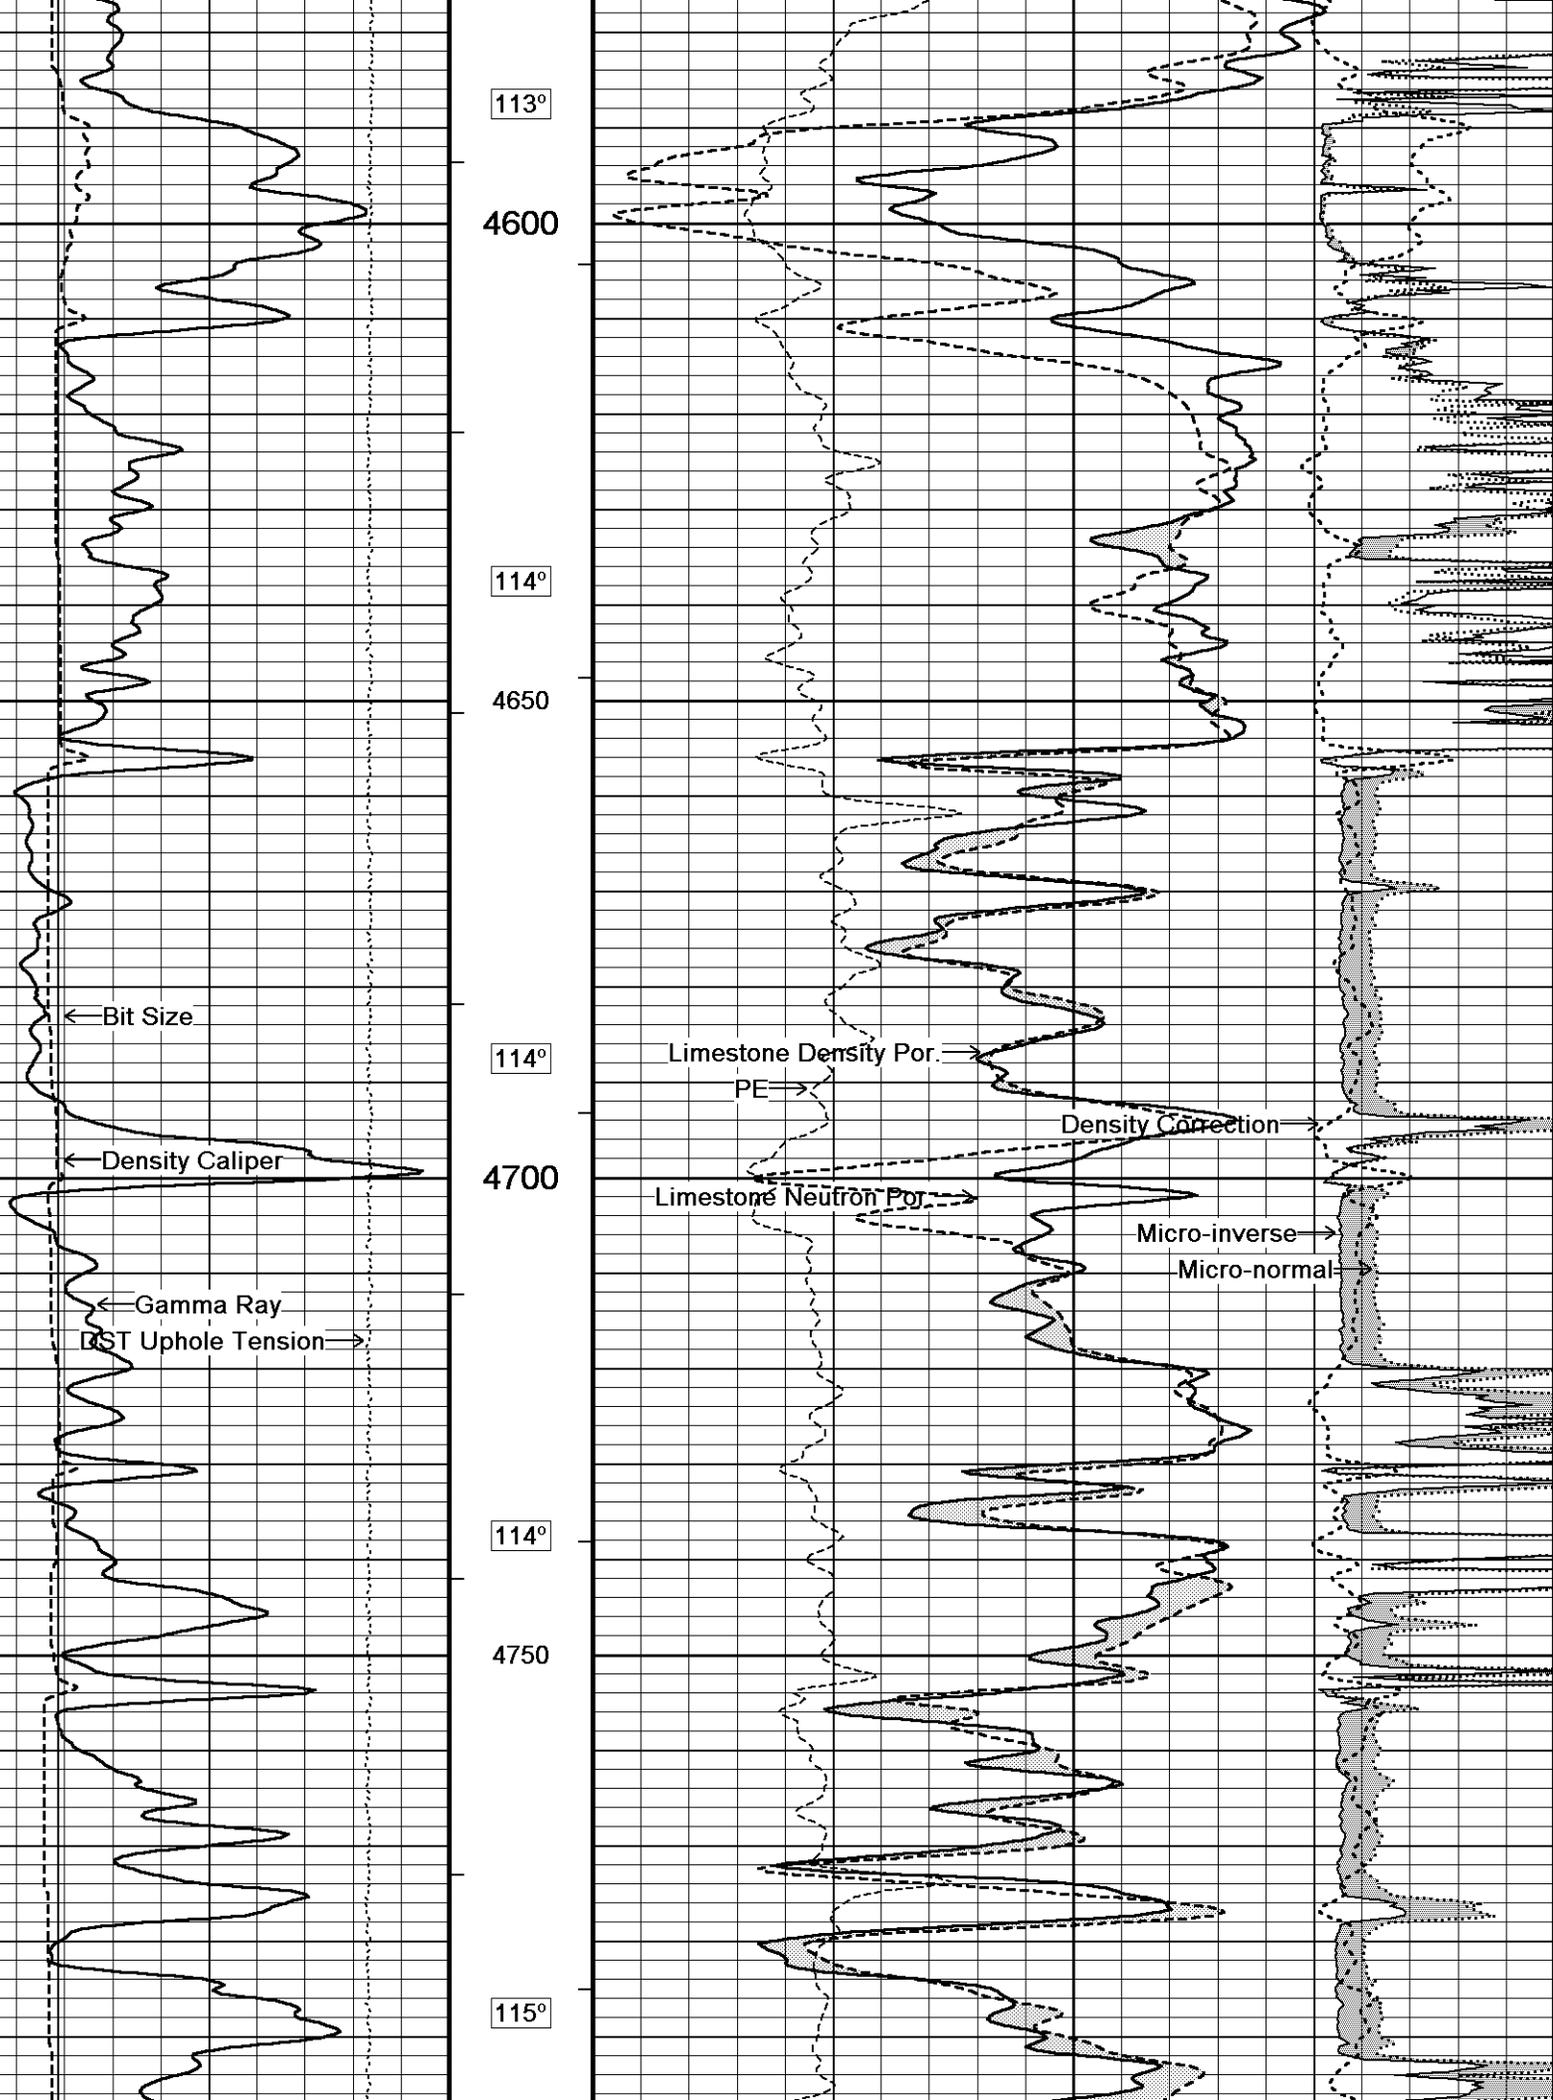


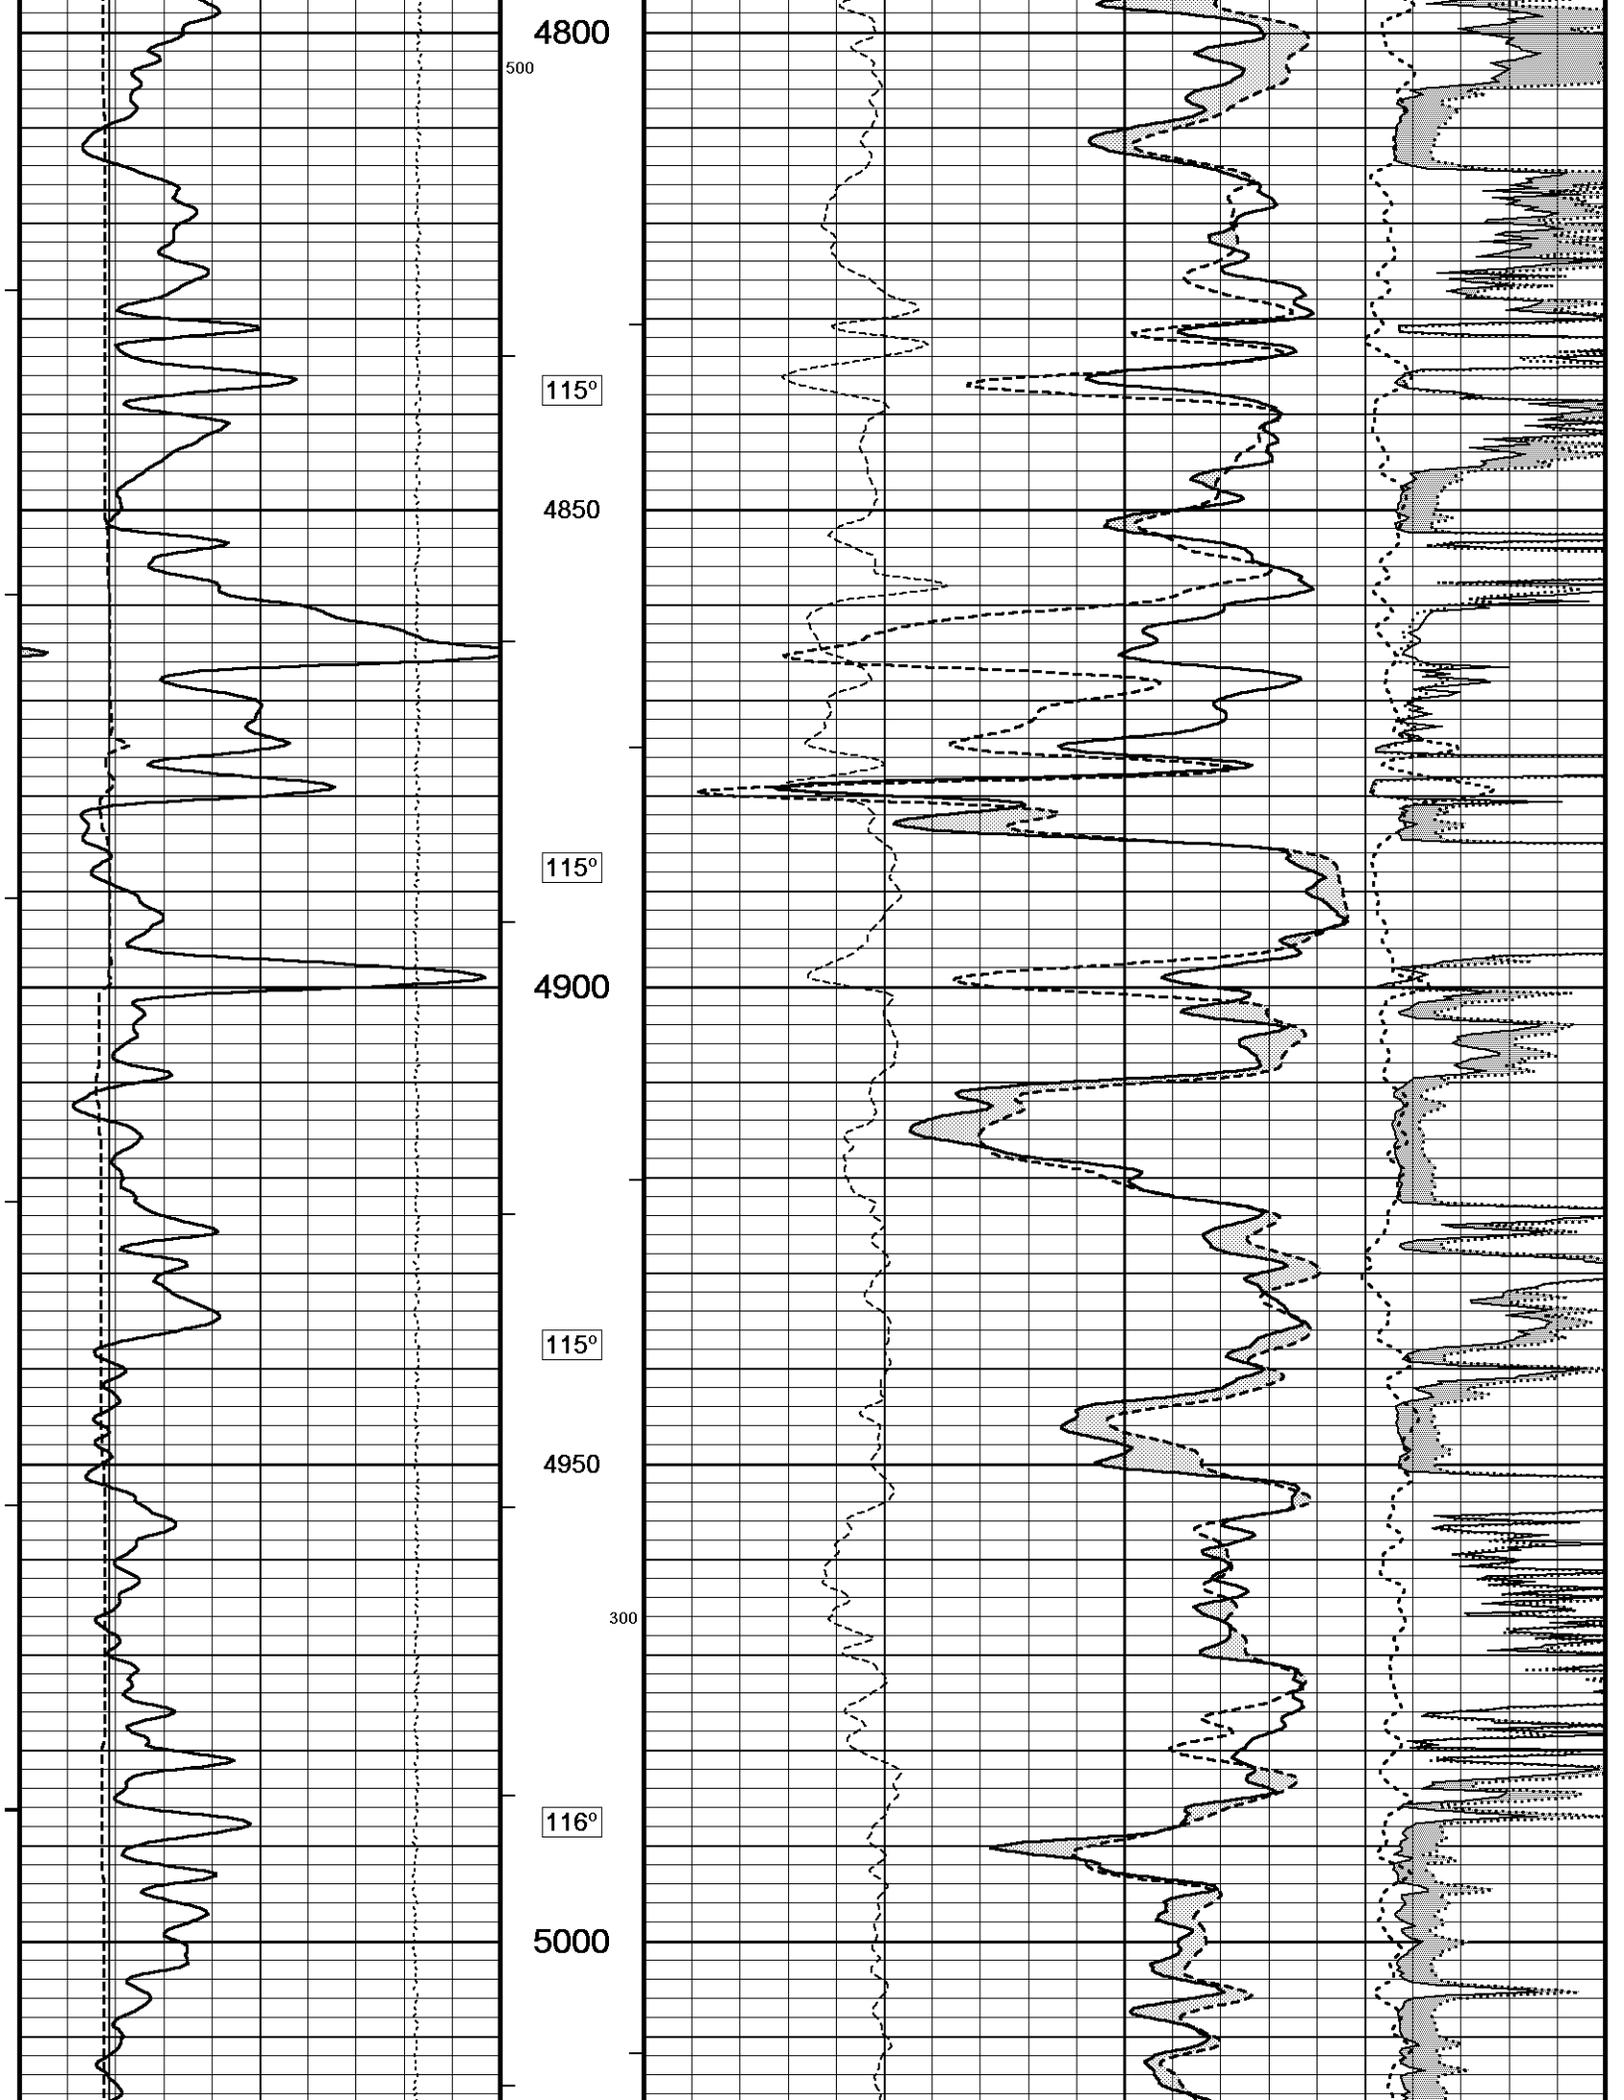


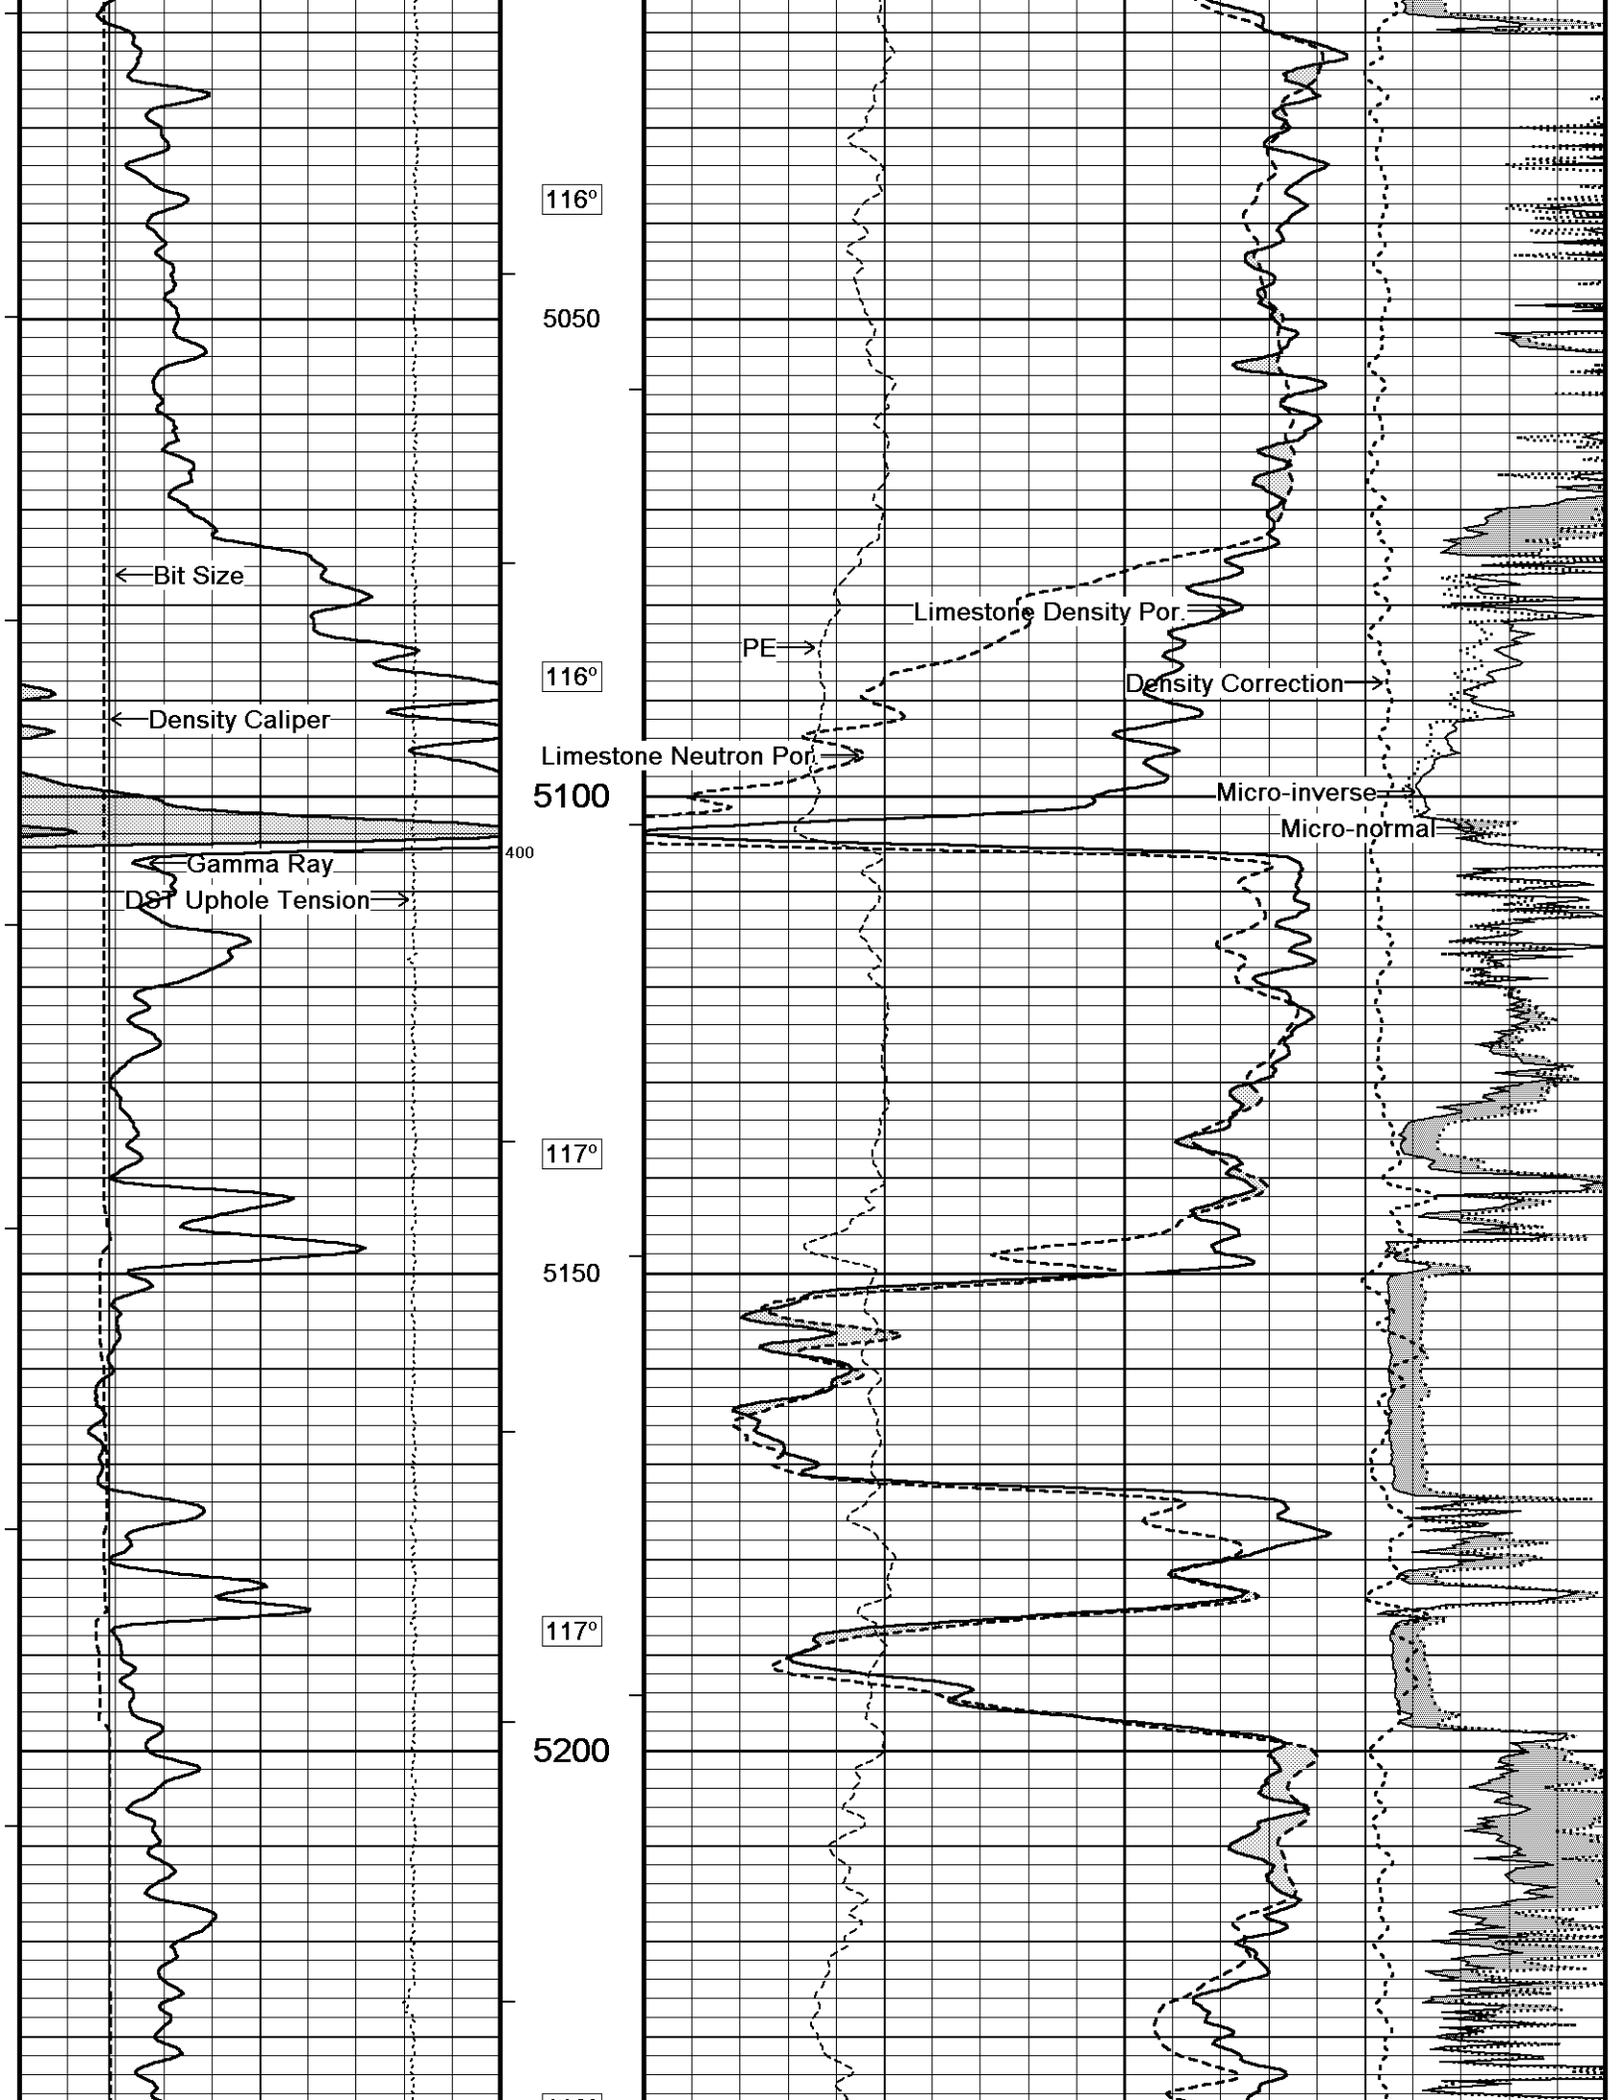

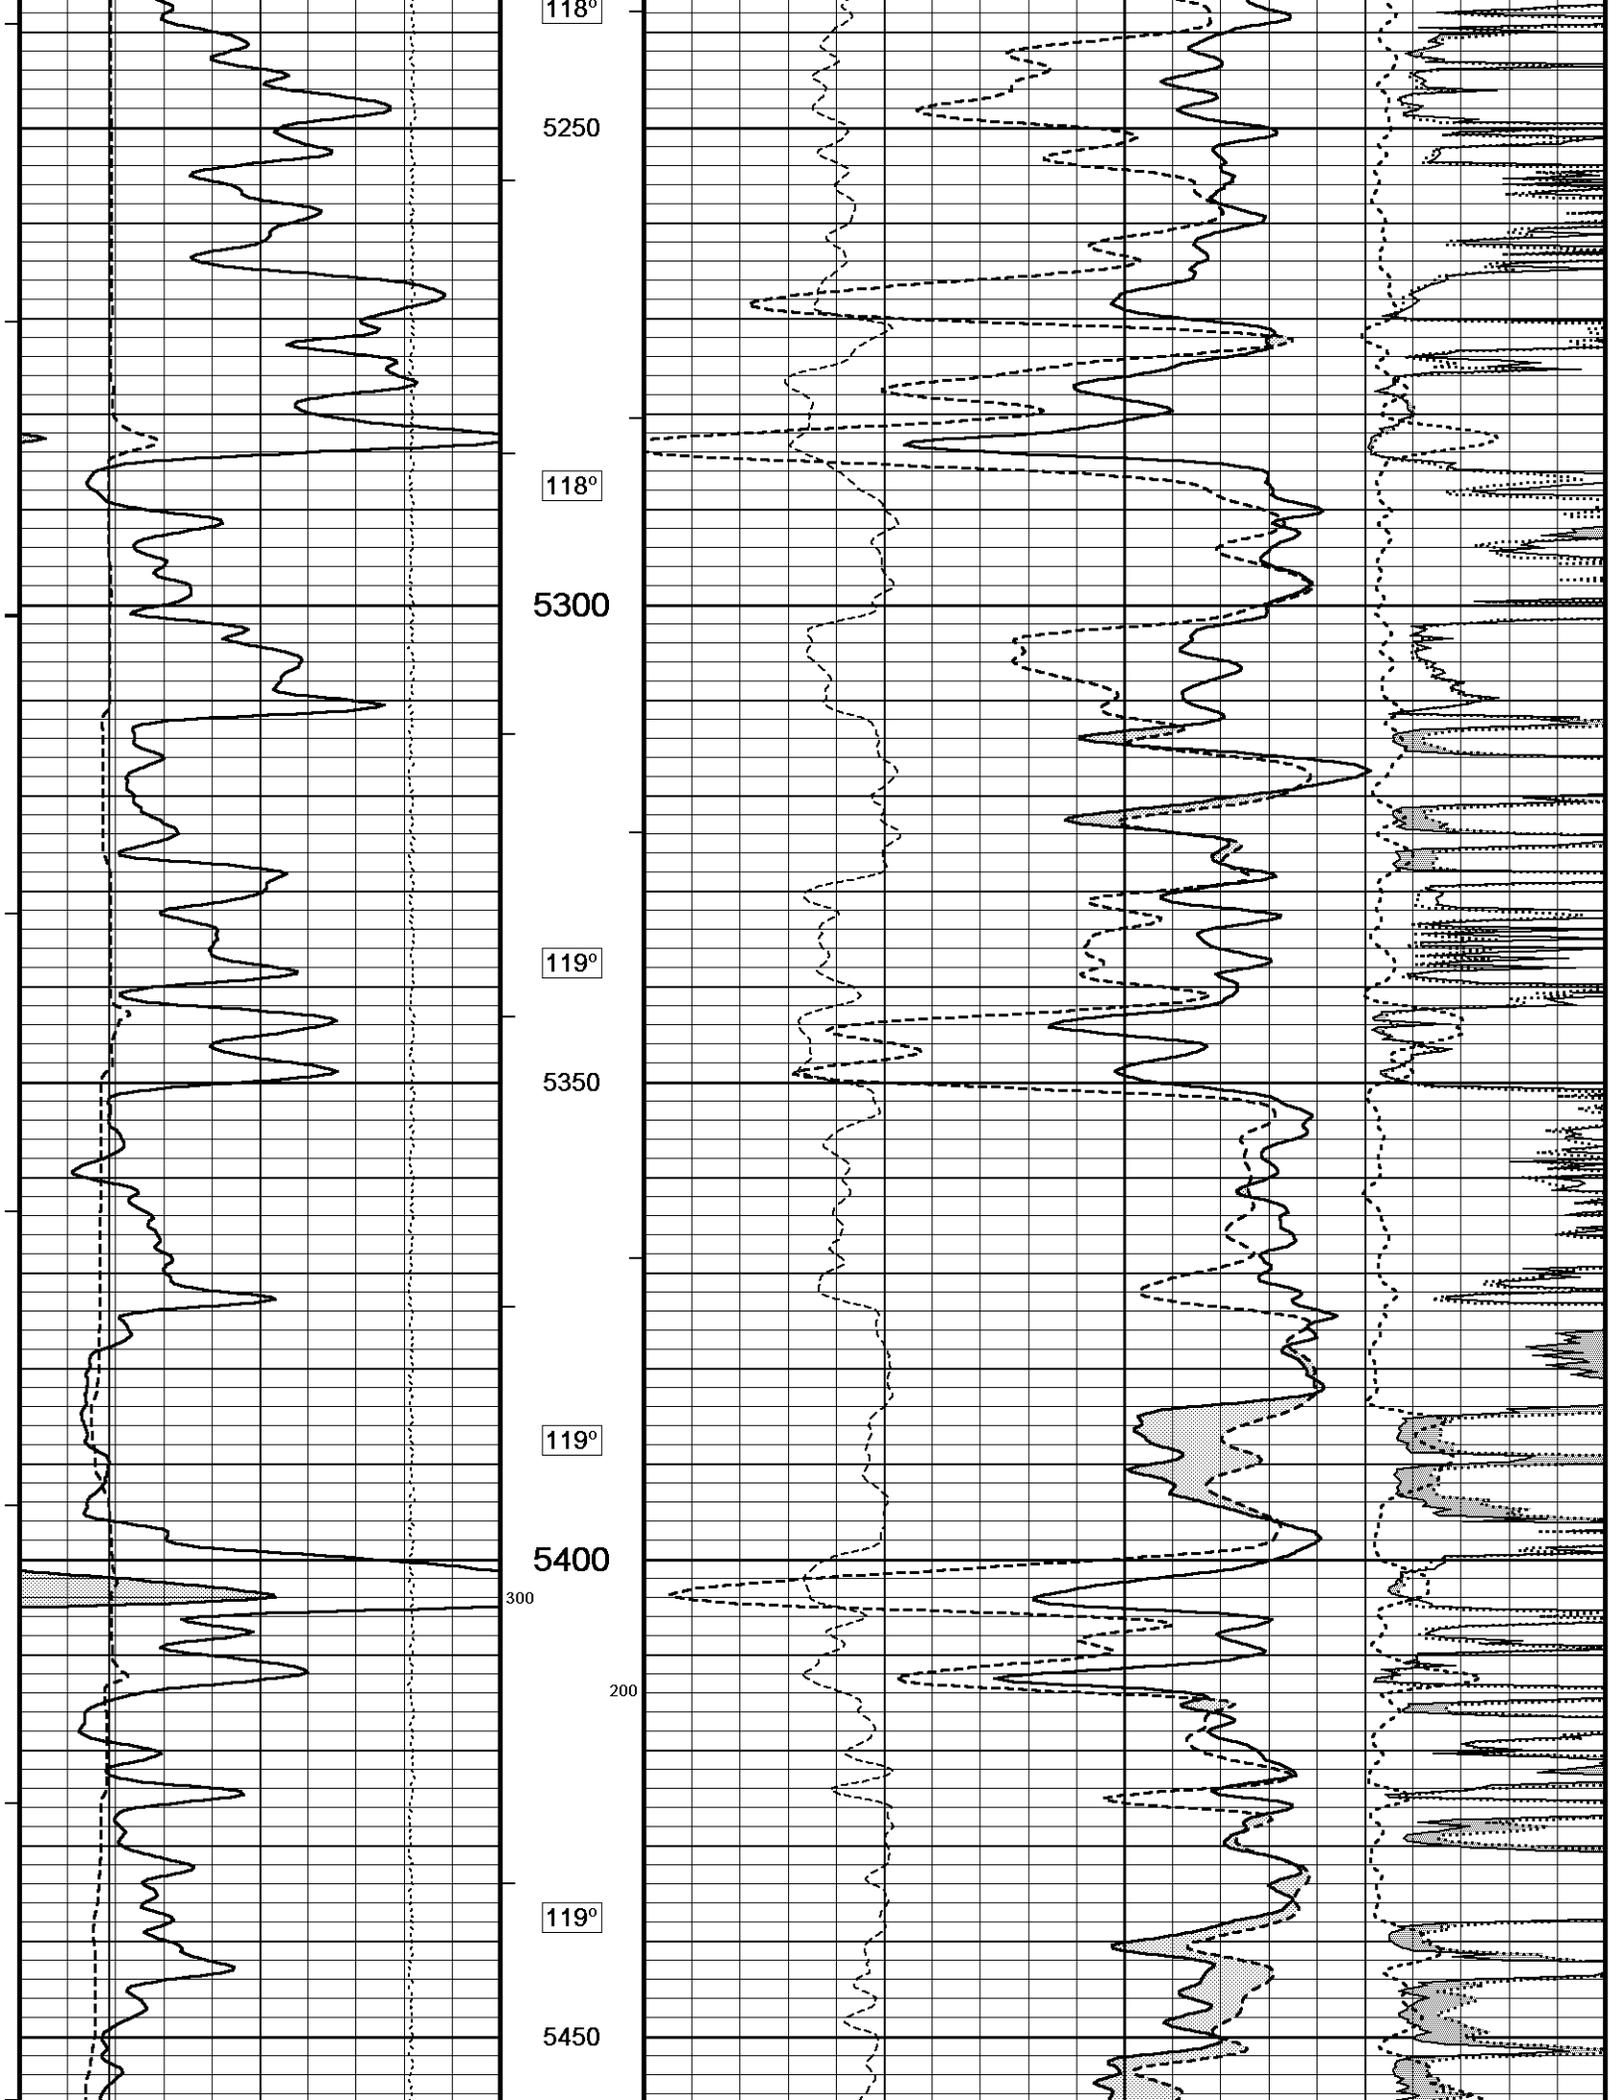

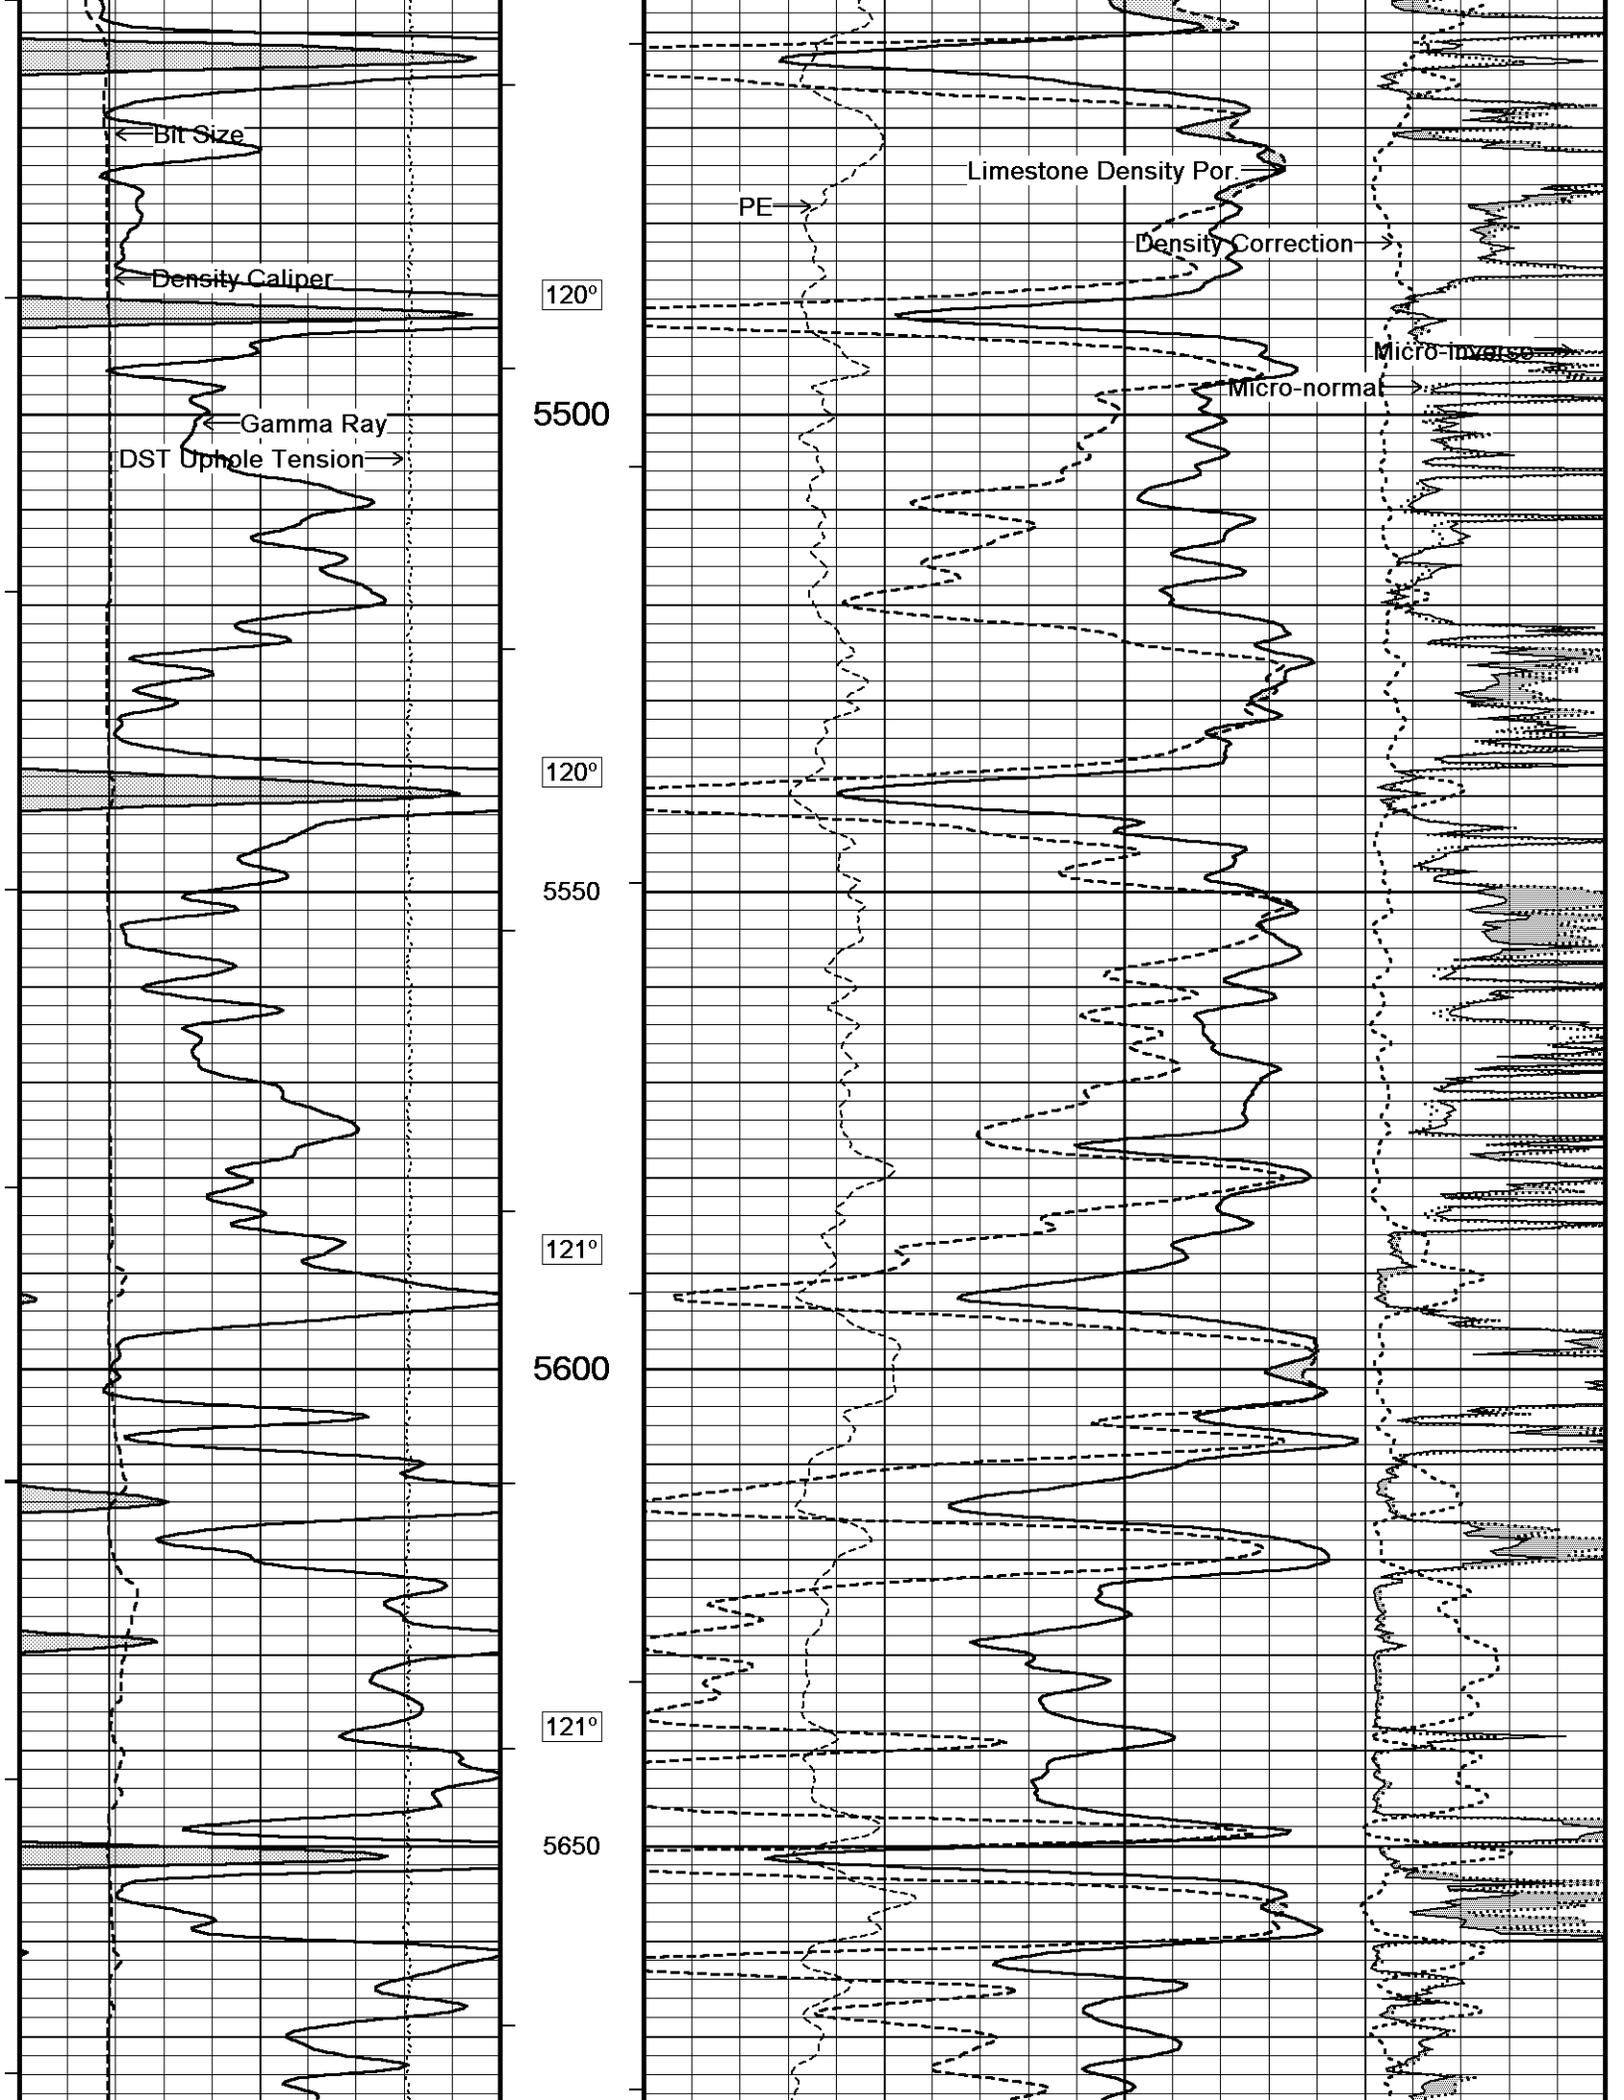

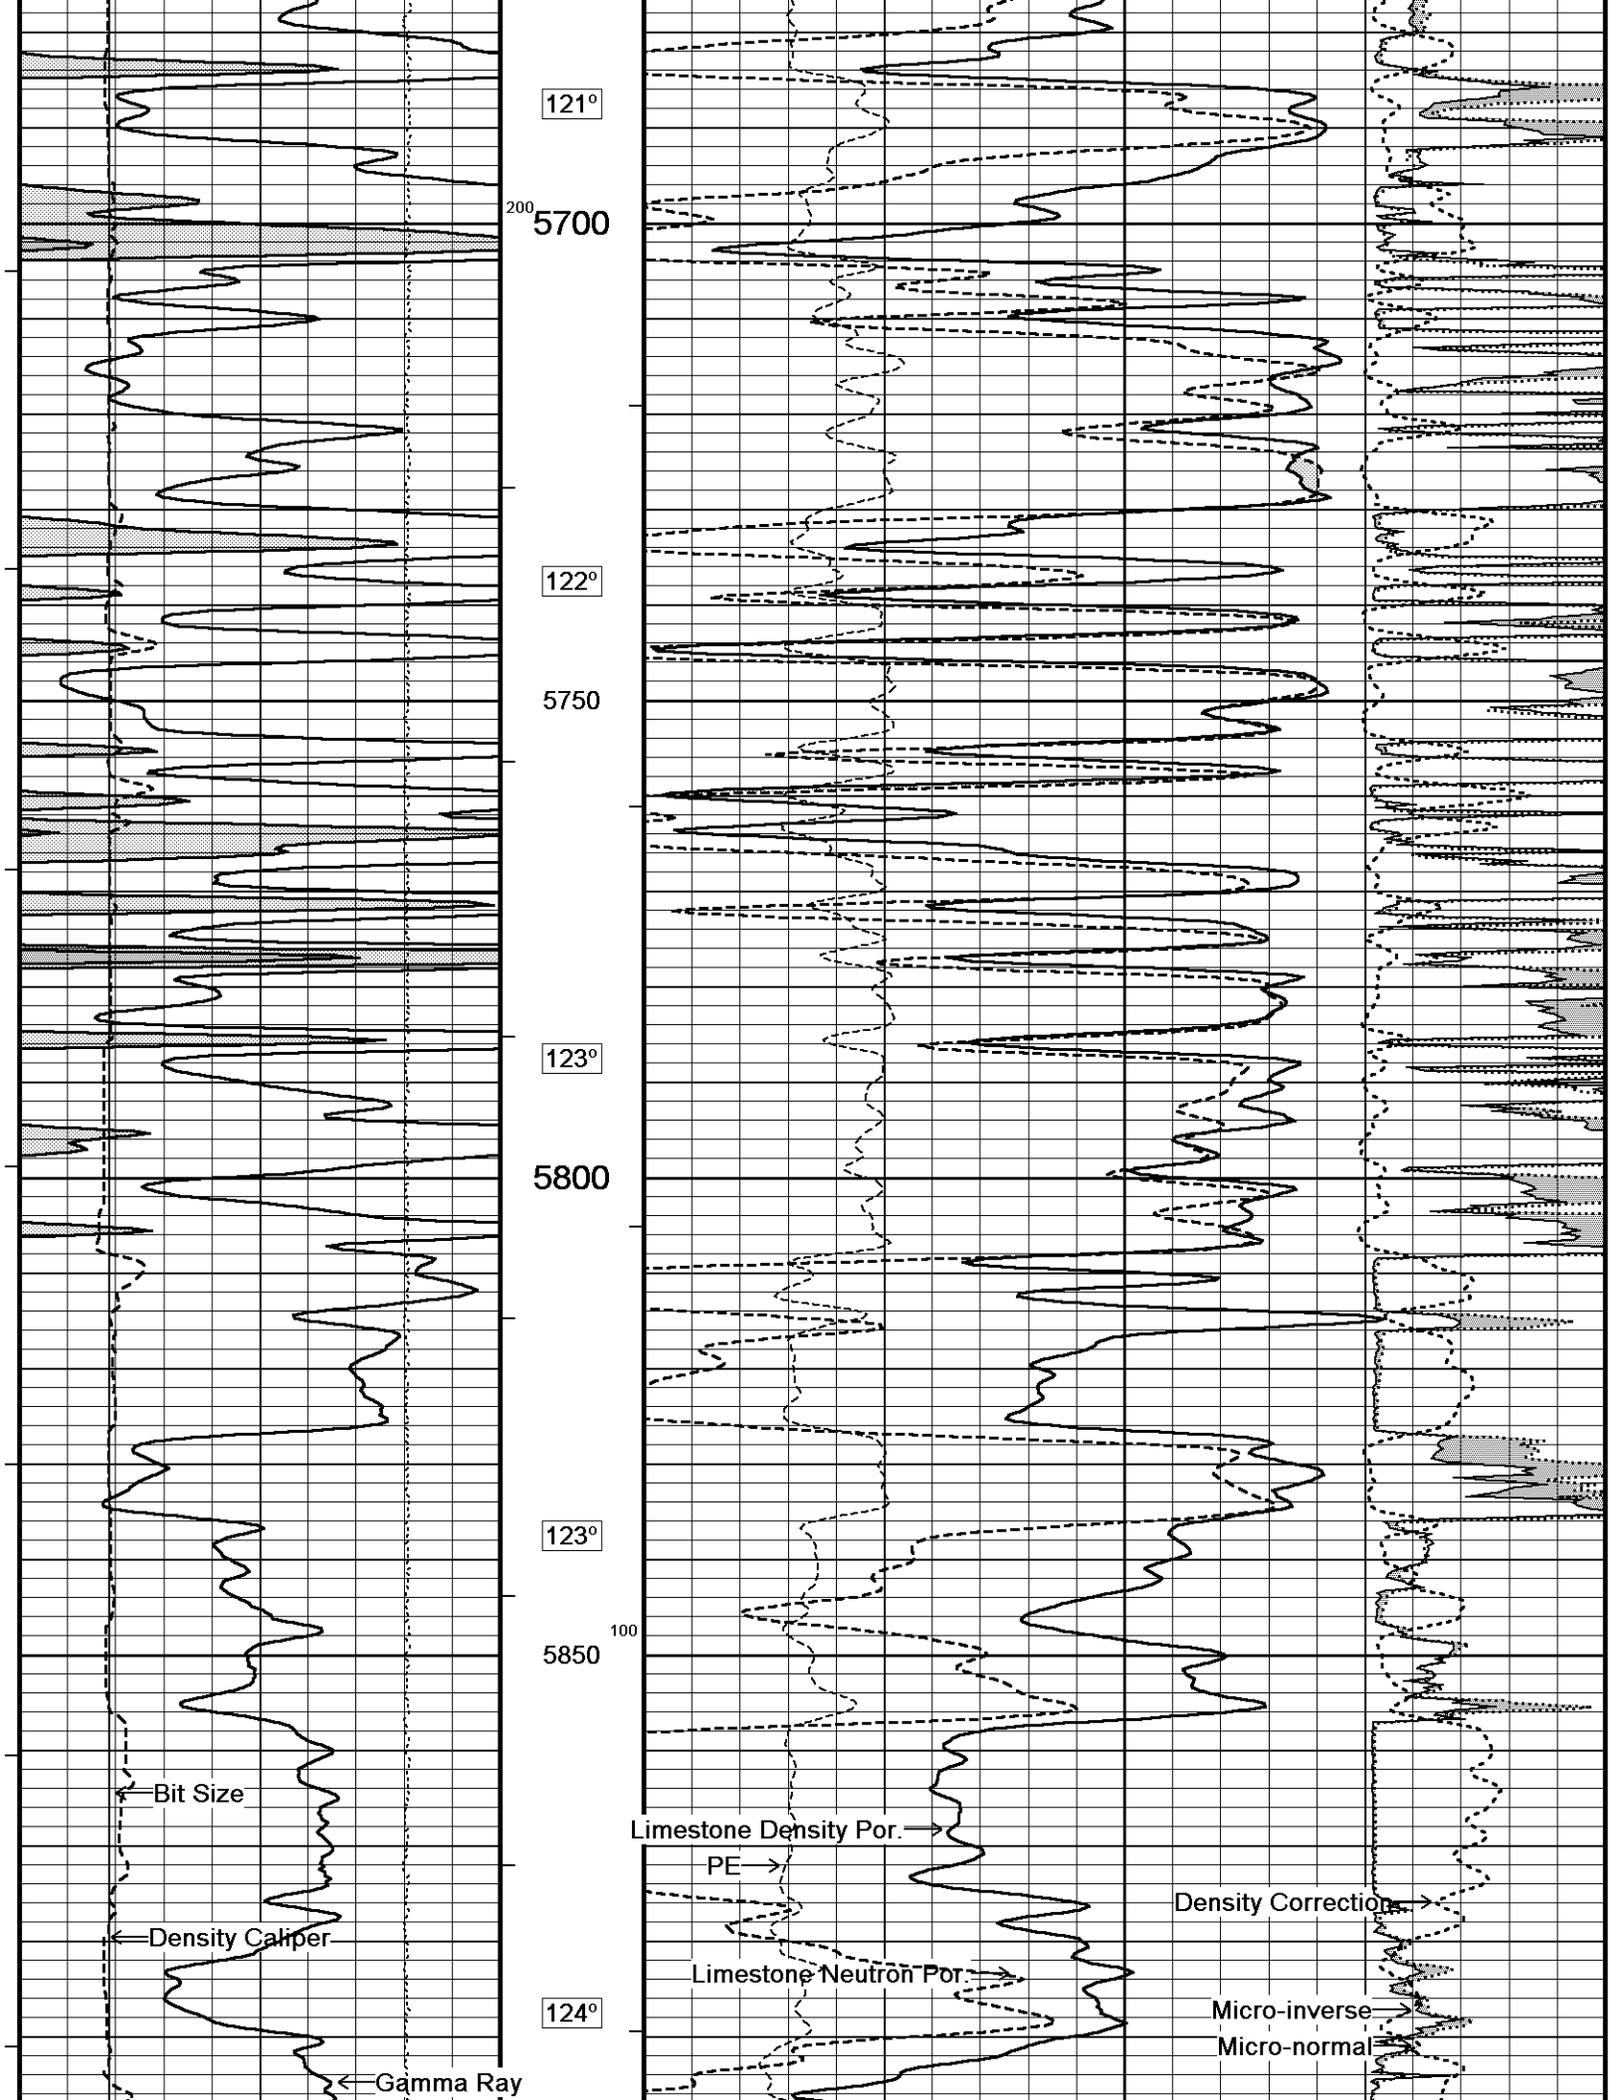

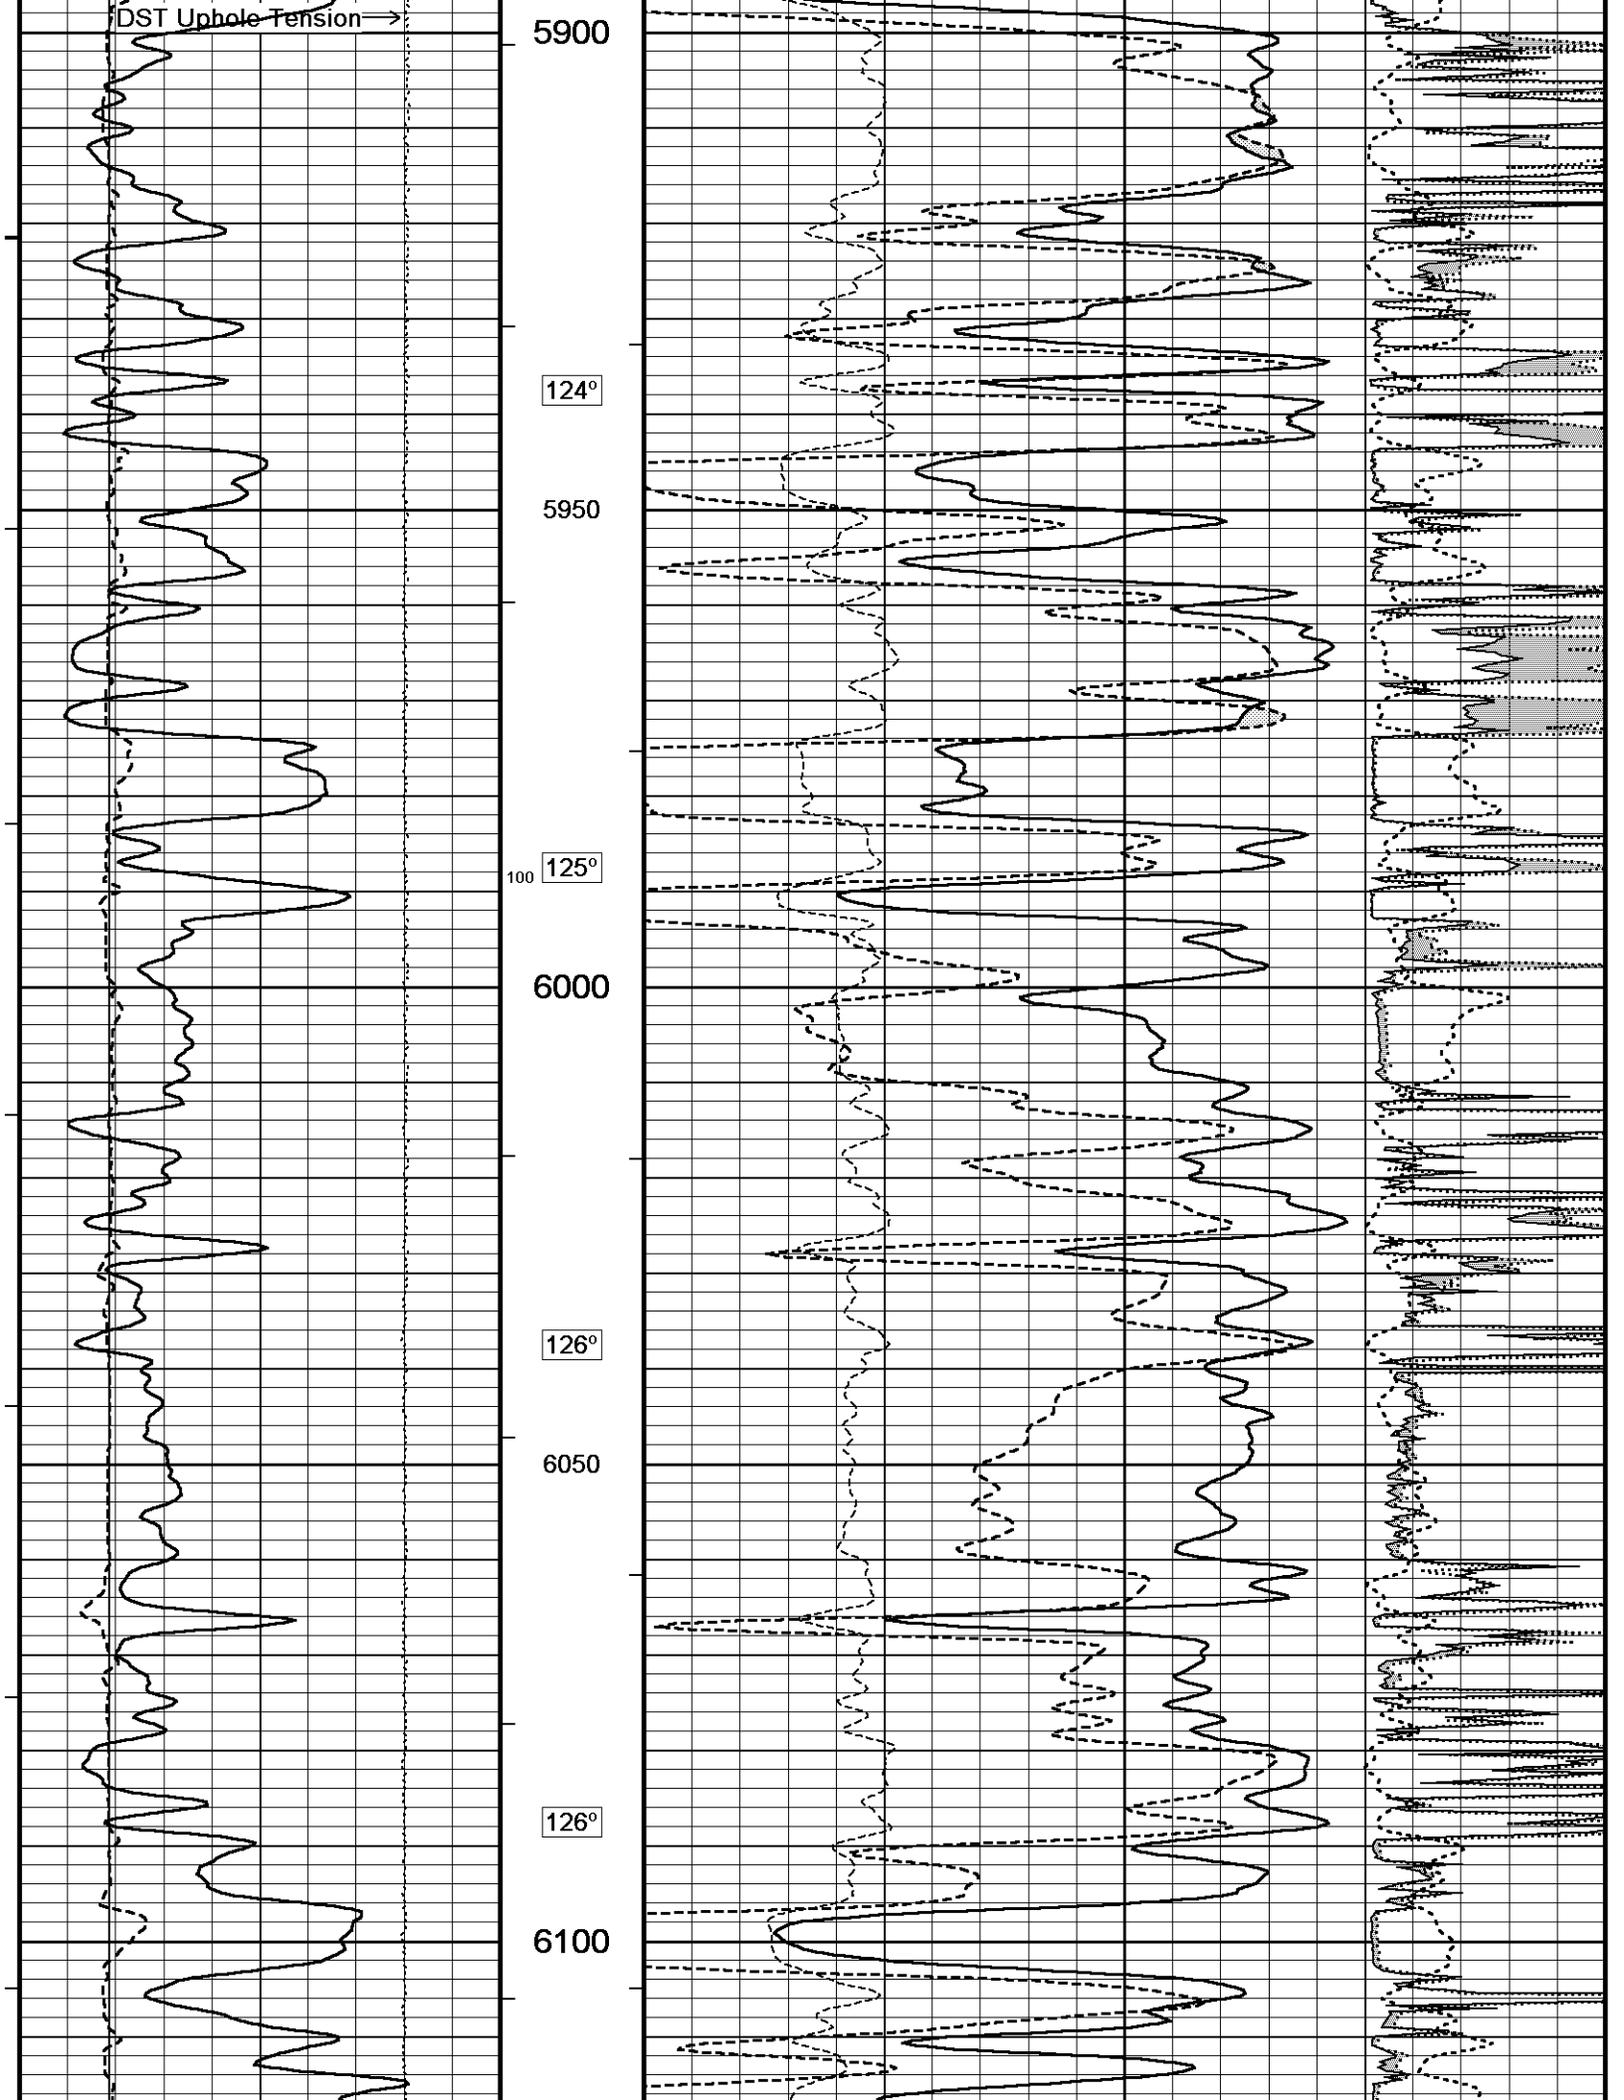

127°

6150

126°

6200

125°


6250

0



6300




6324


Depth
in
Feet

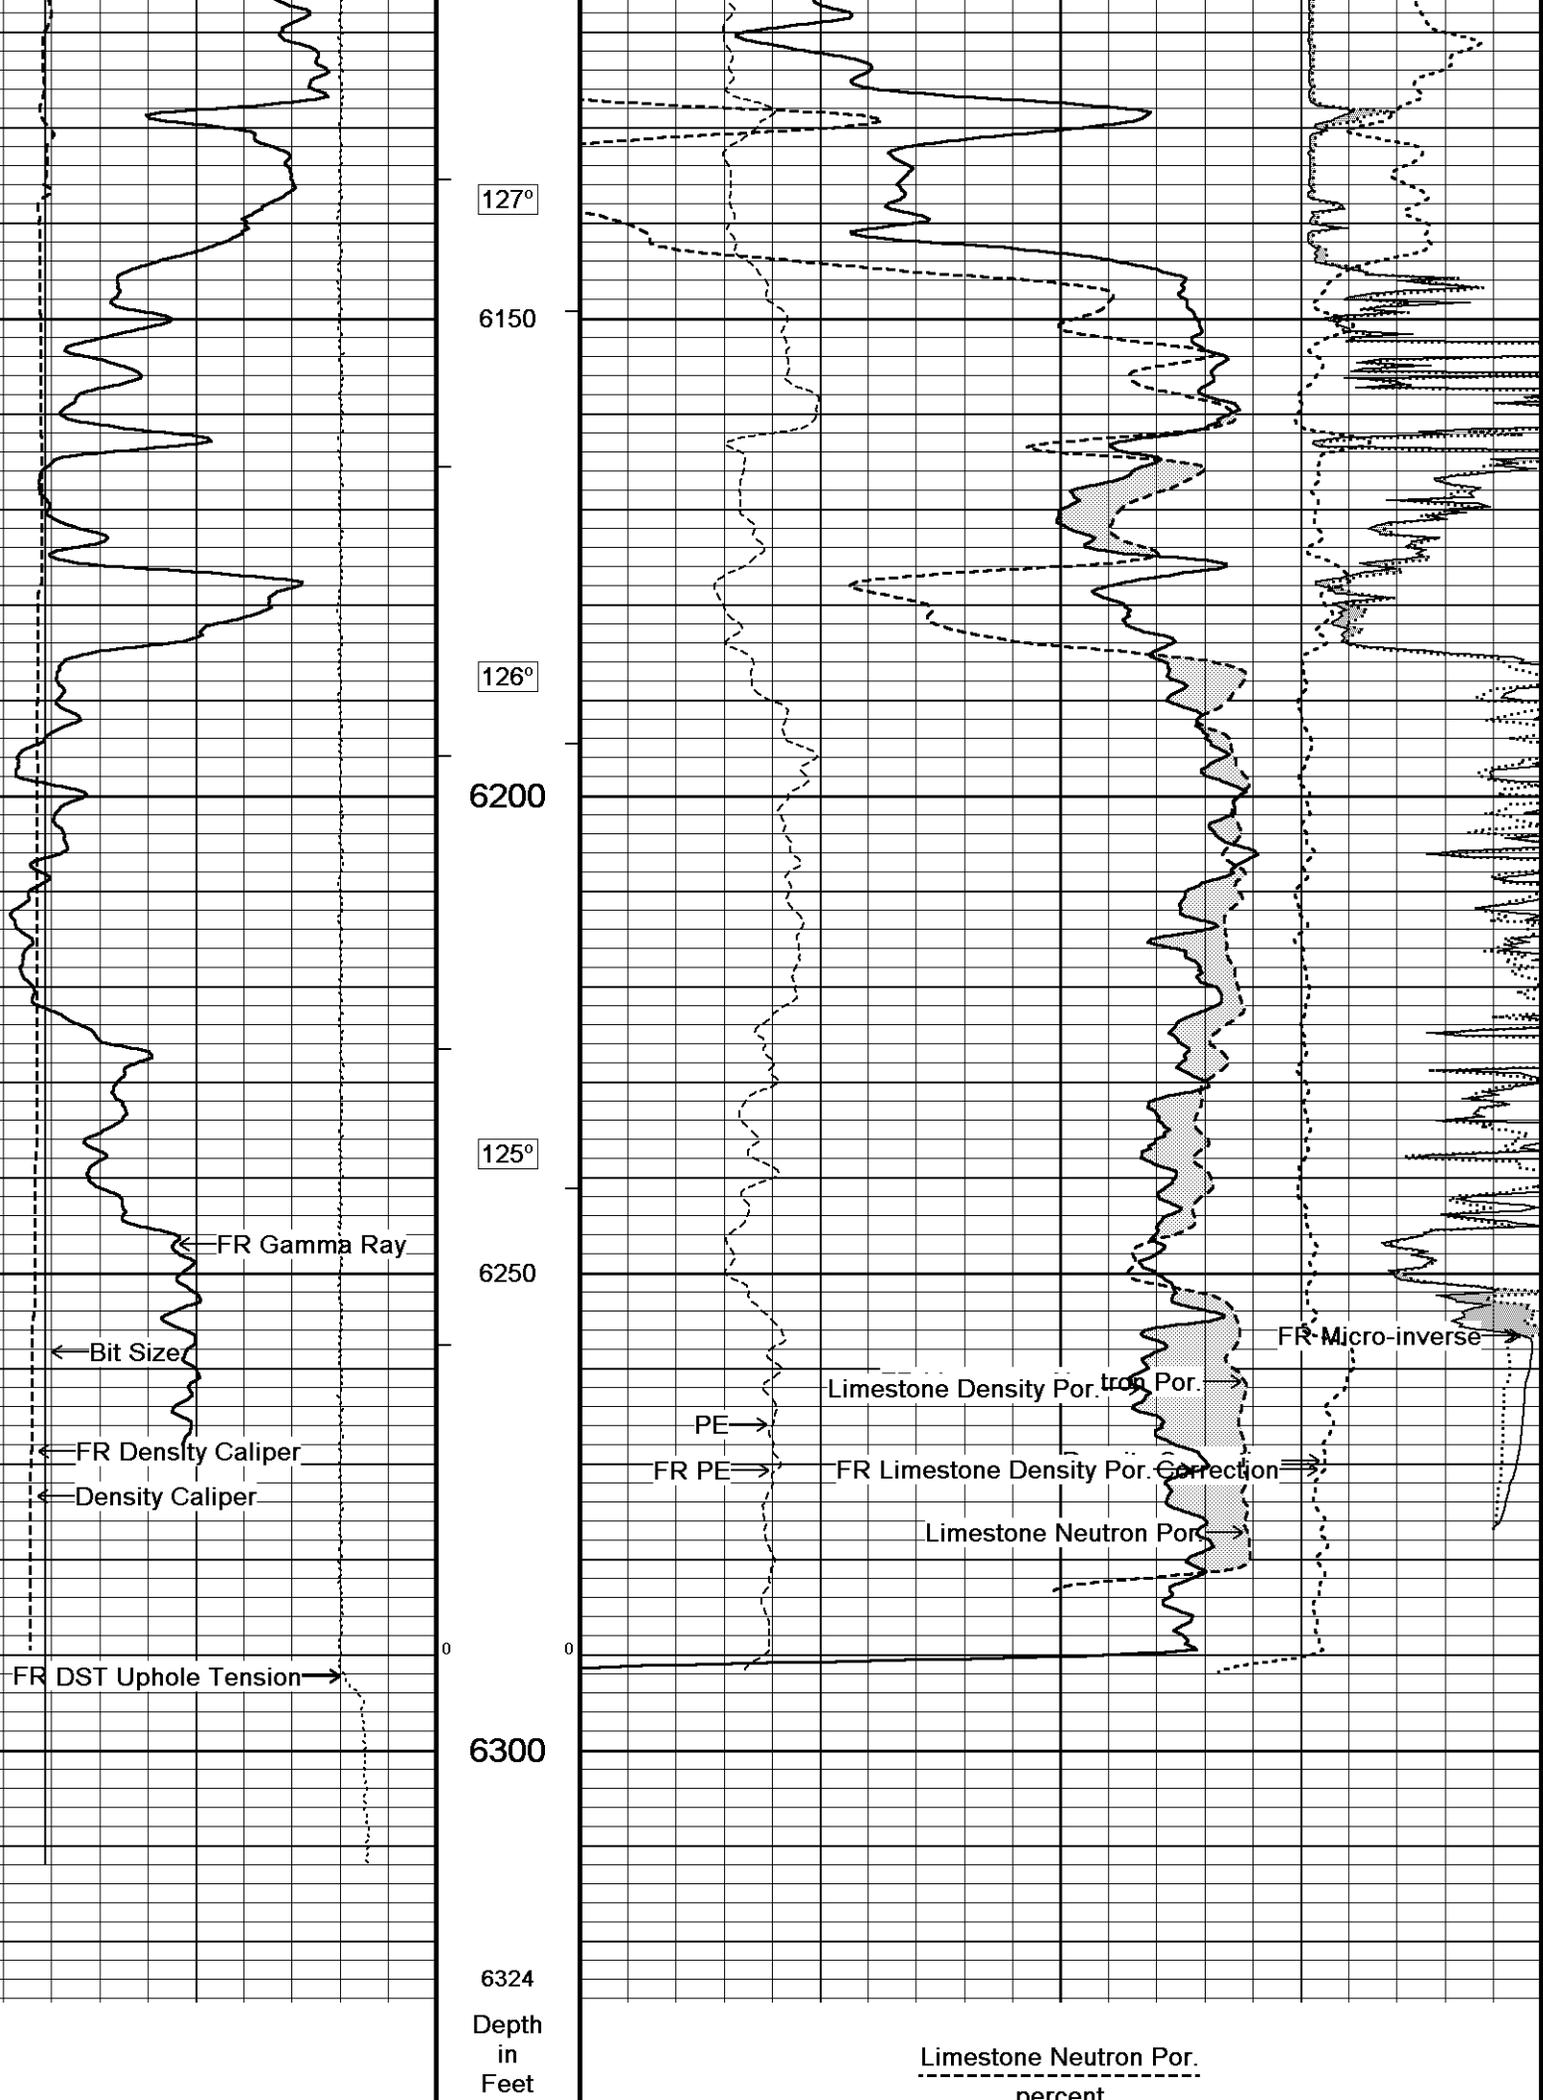

Limestone Neutron Por.
percent

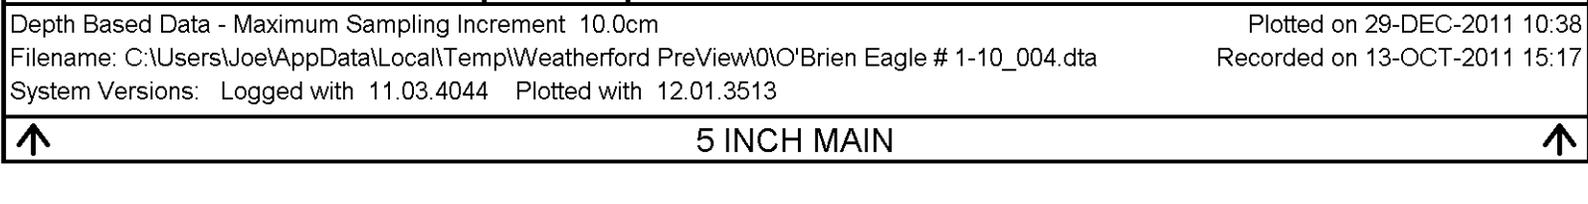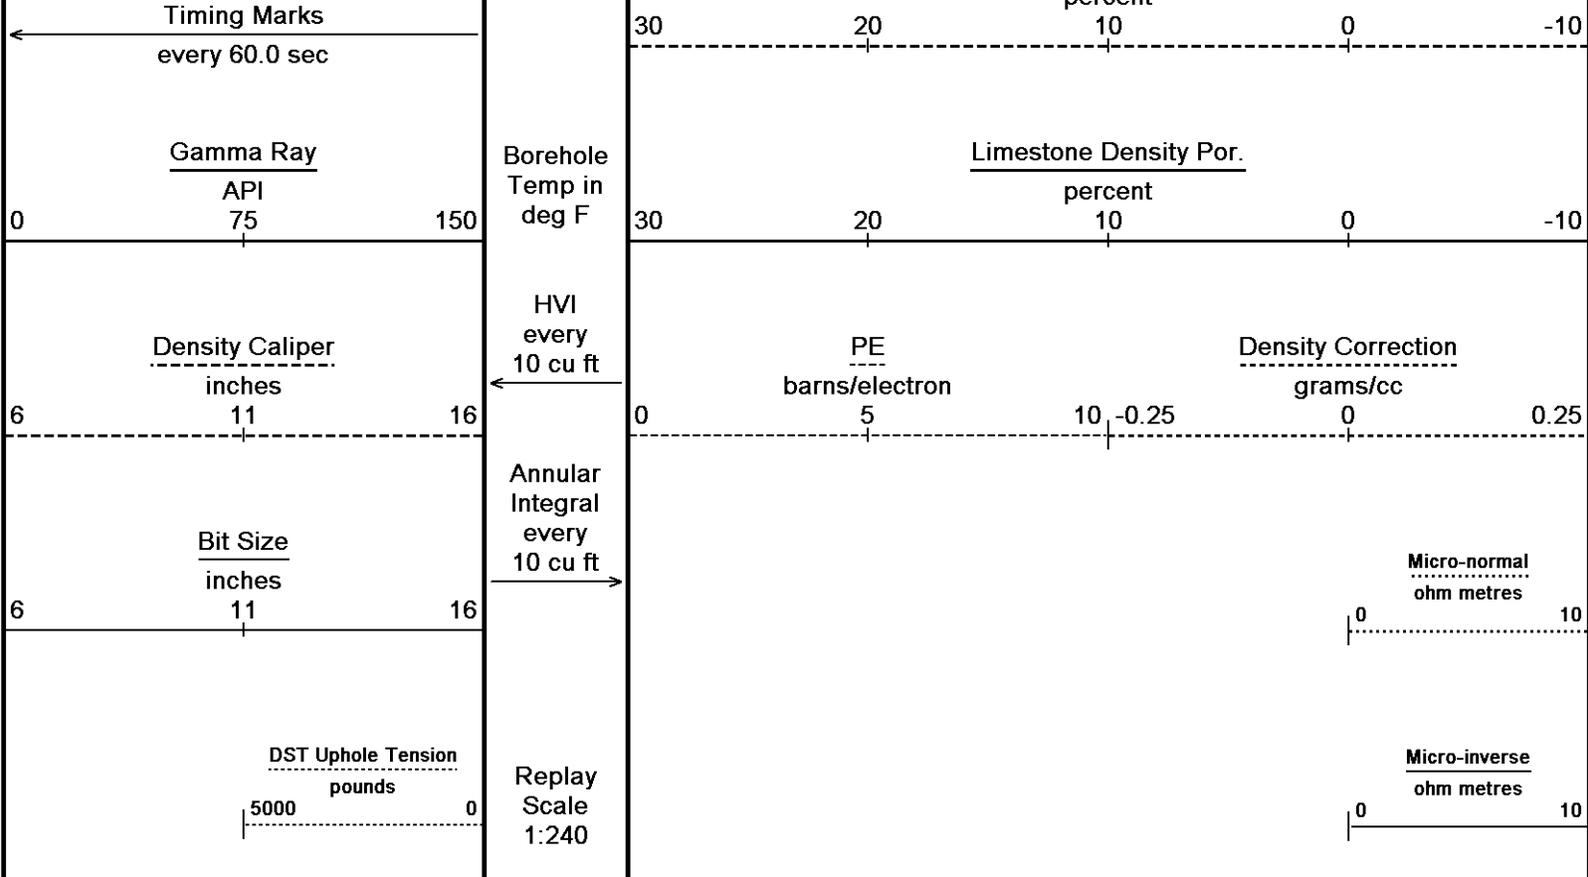

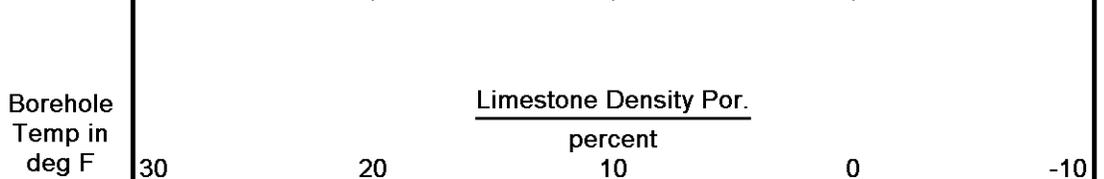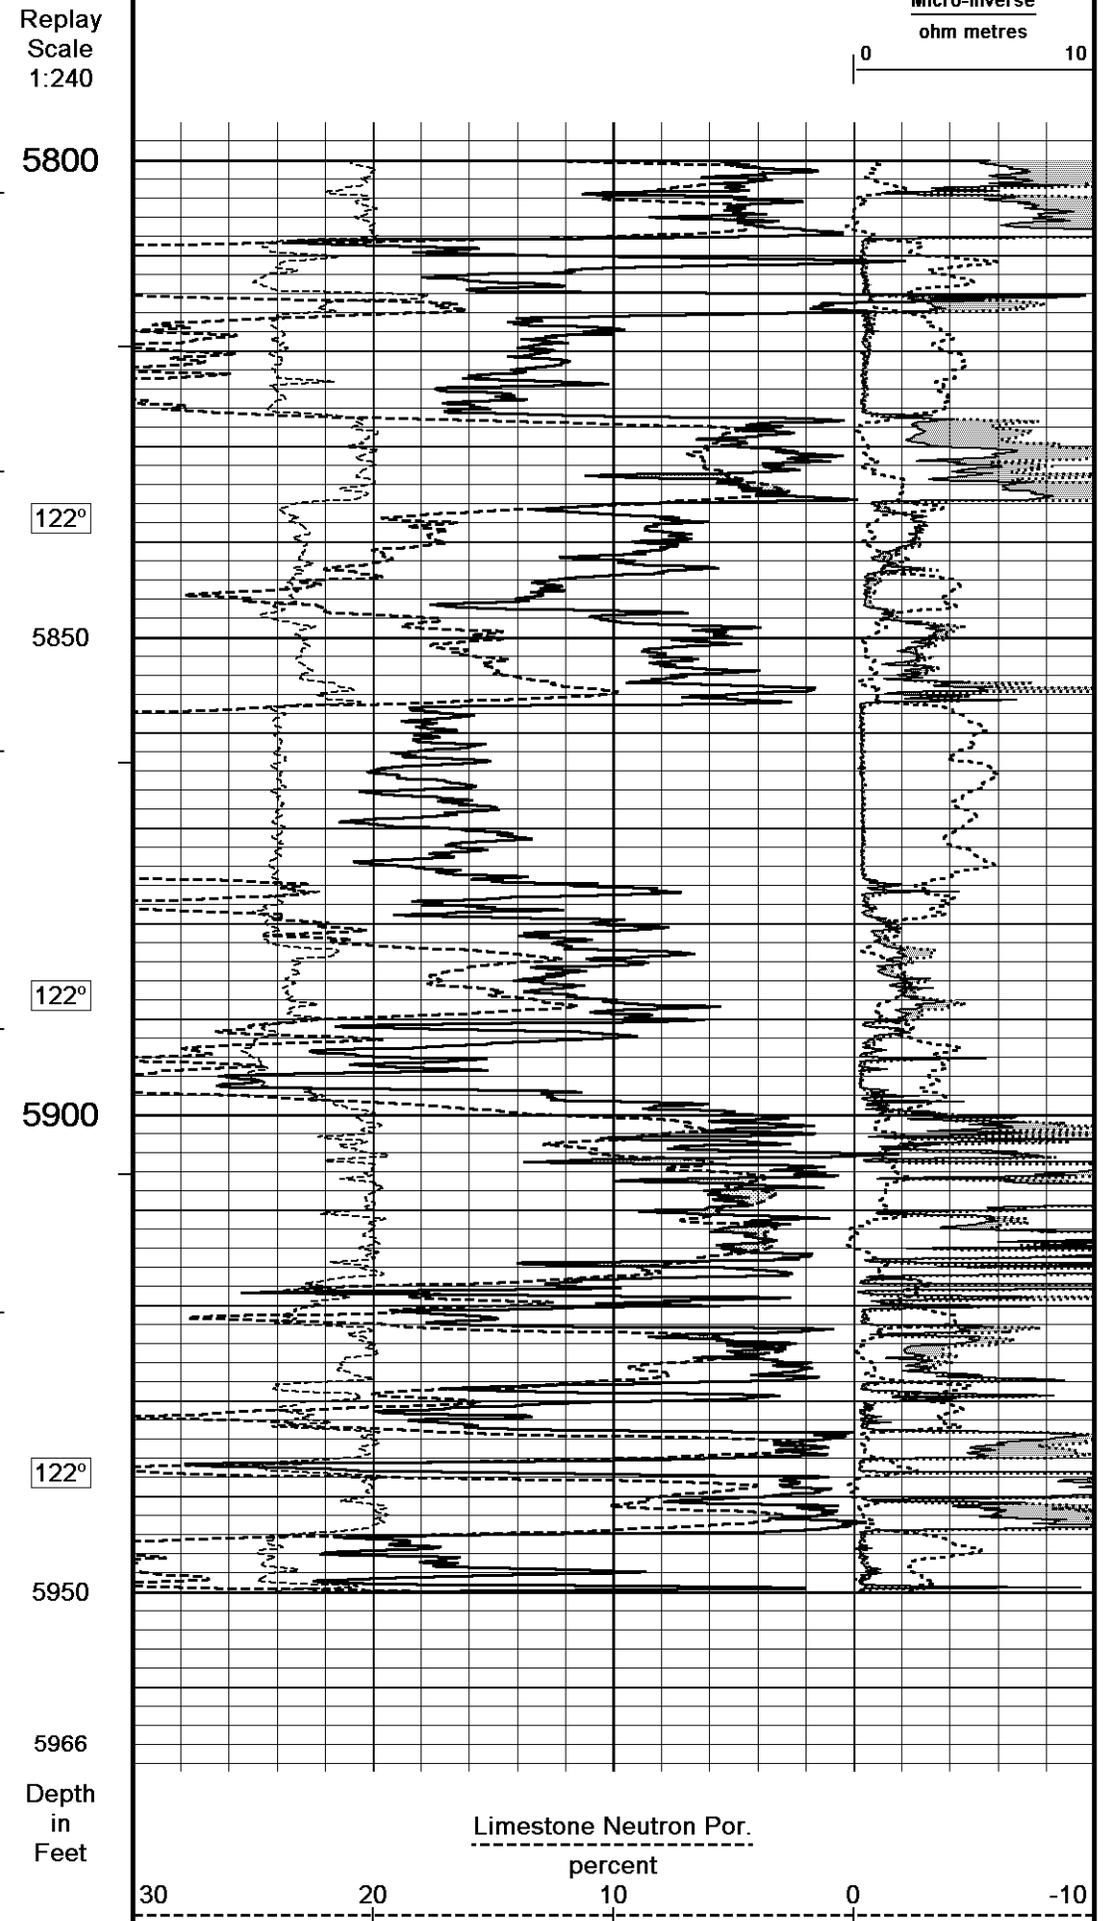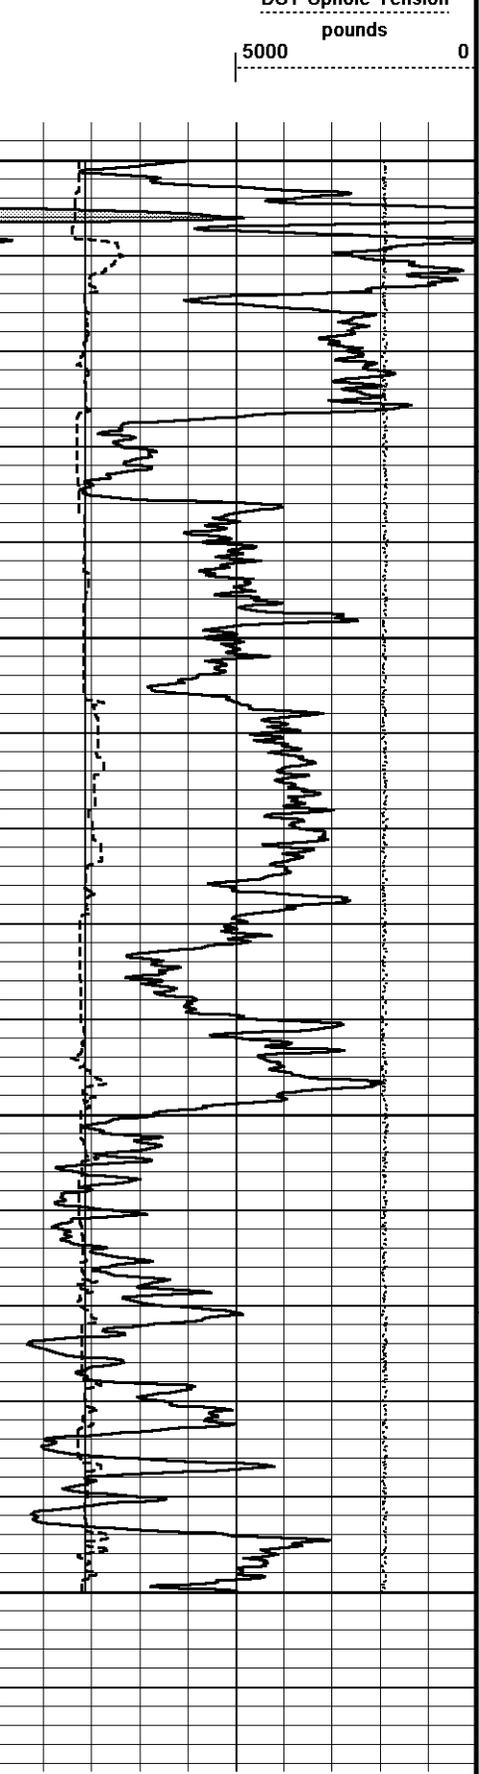

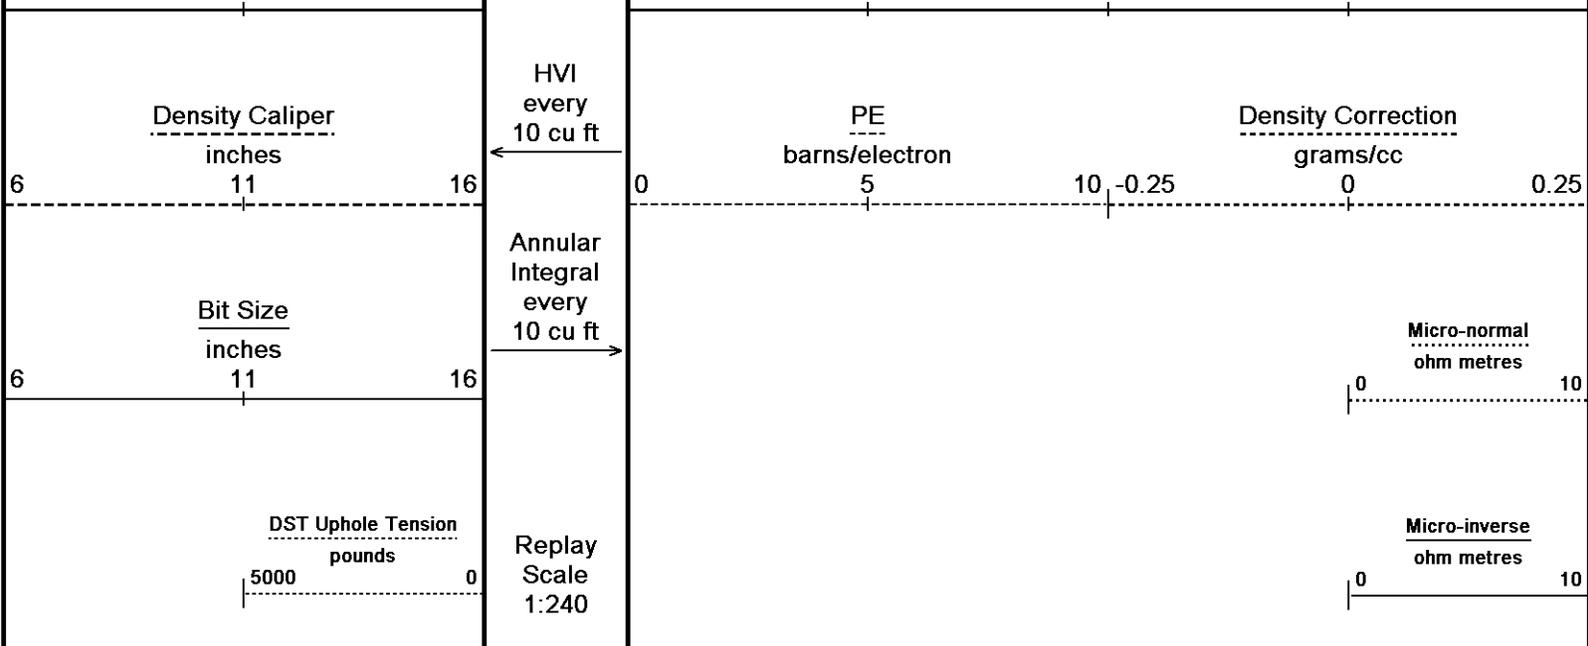



Depth Based Data - Maximum Sampling Increment 2.5cm
 Plotted on 29-DEC-2011 10:38
 Filename: C:\Users\Joe\AppData\Local\Temp\Weatherford PreView\0\O'Brien Eagle # 1-10_003.dta
 Recorded on 13-OCT-2011 14:48
 System Versions: Logged with 11.03.4044 Plotted with 12.01.3513





↑ 10 INCH HI-RES ↑

↓ REPEAT SECTION ↓

Depth Based Data - Maximum Sampling Increment 10.0cm
 Plotted on 29-DEC-2011 10:38
 Filename: C:\Users\Joe\AppData\Local\Temp\Weatherford PreView\0\O'Brien Eagle # 1-10_002.dta
 Recorded on 13-OCT-2011 14:35
 System Versions: Logged with 11.03.4044 Plotted with 12.01.3513

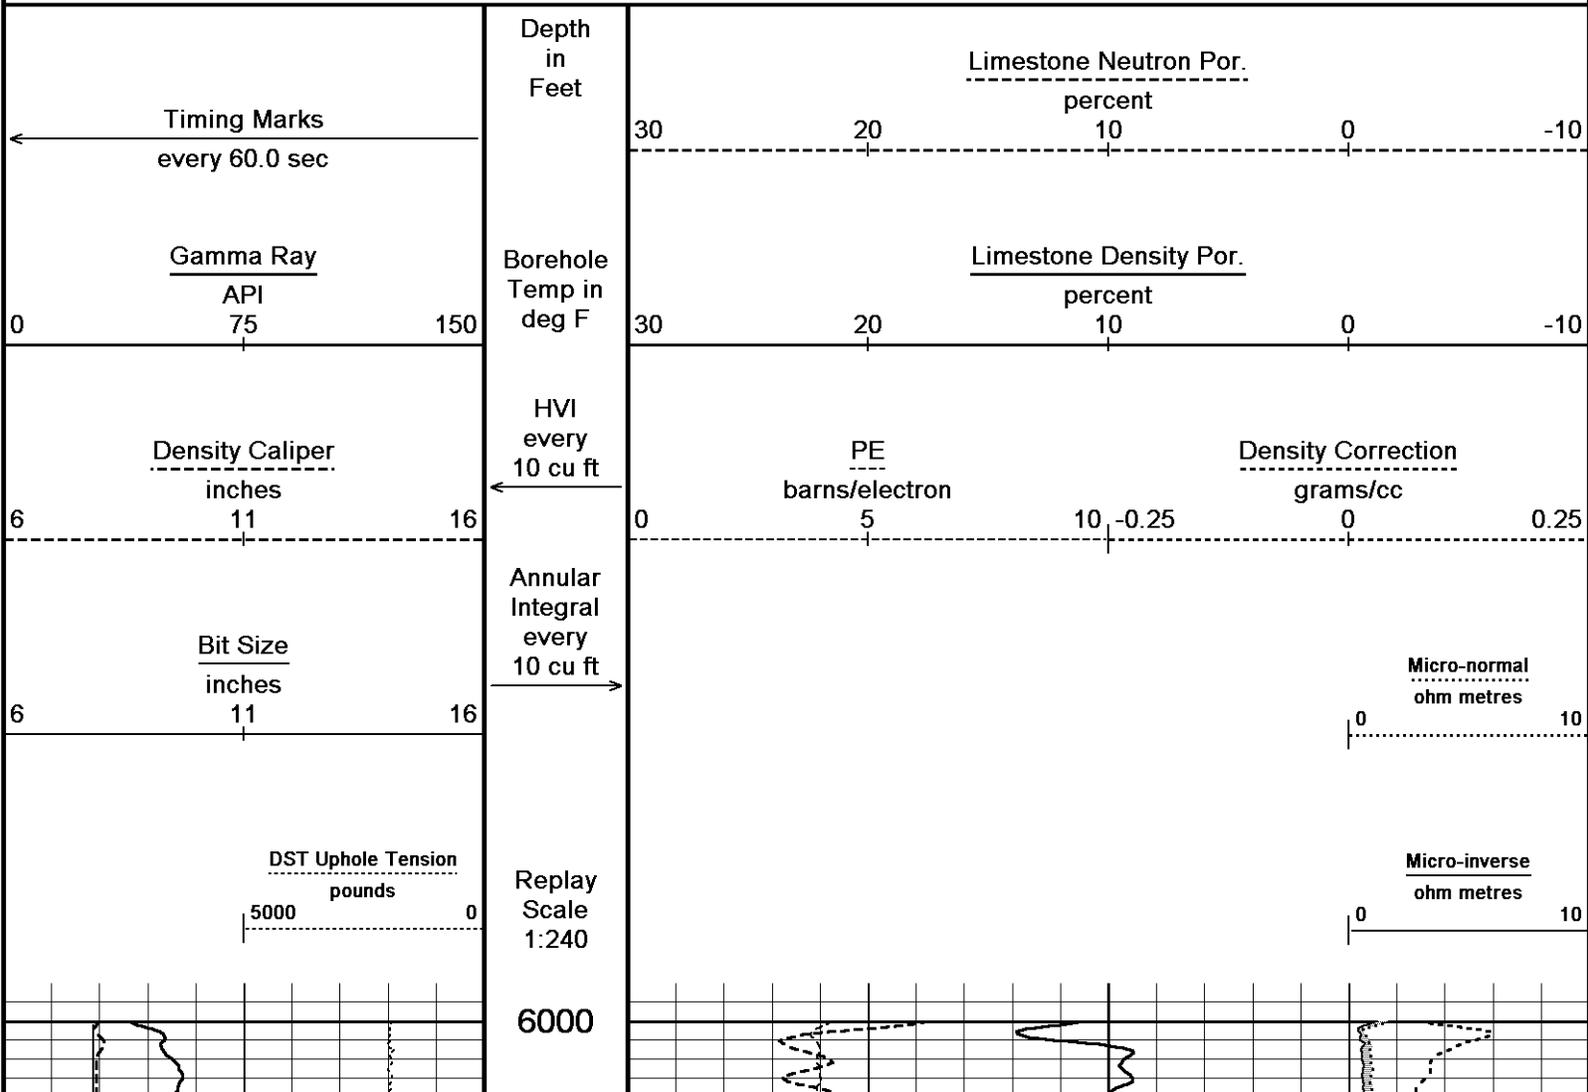

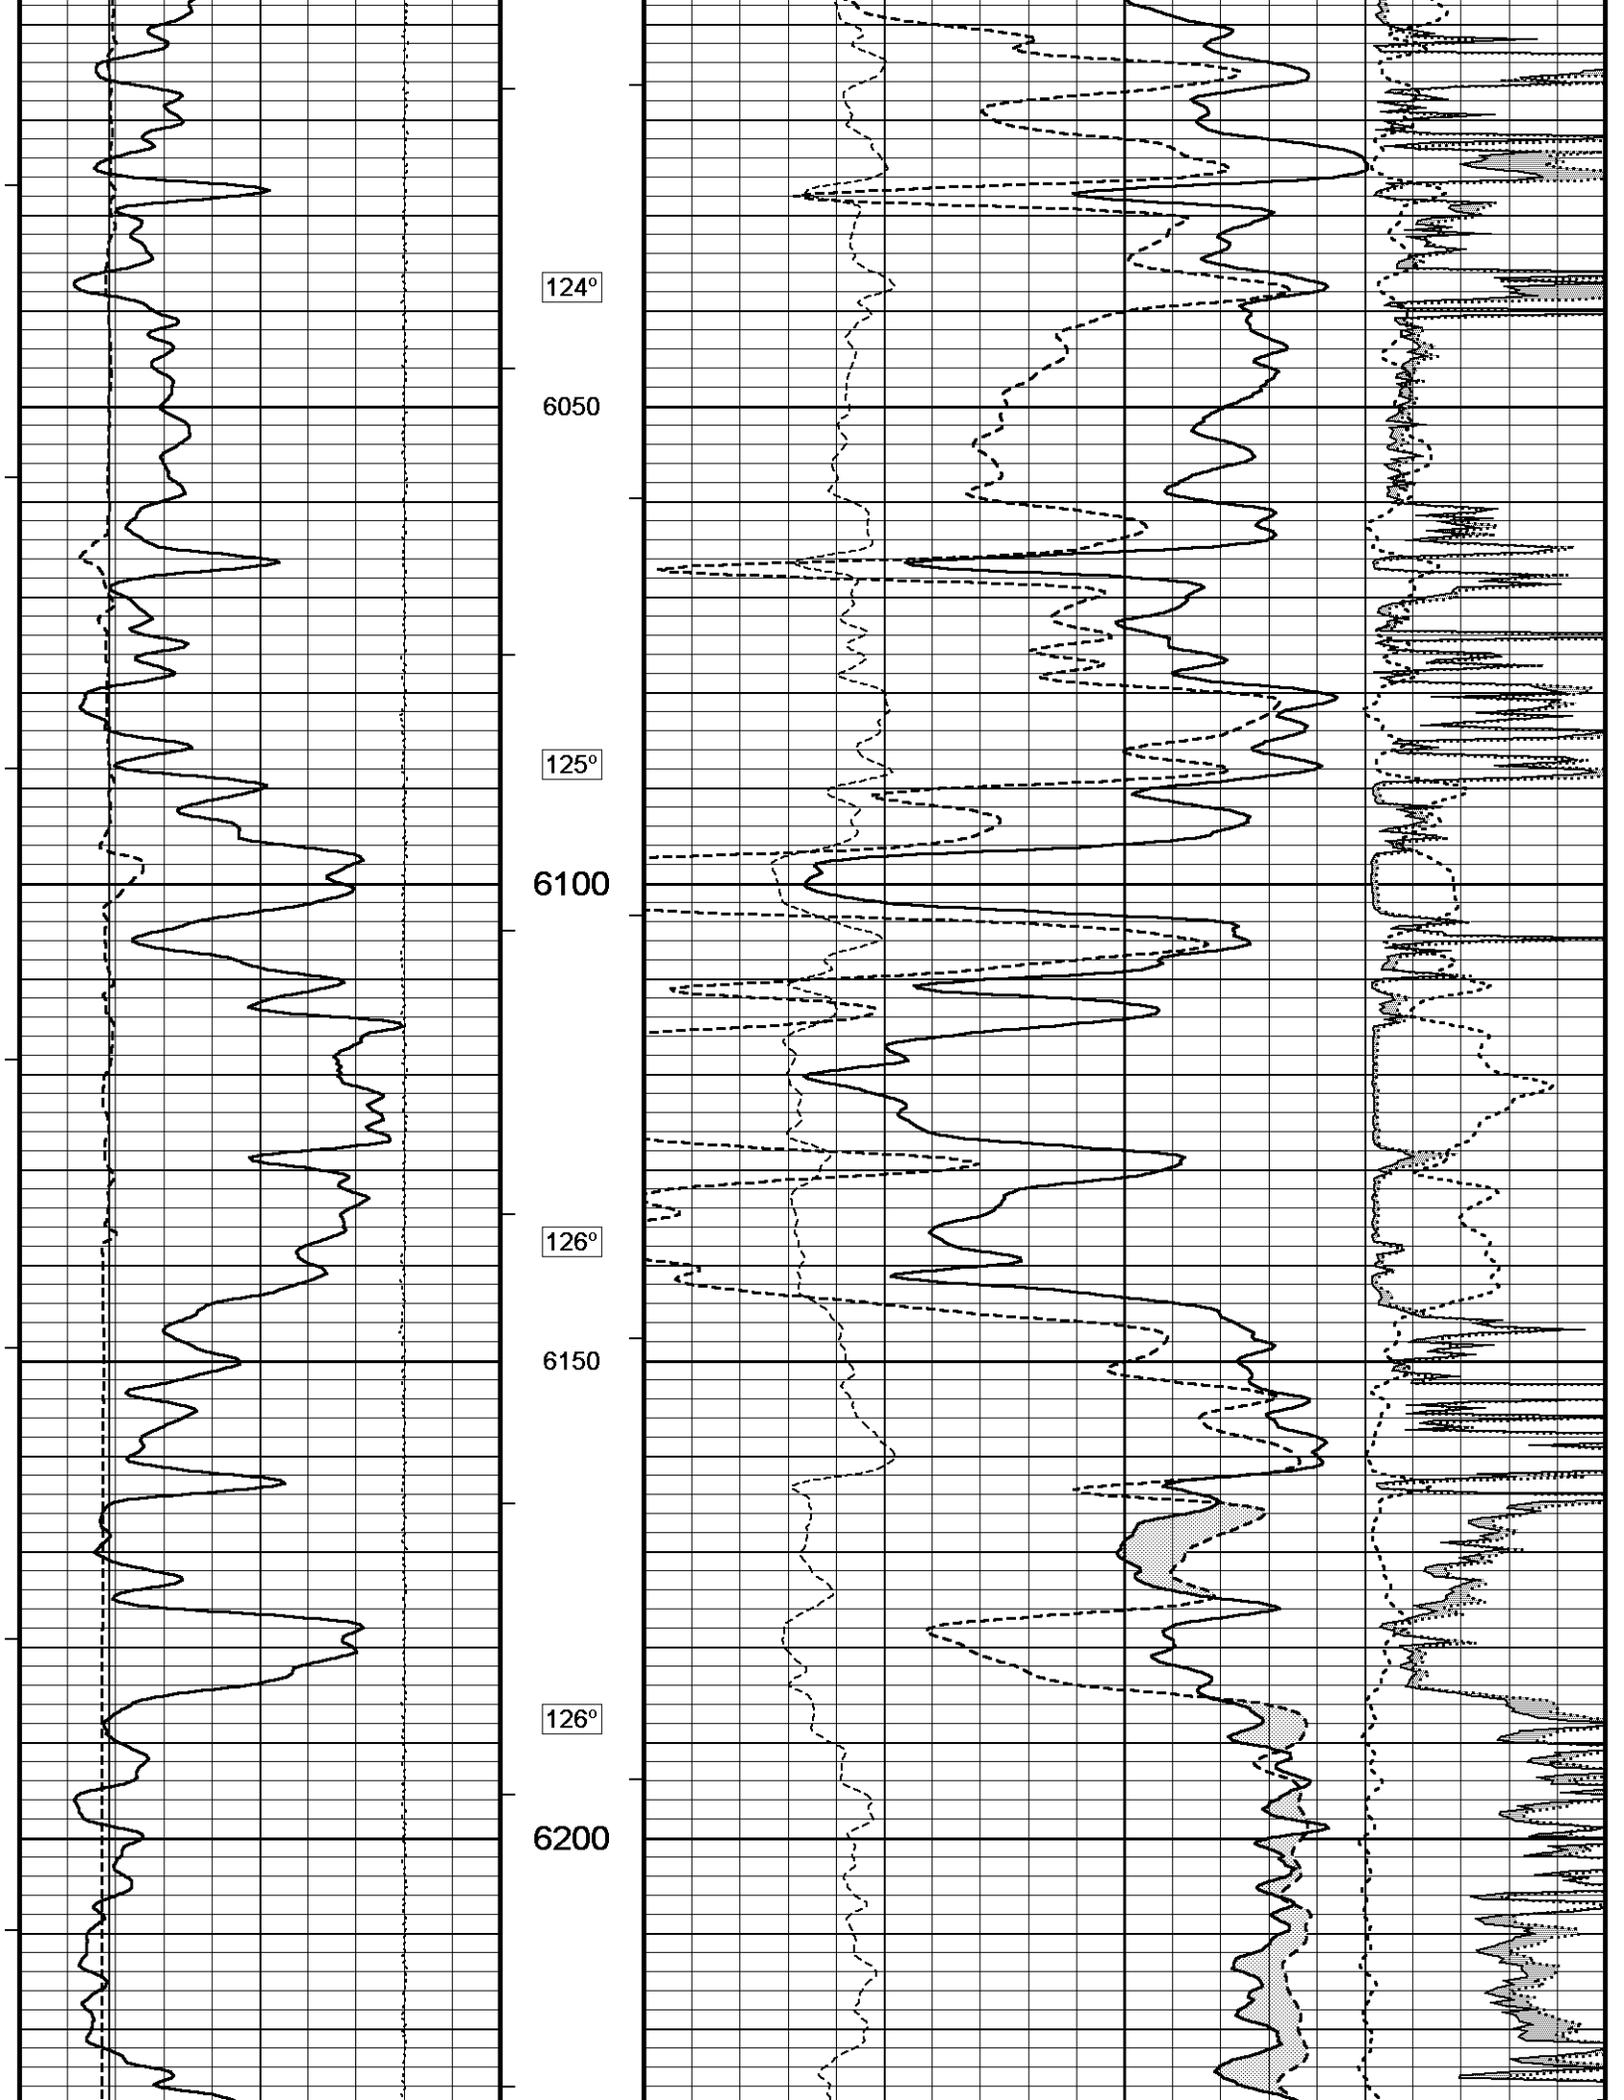

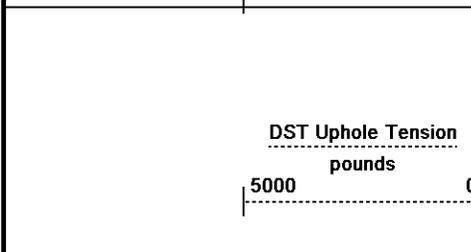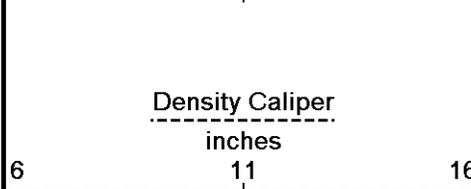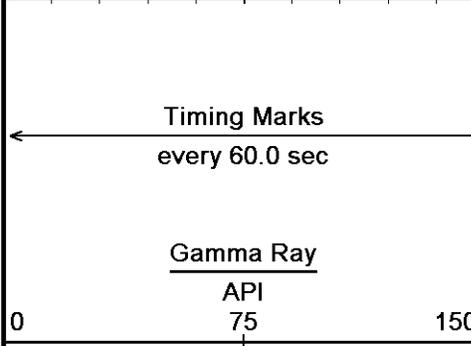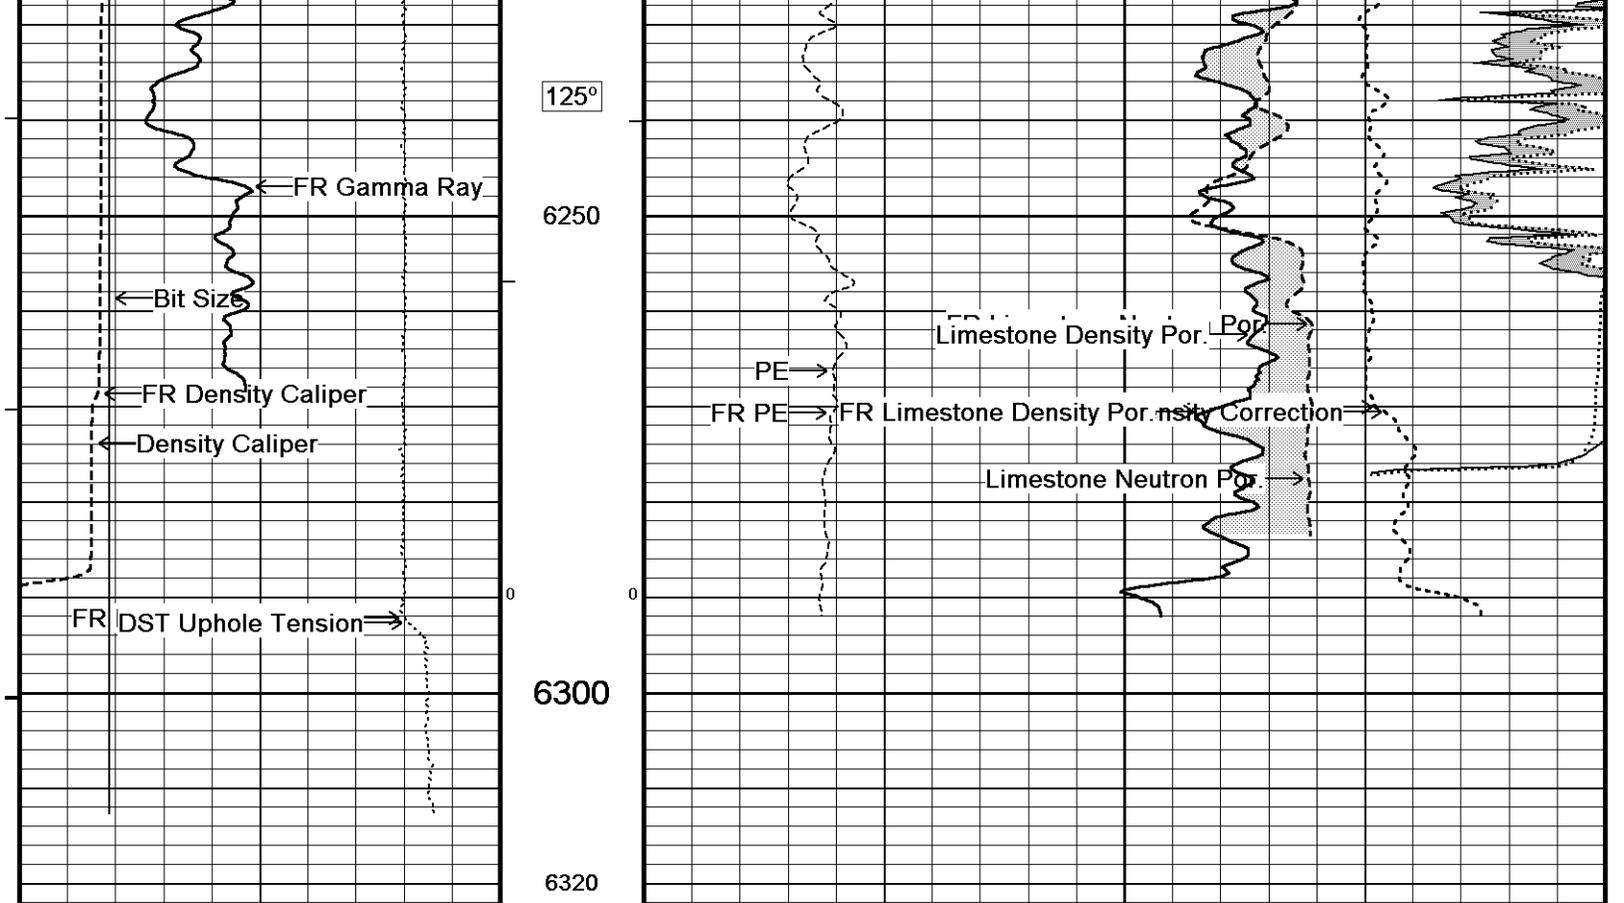




Depth in Feet

Borehole Temp in deg F

HVI every 10 cu ft

Annular Integral every 10 cu ft

Replay Scale 1:240

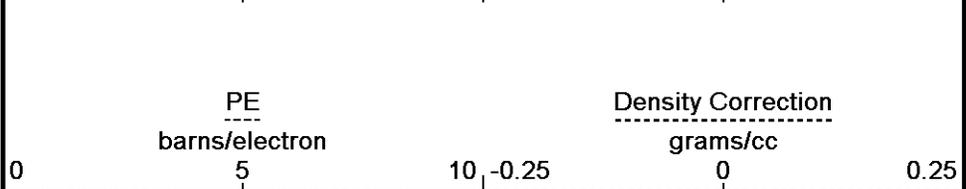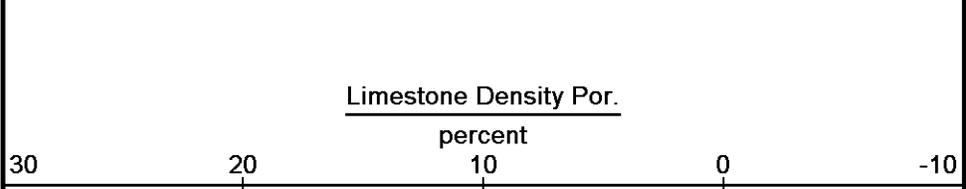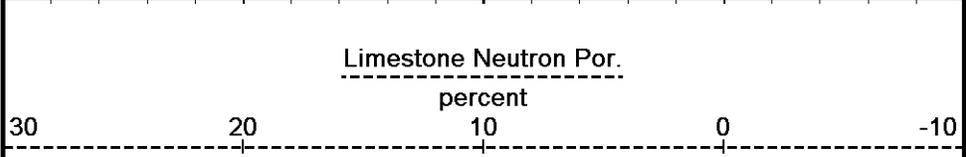

5 INCH MAIN


Depth Based Data - Maximum Sampling Increment 10.0cm


Plotted on 29-DEC-2011 10:38


Filename: C:\Users\Joe\AppData\Local\Temp\Weatherford PreView\O'Brien Eagle # 1-10_004.dta



Recorded on 13-OCT-2011 15:17

System Versions: Logged with 11.03.4044 Plotted with 12.01.3513

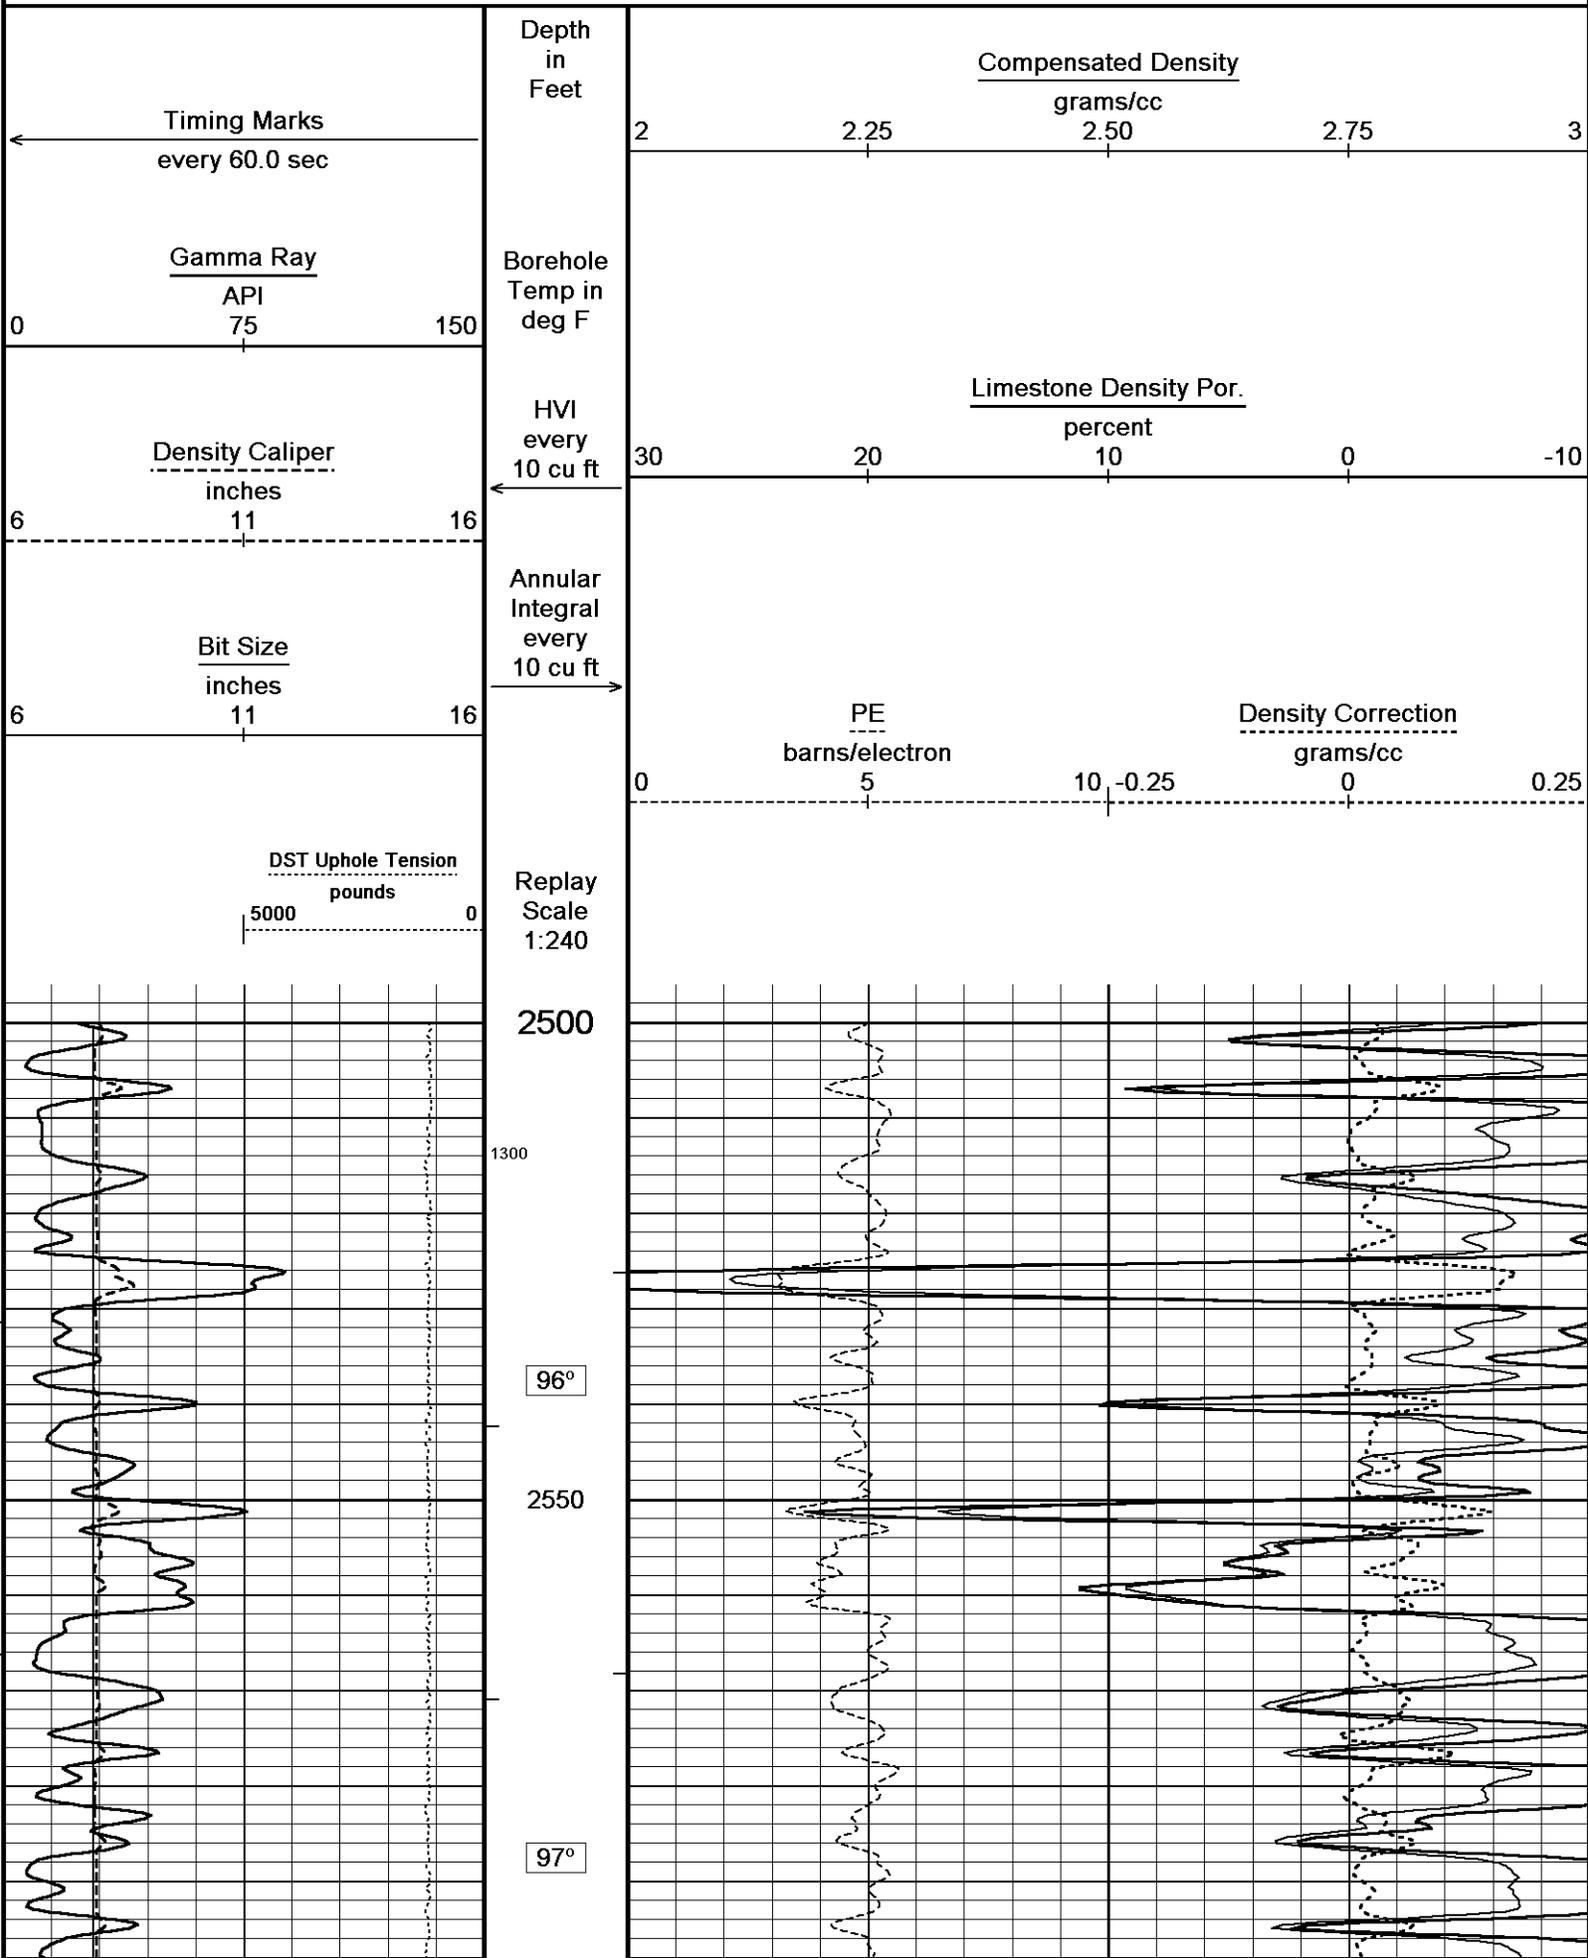



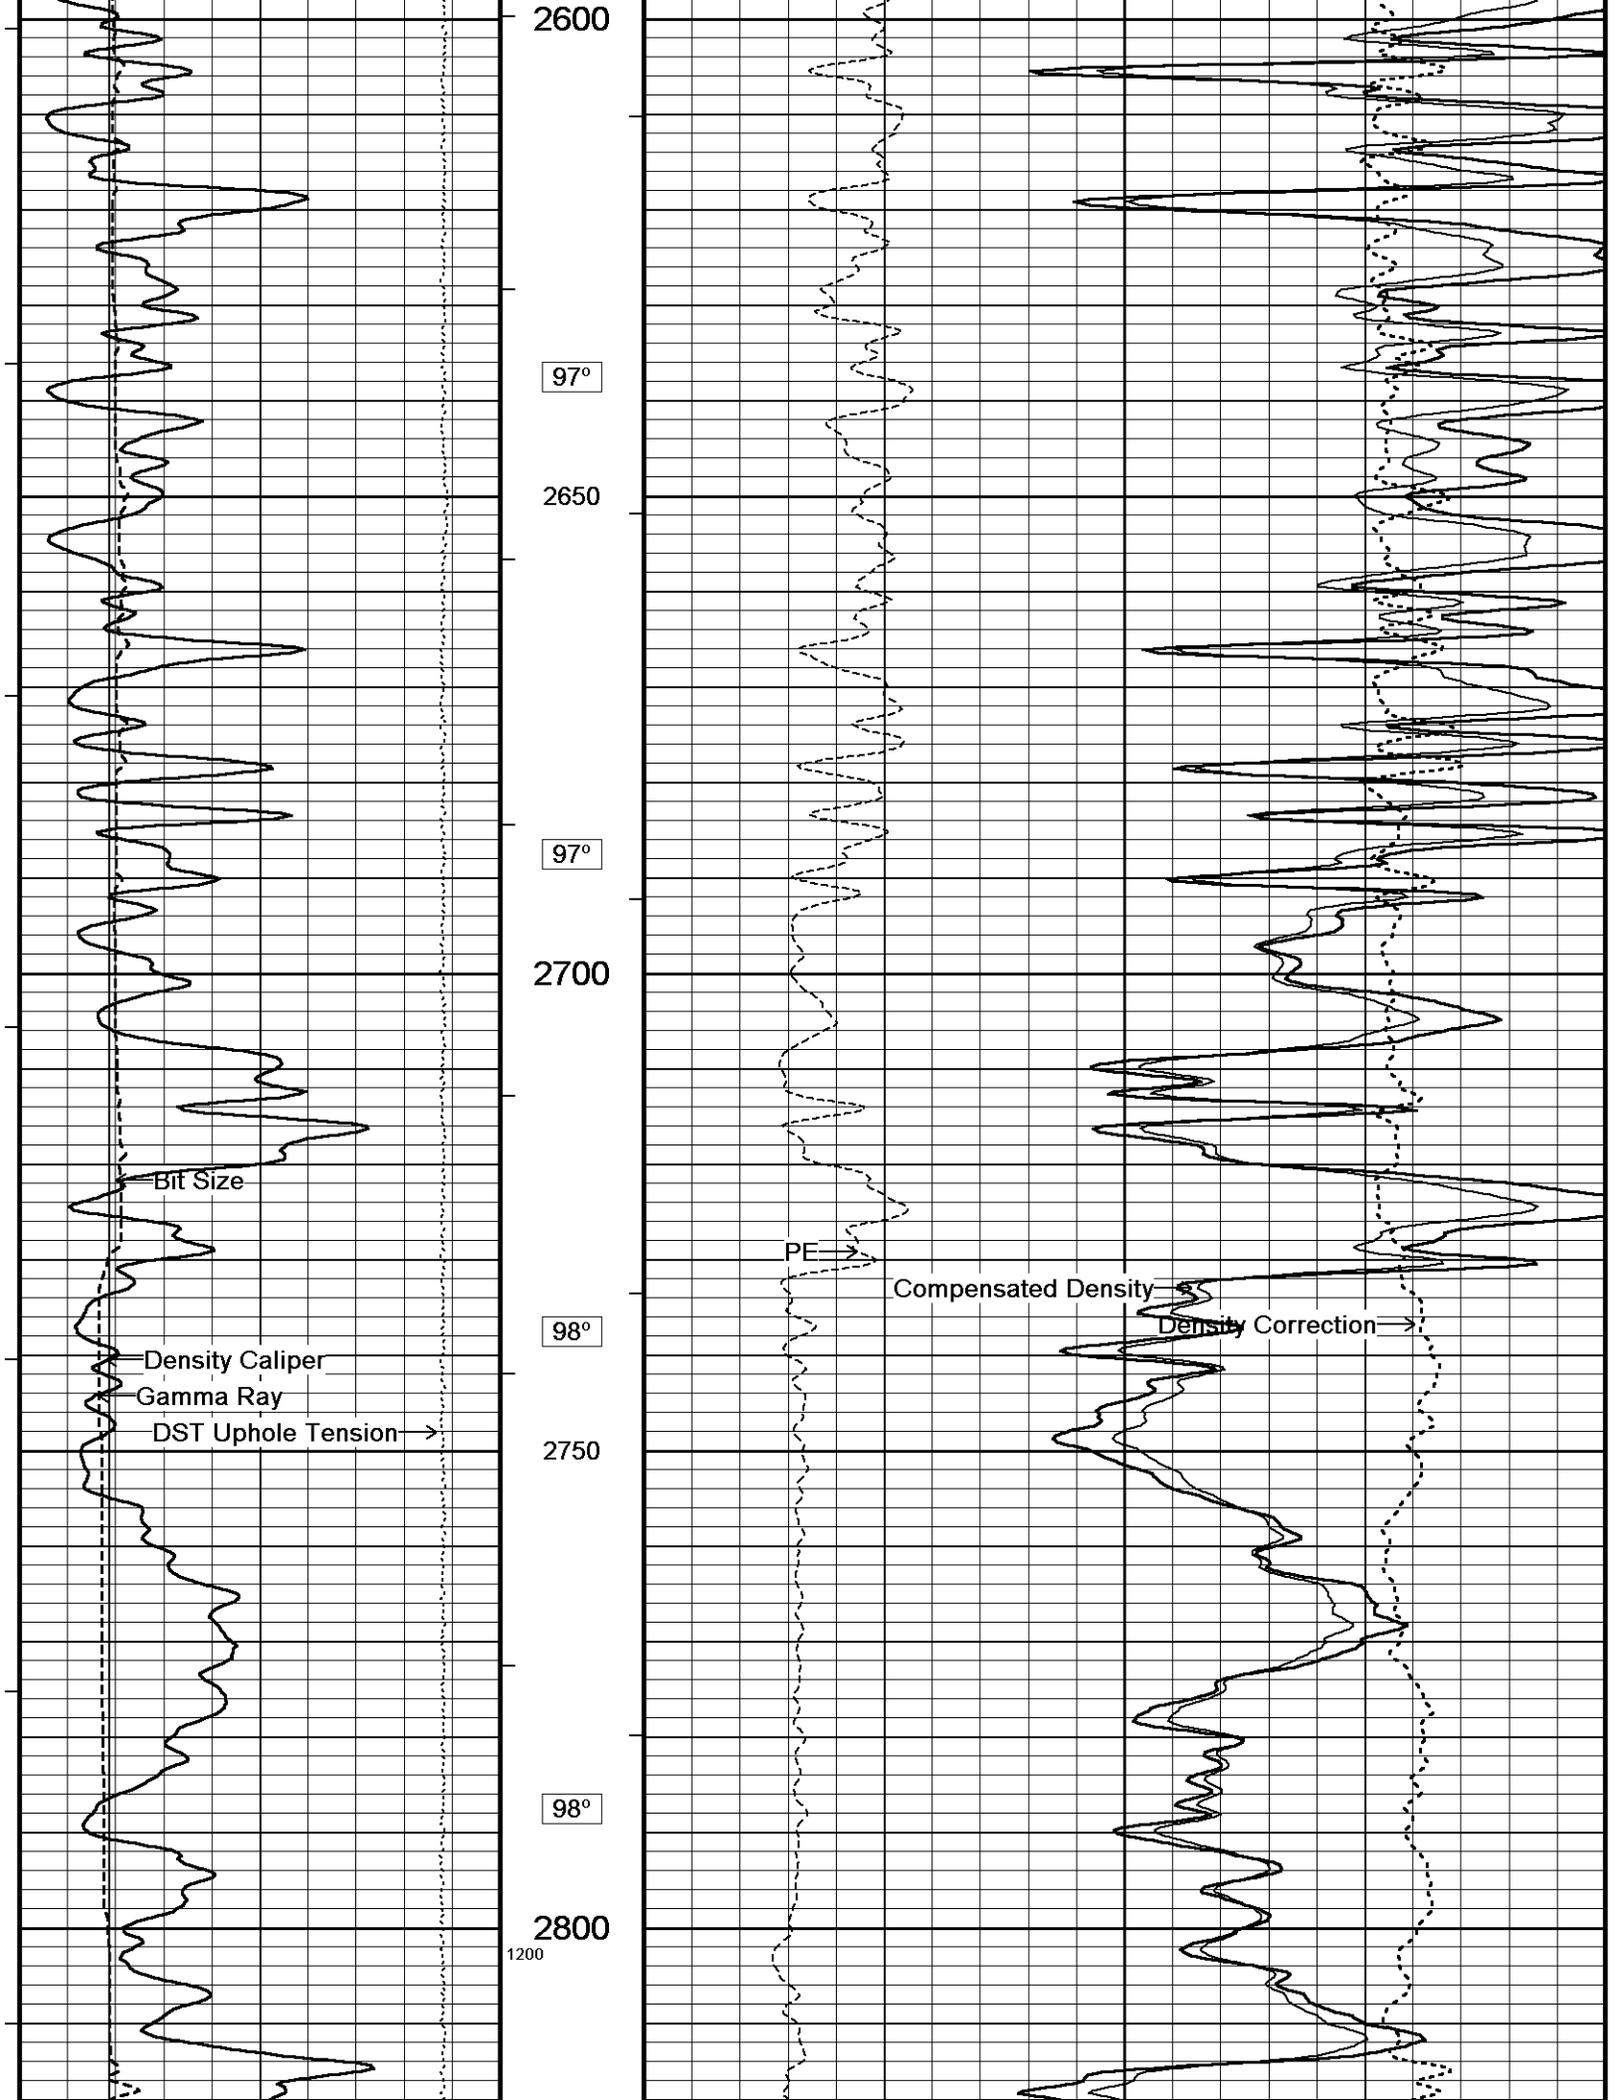


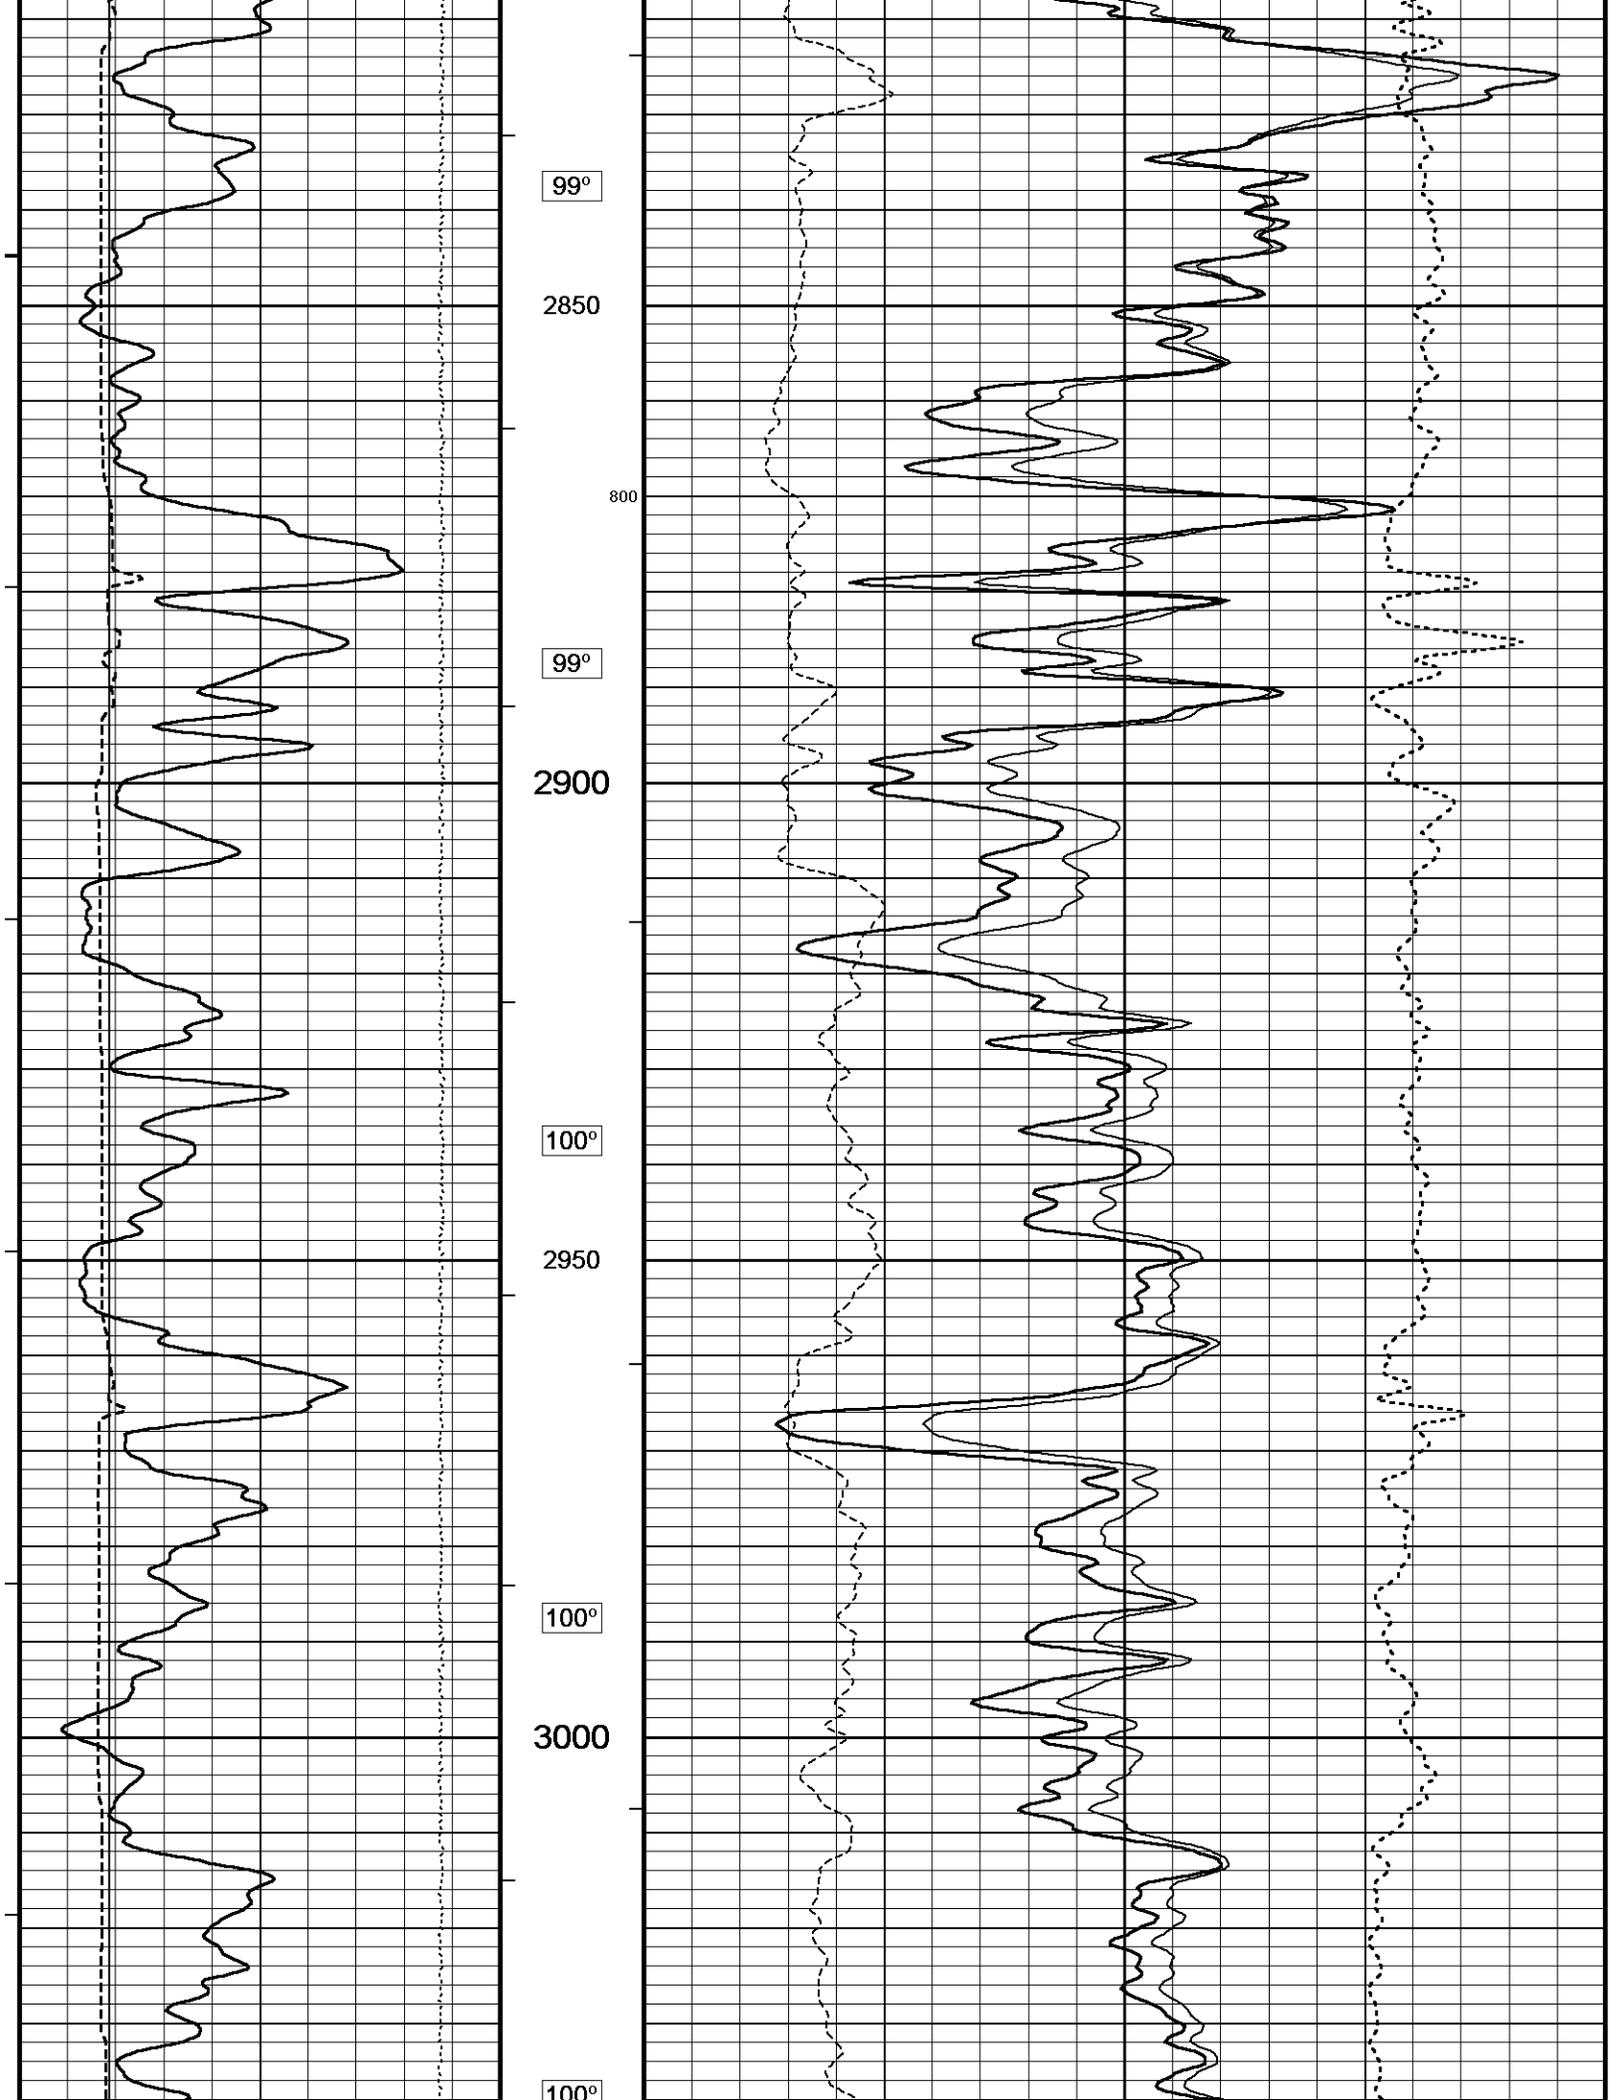


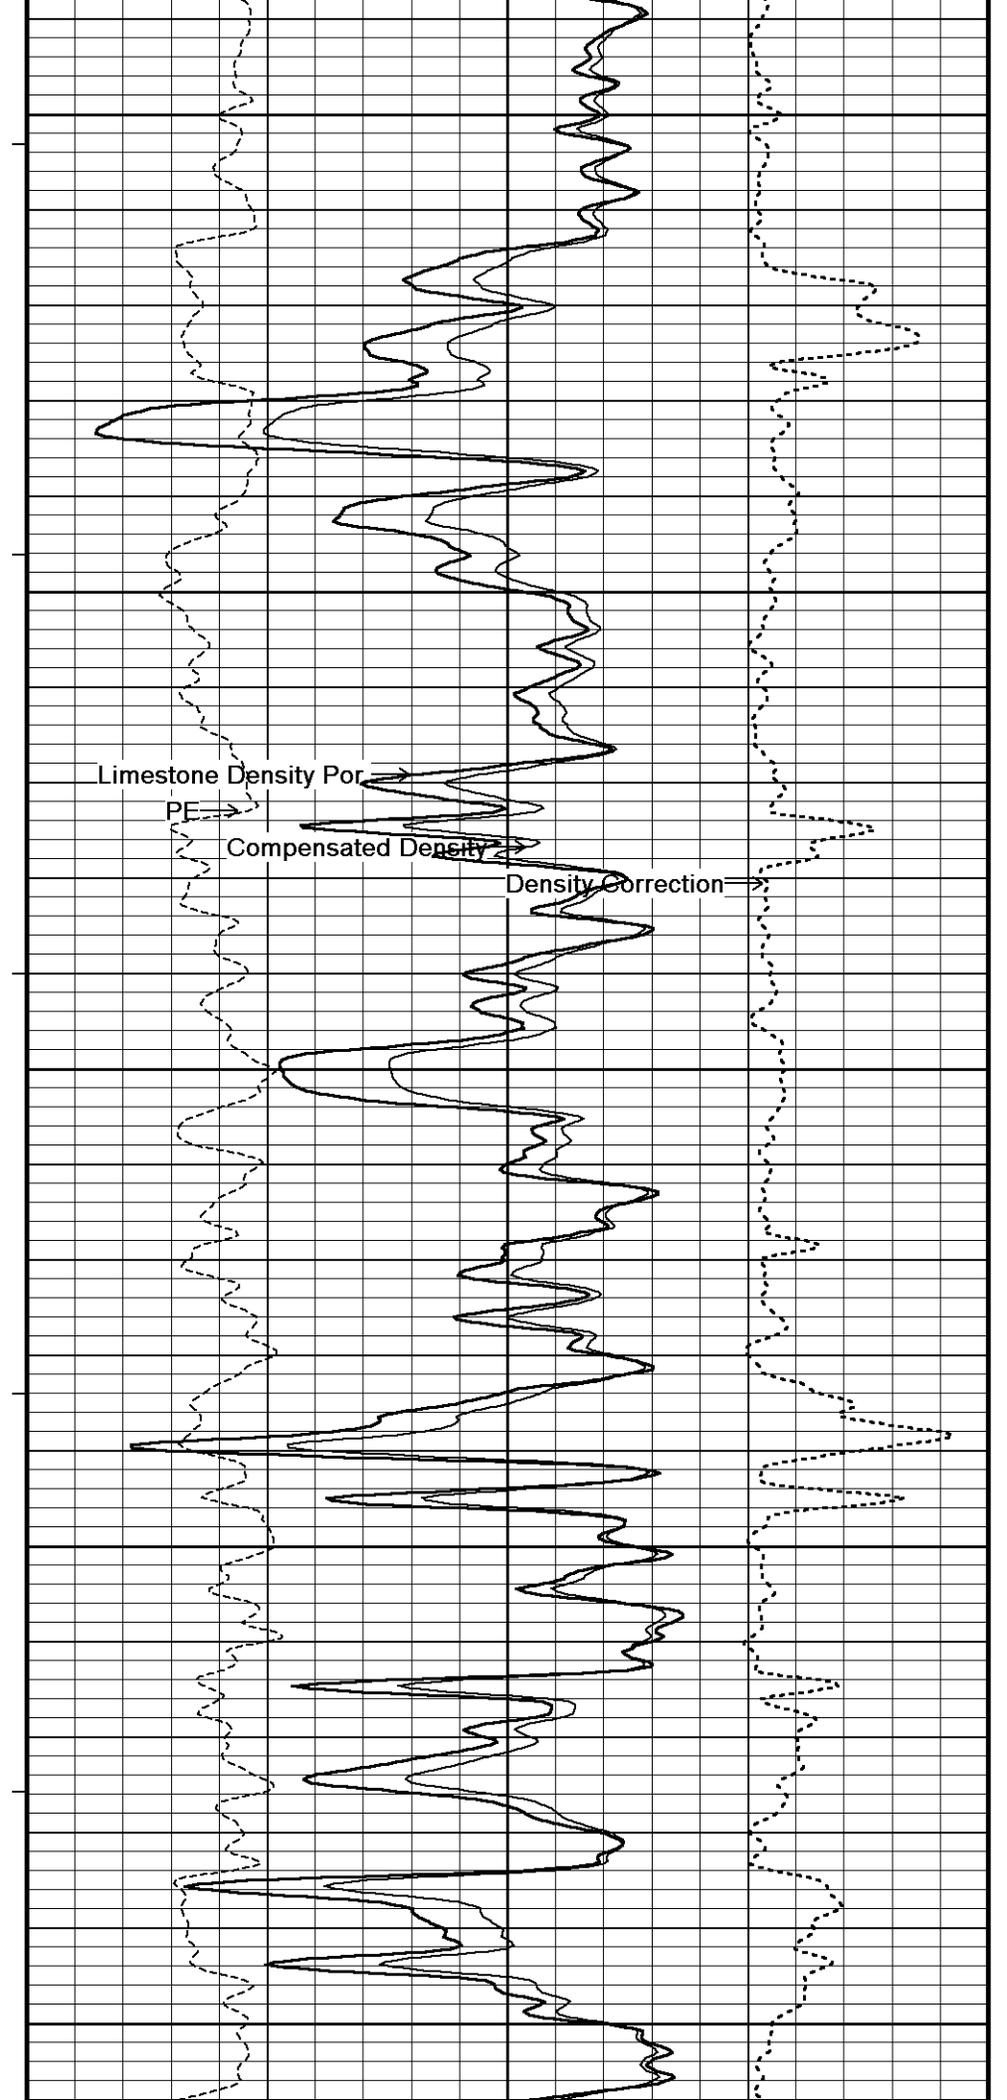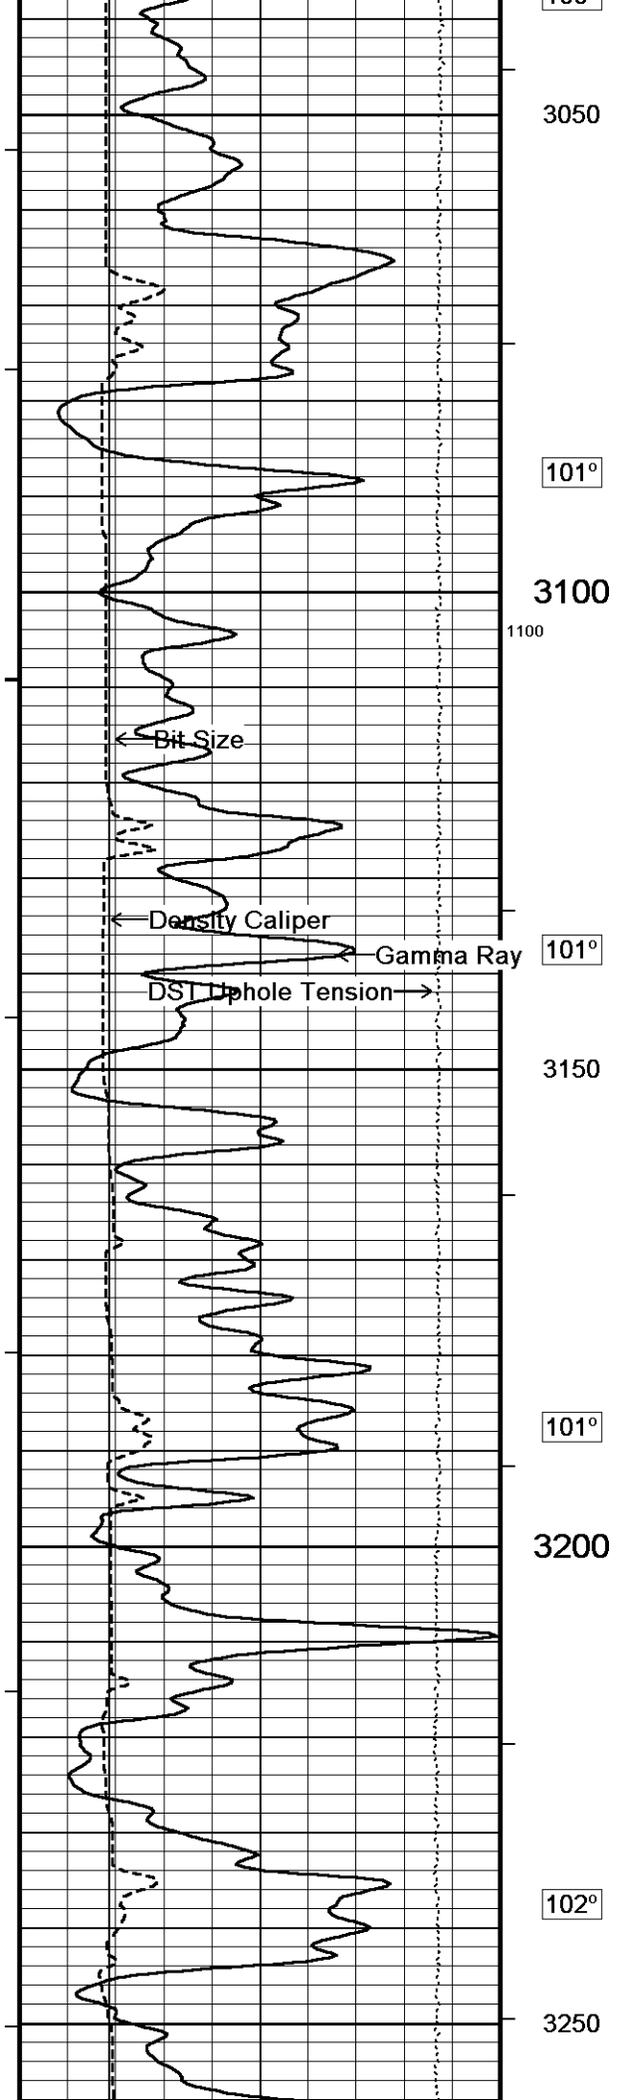




101°
101°
101°
101°
102°

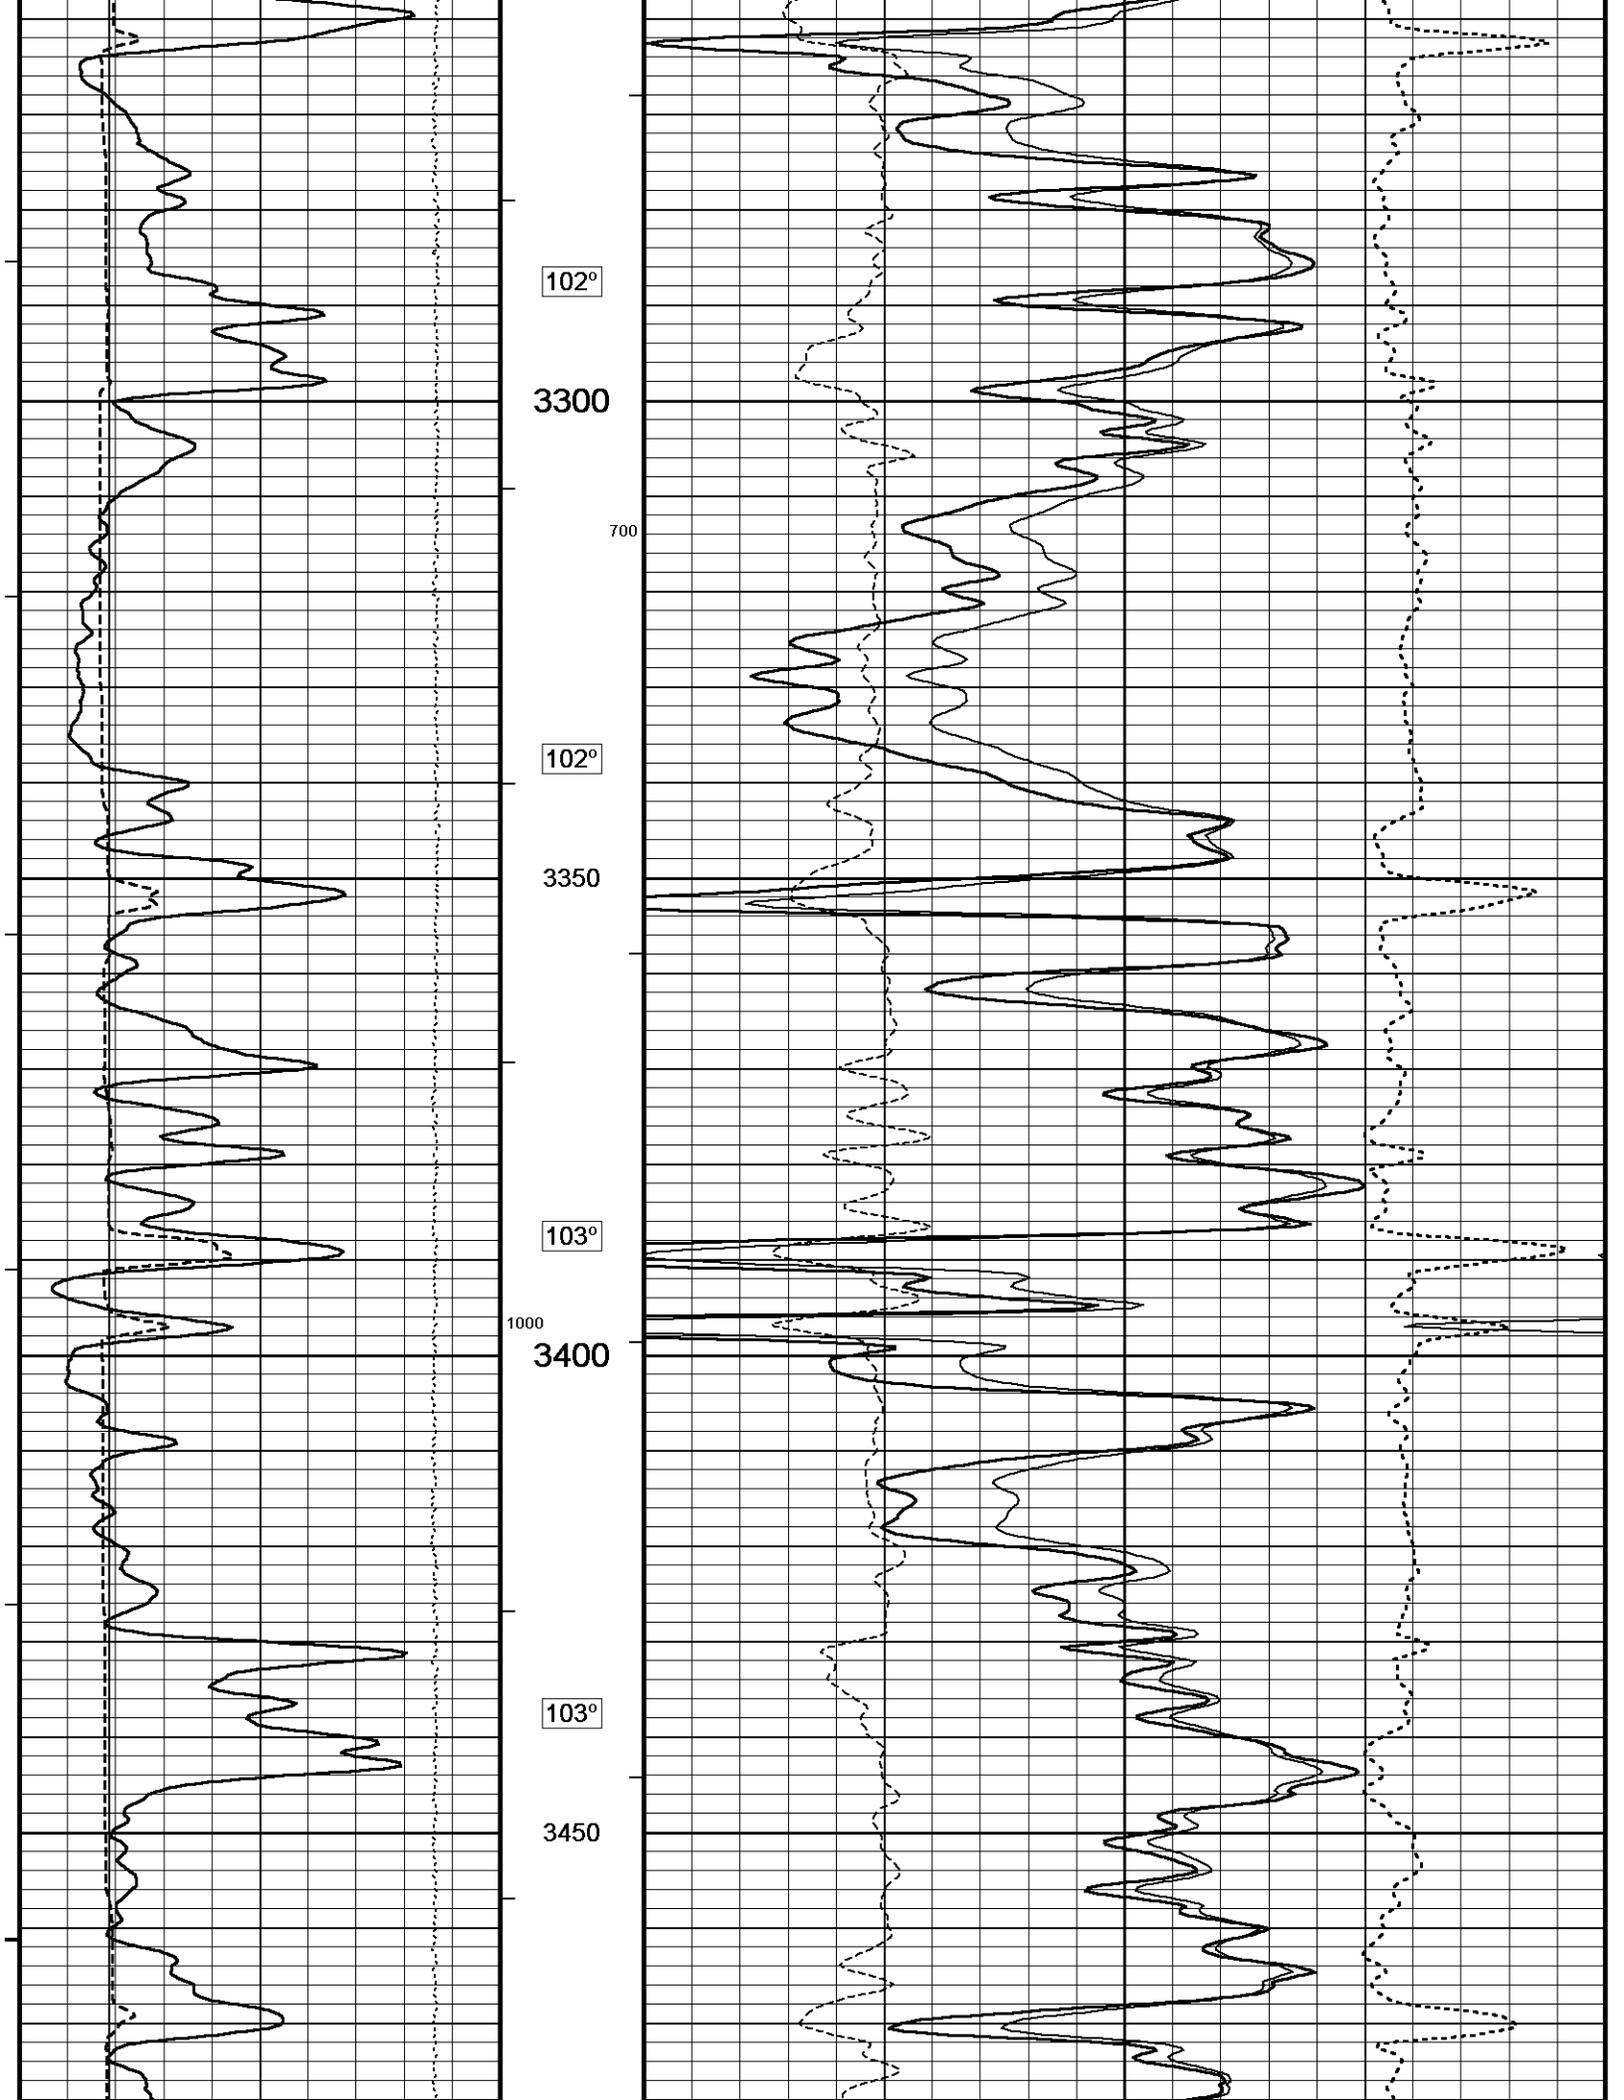


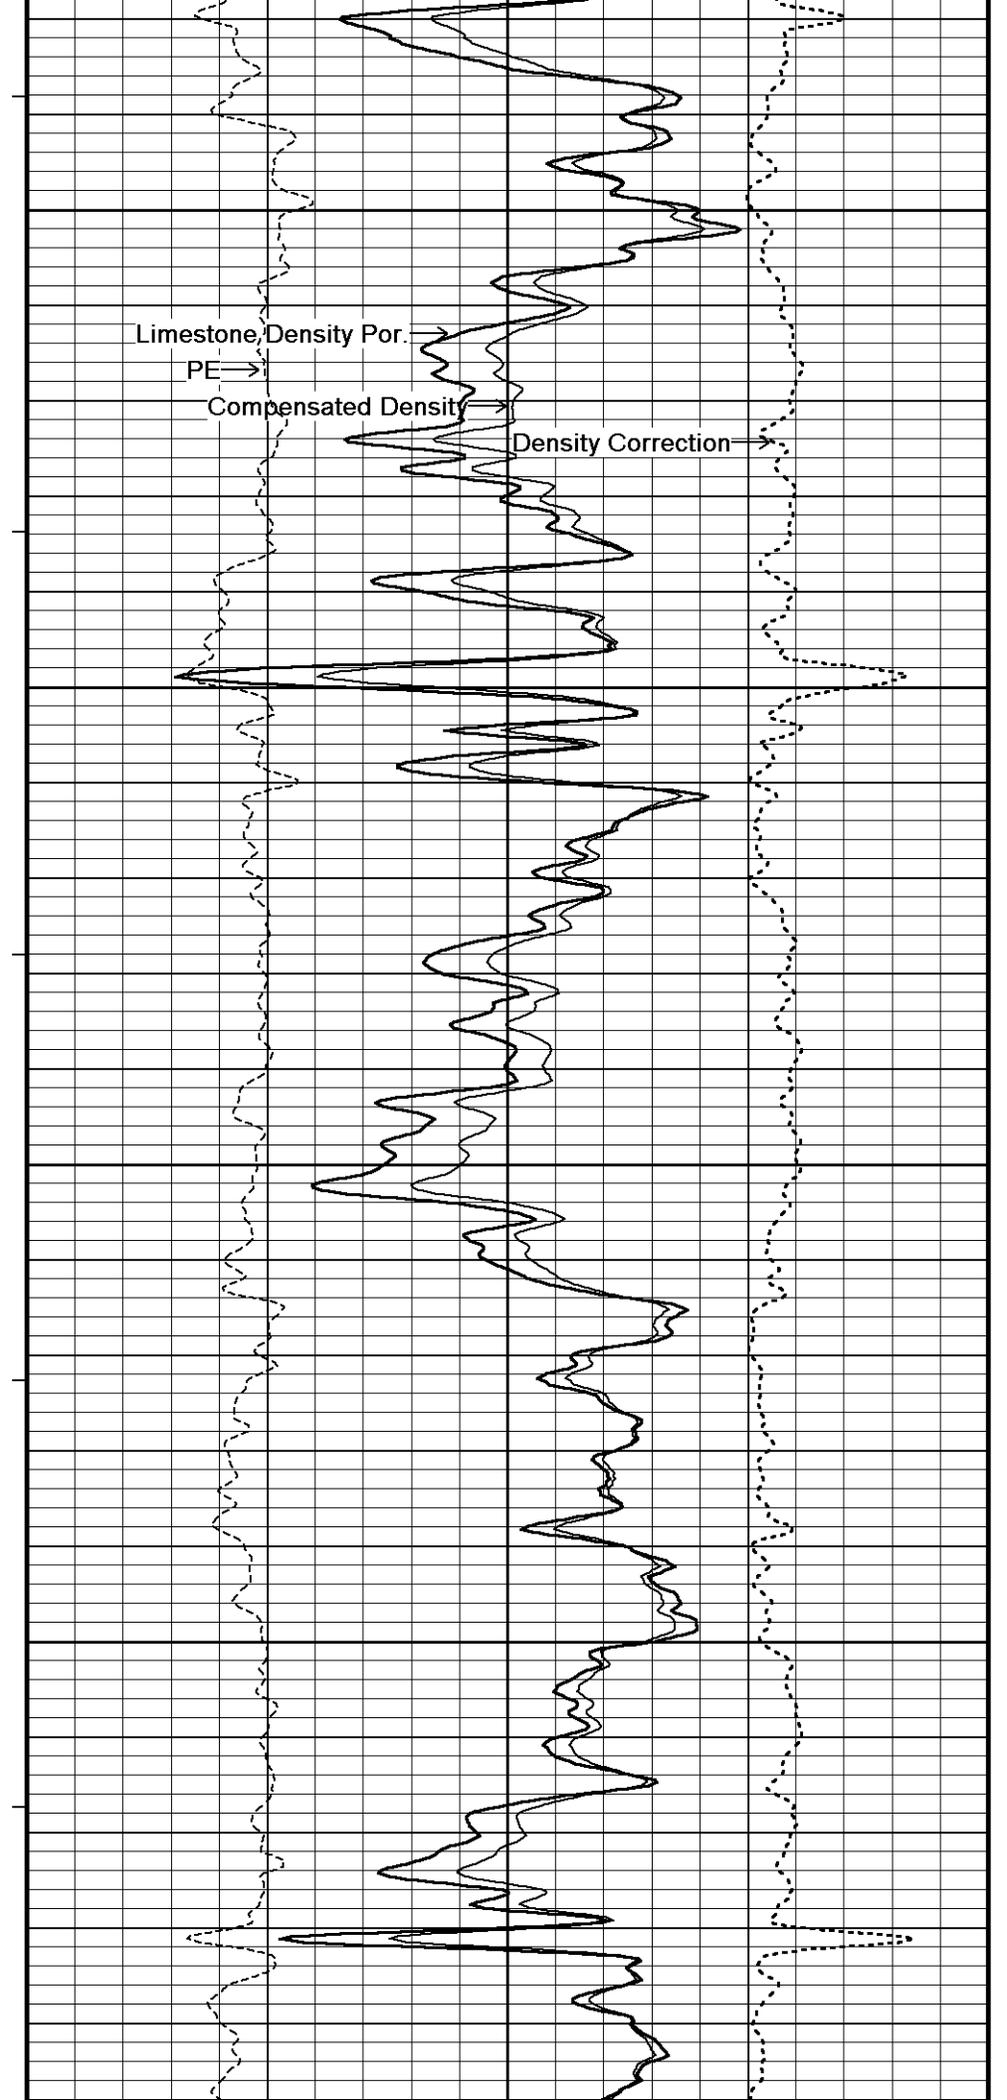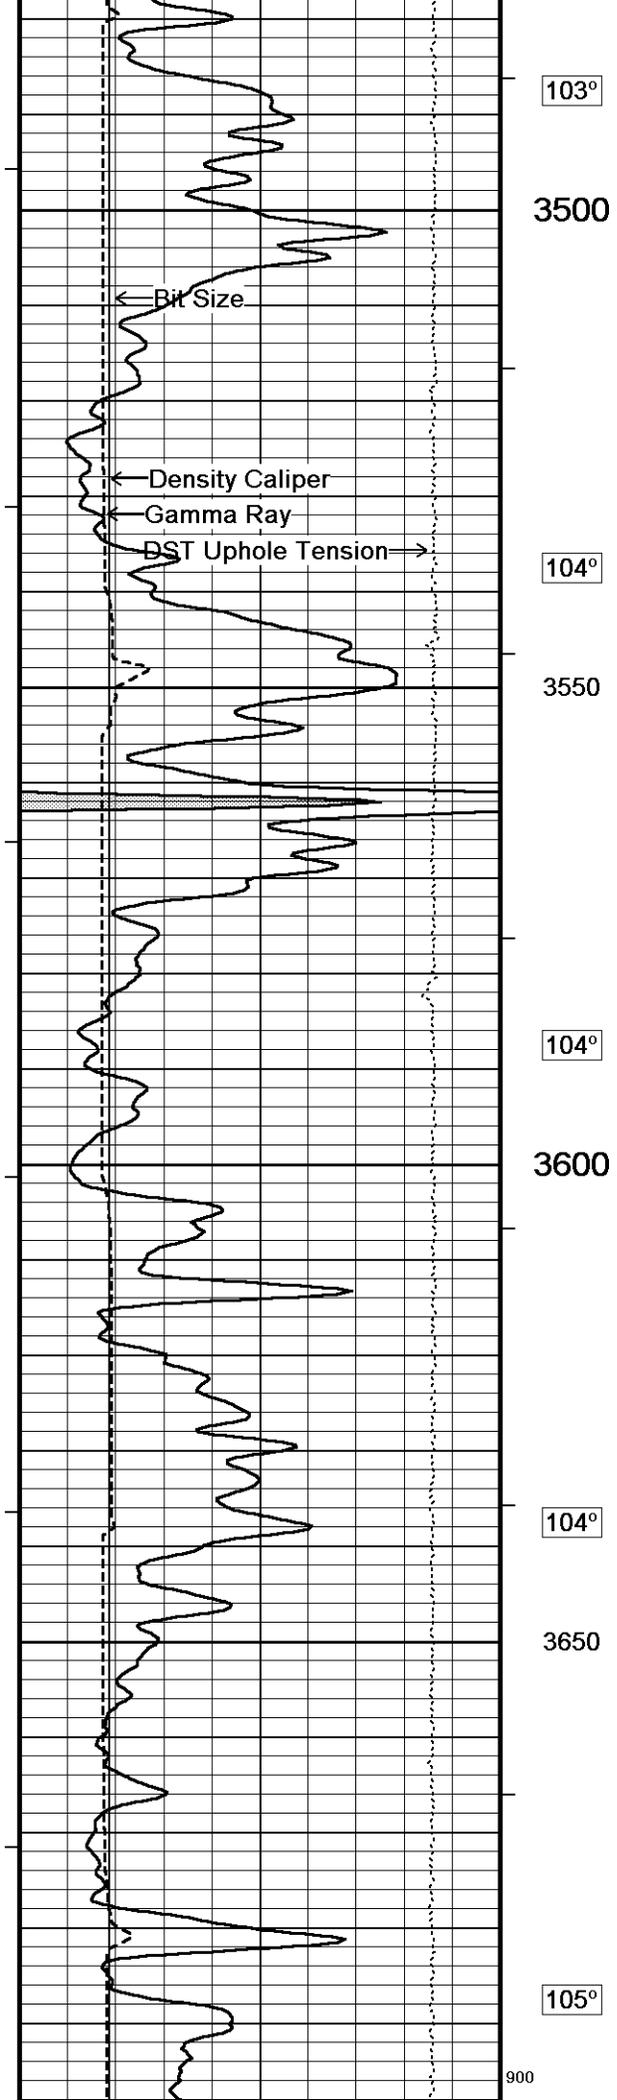

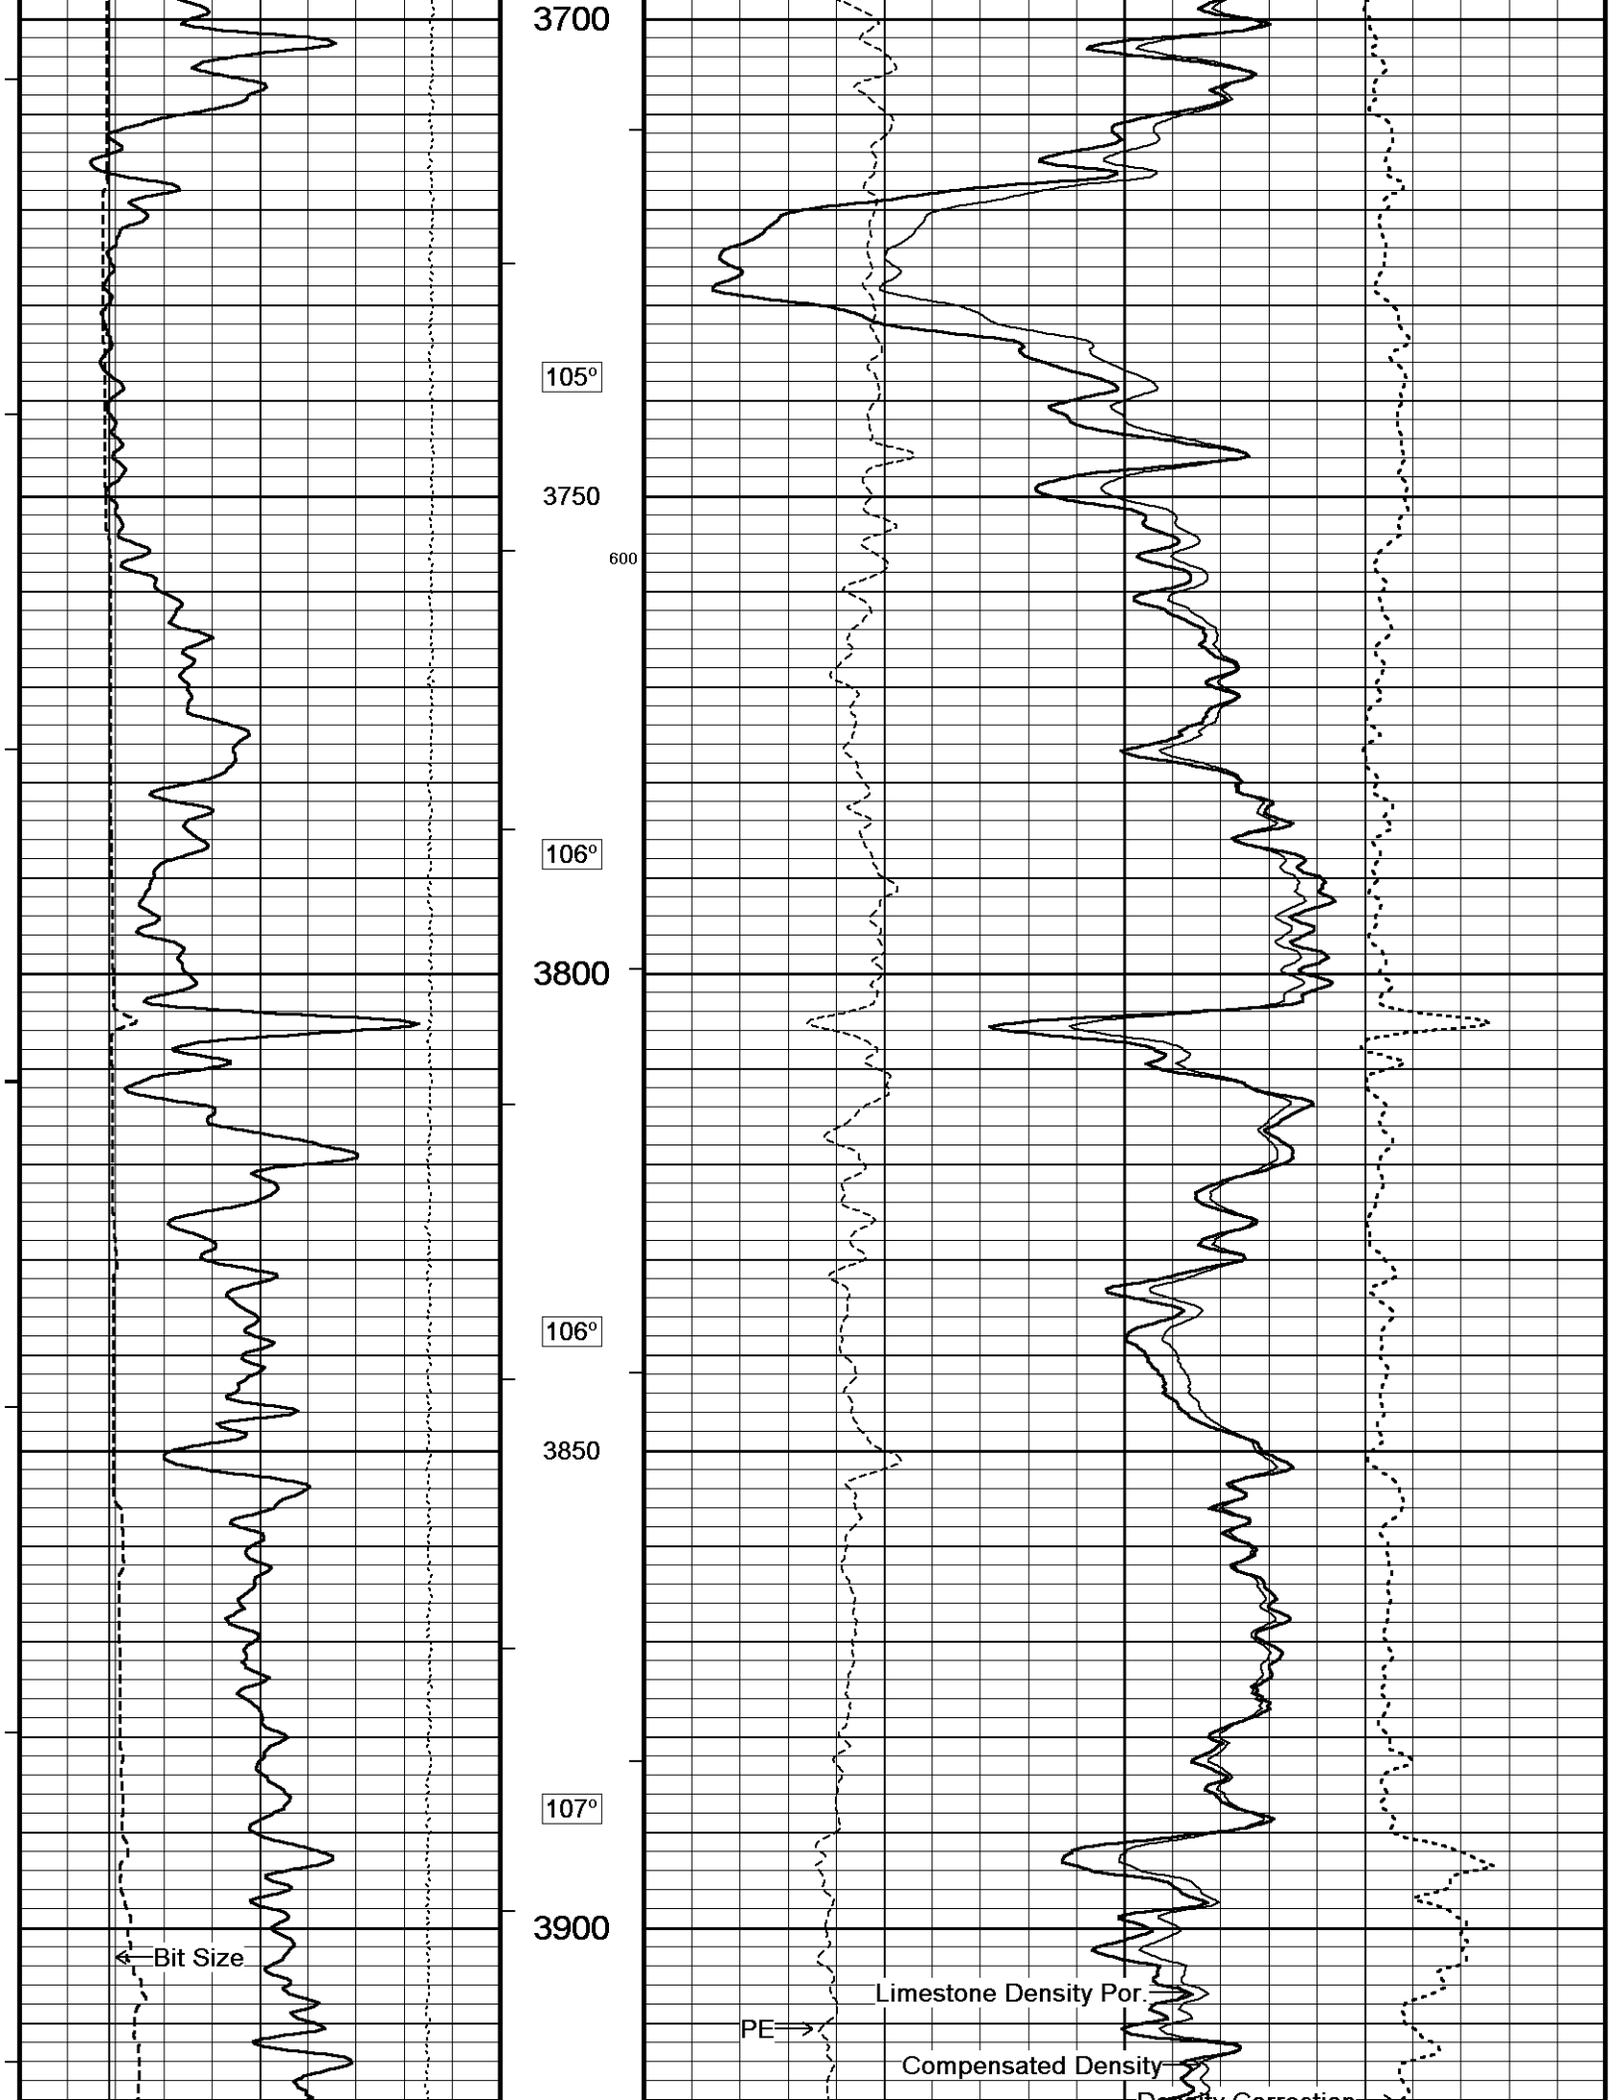

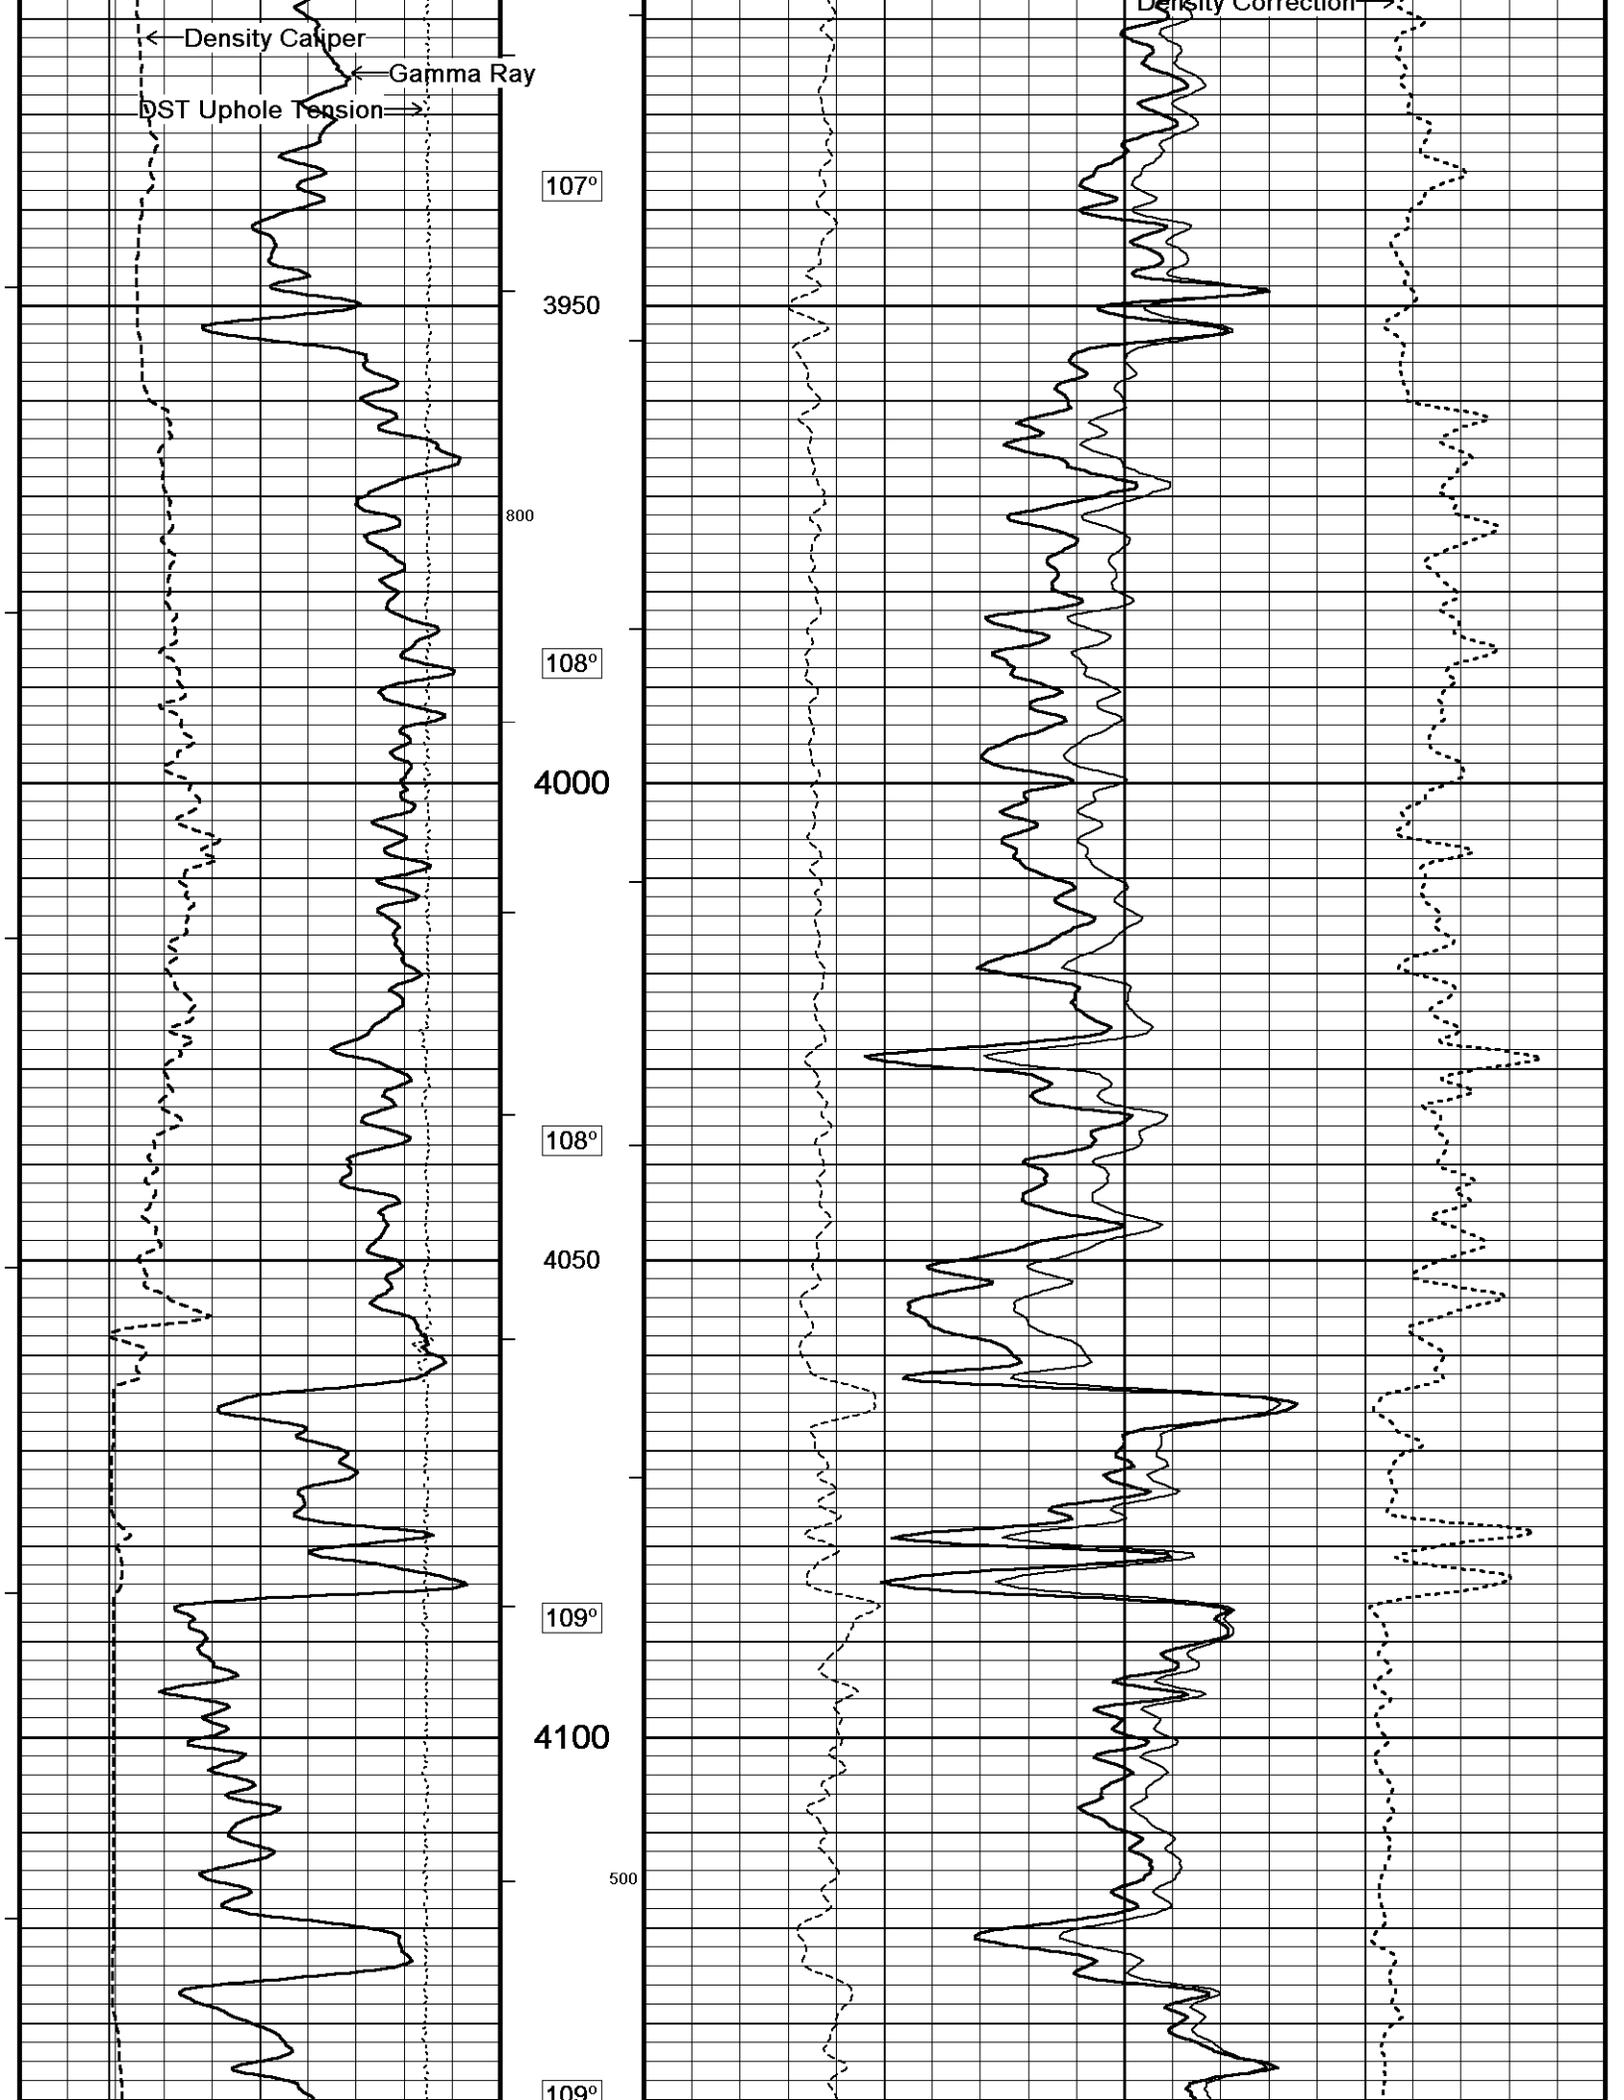

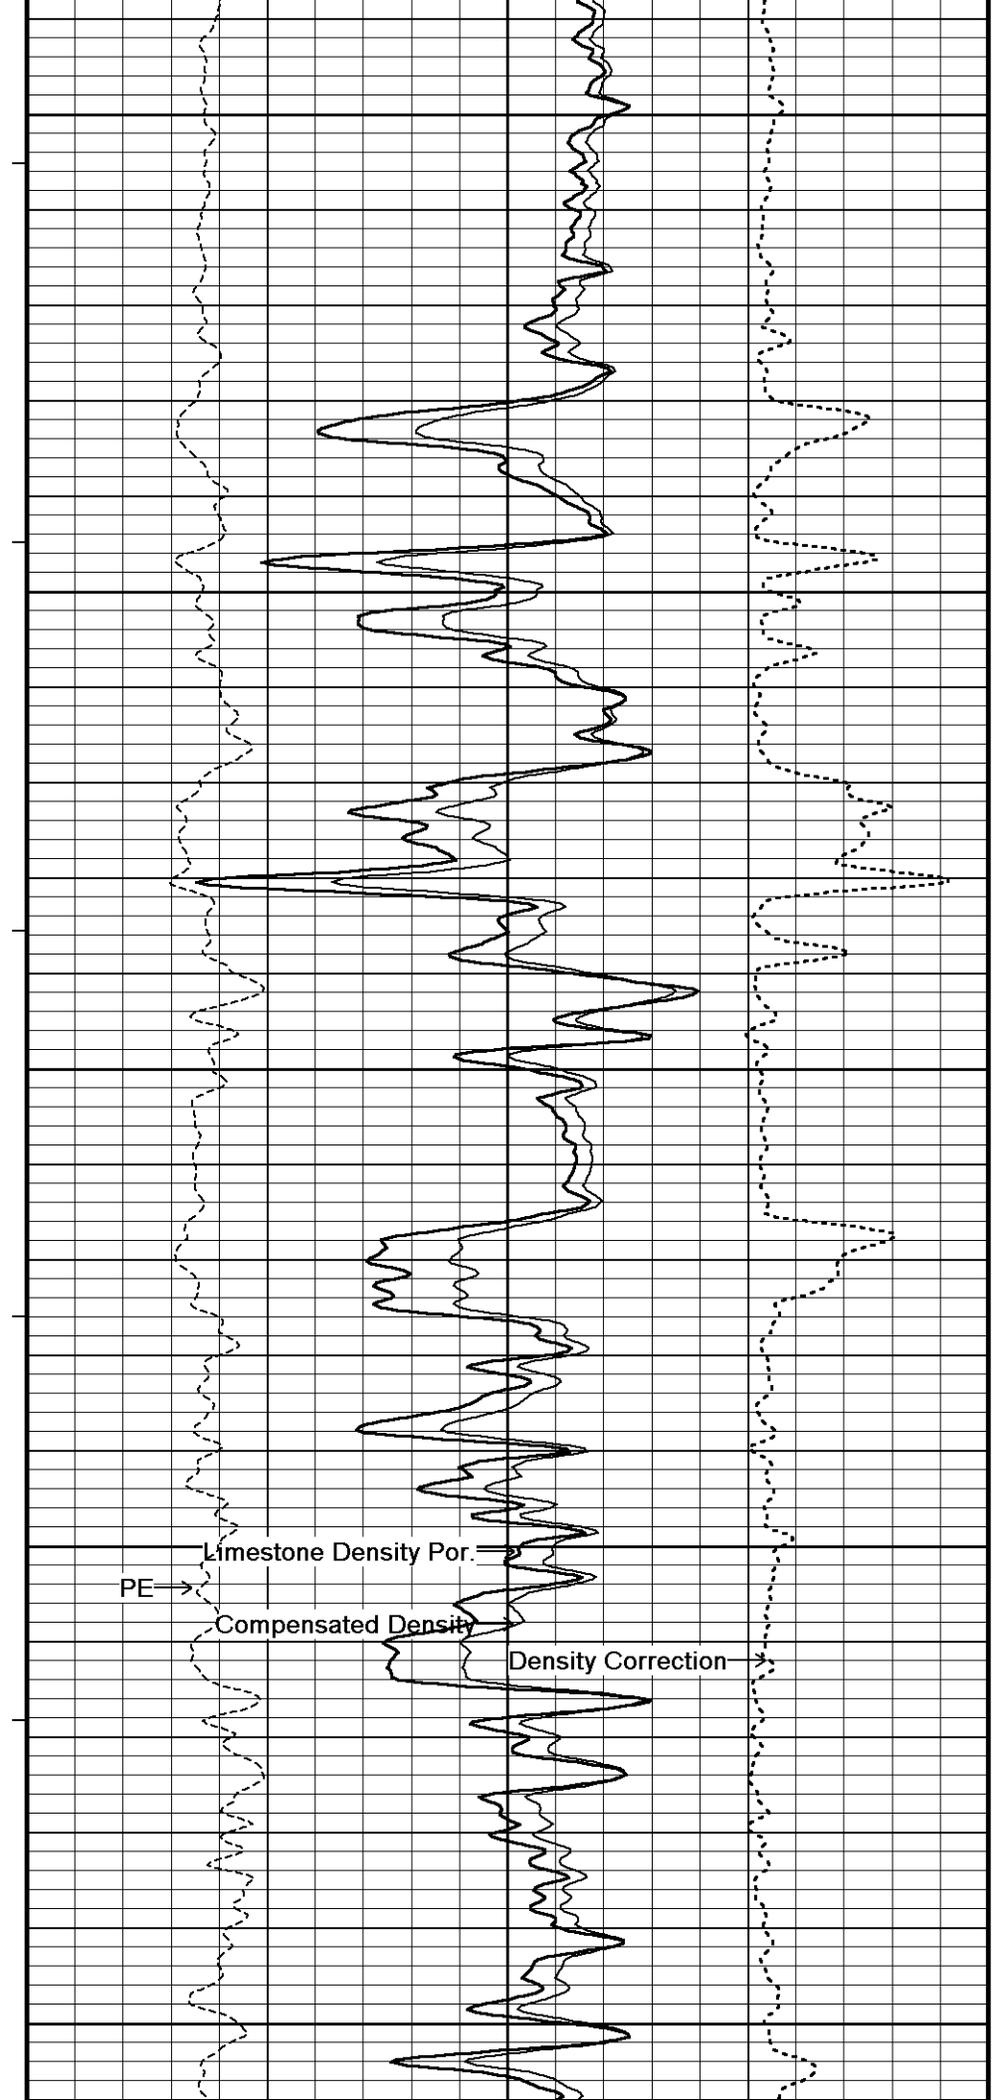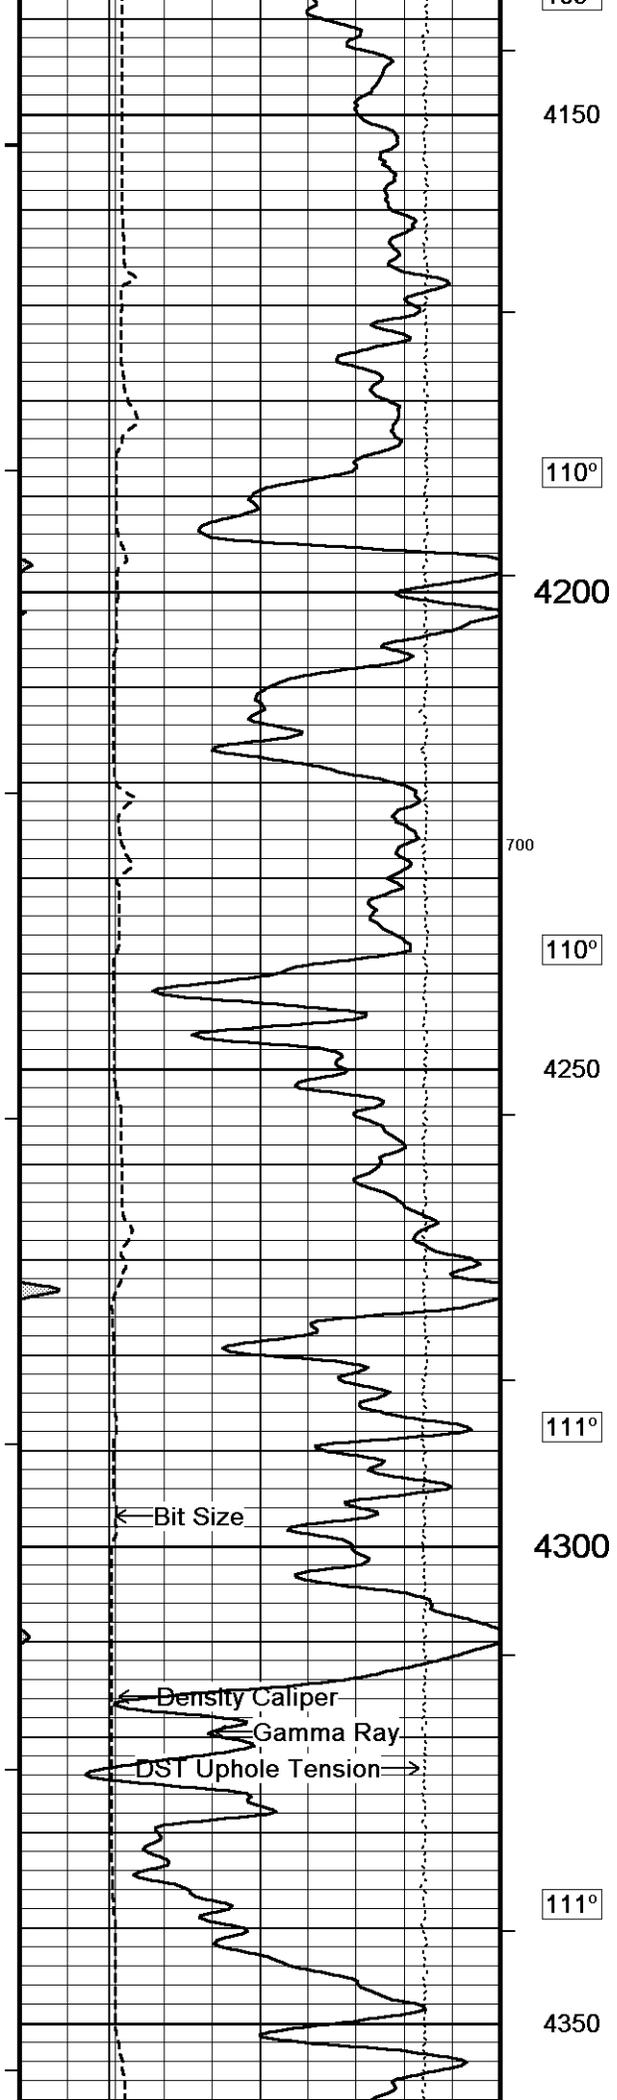

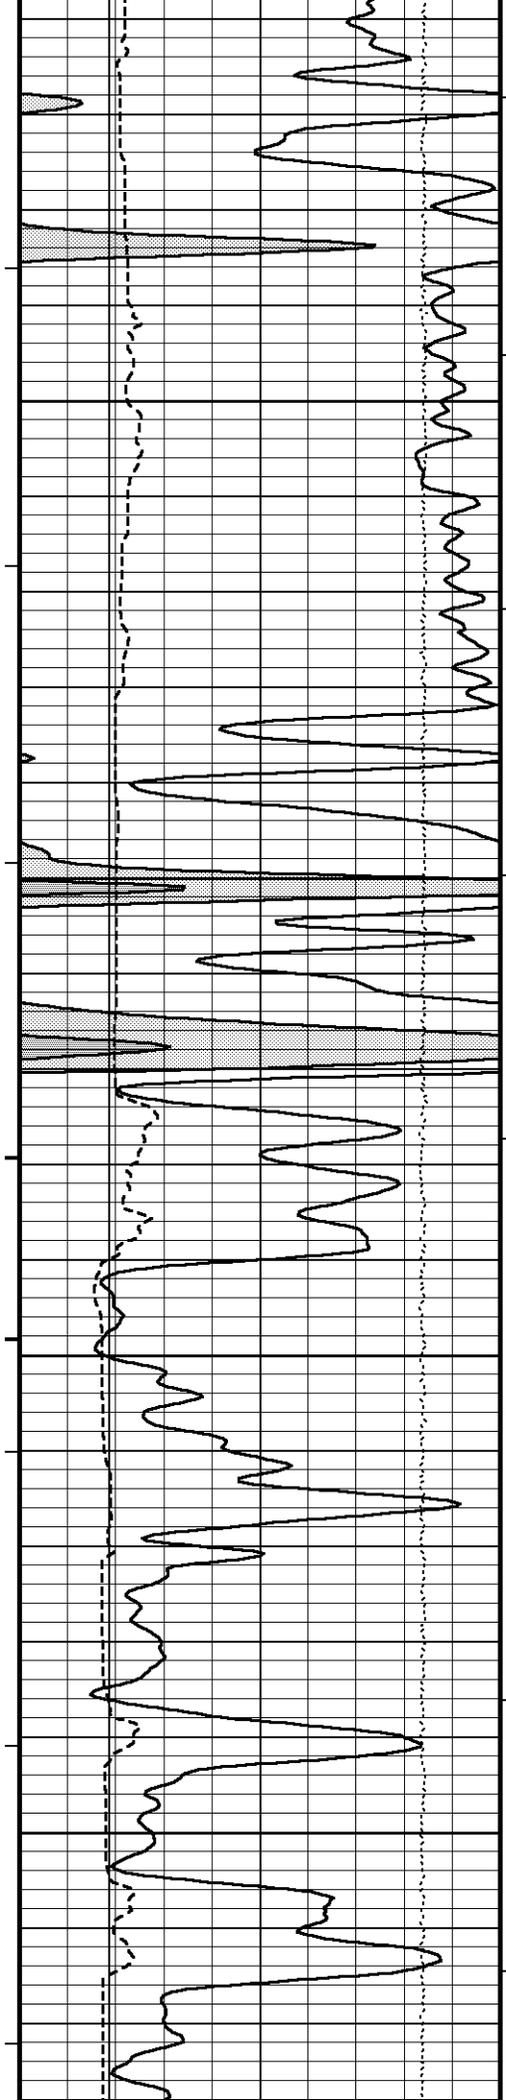

112°

4400

112°

4450

112°


4500


600

113°

4550

400

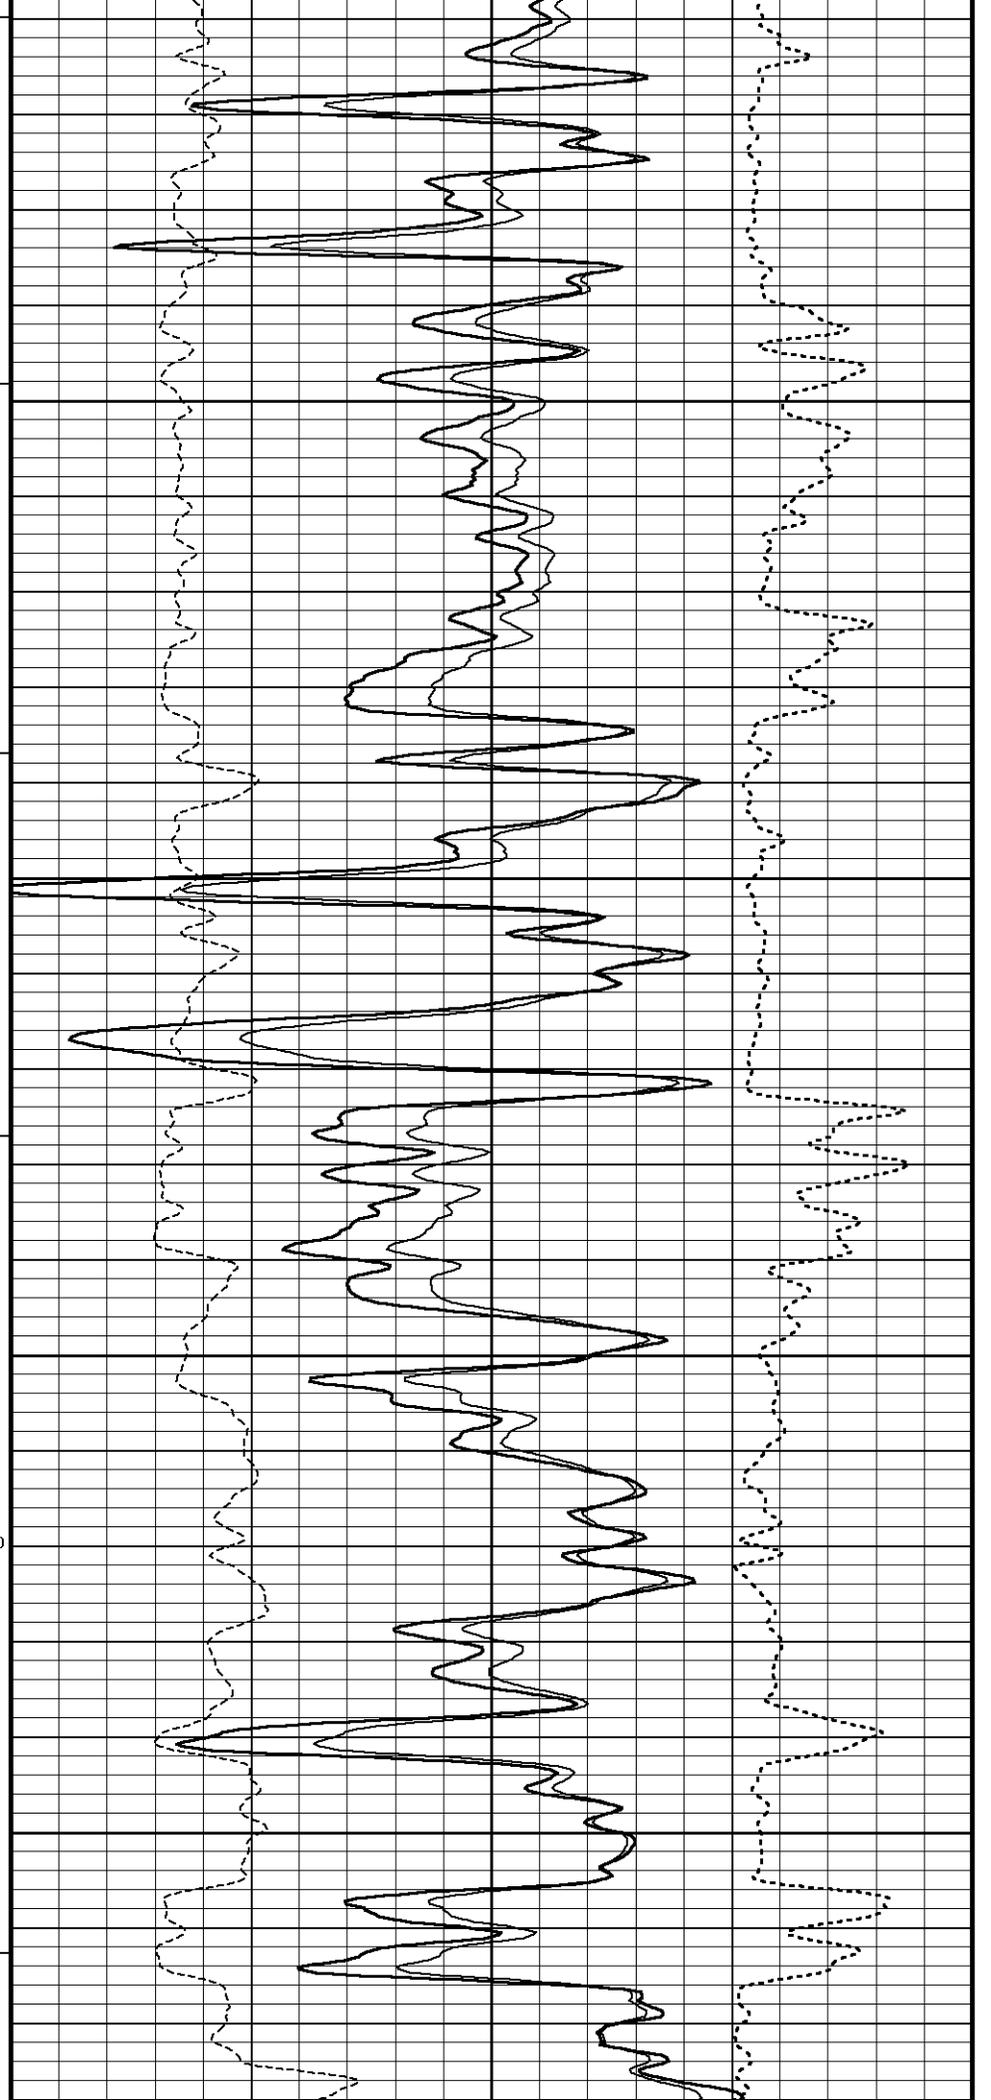

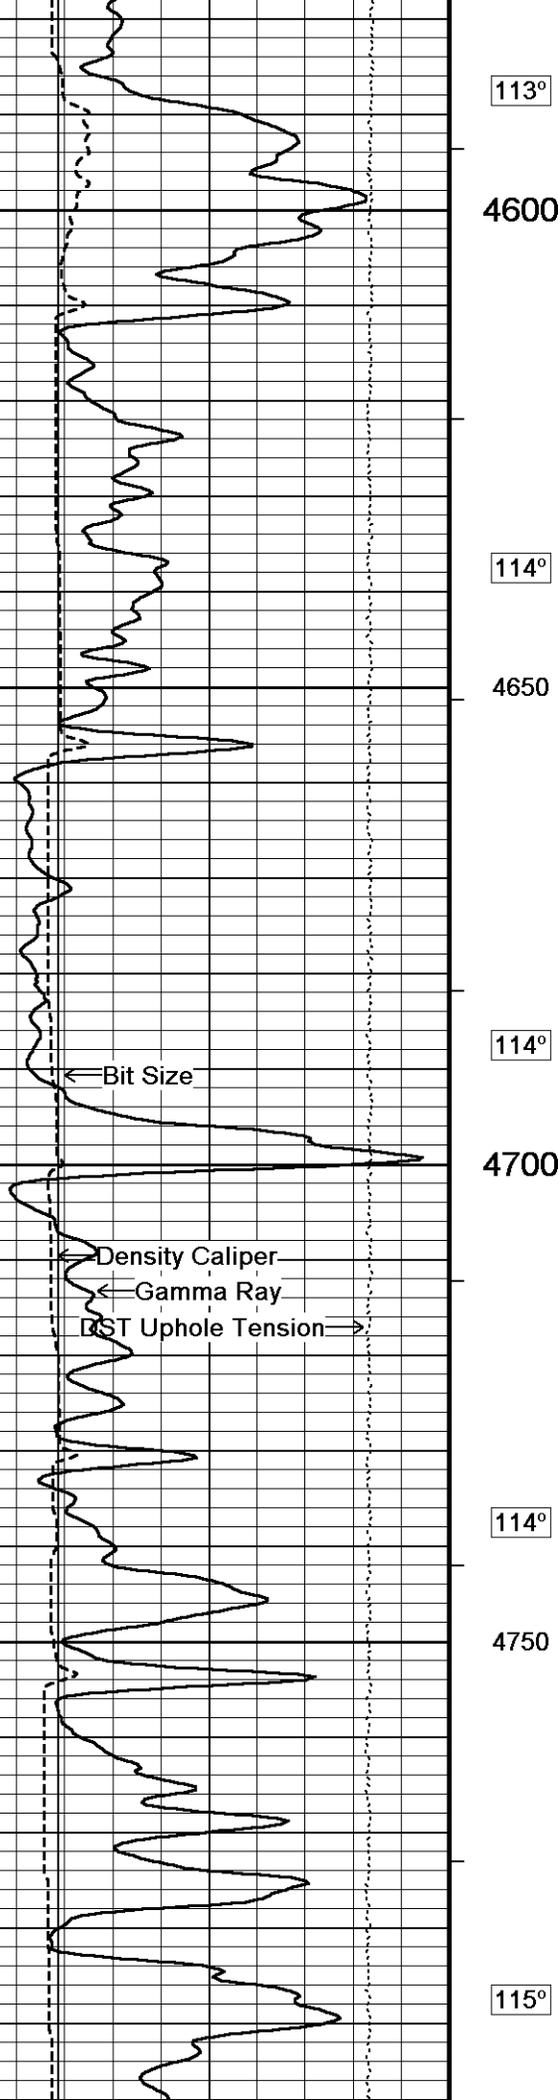

113°

4600

114°

4650

114°

4700

114°

4750

115°

← Bit Size

← Density Caliper

← Gamma Ray


← DST Uphole Tension →


PE →


Limestone Density Por


Compensated Density


Density Correction →

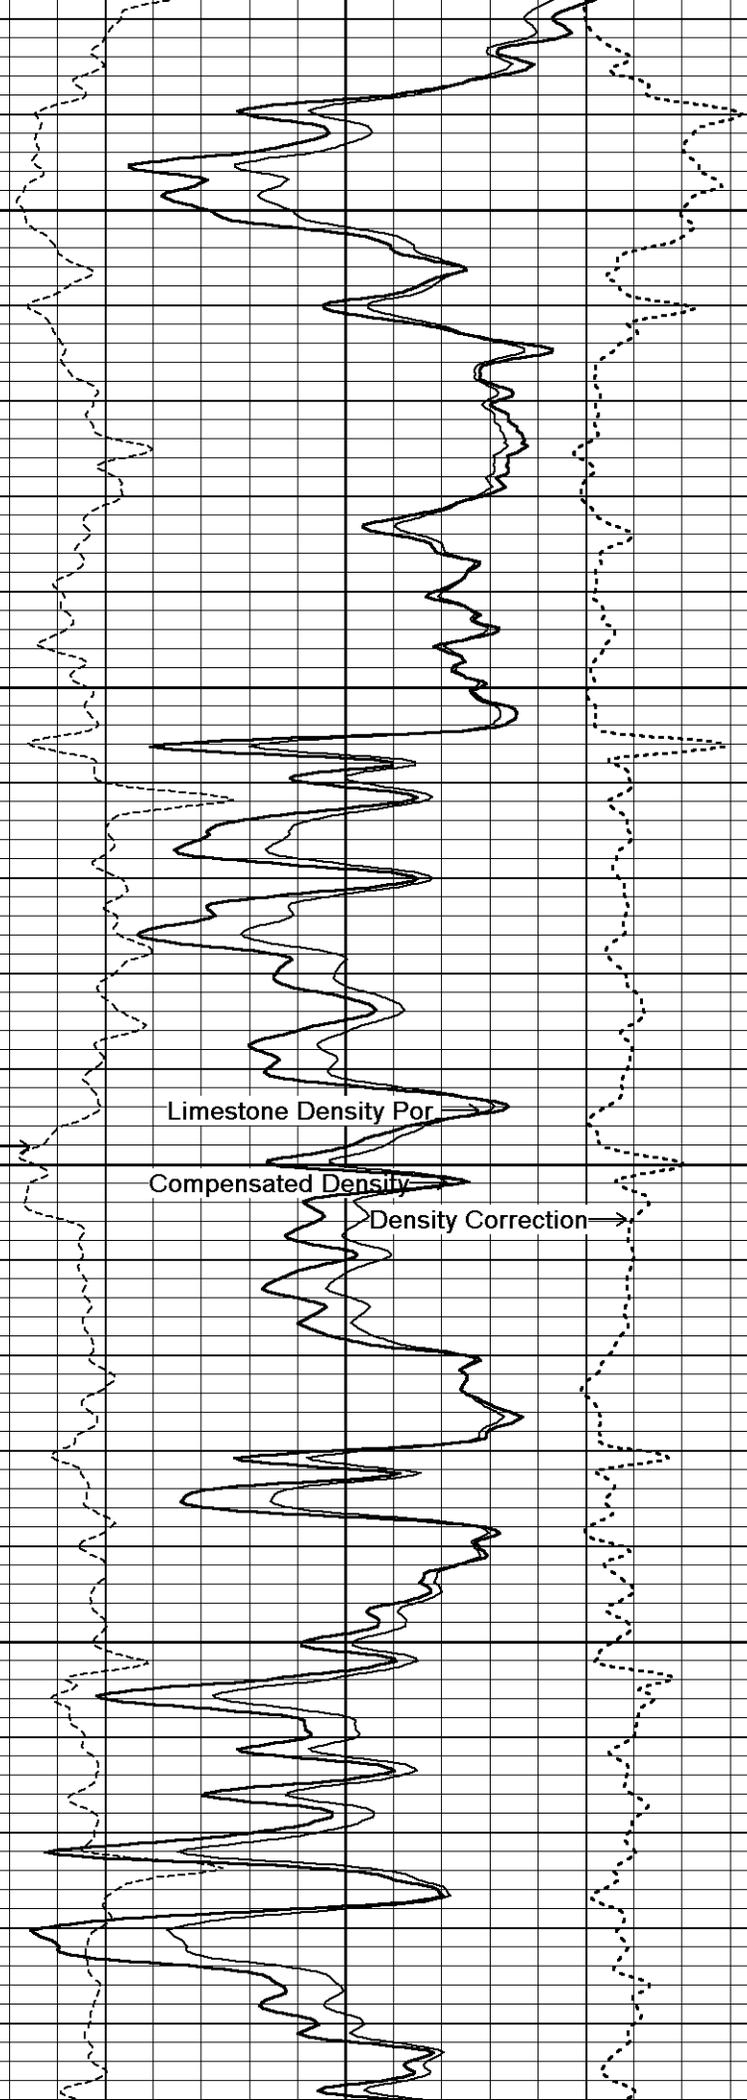

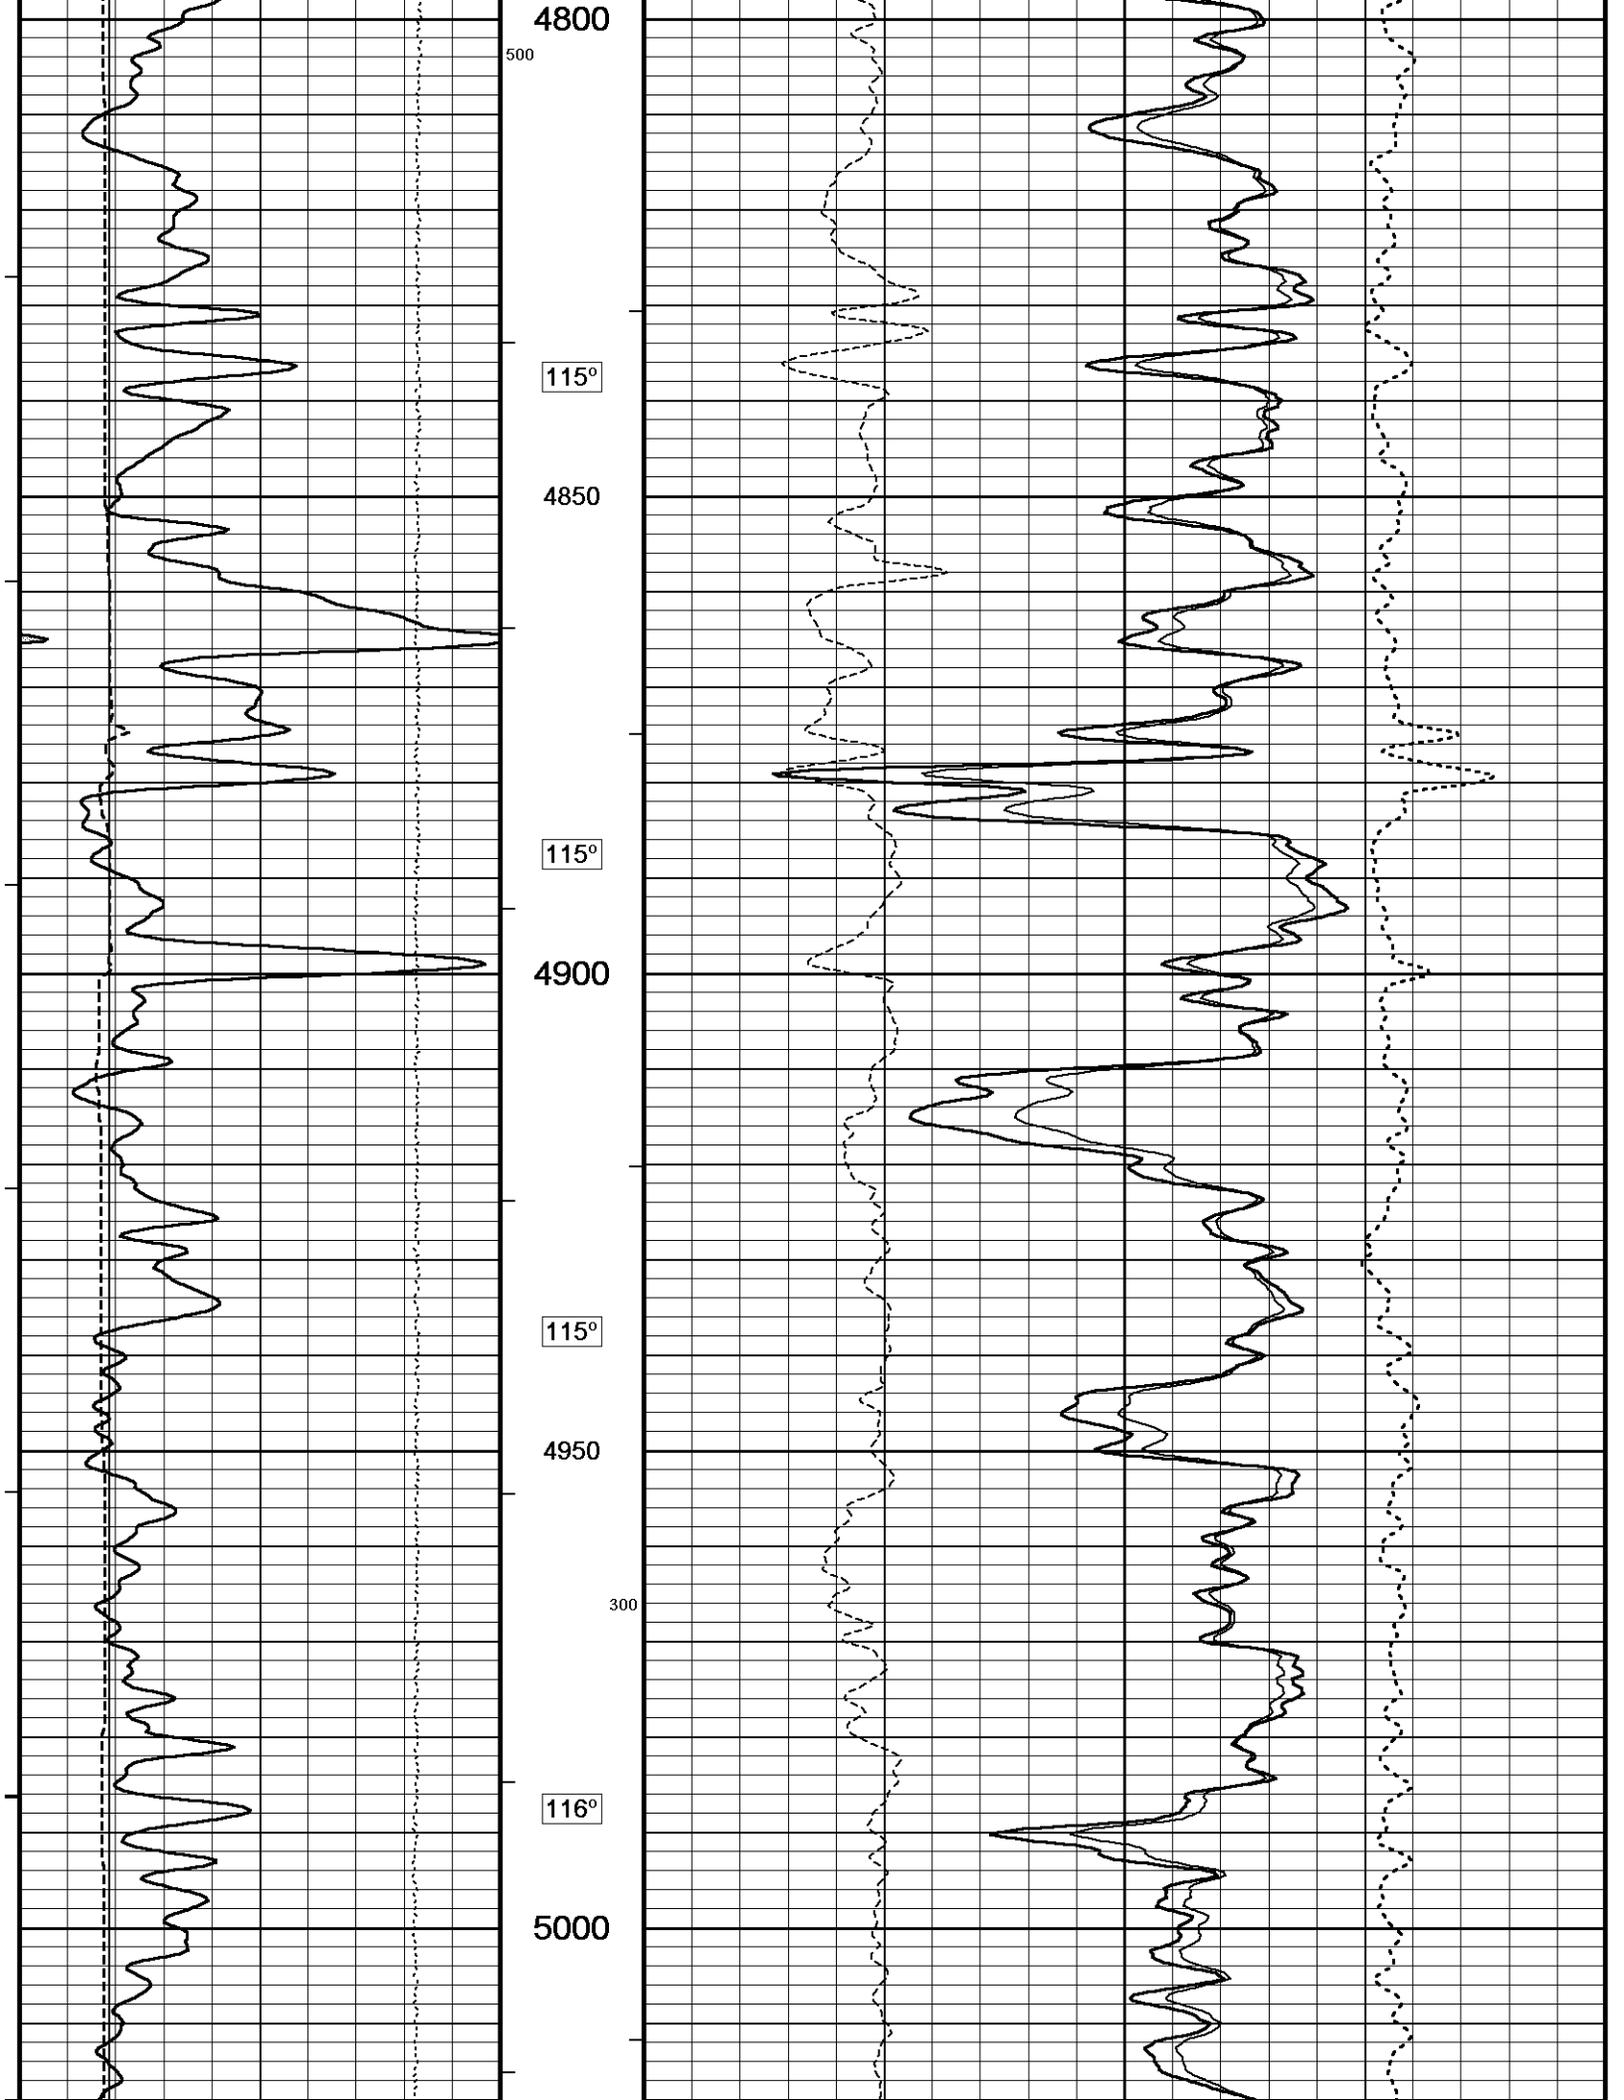

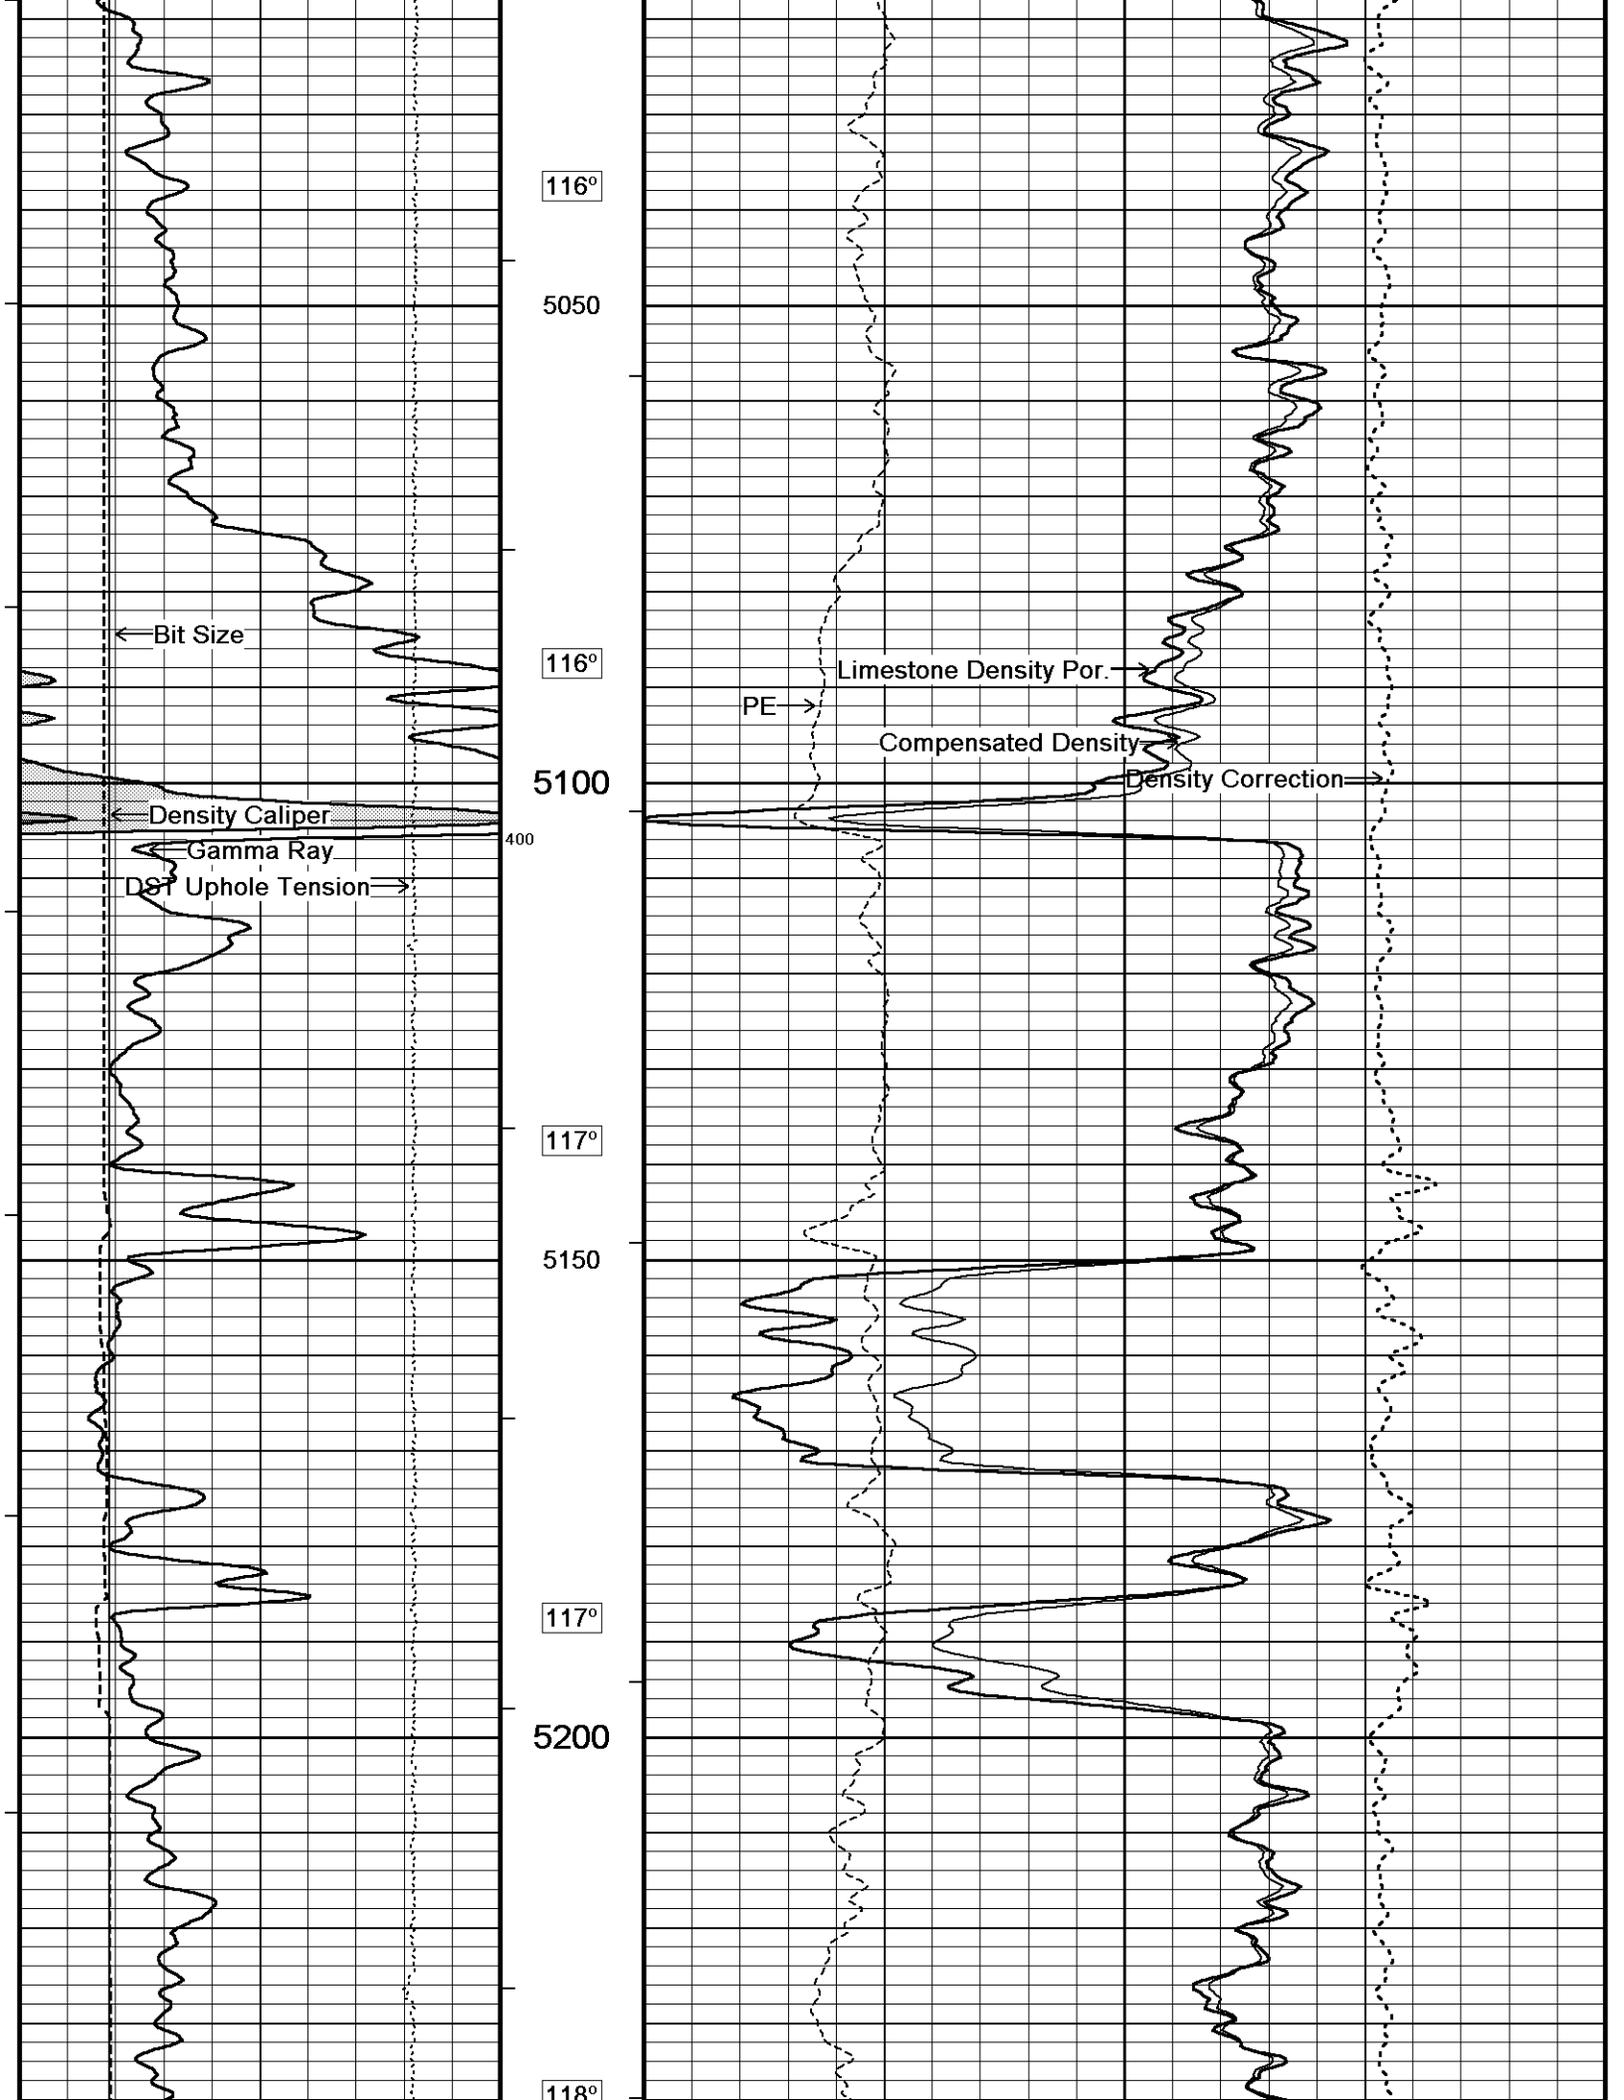

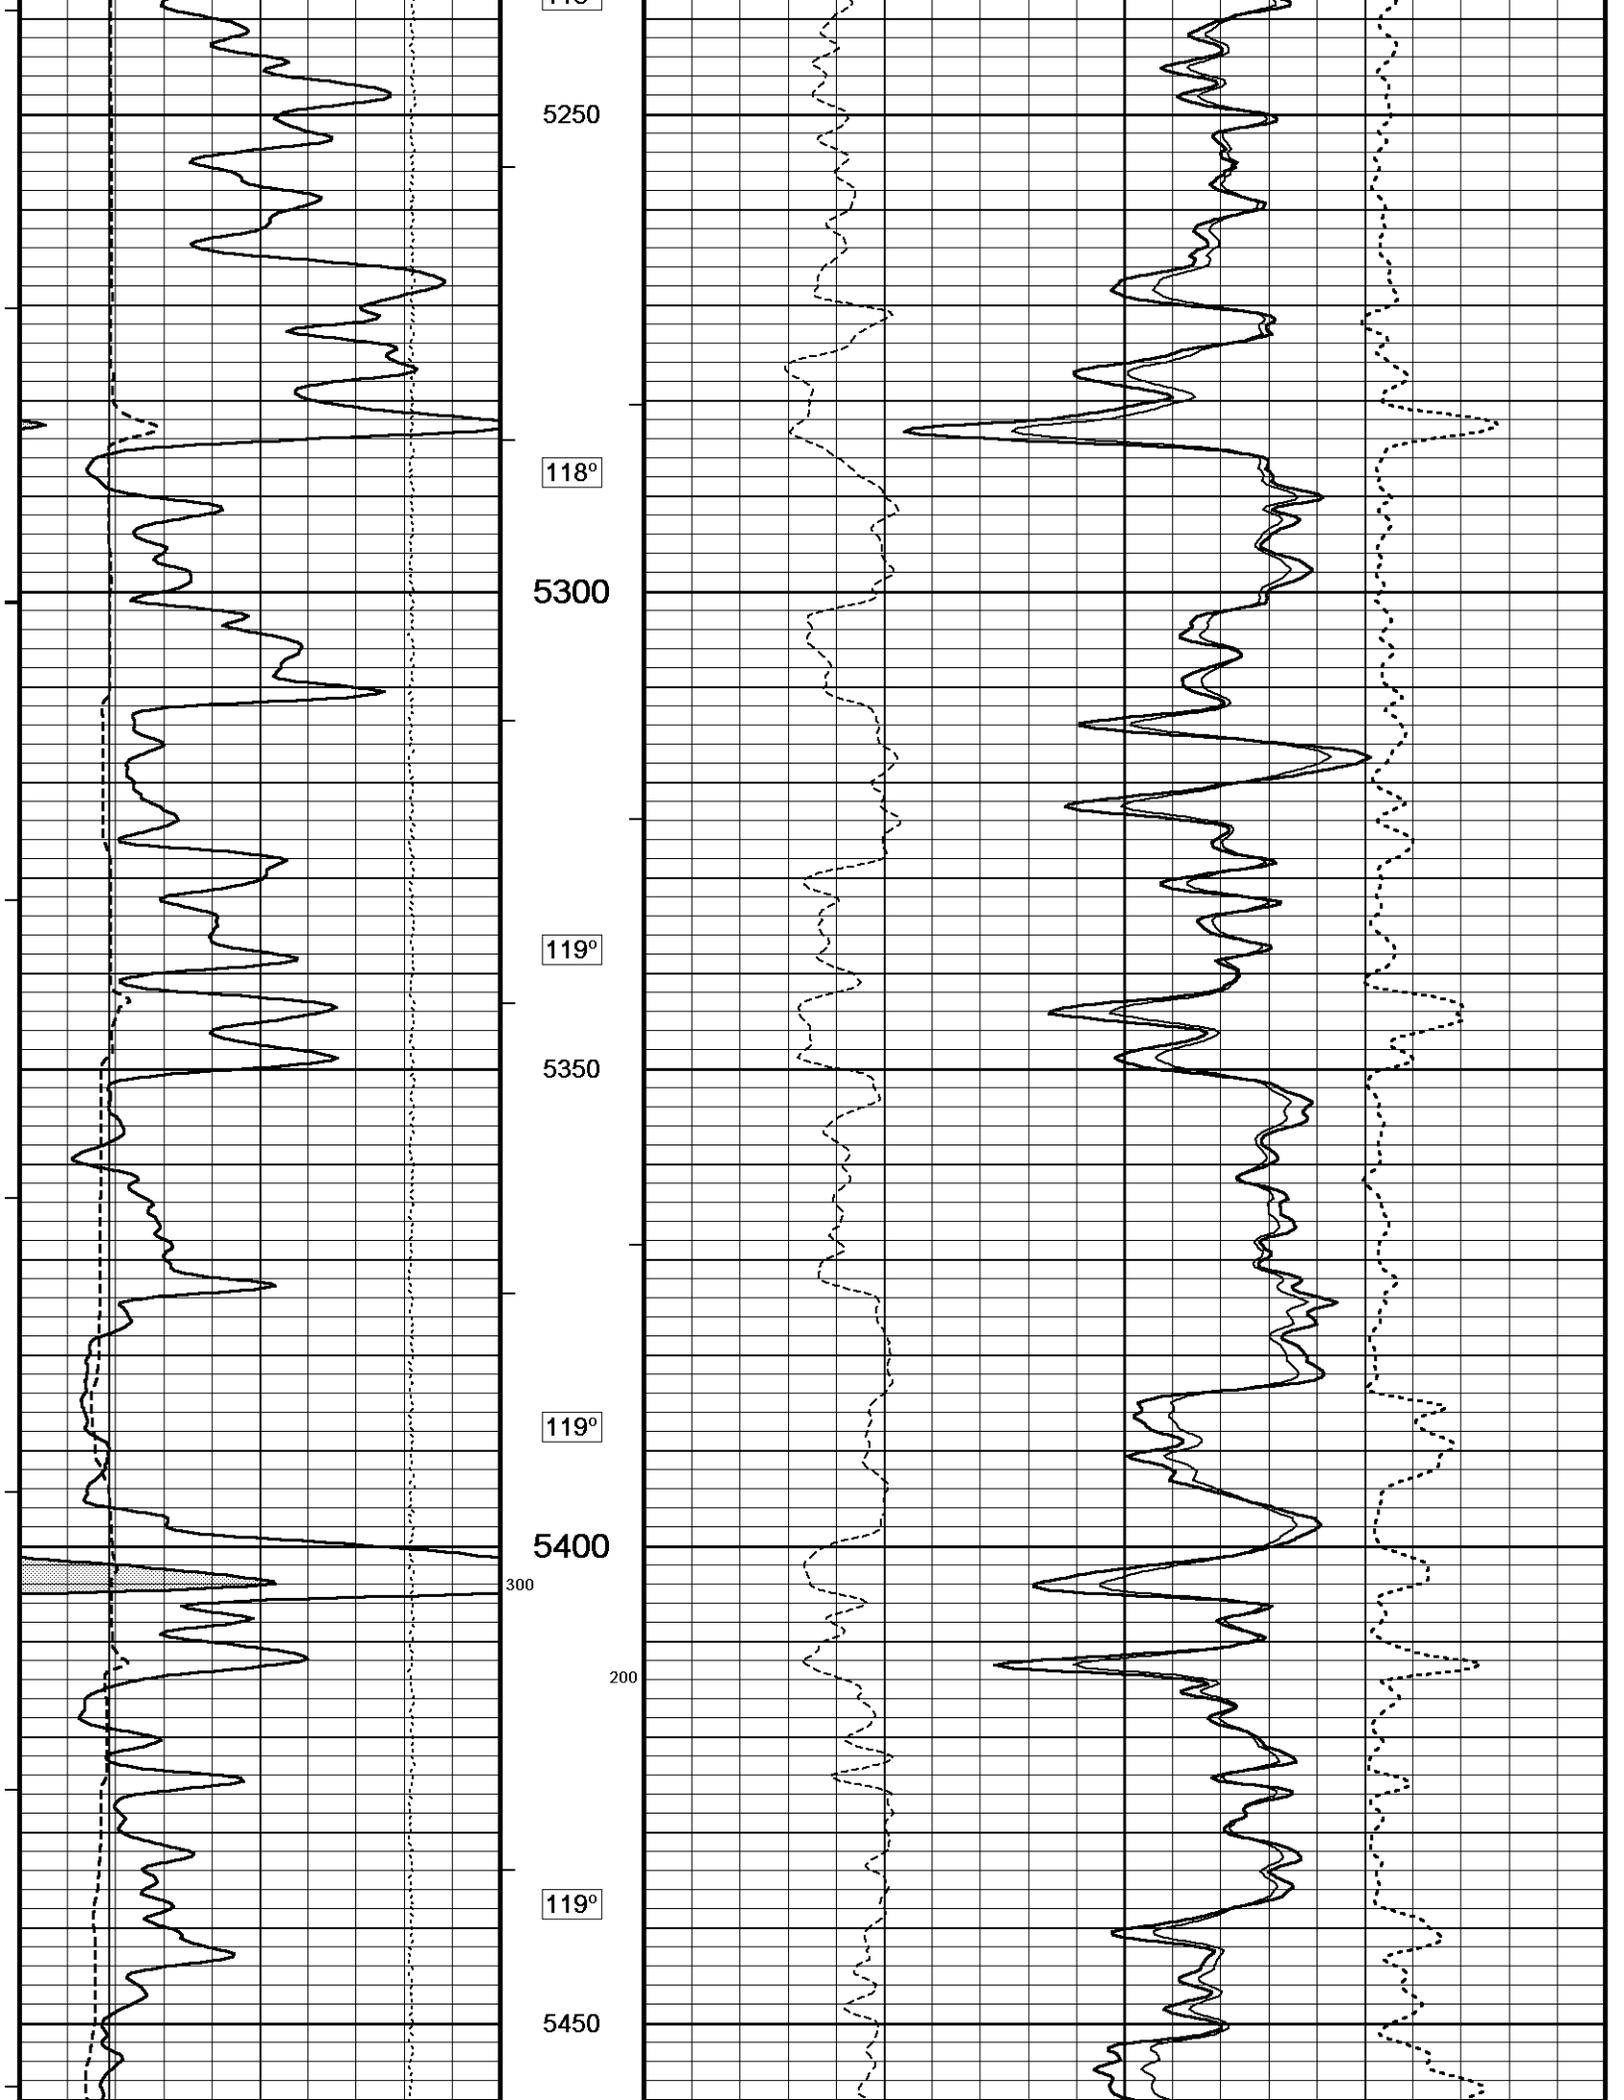

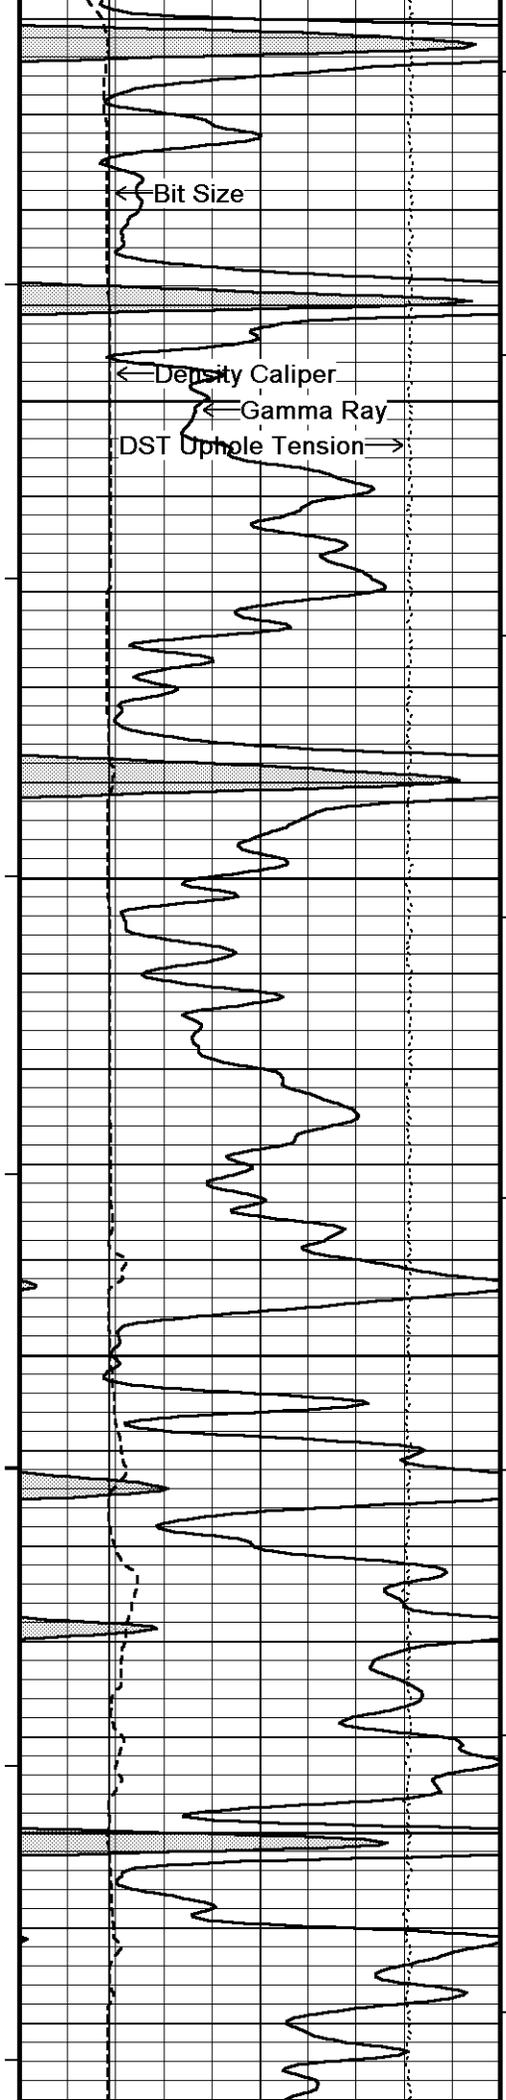

120°

5500

120°


5550

121°

5600

121°

5650


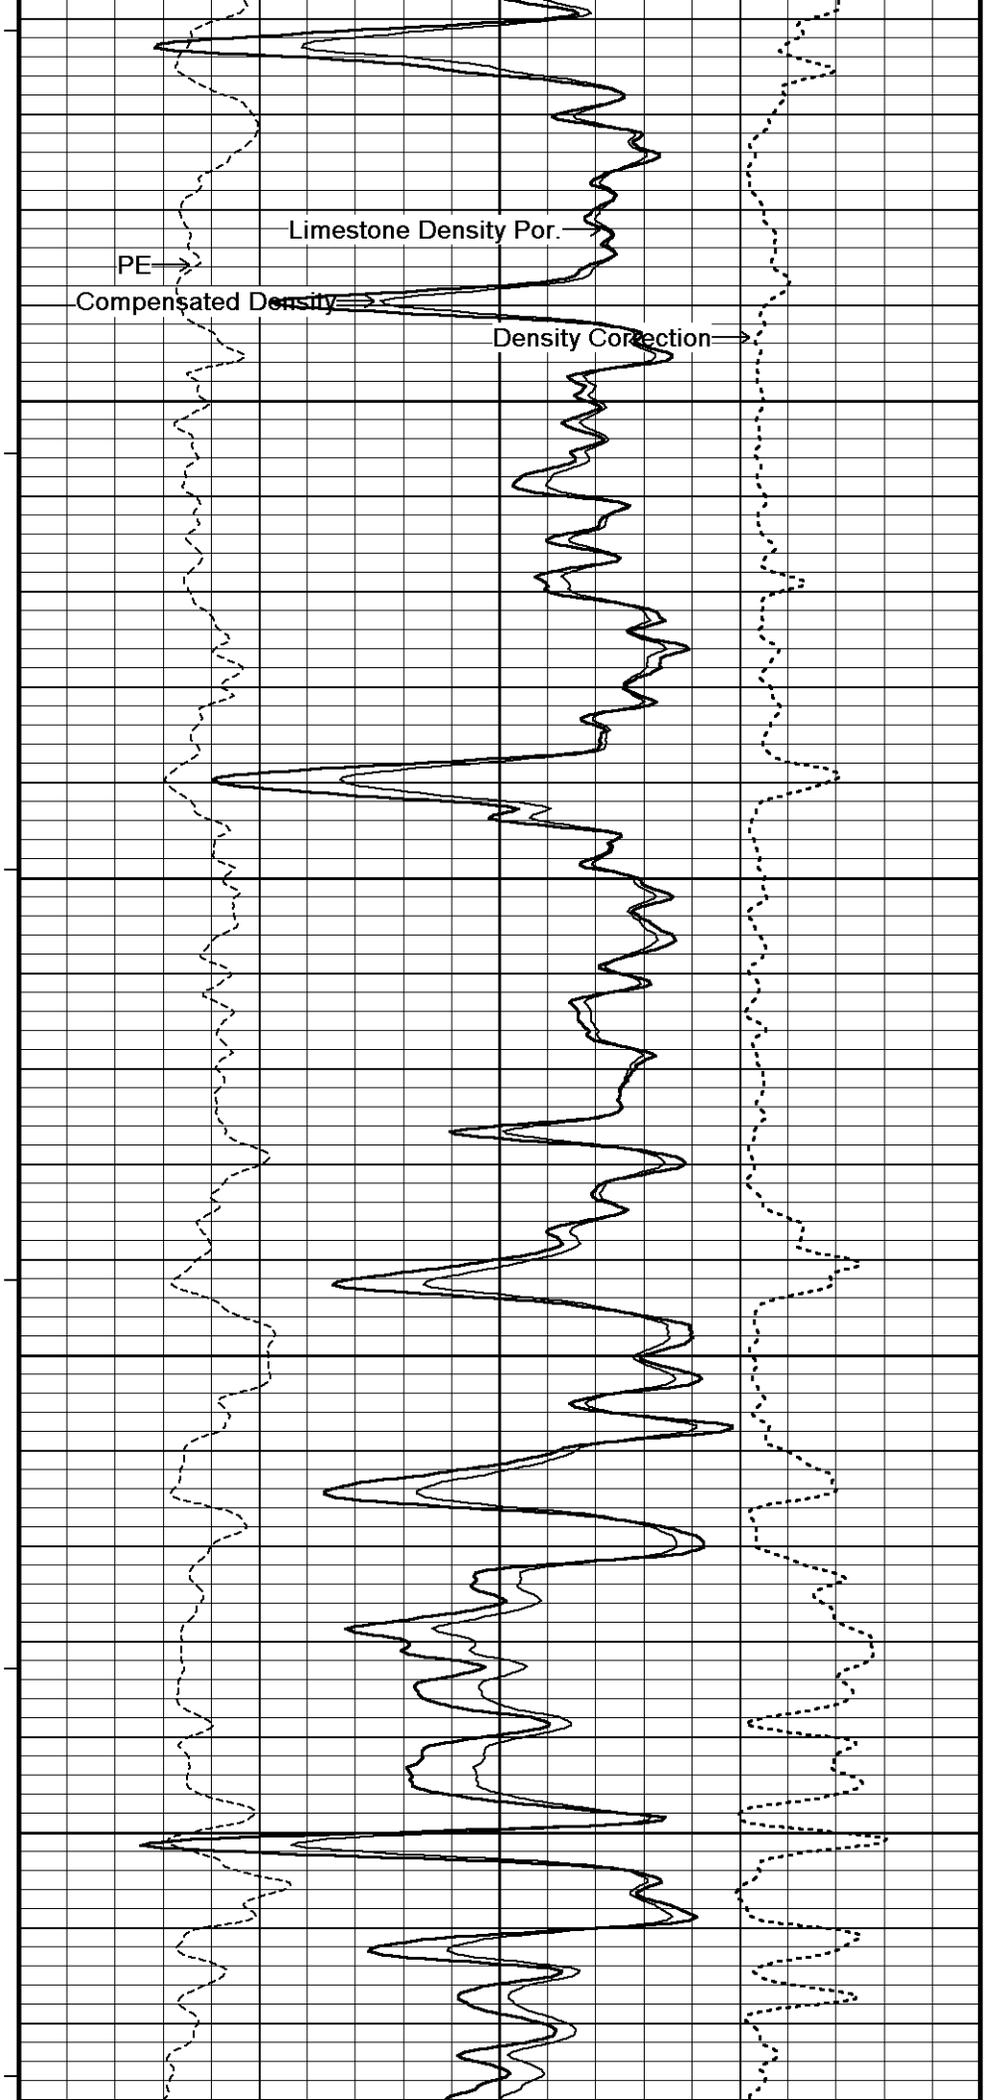


PE →

Compensated Density →

Limestone Density Por.

Density Correction →

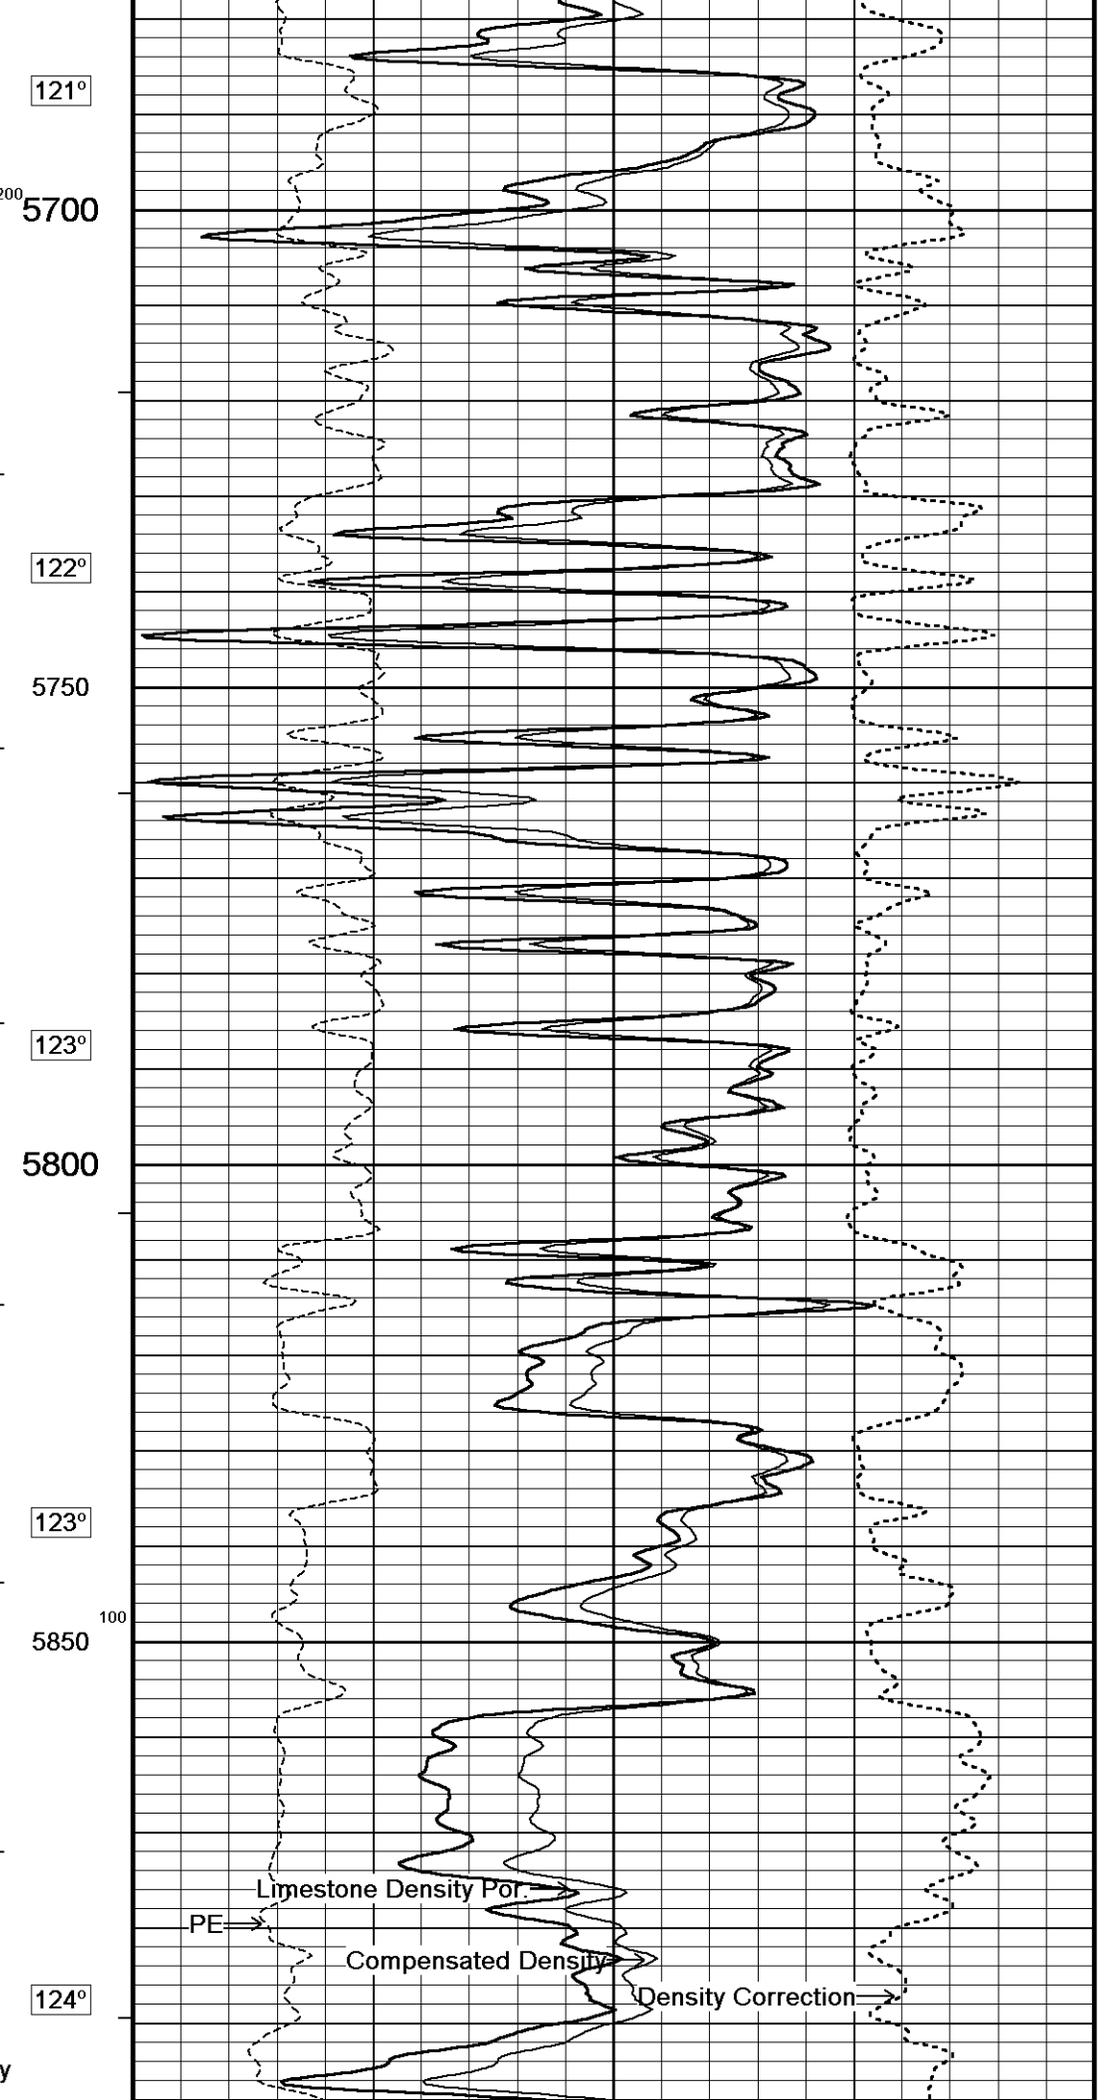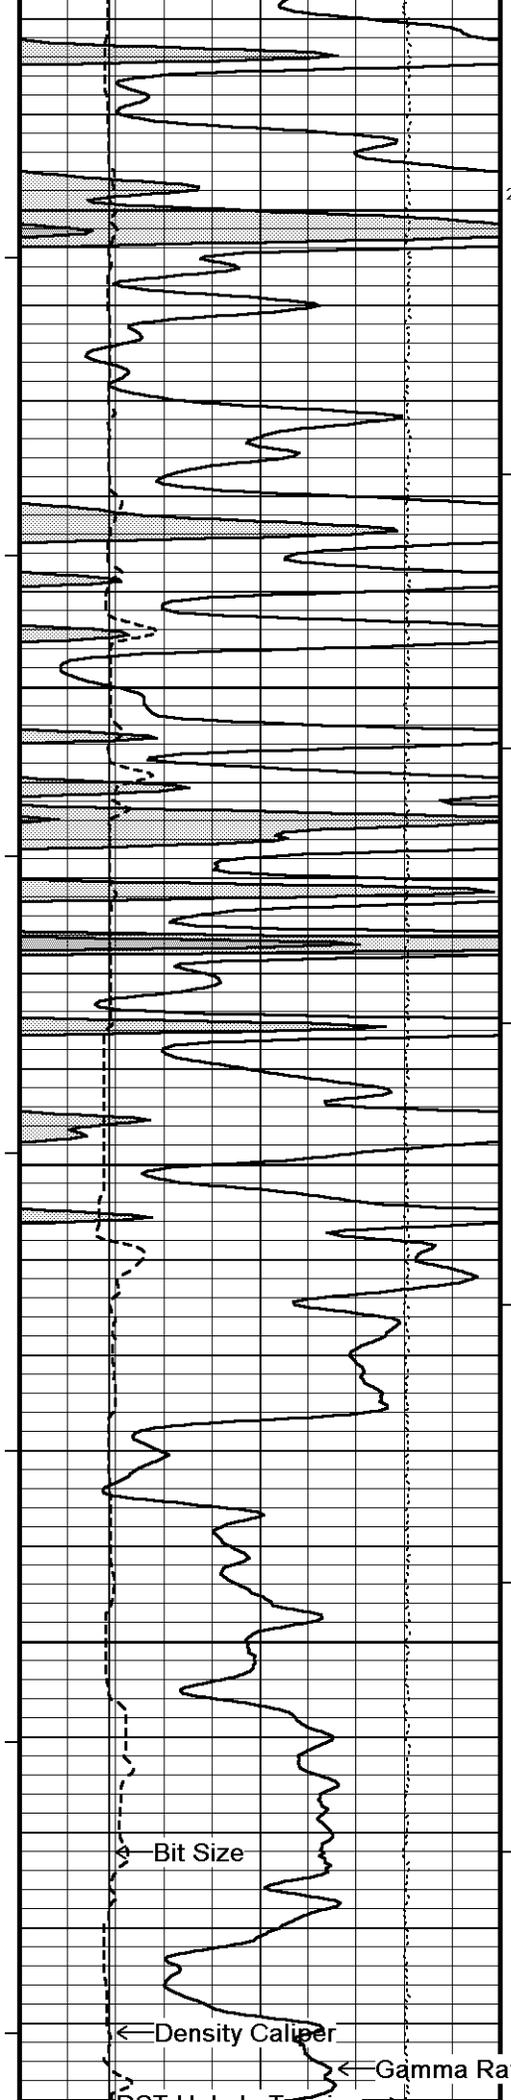

121°

200
5700

122°

5750

123°

5800

123°

100
5850

124°

Bit Size

Density Caliper



Gamma Ray



Limestone Density Por


PE

Compensated Density

Density Correction

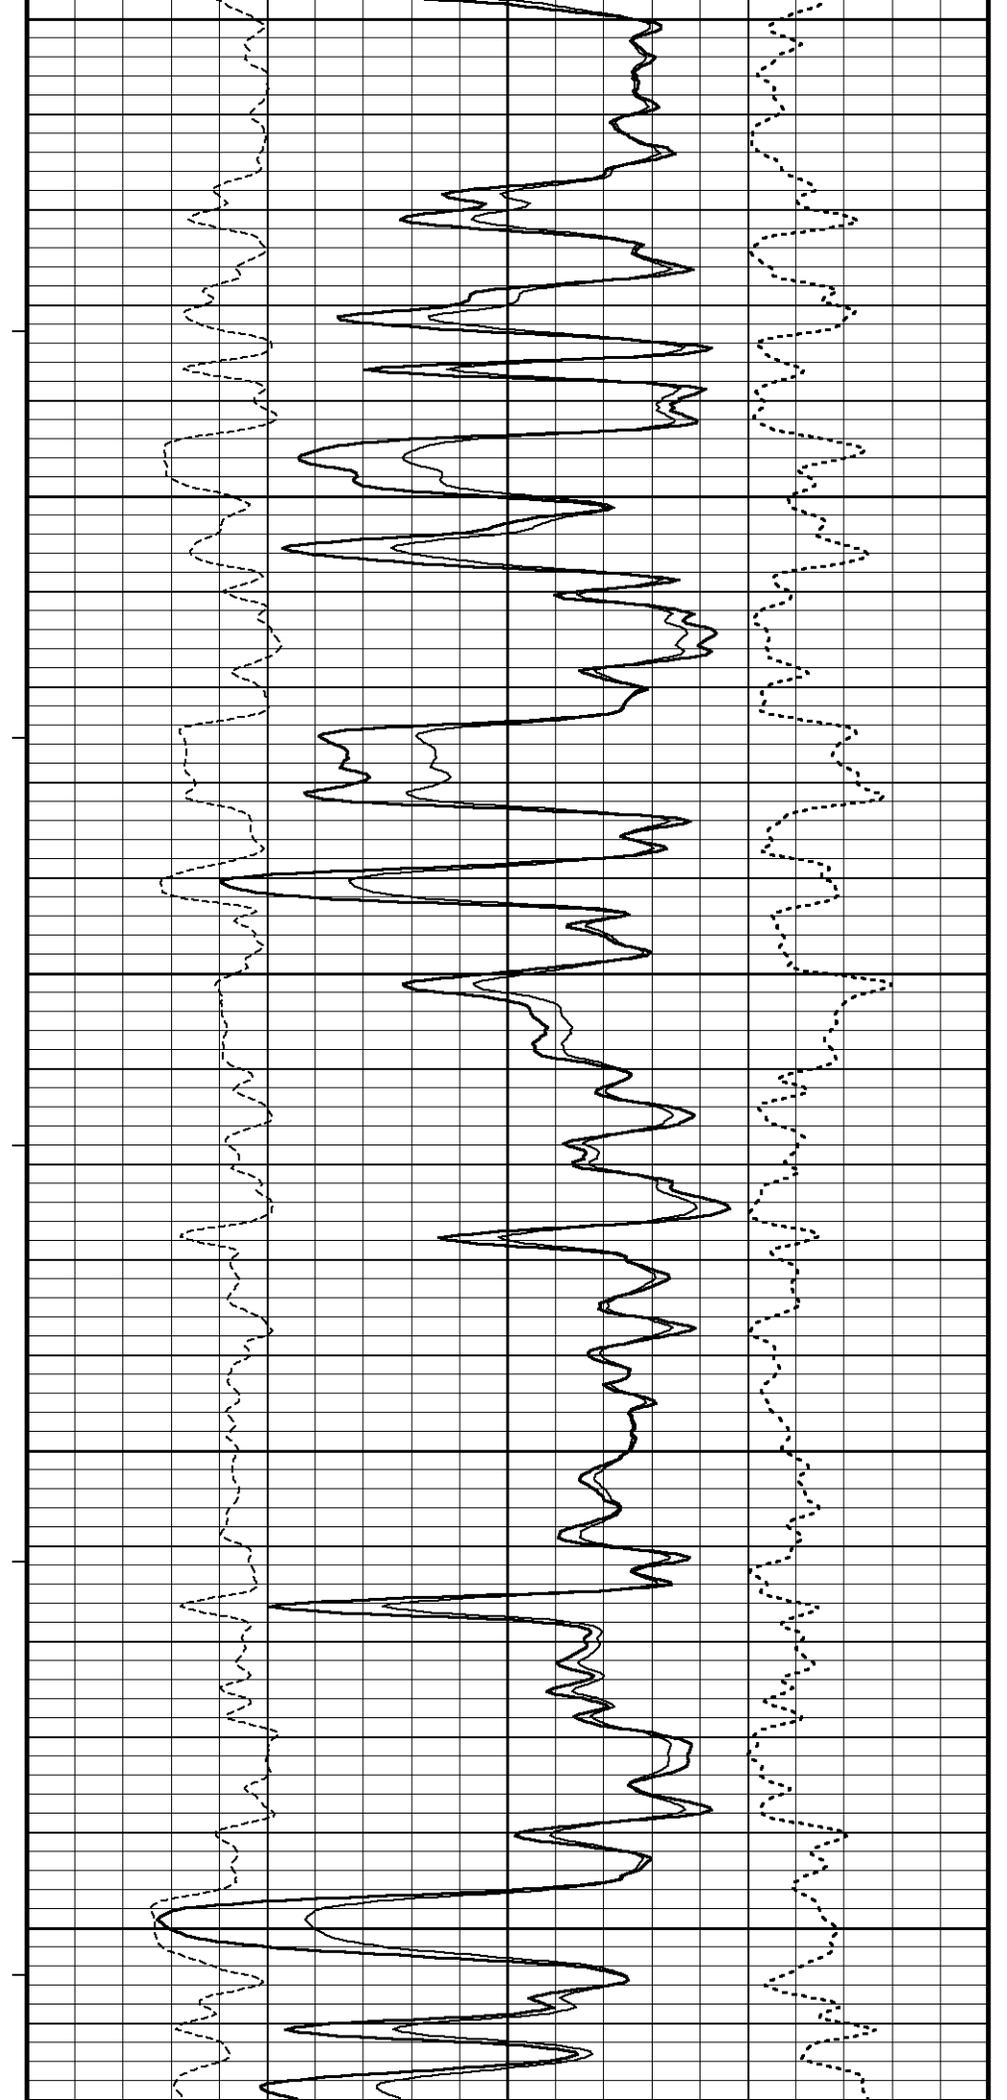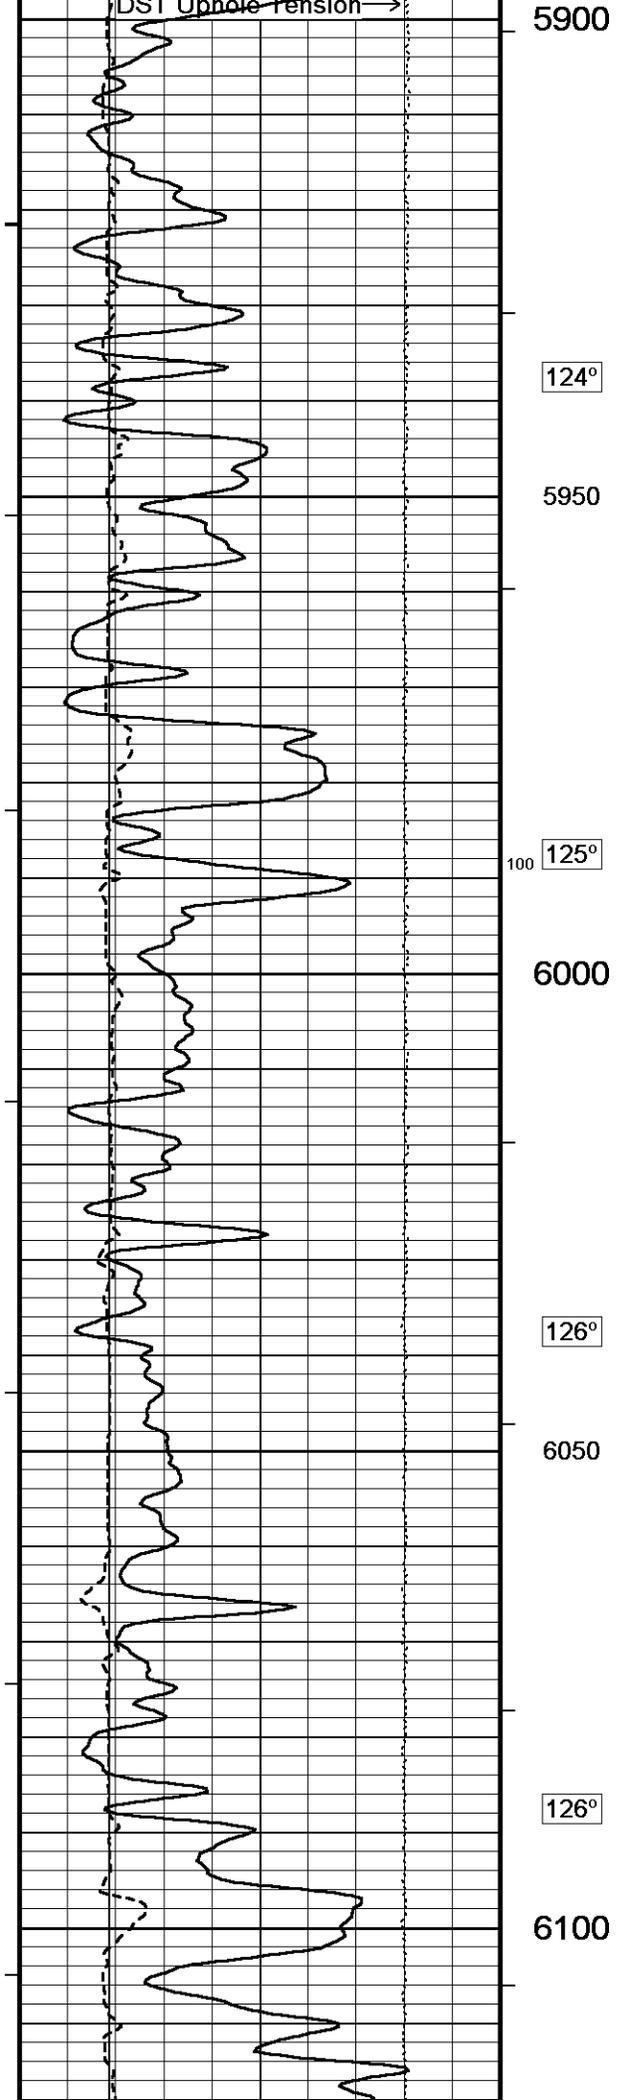

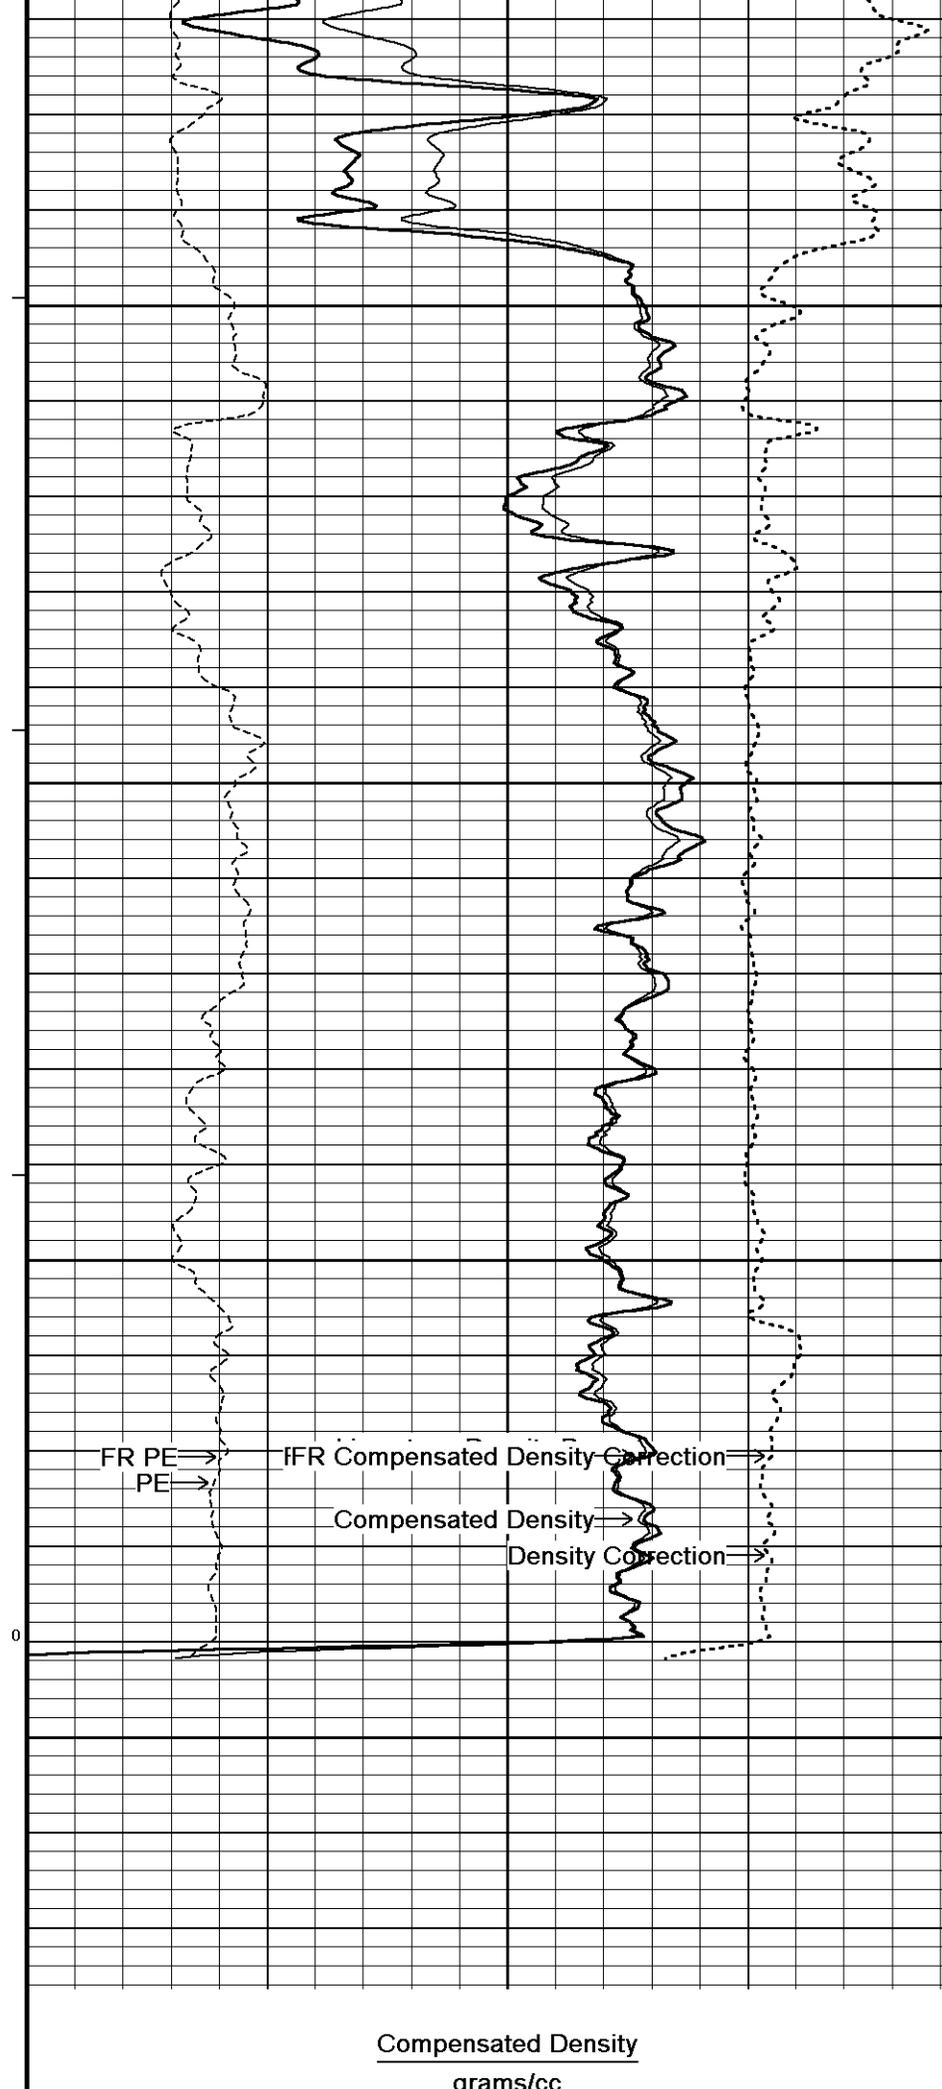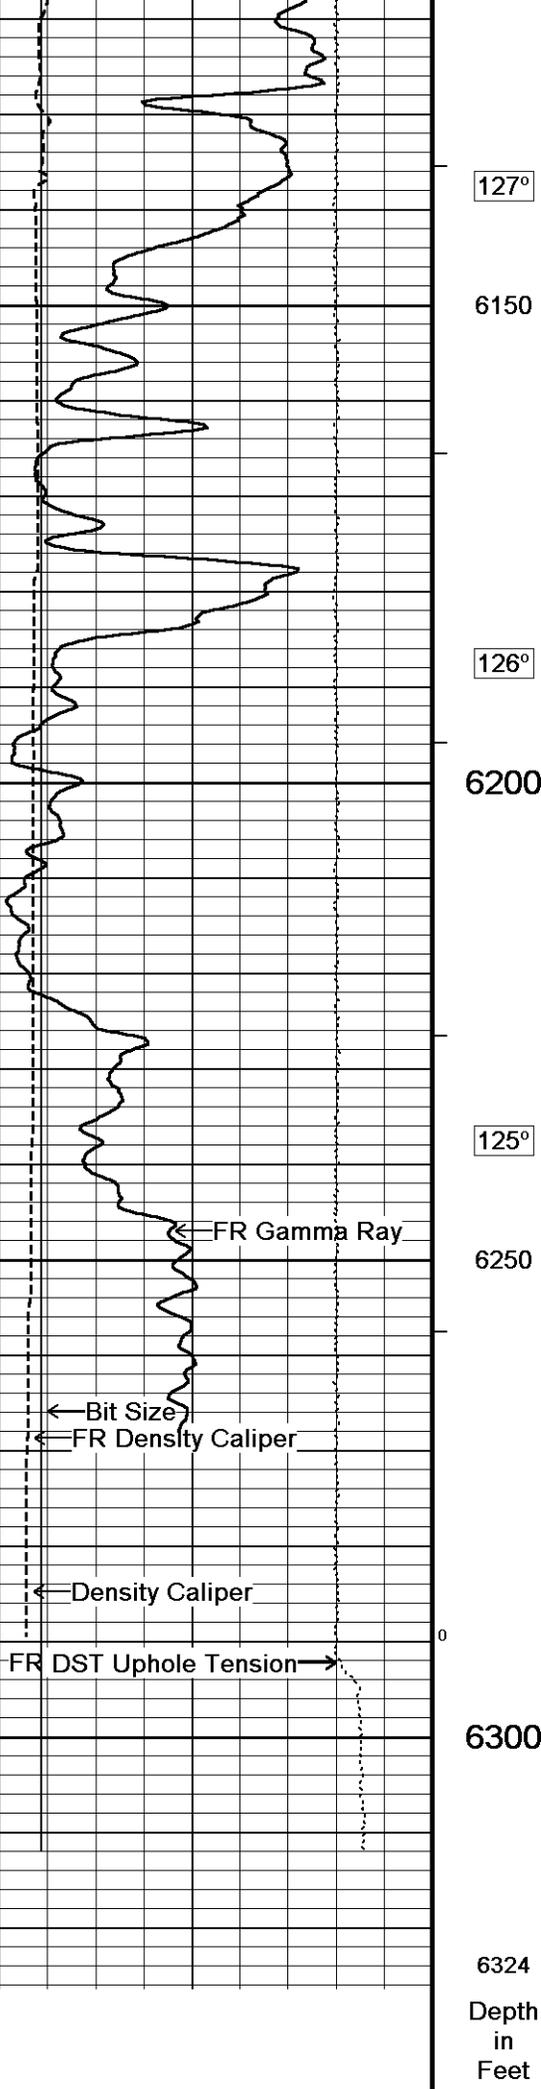

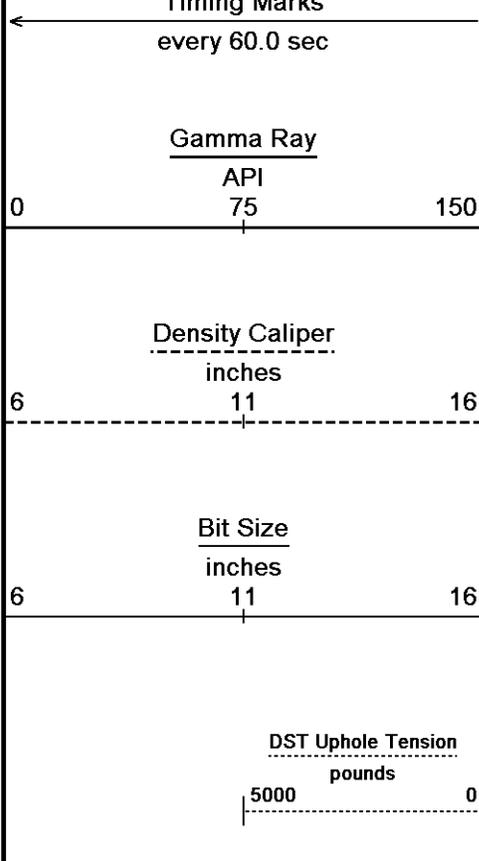


Borehole Temp in deg F

HVI every 10 cu ft

Annular Integral every 10 cu ft

Replay Scale 1:240

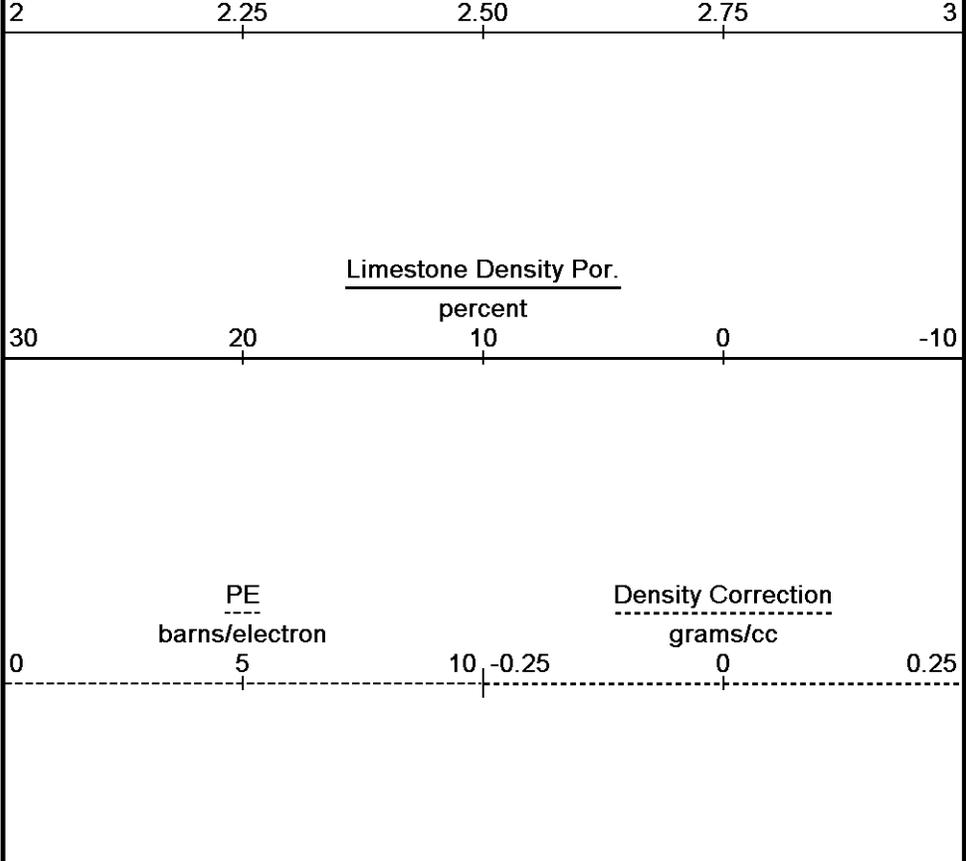


Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 29-DEC-2011 10:38
 Filename: C:\Users\Joel\AppData\Local\Temp\Weatherford PreView\O'Brien Eagle # 1-10_004.dta Recorded on 13-OCT-2011 15:17
 System Versions: Logged with 11.03.4044 Plotted with 12.01.3513

5 INCH MAIN

10 INCH HI-RES

Depth Based Data - Maximum Sampling Increment 2.5cm Plotted on 29-DEC-2011 10:38
 Filename: C:\Users\Joel\AppData\Local\Temp\Weatherford PreView\O'Brien Eagle # 1-10_003.dta Recorded on 13-OCT-2011 14:48
 System Versions: Logged with 11.03.4044 Plotted with 12.01.3513

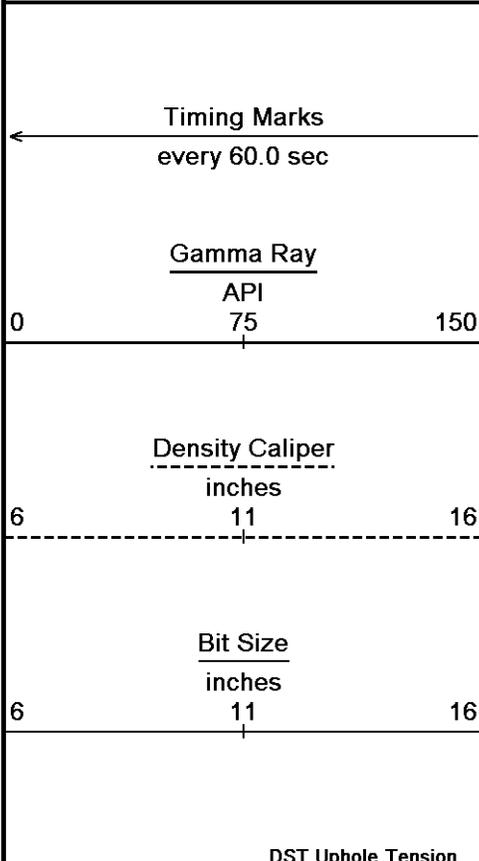


Depth in Feet

Borehole Temp in deg F

HVI every 10 cu ft

Annular Integral every 10 cu ft

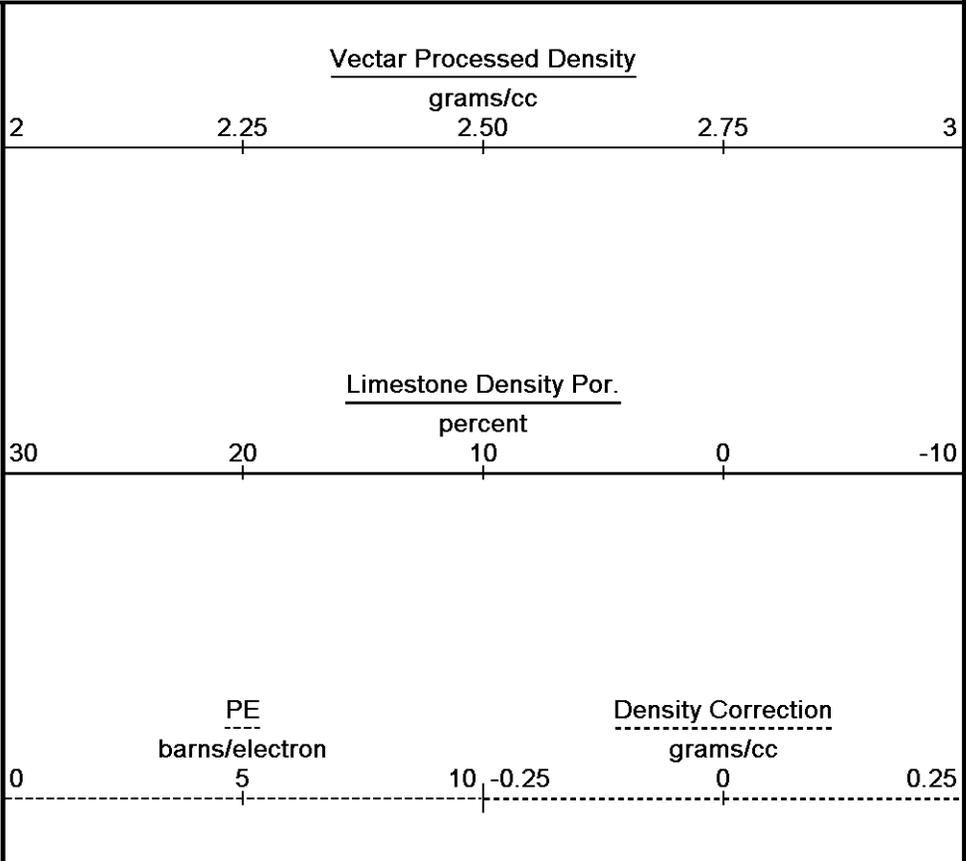


5000 pounds 0

Replay Scale 1:120

5800

5850


5900

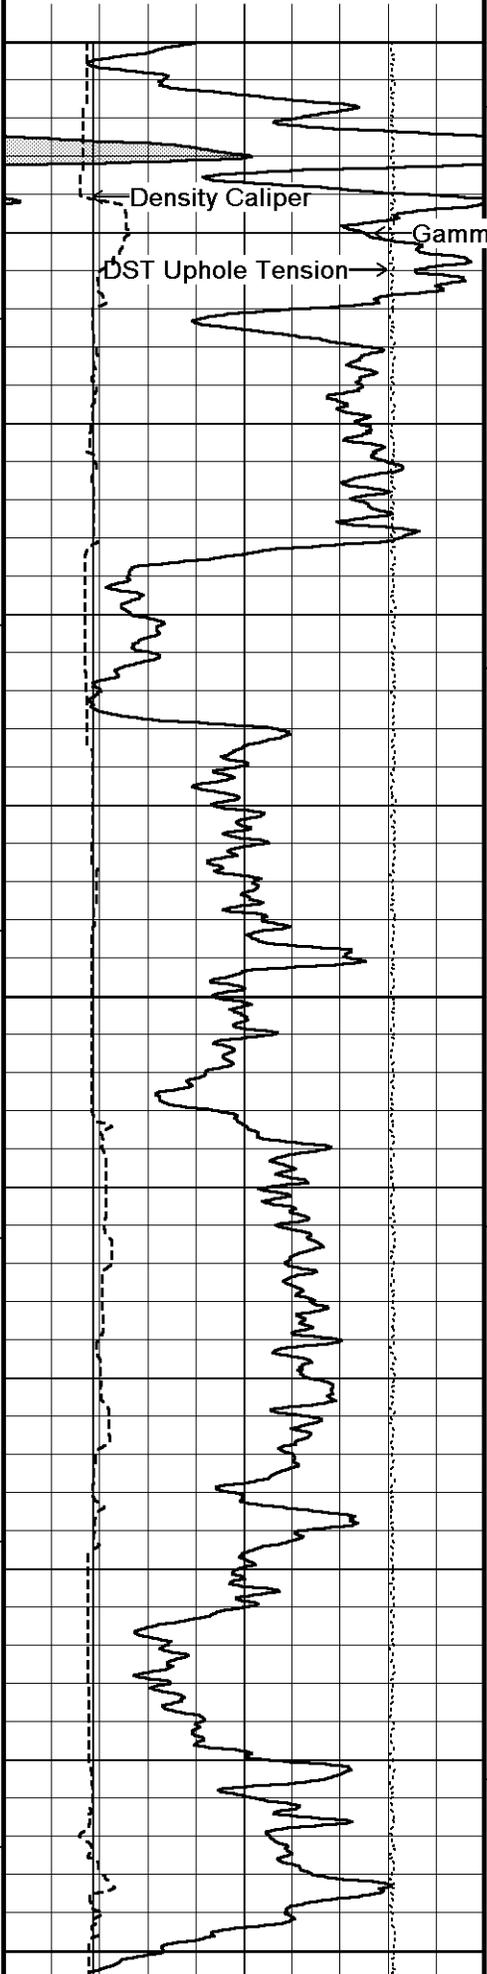

Gamma Ray

122°

122°

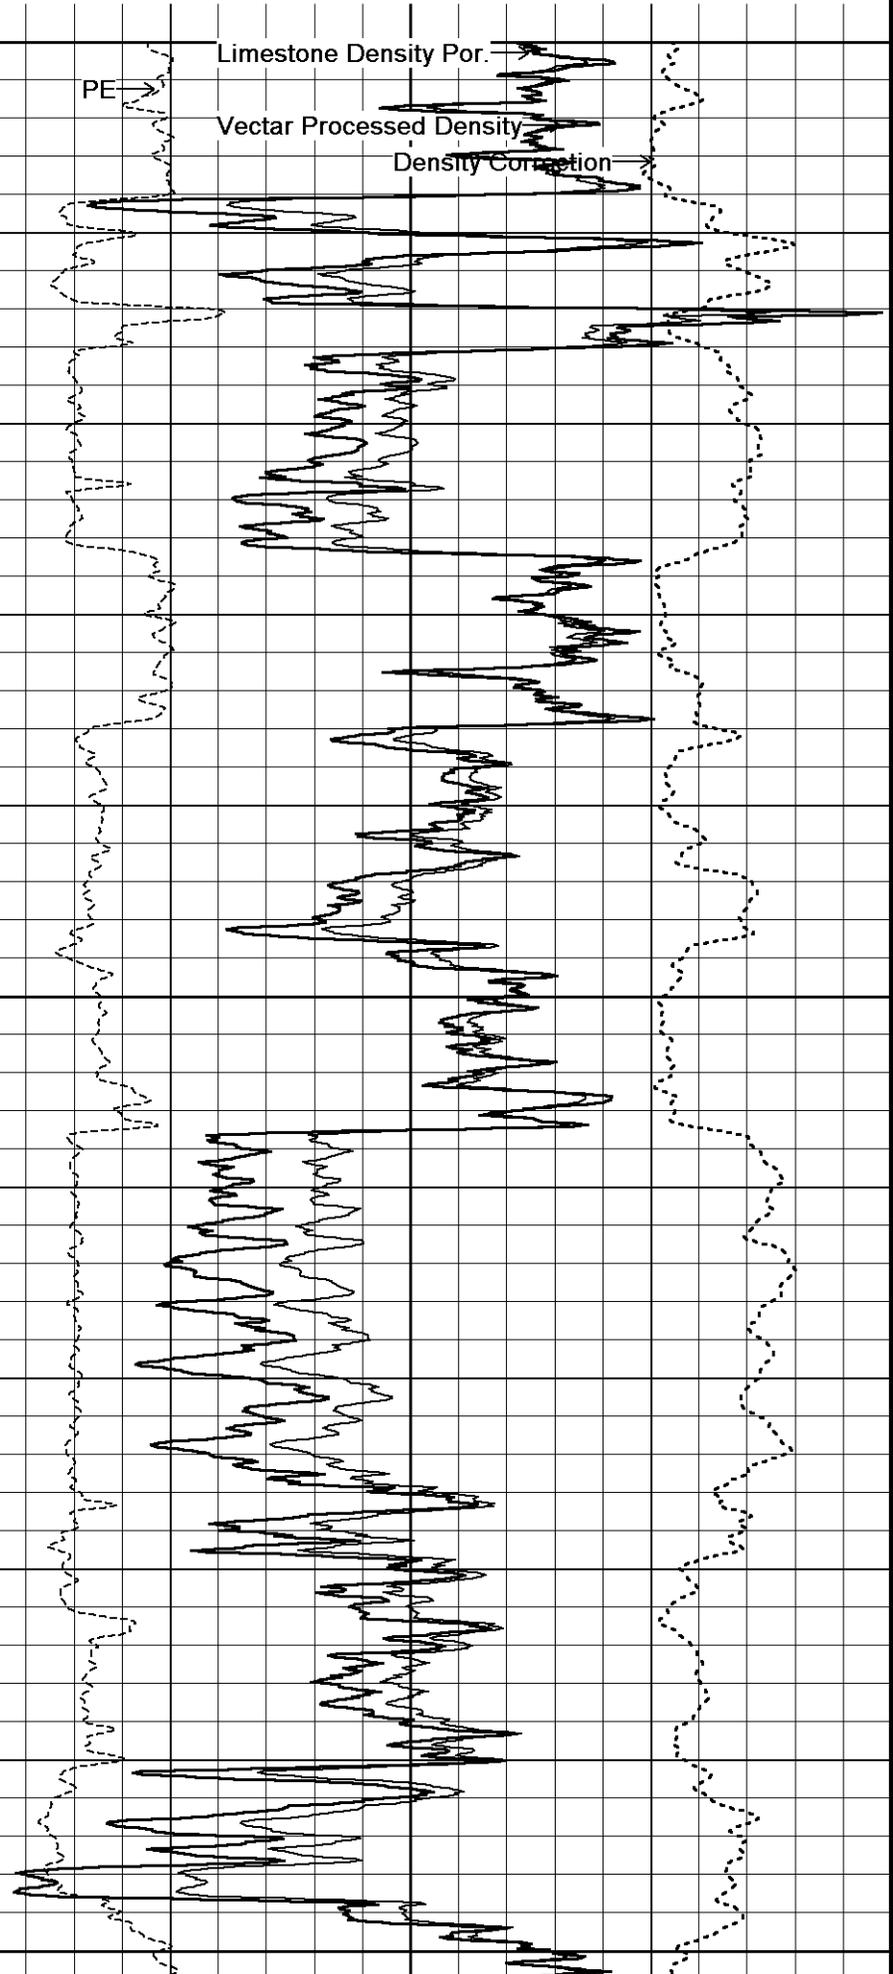


Limestone Density Por.

PE

Vectar Processed Density

Density Correction

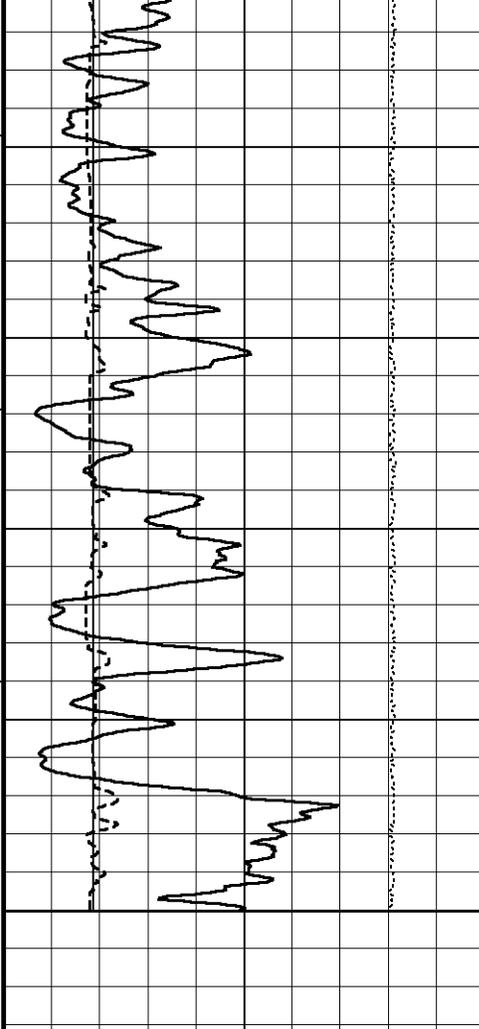

122°

5950

5954

Depth in Feet

Timing Marks every 60.0 sec

Gamma Ray API
0 75 150

Borehole Temp in deg F

Density Caliper inches
6 11 16


HVI every 10 cu ft

Bit Size inches
6 11 16

Annular Integral every 10 cu ft

DST Uphole Tension pounds
5000 0

Replay Scale 1:120

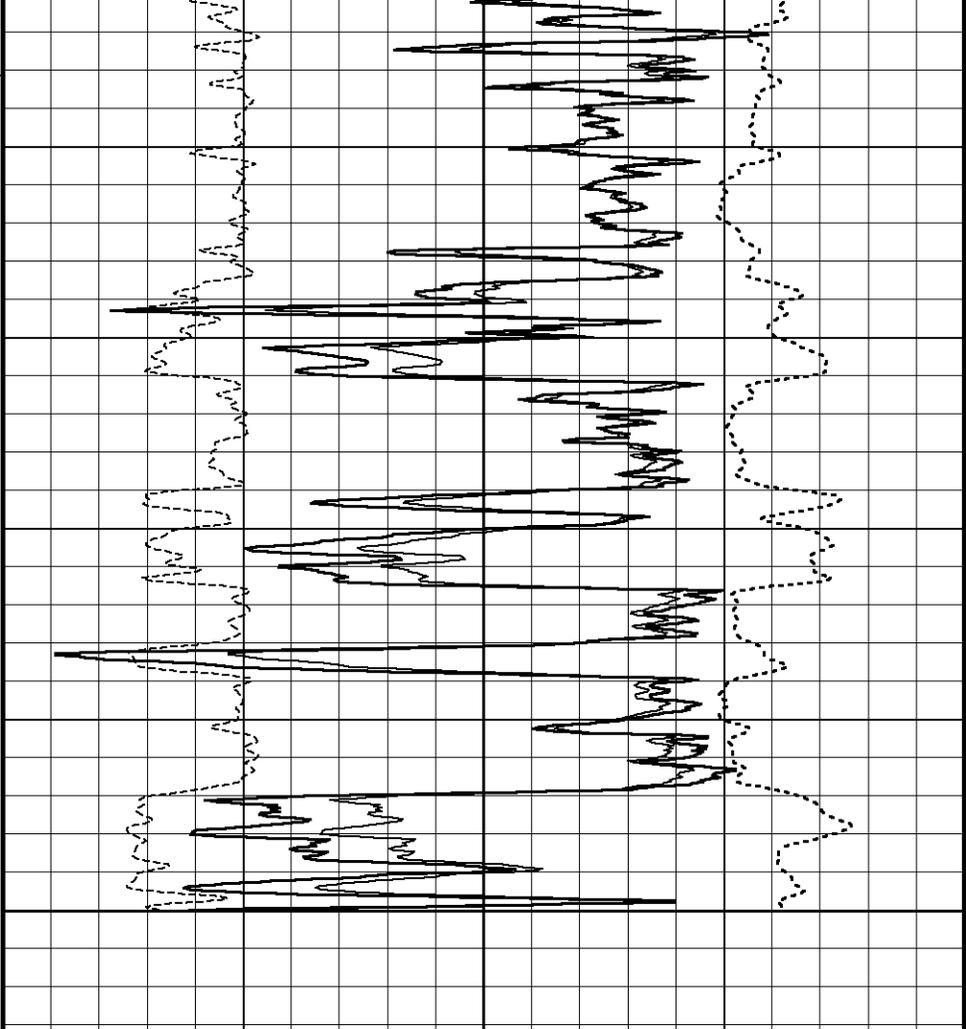

Vectar Processed Density

grams/cc

2 2.25 2.50 2.75 3

Limestone Density Por.

percent

30 20 10 0 -10

PE

barns/electron

Density Correction

grams/cc

0 5 10 -0.25 0 0.25




REPEAT SECTION



Depth Based Data - Maximum Sampling Increment 10.0cm
 Filename: C:\Users\Joe\AppData\Local\Temp\Weatherford PreView\O'Brien Eagle # 1-10_002.dta
 System Versions: Logged with 11.03.4044 Plotted with 12.01.3513

Plotted on 29-DEC-2011 10:38
 Recorded on 13-OCT-2011 14:35

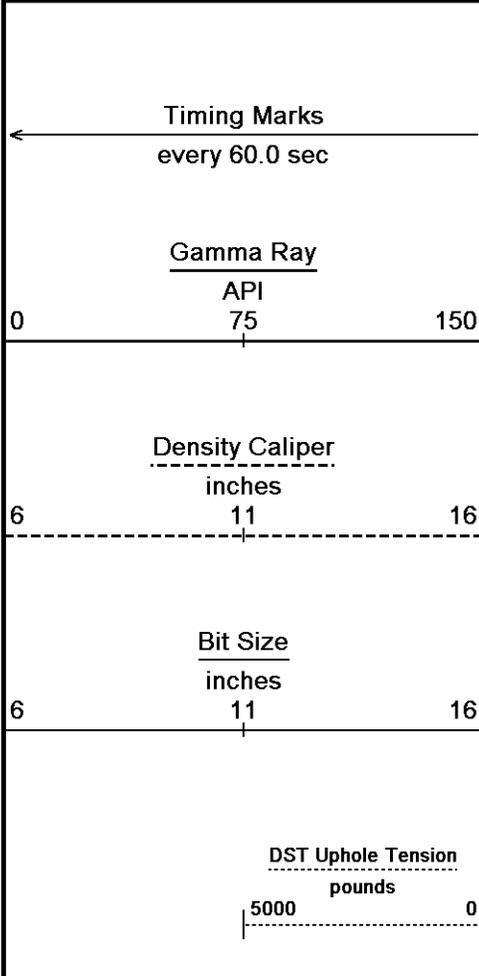



Depth in Feet

Borehole Temp in deg F

HVI every 10 cu ft

Annular Integral every 10 cu ft


Replay Scale 1:240

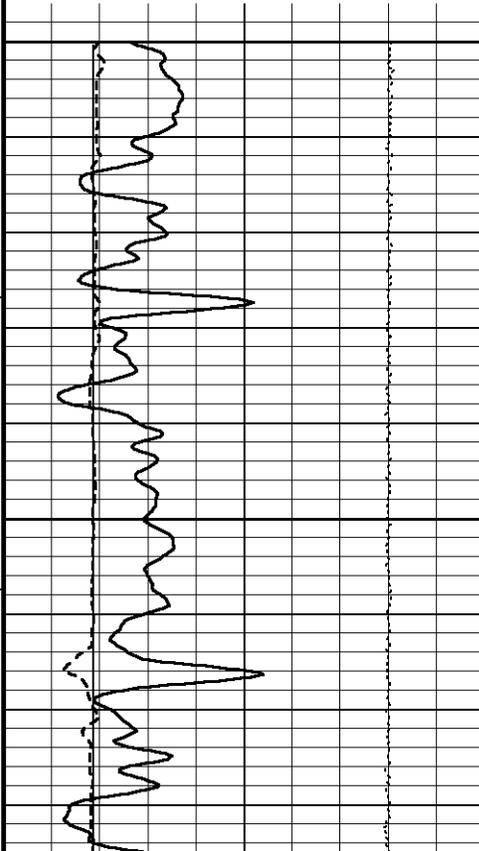
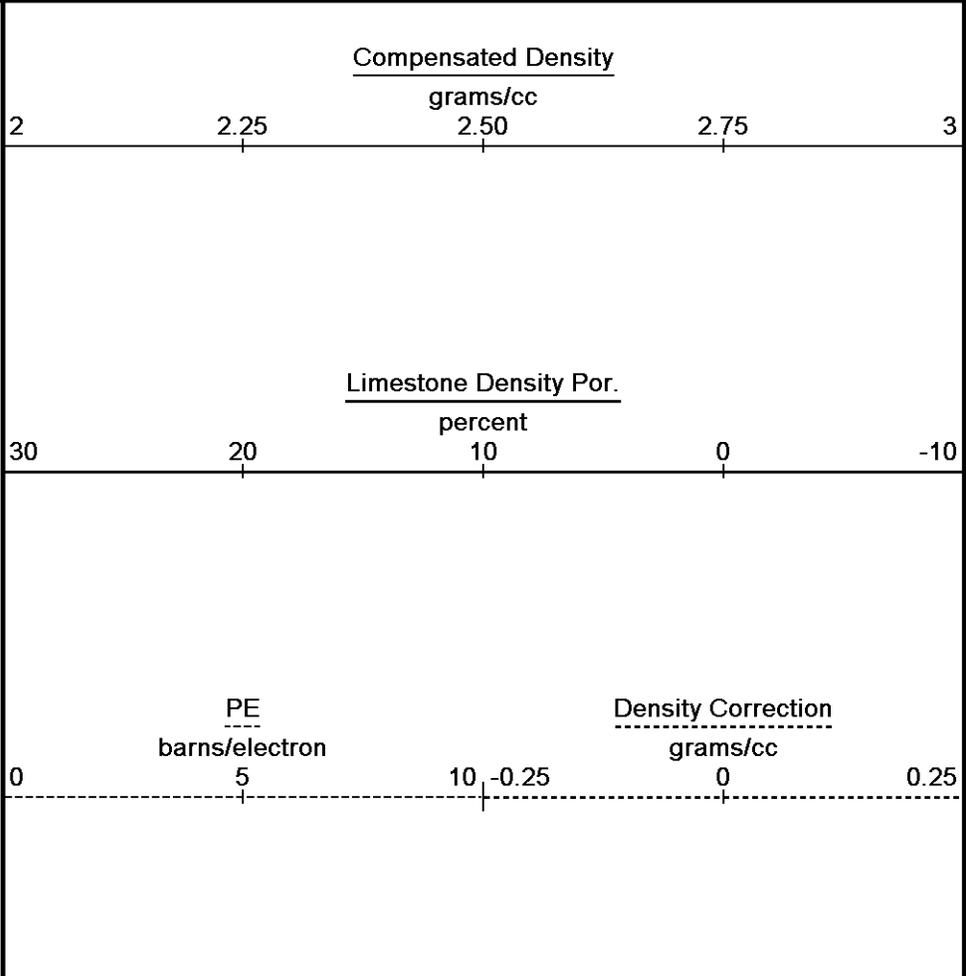



6000

124°

6050

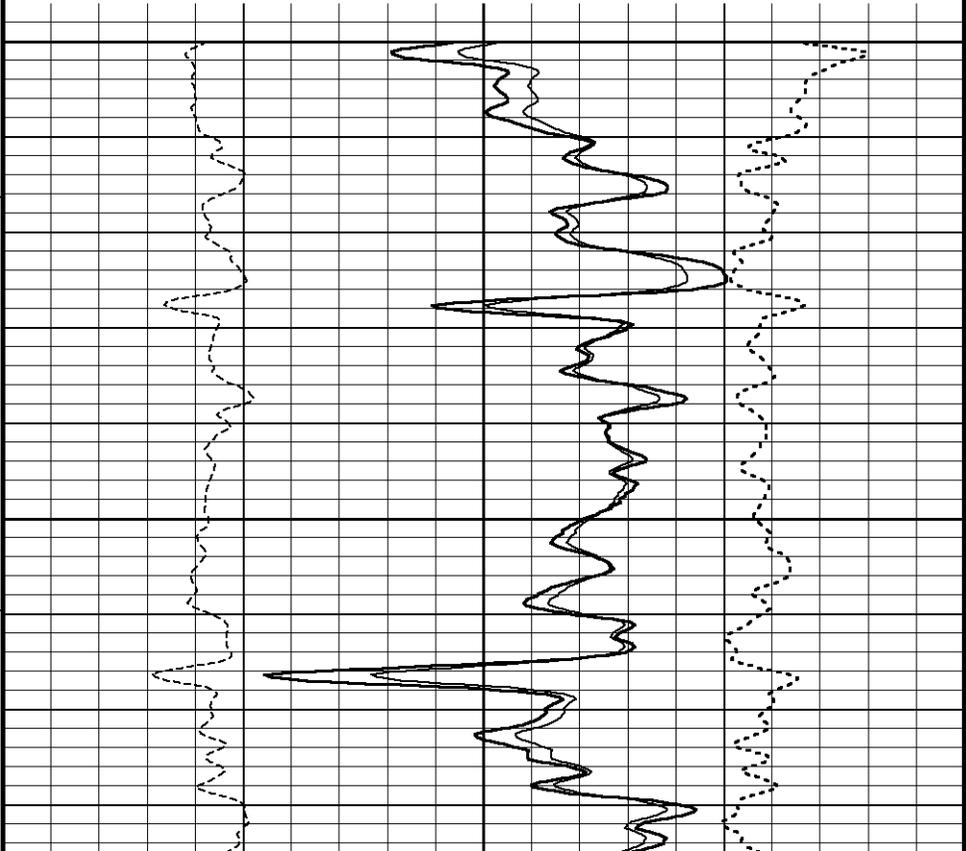

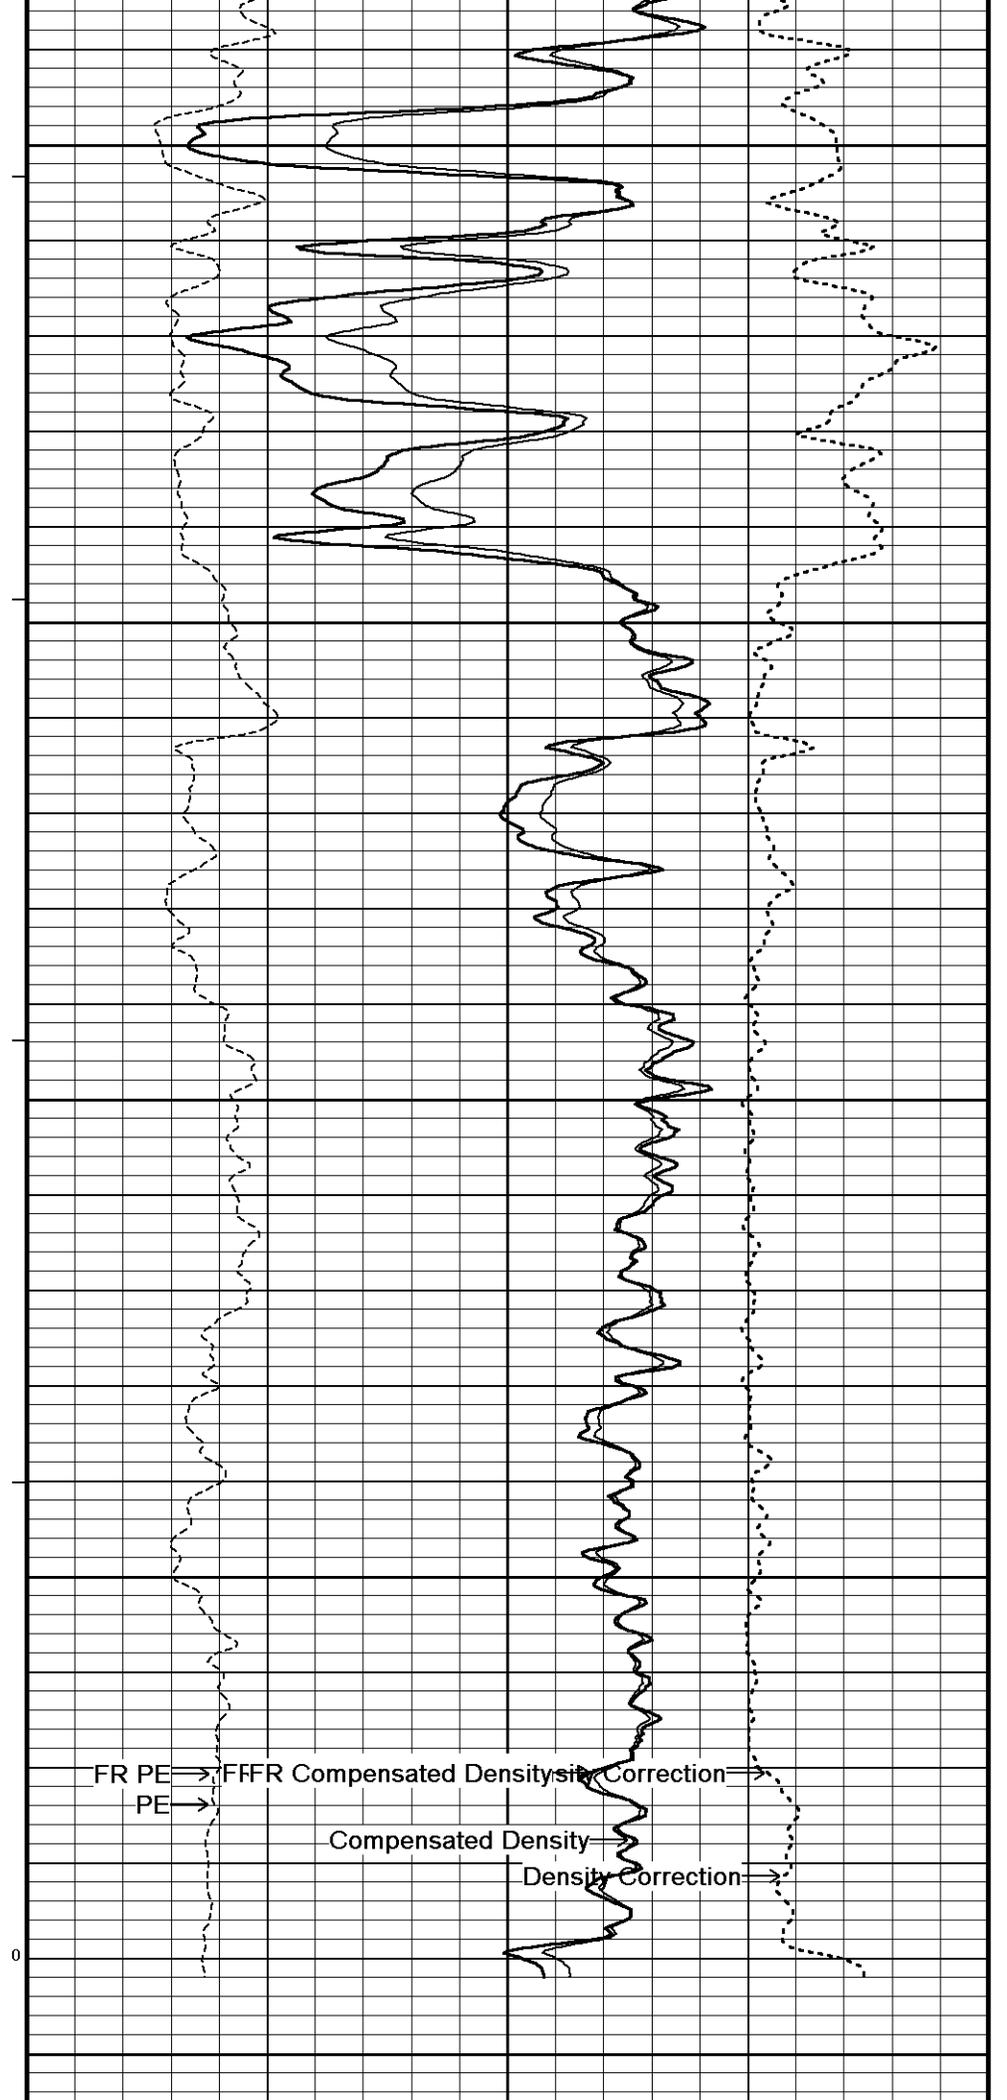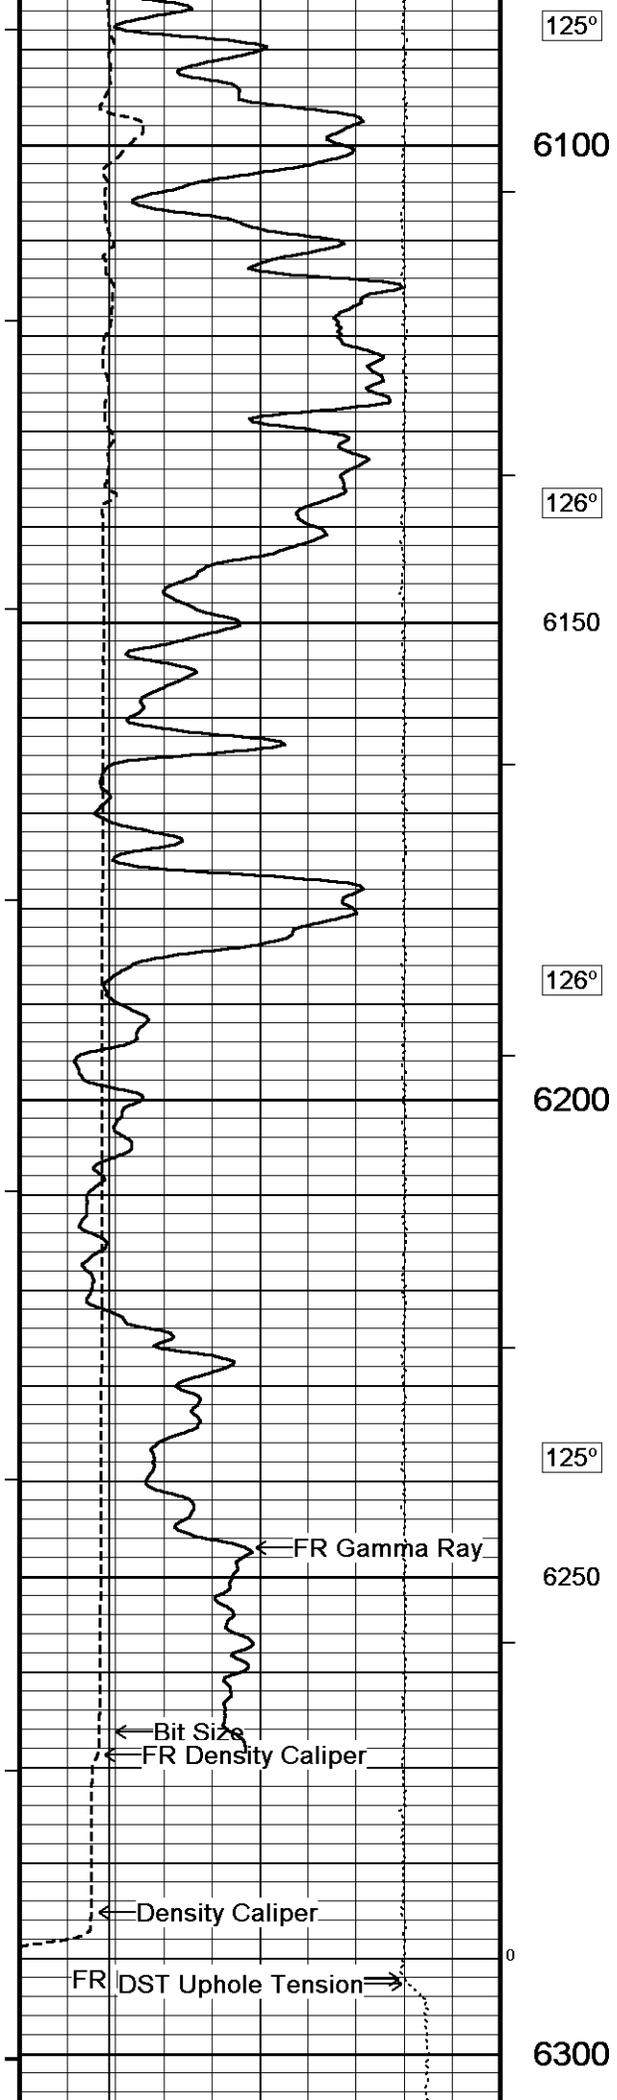

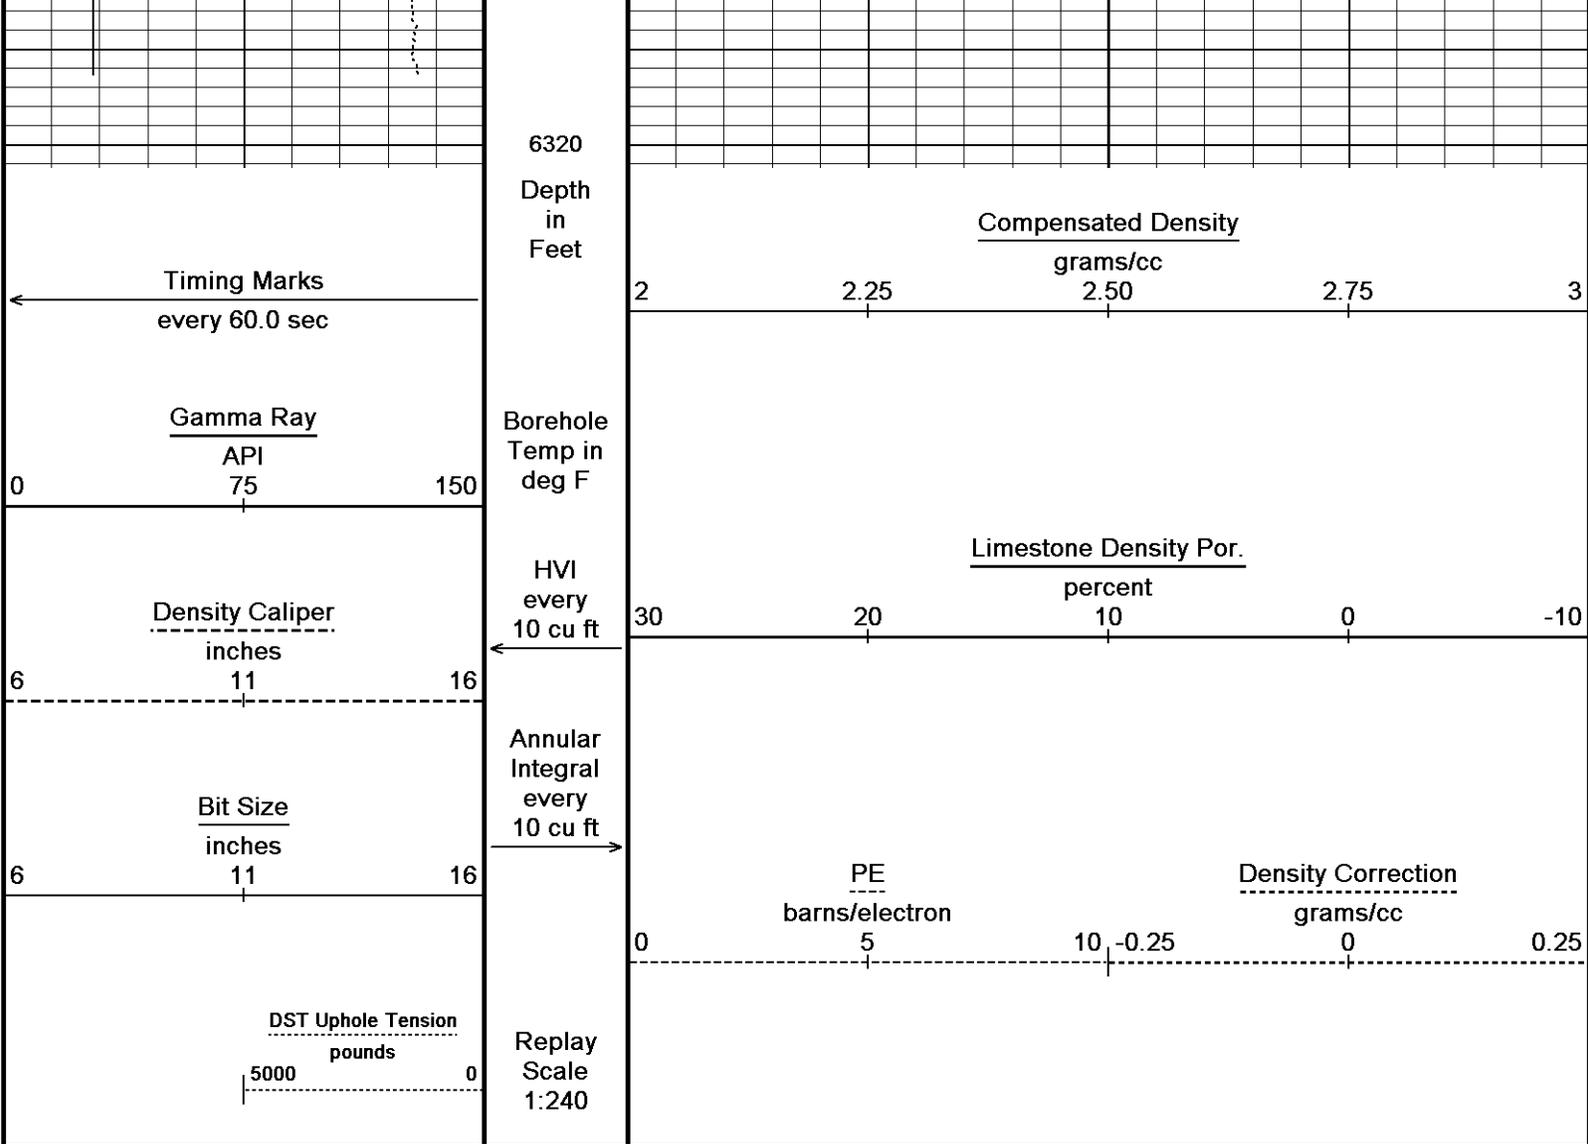

Depth Based Data - Maximum Sampling Increment 10.0cm
 Plotted on 29-DEC-2011 10:38
 Filename: C:\Users\Joe\AppData\Local\Temp\Weatherford PreView\0\O'Brien Eagle # 1-10_002.dta
 Recorded on 13-OCT-2011 14:35
 System Versions: Logged with 11.03.4044 Plotted with 12.01.3513

↑ REPEAT SECTION ↑

BEFORE SURVEY CALIBRATION
 C:\Users\Joe\AppData\Local\Temp\Weatherford PreView\0\O'Brien Eagle # 1-10_004.dta

General Constants All 000 Last Edited on 13-OCT-2011 15:01

General Parameters

| | | |
|-----------------------------|----------|------------|
| Mud Resistivity | 0.900 | ohm-metres |
| Mud Resistivity Temperature | 82.000 | degrees F |
| Water Level | 0.000 | feet |
| Density/Neutron Processing | Wet Hole | |

Hole/Annular Volume and Differential Caliper Parameters

| | | |
|----------------------------------|-----------------|--------|
| HVOL Method | Single Caliper | |
| HVOL Caliper 1 | Density Caliper | |
| HVOL Caliper 2 | N/A | |
| Annular Volume Diameter | 4.500 | inches |
| Caliper for Differential Caliper | Density Caliper | |

Rwa Parameters

| | |
|------------------|------------------------|
| Porosity used | Base Density Porosity |
| Resistivity used | Array Ind. Four Res Rt |
| RWA Constant A | 1.000 |
| RWA Constant M | 2.000 |

Down-hole Tension Calibration SMS 0

| Reading No | Measured | Calibrated (lbs) |
|------------|----------|------------------|
| 1 | 12257.67 | 0.00 |
| 2 | 13806.99 | 650.00 |

Gamma Calibration MCG-C 84

Field Calibration on 13-OCT-2011 10:38

| | Measured | Calibrated (API) |
|--------------------|----------|------------------|
| Background | 74 | 51 |
| Calibrator (Gross) | 1125 | 776 |
| Calibrator (Net) | 1052 | 725 |

Gamma Constants MCG-C 84

Last Edited on 13-OCT-2011 15:01

| | | |
|-------------------------------|-----------------|-------|
| Gamma Calibrator Number | grc38 | |
| Mud Density | 1.09 | gm/cc |
| Caliper Source for Processing | Density Caliper | |
| Tool Position | Eccentred | |
| Concentration of KCl | 0.00 | kppm |

SP Calibration MCG-C 84

Field Calibration on 28-DEC-2010 11:28

| | Measured | Calibrated (mV) |
|-------------|----------|-----------------|
| Reference 1 | 100.3 | 100.0 |
| Reference 2 | -99.7 | -100.0 |

High Resolution Temperature Calibration MCG-C 84

Field Calibration on 24-JUN-2010 14:02

| | Measured | Calibrated (Deg F) |
|-------|----------|--------------------|
| Lower | 50.00 | 50.00 |
| Upper | 75.00 | 75.00 |

High Resolution Temperature Constants MCG-C 84

Last Edited on

| | |
|-------------------|----|
| Pre-filter Length | 11 |
|-------------------|----|

Micro Normal and Micro Inverse Calibration MML-A 9

Base Calibration on 06-SEP-2011 11:42

Field Check on 13-OCT-2011 10:46

Base Calibration

| Channel | Resistor 1 | Resistor 2 | Calibrated (ohm-m) | |
|---------------|------------|------------|--------------------|------------|
| | | | Resistor 1 | Resistor 2 |
| Micro Normal | 12.1 | 59.5 | 2.6 | 12.8 |
| Micro Inverse | 15.6 | 77.7 | 1.7 | 8.4 |

| Channel | Base Check (ohm-m) | Field Check (ohm-m) |
|---------------|--------------------|---------------------|
| Micro Normal | 32.5 | 32.5 |
| Micro Inverse | 16.4 | 16.4 |

Micro Normal and Micro Inverse Constants MML-A 9

Last Edited on 13-OCT-2011 14:39

| | | | |
|------------------------|---|--|------------|
| Pad Type | 8-12 in Soft Rubber Inflatable 006-9011-159 | | |
| Micro Normal K Factor | | | 0.5110 |
| Micro Inverse K Factor | | | 0.3380 |
| Standoff Offset | | | N/A inches |

Caliper Calibration MML-A 9

Base Calibration on 06-SEP-2011 11:51

Field Calibration on 13-OCT-2011 10:43

Base Calibration

| Reading No | Measured | Calibrator Size (in) |
|------------|----------|----------------------|
| 1 | 14909 | 5.98 |
| 2 | 18394 | 7.97 |
| 3 | 21677 | 9.86 |
| 4 | 25490 | 11.92 |
| 5 | 0 | 0.00 |
| 6 | N/A | N/A |

Field Calibration

| Measured Caliper (in) | Actual Caliper (in) |
|-----------------------|---------------------|
| 6.11 | 5.98 |

Neutron Calibration MDN-A.B 39

Base Calibration on 13-SEP-2011 12:16

Field Check on 13-OCT-2011 10:53

Base Calibration

| Measured | Calibrated (cps) |
|----------|------------------|
|----------|------------------|

| | | | | | | | |
|------|------|-----|----|------|------|-----|-----|
| Near | 2859 | Far | 90 | Near | 3714 | Far | 110 |
|------|------|-----|----|------|------|-----|-----|

| | | |
|-------|--------|--------|
| Ratio | 31.838 | 33.764 |
|-------|--------|--------|

| | |
|--------------------------|------------------|
| Field Calibrator at Base | Calibrated (cps) |
| Ratio | 2315 3367 |
| | 0.688 |

| | |
|-------------|------------------|
| Field Check | Calibrated (cps) |
| Ratio | 2302 3331 |
| | 0.691 |

Neutron Constants MDN-A.B 39 Last Edited on 13-OCT-2011 14:39

| | | | |
|---------------------------------|-----------------|-----------|--|
| Neutron Source Id | N1095 | | |
| Neutron Jig Number | NECD117 | | |
| Epithermal Neutron | No | | |
| Caliper Source for Processing | Density Caliper | | |
| Stand-off | 0.00 | inches | |
| Mud Density | 1.00 | gm/cc | |
| Limestone Sigma | 7.10 | cu | |
| Sandstone Sigma | 4.26 | cu | |
| Dolomite Sigma | 4.70 | cu | |
| Formation Pressure Source | None | | |
| Formation Pressure | N/A | kpsi | |
| Temperature Source | Constant Value | | |
| Temperature | 68.00 | degrees F | |
| Mud Salinity | 0.00 | kppm | |
| Formation Fluid Salinity Source | Constant Value | | |
| Formation Fluid Salinity | 0.00 | kppm | |
| Barite Mud Correction | Not Applied | | |

FE Calibration MFE-A.A 67 Base Calibration on 06-SEP-2011 12:02
Field Check on 13-OCT-2011 11:04

| | | |
|------------------|----------|--------------------|
| Base Calibration | Measured | Calibrated (ohm-m) |
| Reference 1 | 0.0 | 0.0 |
| Reference 2 | 960.5 | 126.8 |
| Base Check | | 280.8 |
| Field Check | | 280.7 |

FE Constants MFE-A.A 67 Last Edited on 13-OCT-2011 15:02

| | | | |
|----------------------------------|--------------------------|--------|--|
| Running Mode | No Sleeve | | |
| MFE K Factor | 0.1268 | | |
| Caliper Source for FE correction | Density Caliper | | |
| Caliper Value for FE correction | N/A | inches | |
| Rm Source for FE correction | Temperature Corr | | |
| Temp. for Rm Corr. | MCG External Temperature | | |
| Stand-off | 0.5 | inches | |

High Resolution Temperature Calibration MAI-A.A 188 Field Calibration on 12-AUG-2011 22:41

| | | |
|-------|----------|-------------------|
| | Measured | Calibrated(Deg F) |
| Lower | 32.00 | 32.00 |
| Upper | 68.00 | 68.00 |

High Resolution Temperature Constants MAI-A.A 188 Last Edited on 21-JUN-2011 20:05

Pre-filter Length 11

Induction Calibration MAI-A.A 188 Base Calibration on 25-JUL-2011 15:59
Field Check on 13-OCT-2011 11:06

| | | |
|-----------------------|------------|---------------------|
| Base Calibration | Measured | Calibrated (mmho/m) |
| Test Loop Calibration | Low High | Low High |
| Channel | | |
| 1 | 16.5 472.3 | 9.3 966.2 |
| 2 | 6.0 378.3 | 7.6 821.4 |
| 3 | 3.5 260.7 | 5.2 566.0 |
| 4 | 1.1 135.1 | 2.6 279.2 |

Array Temperature

82.2

Deg F

| Channel | Base Check (mmho/m) | | Field Check (mmho/m) | |
|-------------------|---------------------|------|----------------------|--------|
| | Low | High | Low | High |
| 1 | 0.0 | 0.0 | 14.3 | 3847.2 |
| 2 | 0.0 | 0.0 | 30.8 | 3568.5 |
| 3 | 0.0 | 0.0 | 28.4 | 3039.9 |
| 4 | 0.0 | 0.0 | 21.0 | 2038.1 |
| Deep | 0.0 | 0.0 | 18.1 | 1923.1 |
| Medium | 0.0 | 0.0 | 40.2 | 4054.1 |
| Shallow | 0.0 | 0.0 | 45.3 | 5360.3 |
| Array Temperature | | 0.0 | 66.9 | Deg F |

Induction Constants MAI-A.A 188

Last Edited on 13-OCT-2011 15:02

| | | | |
|--|--------|--------------------------|-------------|
| Induction Model | | RtAP-WBM | |
| Caliper for Borehole Corr. | | Density Caliper | |
| Hole Size for Borehole Correction | | N/A | inches |
| Tool Centred | | No | |
| Stand-off Type | | Fins | |
| Stand-off | | 0.50 | inches |
| Number of Fins on Stand-off | | 8.0000 | |
| Stand-off Fin Angle | | 45.00 | degrees |
| Stand-off Fin Width | | 0.5000 | inches |
| Borehole Corr. Rm Source | | Temperature Corr | |
| Temp. for Rm Corr. | | MCG External Temperature | |
| Squasher Start | | 0.0020 | mhos/metre |
| Squasher Offset | | N/A | mhos/metre |
| Borehole Normalisation | | | |
| DRM1 | 0.0000 | DRC1 | 0.0000 |
| DRM2 | 0.0000 | DRC2 | 0.0000 |
| MRM1 | 0.0000 | MRC1 | 0.0000 |
| MRM2 | 0.0000 | MRC2 | 0.0000 |
| SRM1 | 0.0000 | SRC1 | 0.0000 |
| SRM2 | 0.0000 | SRC2 | 0.0000 |
| Calibration Site Corrections | | | |
| Channel 1 | | 0.00 | mmhos/metre |
| Channel 2 | | 0.00 | mmhos/metre |
| Channel 3 | | 0.00 | mmhos/metre |
| Channel 4 | | 0.00 | mmhos/metre |
| Apparent Porosity and Water Saturation Constants | | | |
| Archie Constant (A) | | 1.00 | |
| Cementation Exponent (M) | | 2.00 | |
| Saturation Exponent (N) | | 2.00 | |
| Saturation of Water for Apor | | 100.00 | percent |
| Resistivity of Water for Apor and Sw | | 0.05 | ohm-m |
| Resistivity of Mud Filtrate for Sw | | 0.00 | ohm-m |
| Source for Rt | | 0.00 | |
| Source for Rxo | | 0.00 | |

Caliper Calibration MPD-B 64

Base Calibration on 07-SEP-2011 16:24

Field Calibration on 13-OCT-2011 11:02

| | | |
|-------------------|-----------------------|----------------------|
| Base Calibration | | |
| Reading No | Measured | Calibrator Size (in) |
| 1 | 12081 | 3.99 |
| 2 | 21120 | 5.98 |
| 3 | 29684 | 7.97 |
| 4 | 38065 | 9.86 |
| 5 | 47376 | 11.92 |
| 6 | N/A | N/A |
| Field Calibration | | |
| | Measured Caliper (in) | Actual Caliper (in) |
| | 5.98 | 5.98 |

Photo Density Calibration MPD-B 64

Base Calibration on 07-SEP-2011 16:45

Field Check on 13-OCT-2011 10:59

Density Calibration

| Density Calibration | Measured | | Calibrated (sdu) | |
|---------------------|----------|-------|------------------|-------|
| | Near | Far | Near | Far |
| Reference 1 | 59610 | 30619 | 59556 | 30836 |
| Reference 2 | 23960 | 2758 | 24941 | 2541 |

Field Check at Base
1212.8 1410.1

Field Check
1212.1 1398.5

| PE Calibration | Base Calibration | Measured | | Calibrated |
|----------------|------------------|----------|-------|------------|
| | | WS | WH | Ratio |
| | Background | 221 | 1085 | |
| | Reference 1 | 22948 | 59410 | 0.390 |
| | Reference 2 | 6634 | 23822 | 0.282 |

Field Check at Base
221.4 1084.8

Field Check
219.1 1082.0

Density Constants MPD-B 64

Last Edited on 13-OCT-2011 15:01

| | | |
|-------------------------------|-----------------|-------|
| Density Source Id | P57072B | |
| Nylon Calibrator Number | DNCE695 | |
| Aluminium Calibrator Number | DACD698 | |
| Density Shoe Profile | 8 inch | |
| Caliper Source for Processing | Density Caliper | |
| PE Correction to Density | Not Applied | |
| Mud Density | 1.09 | gm/cc |
| Mud Density Z/A Multiplier | 1.11 | |
| Mud Filtrate Density | 1.00 | gm/cc |
| Dry Hole Mud Filtrate Density | 1.00 | gm/cc |
| DNCT | 0.00 | gm/cc |
| CRCT | 0.00 | gm/cc |
| Density Z/A Correction | Hybrid | |

| Matrix Density (gm/cc) | Depth (ft) |
|------------------------|------------|
| 2.71 | |
| 0.00 | 0.00 |
| 0.00 | 0.00 |
| 0.00 | 0.00 |
| 0.00 | 0.00 |
| 0.00 | 0.00 |
| 0.00 | 0.00 |
| 0.00 | 0.00 |
| 0.00 | 0.00 |


DOWNHOLE EQUIPMENT

C:\Users\Joe\AppData\Local\Temp\Weatherford PreView\0\O'Brien Eagle # 1-10_004.dta

Compact Comms Gamma
MCG-C 84 LG: 8.70 ft WT: 63.9 lb OD: 2.24 in

Compact Micro-log
MML-A 9 LG: 7.97 ft WT: 81.6 lb OD: 2.24 in

Compact Neutron
MDN-A.B 39 LG: 5.04 ft WT: 50.7 lb OD: 2.24 in

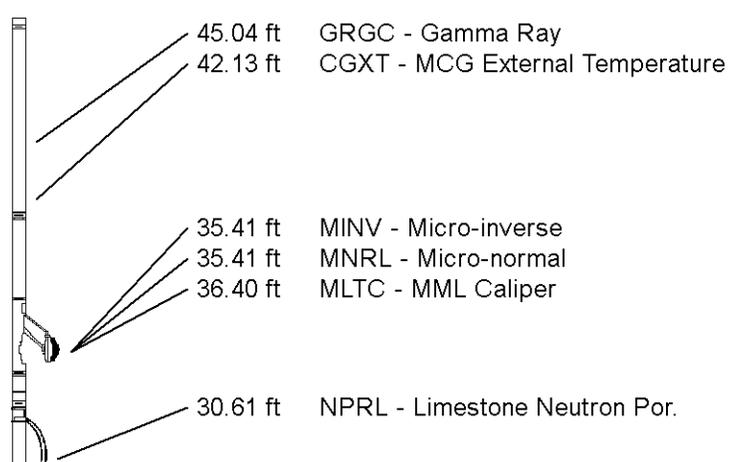


Compact Density/Caliper
 MPD-B 64 LG: 9.59 ft WT: 90.4 lb OD: 2.45 in

SKJ-D.A Compact Knuckle Joint
 SKJ-D.A 91 LG: 2.17 ft WT: 24.3 lb OD: 2.24 in

Compact Focused Electric
 MFE-A.A 67 LG: 6.05 ft WT: 48.5 lb OD: 2.24 in

Compact Induction
 MAI-A.A 188 LG: 10.81 ft WT: 48.5 lb OD: 2.24 in

Total Length: 50.32 ft Weight: 407.9 lb

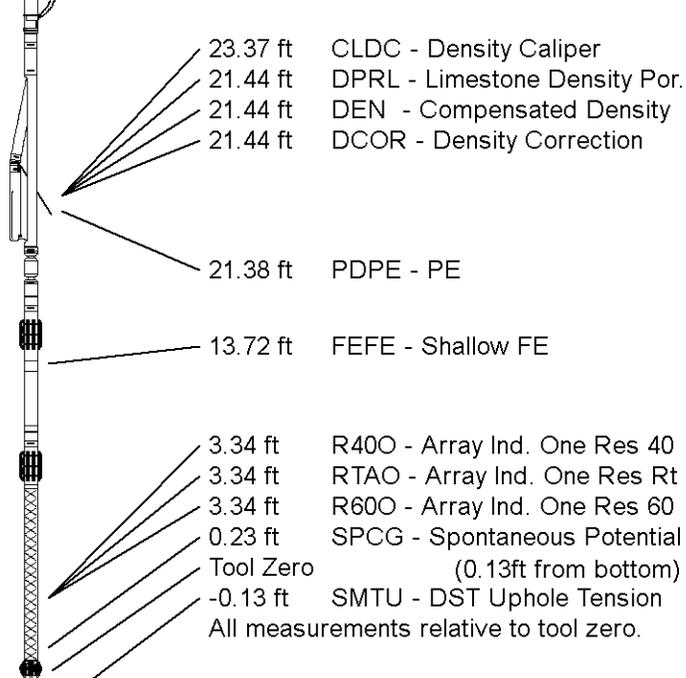

| | |
|-----------------|--------------------------------|
| COMPANY | O'BRIEN ENERGY RESOURCES CORP. |
| WELL | EAGLE # 1-10 |
| FIELD | NOVINGER SOUTHWEST |
| PROVINCE/COUNTY | MEADE |
| COUNTRY/STATE | U.S.A. / KANSAS |

| | | | | | |
|-------------------------|---------|------|---------------|---------|------|
| Elevation Kelly Bushing | 2693.00 | feet | First Reading | 6269.00 | feet |
| Elevation Drill Floor | 2691.00 | feet | Depth Driller | 6300.00 | feet |
| Elevation Ground Level | 2681.00 | feet | Depth Logger | 6292.00 | feet |



COMPACT PHOTO DENSITY
 COMPENSATED NEUTRON
 MICRORESISTIVITY LOG

