

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
WELL PLUGGING APPLICATION
Please TYPE Form and File ONE Copy

Form CP-1
September 2003
This Form must be Typed
Form must be Signed
All blanks must be Filled

API # 15 - 071206910000 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued, indicate original spud or completion date 07/08/98.

Well Operator: Western Operating Company KCC License #: 32283

Address: 518 17th Street, Suite 1680 City: Denver

State: Colorado Zip Code: 80202 Contact Phone: (303) 893-2438

Lease: Siverson Well #: 1-X Sec. 23 Twp. 20 S. R. 42 East West

NW - NW - NW Spot Location / QQQQ County: Greeley

2/06

490 Feet (in exact footage) From North / South (from nearest outside section corner) Line of Section (Not Lease Line)

540 Feet (in exact footage) From East / West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One: Oil Well Gas Well D&A Cathodic Water Supply Well

SWD Docket # _____ ENHR Docket # _____ Other: _____

~~Surface~~ Conductor Casing Size: 13 3/8" Set at: 506' Cemented with: 375 Sacks

~~Intermediate~~ Surface Casing Size: 8 5/8" Set at: 2,432' Cemented with: 1,000 Sacks

Production Casing Size: 4 1/2" Set at: 5,297' Cemented with: 645 Sacks

List (ALL) Perforations and Bridgeplug Sets: 2 SPF @ 5,124' - 5,134' 20 holes

Elevation: 3,739 (G.L. / K.B.) T.D.: 5,300' PBDT: _____ Anhydrite Depth: Base - 2,441' + 1,309
(Stone Corral Formation)

Condition of Well: Good Poor Casing Leak Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): See attached page

Is Well Log attached to this application as required? Yes No Is ACO-1 filed? Yes No

If not explain why? _____

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: Dale Hart

Address: 10805 County Road 58.5 City / State: Lamar, Colorado 81071

Phone: (719) 729-3391

Plugging Contractor: Plains, Inc. KCC License #: 4072

Address: P.O. Box 346, Ness City, KS. 67560 Phone: (785) 798-3995

11/05

Proposed Date and Hour of Plugging (if known?): _____

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 03/16/05 Authorized Operator / Agent: Sandra L. Crosier
Sandra L. Crosier, Agent (Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

RECEIVED
MAR 21 2005
KCC WICHITA

Plugging proposal Greeley County Sec. 23-T20S-R42W


Bottom plug: Tie onto 4 ½" casing and pump 300#-400# of hulls & 40 sx cmt.
Follow with gel spacer (calculate to fill up to 1500').

Top plug: Fill with cement from 1500' to surface.

Type of cement: 60/40 pozmix 6% gel

If you have any questions, please call Steve Durrant at 620-225-8888

RECEIVED
MAR 21 2005
KCC WICHITA

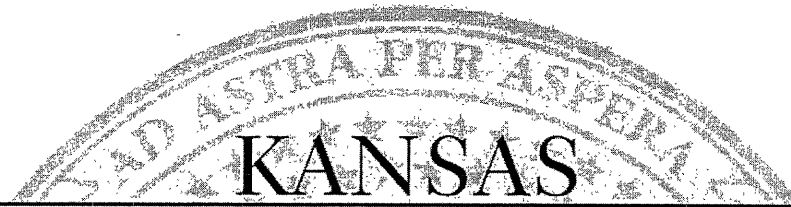

CORPORATION COMMISSION

Kathleen Sebelius, Governor Brian J. Moline, Chair Robert E. Krehbiel, Commissioner Michael C. Moffet, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

Western Operating Company
518 - 17th St., Ste 1680
Denver, CO 80202

April 04, 2005

Re: SIVERSON #1-X
API 15-071-20691-00-00
NWNWNW 23-20S-42W, 490 FNL 540 FWL
GREELEY COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.


Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

District: #1
210 E Frontview, Suite A
Dodge City, KS 67801
(620) 225-8888

Sincerely

David P. Williams
Production Supervisor