



Microresistivity
Log

DIGITAL LOG (785) 625-3858

API No.

15-083-21,738-00-00	
Company	American Warrior, Inc.
Well	Irsik No.1-3
Field	Wildcat
County	Hodgeman State
Location	335' FNL & 1300' FWL
Sec: 3	Twp: 21 S Rge: 26 W
Other Services CNL/CDL DIL/BHCS	Elevation K.B. 2421 D.F. 2410 G.L. 2410

Permanent Datum	Ground Level	Elevation 2410
Log Measured From	Kelly Bushing	11 Ft. Above Perm. Datum
Drilling Measured From	Kelly Bushing	
Date	12/3/2011	
Run Number	Two	
Depth Driller	4710	
Depth Logger	4717	
Bottom Logged Interval	4716	
Top Log Interval	3600	
Casing Driller	8.625 @ 224	
Casing Logger	224	
Bit Size	7.875	
Type Fluid in Hole	Chemical	
Salinity,ppm CL	4.200	
Density / Viscosity	9.6 56	
pH / Fluid Loss	10.0 6.8	
Source of Sample	Flowline	
Rm @ Meas. Temp	.75 @ 41	
Rmf @ Meas. Temp	.56 @ 41	
Rmc @ Meas. Temp	1.01 @ 41	
Source of Rmf / Rmc	Charts	
Rm @ BHT	.25 @ 123	
Operating Rig Time	4 1/2 Hours	
Max Rec. Temp. F	123	
Equipment Number	17	
Location	Hays	
Recorded By	C. Desaire	
Witnessed By	Harley Sayles	

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Ness City KS, S to X Rd,
14 W, N Into

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

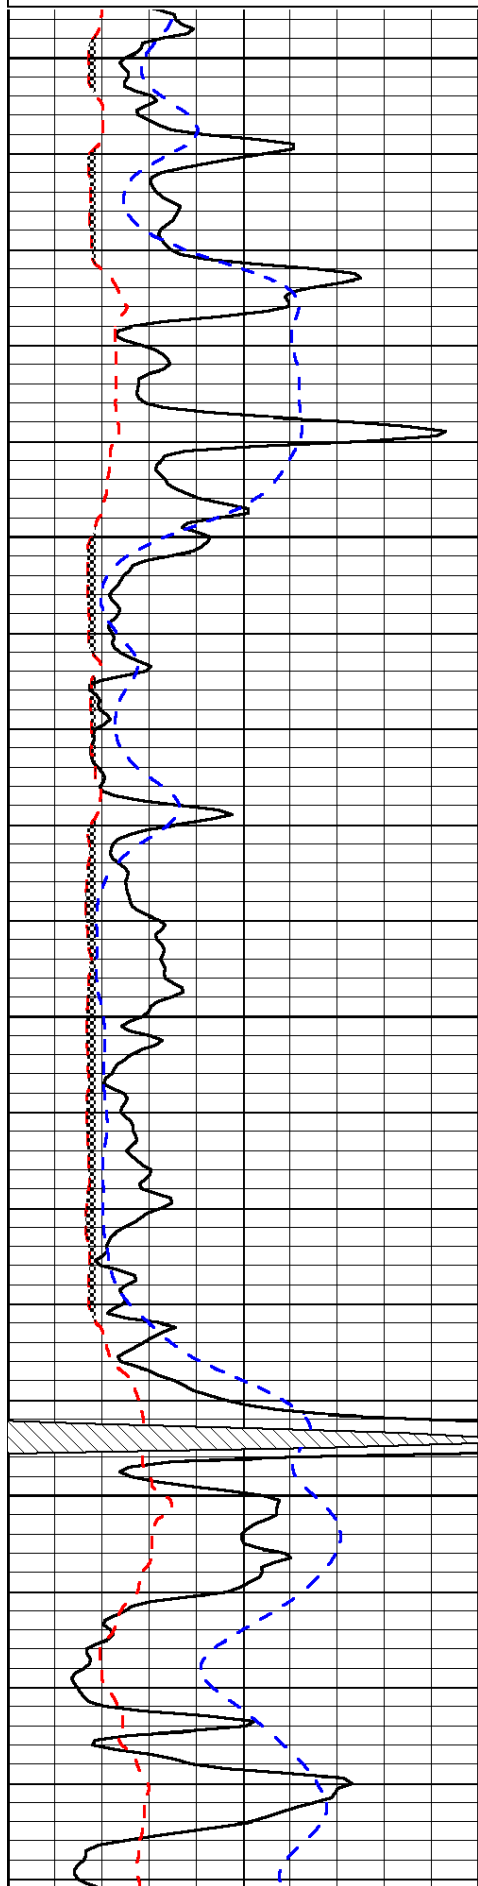

3600


3650

3700

3750

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD


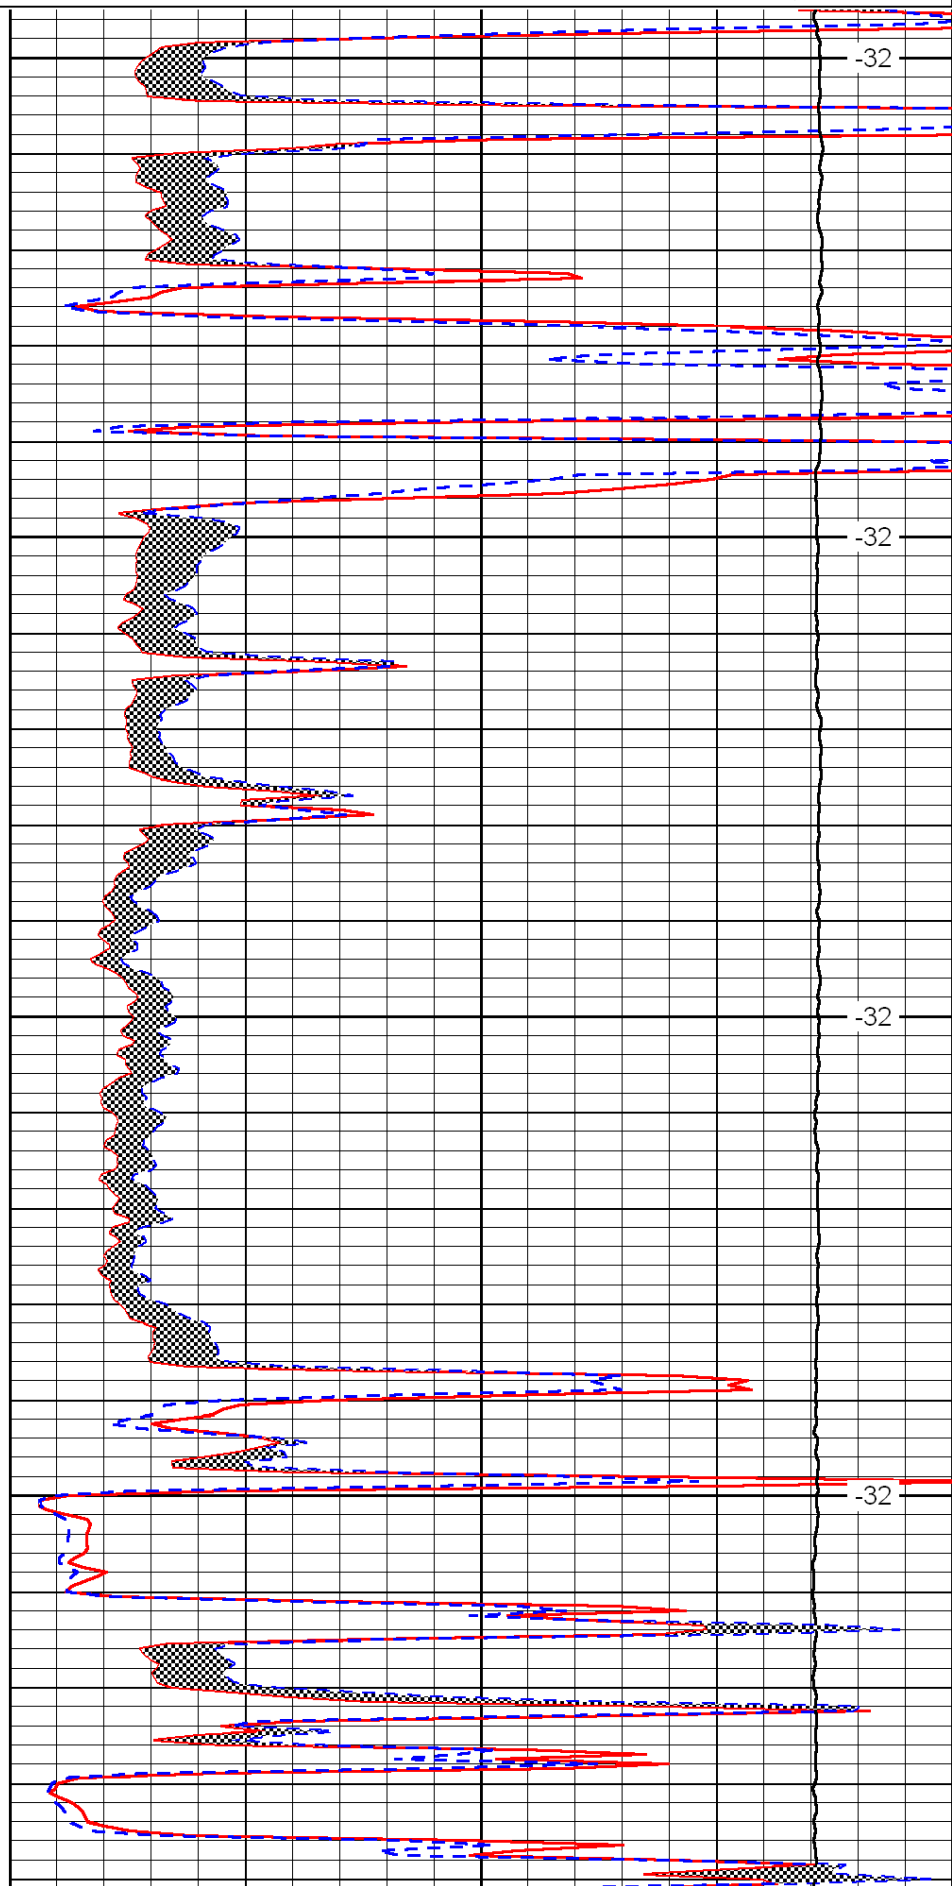



-32

-32

-32

-32

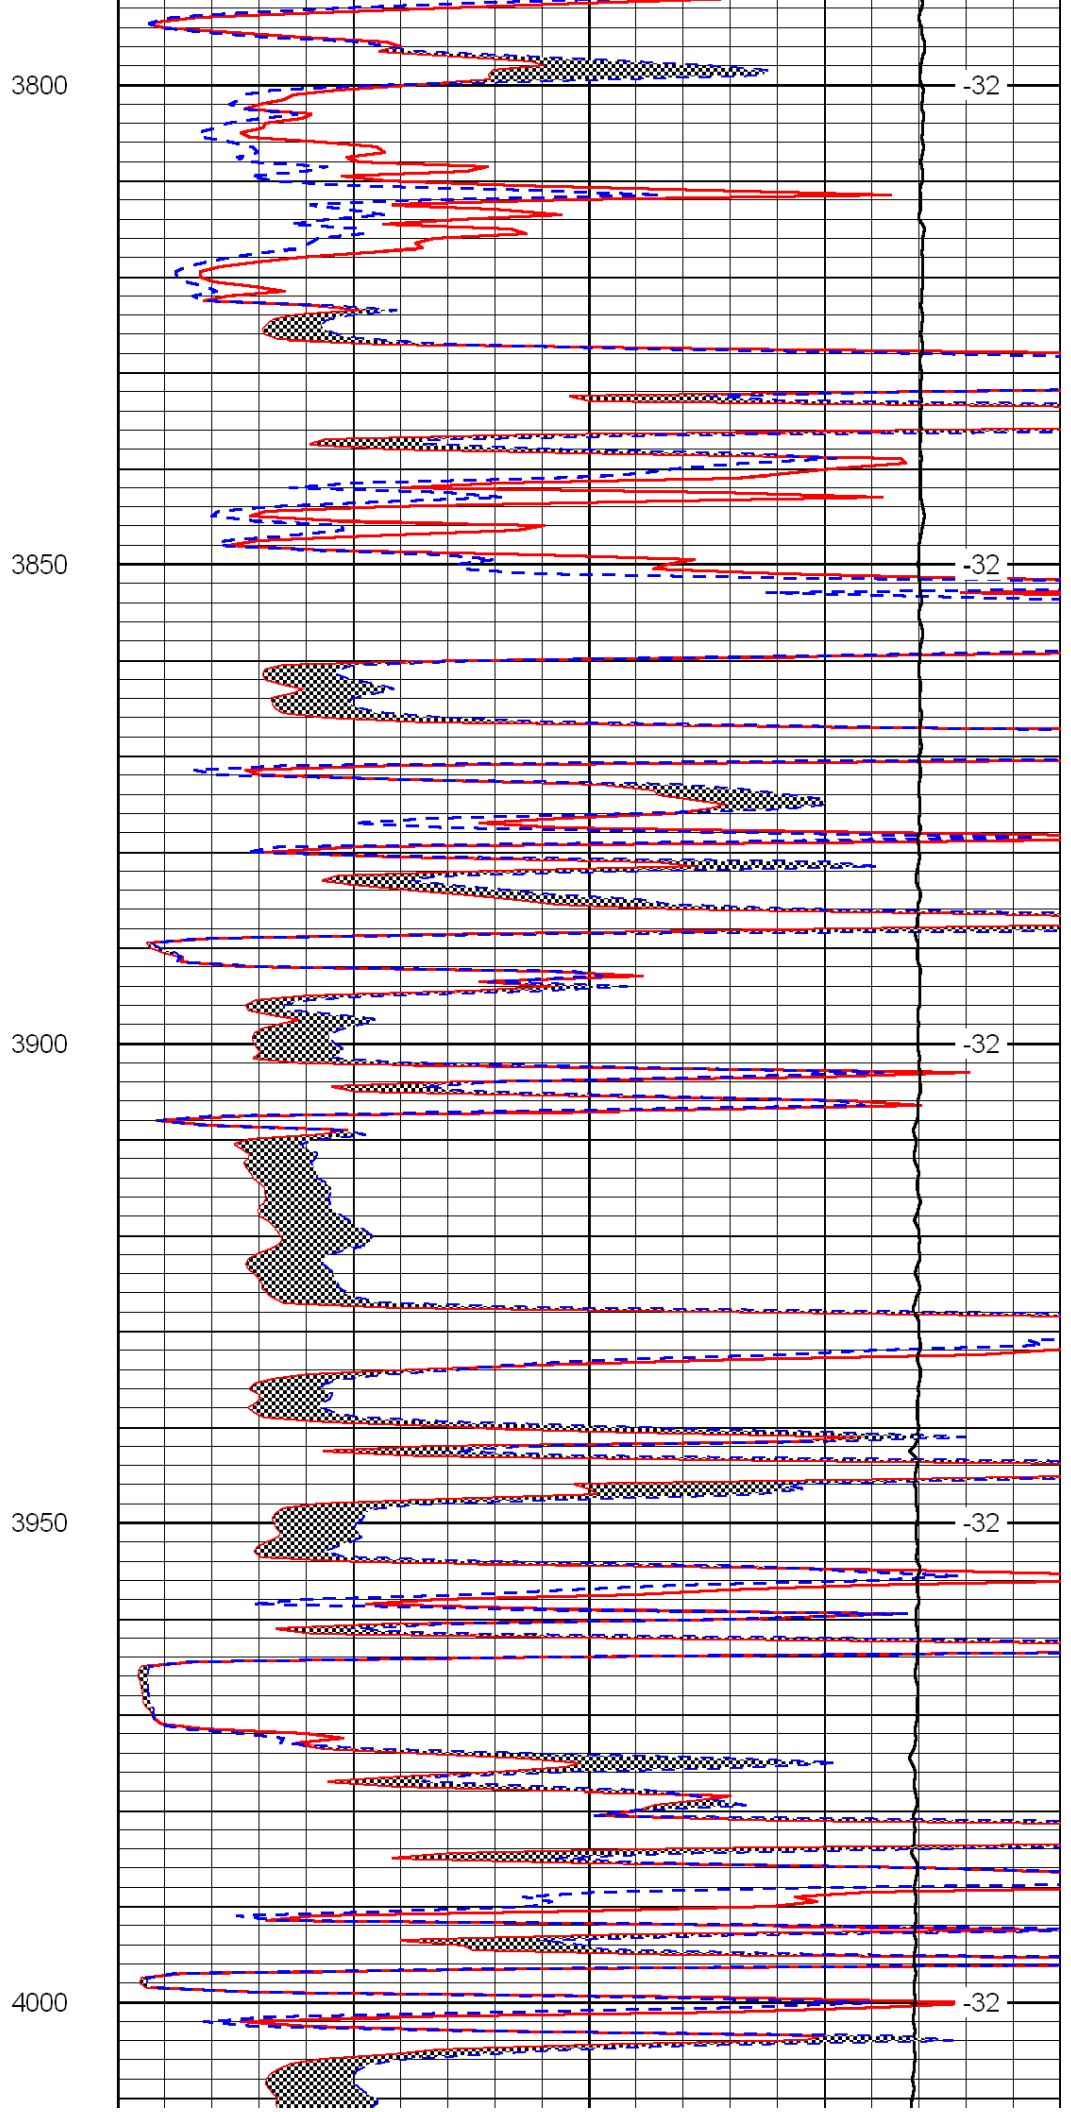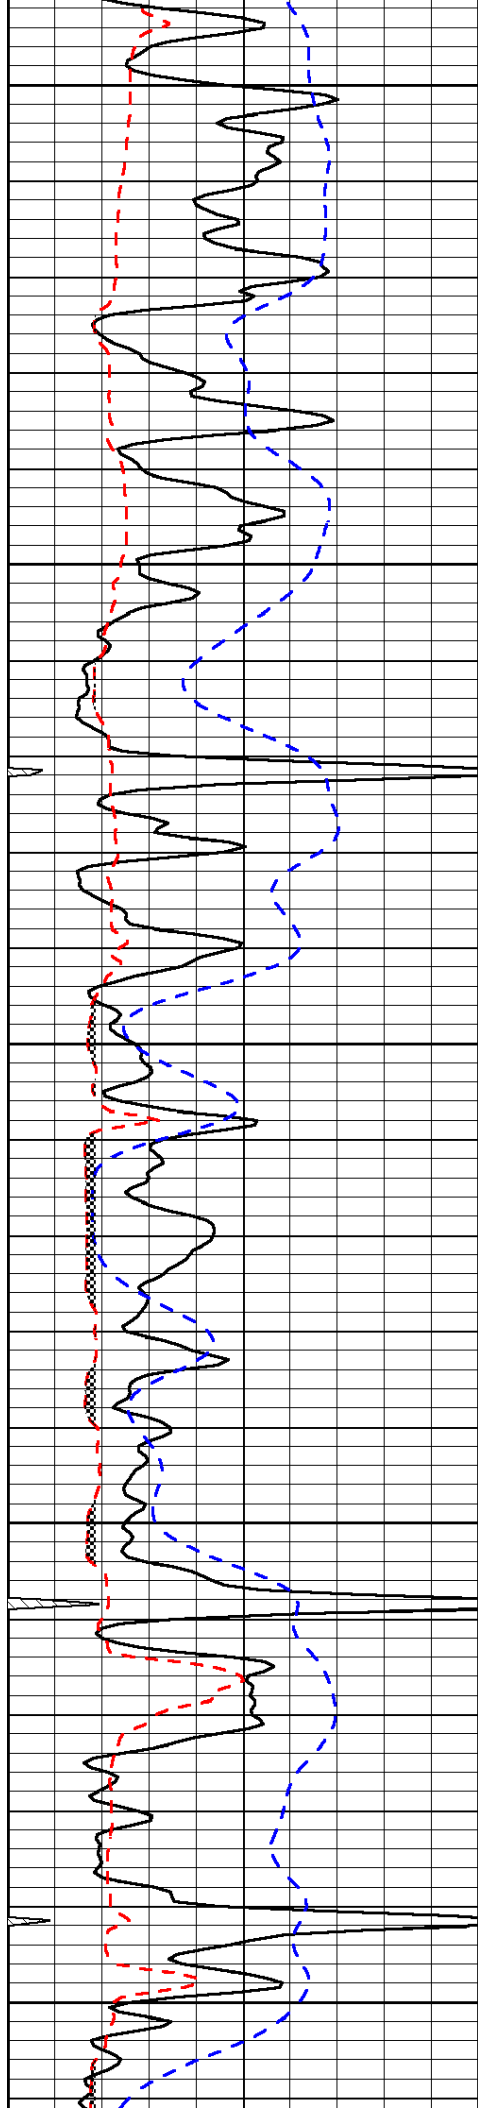

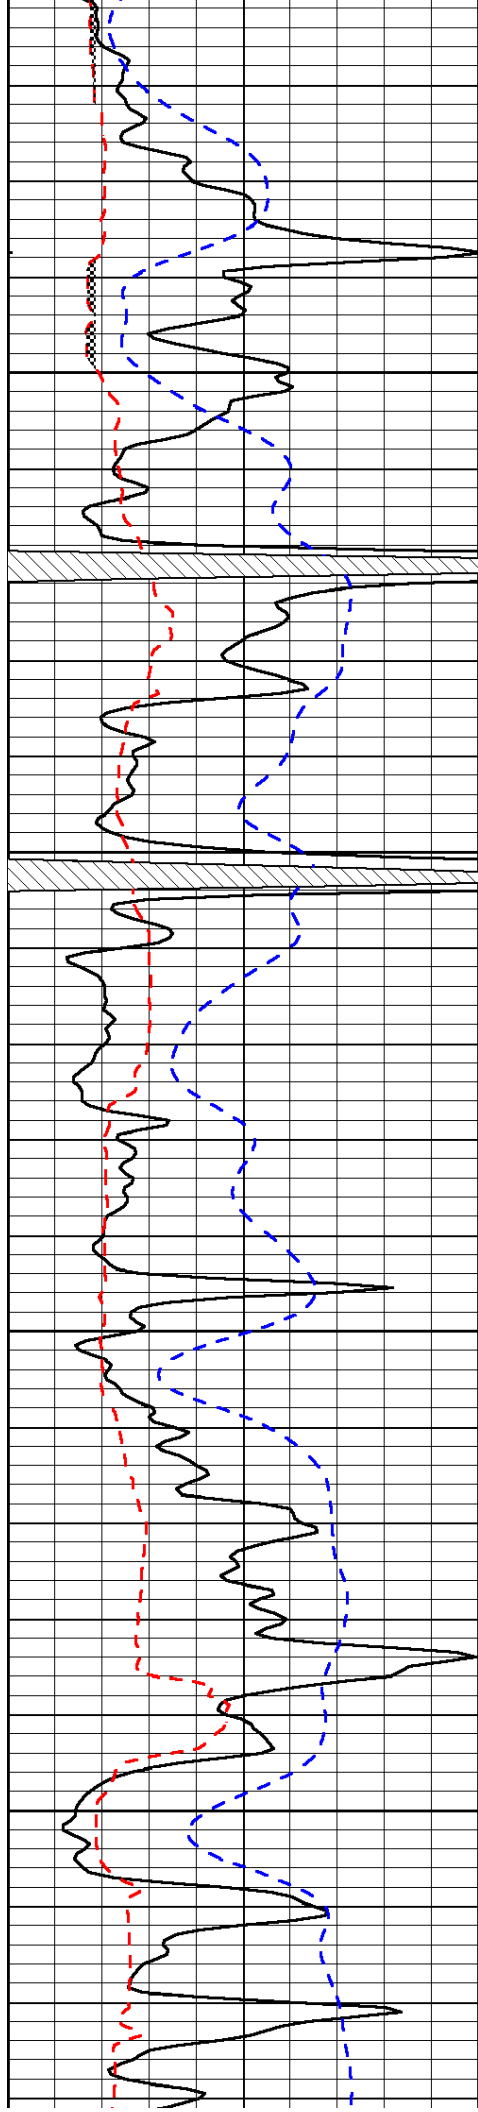


4050

4100

4150

4200

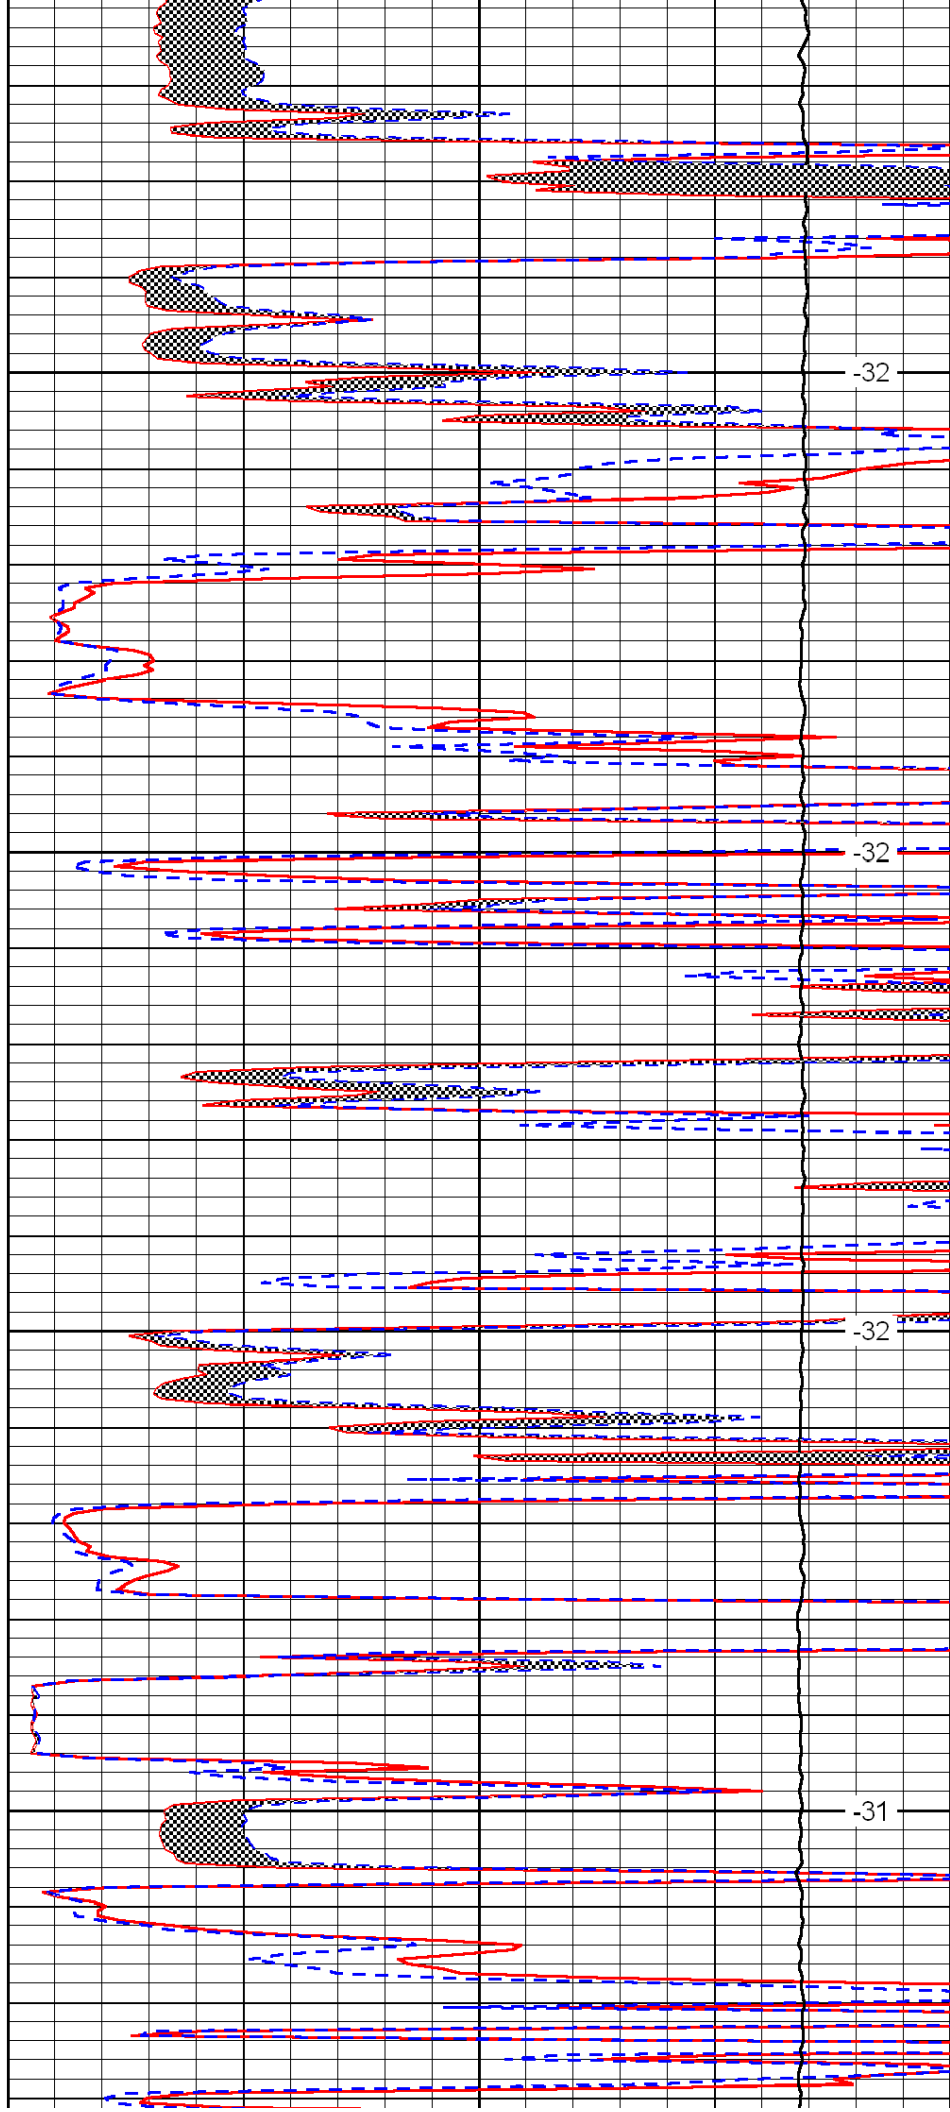


-32

-32

-32

-31

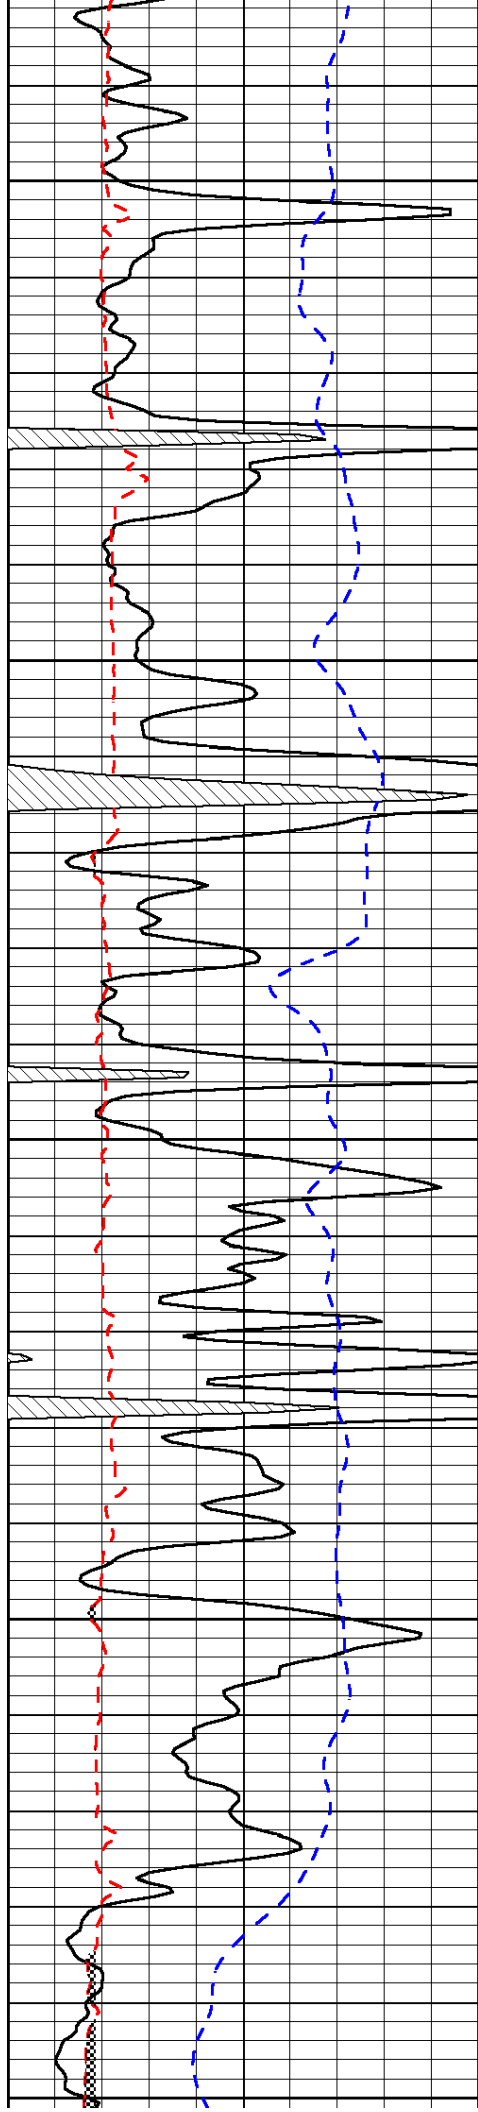


4250

4300

4350

4400

4450

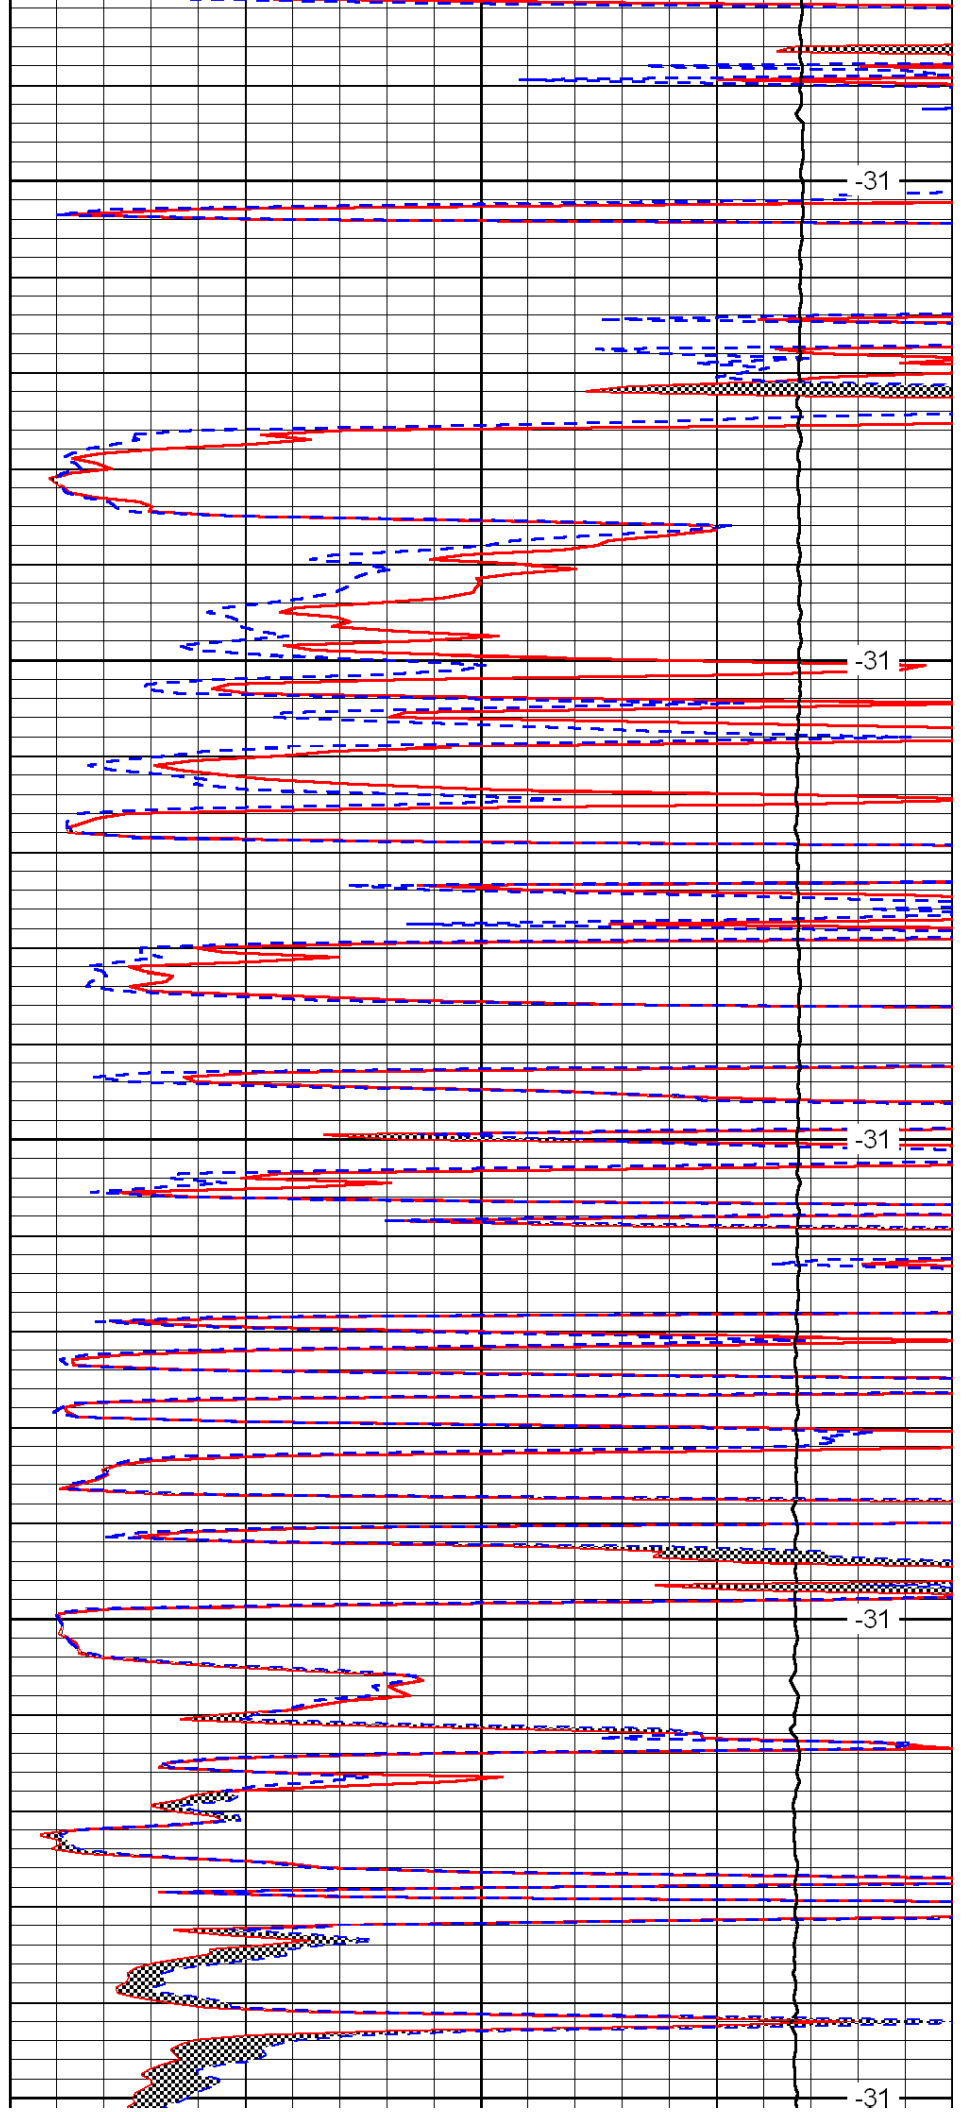


-31

-31

-31

-31

-31

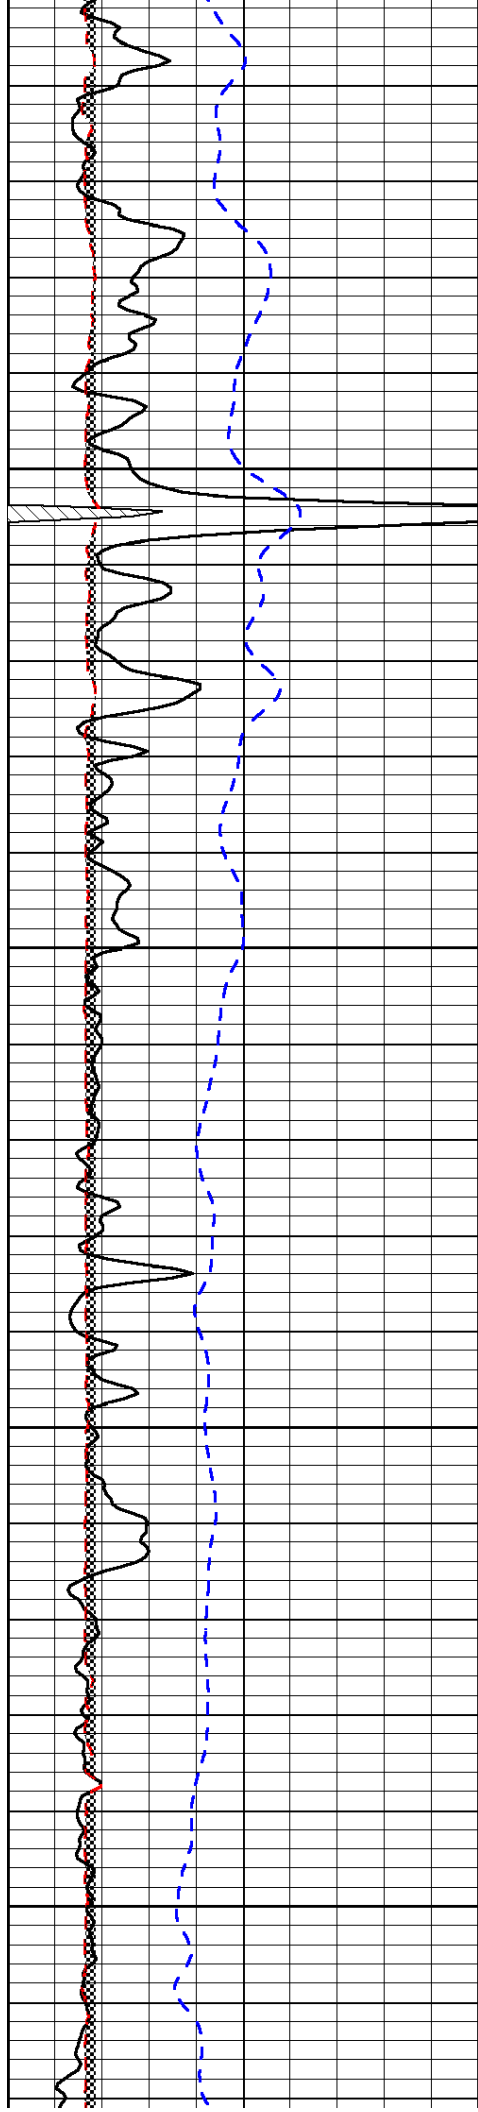


4500

4550

4600

4650

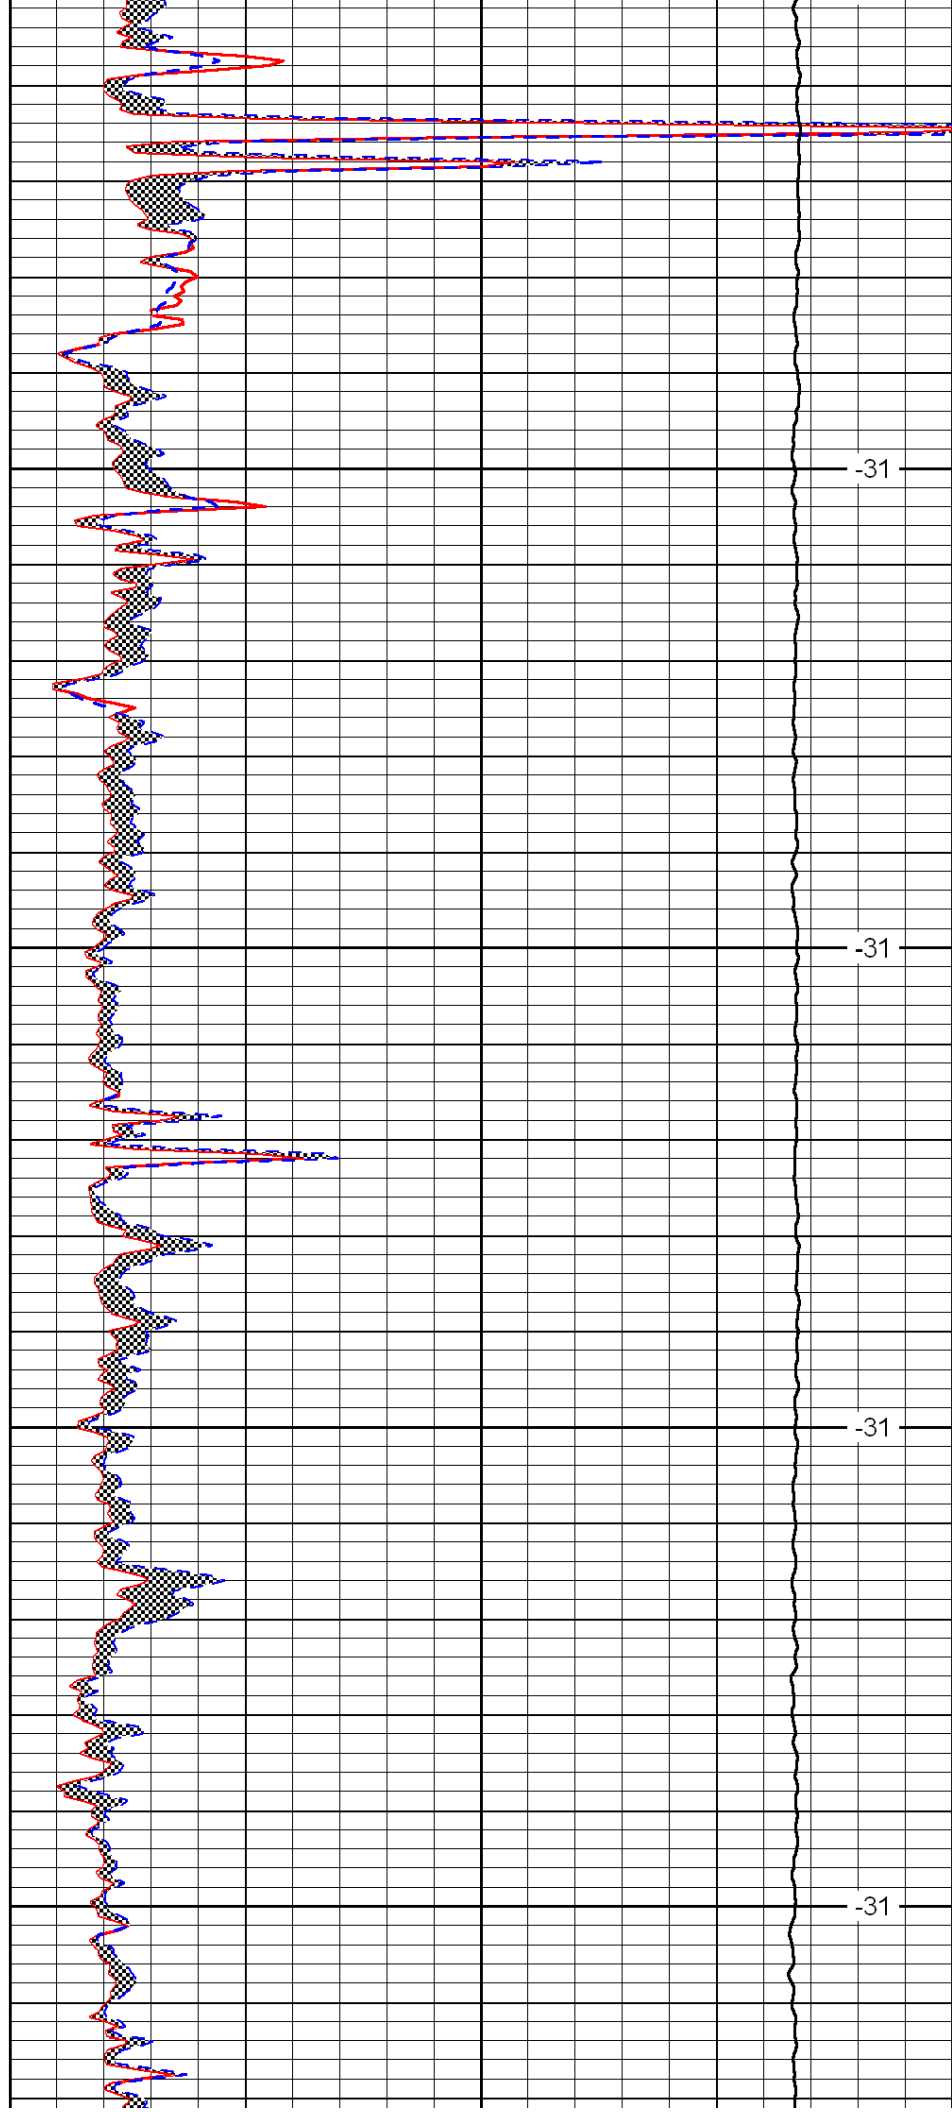


-31


-31

-31

-31

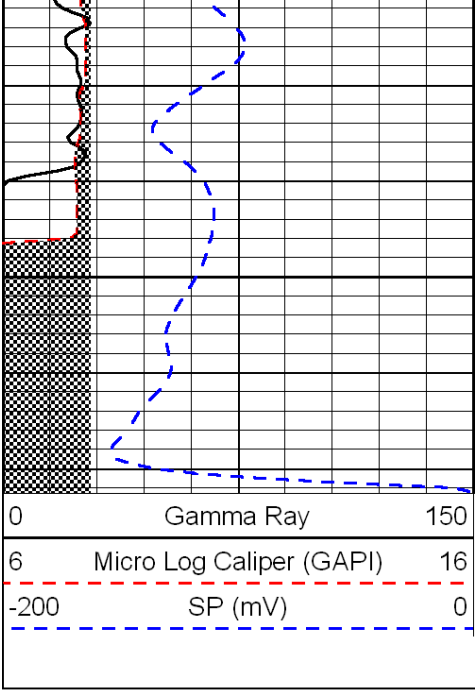

4700

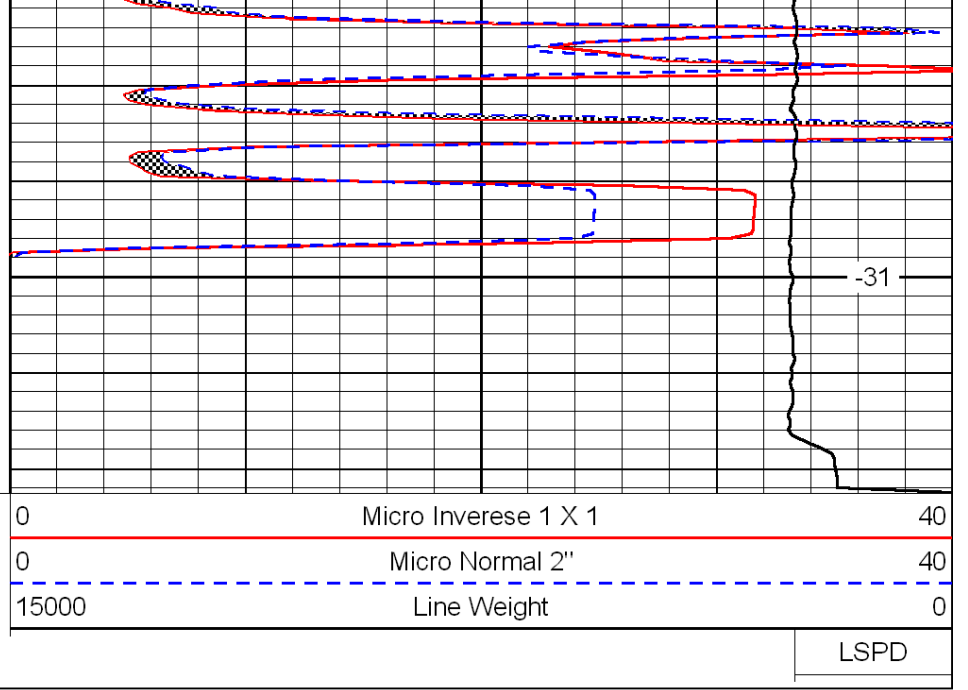

-31

LSPD