



Microresistivity Log

DIGITAL LOG (785) 625-3858

15-033-21,594-00-00

API No.

Company **Five Star Energy, Inc.**
 Well **Baker No. 4-35**
 Field **Box Ranch Extension**
 County **Comanche** State **Kansas**

Location **SW SW NW
2,628' FNL & 200' FWL**
 Sec: **35** Twp: **34S** Rge: **20W**

Other Services
CNL/CDL
DIL

Permanent Datum **Ground Level** Elevation **1717**
 Log Measured From **Kelly Bushing** 10 Ft. Above Perm. Datum
 Drilling Measured From **Kelly Bushing**

Elevation
K.B. 1727
D.F. 1725
G.L. 1717

Date	9/10/2011	
Run Number	Two	
Depth Driller	6450	
Depth Logger	6450	
Bottom Logged Interval	6449	
Top Log Interval	3900	
Casing Driller	8,625 @ 681	
Casing Logger	689	
Bit Size	7.875	
Type Fluid in Hole	Chemical	
Salinity, ppm CL	7000	
Density / Viscosity	8.8 48	
pH / Fluid Loss	9.5 12.8	
Source of Sample	Flowline	
Rm @ Meas. Temp	.41 @ 75	
Rmf @ Meas. Temp	.31 @ 75	
Rmc @ Meas. Temp	.55 @ 75	
Source of Rmf / Rmc	Charts	
Rm @ BHT	.22 @ 141	
Operating Rig Time	4 Hours	
Max Rec. Temp. F	141	
Equipment Number	10	
Location	Hays	
Recorded By	J. Long	
Witnessed By	Jeff Burk	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments



Thank you for using Log-Tech, Inc.
(785) 625-3858

Coldwater, South to Highway 183 and Highway 160 Intersection, 9 South to W Avenue, 8 West,
1 1/4 South, East Into

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

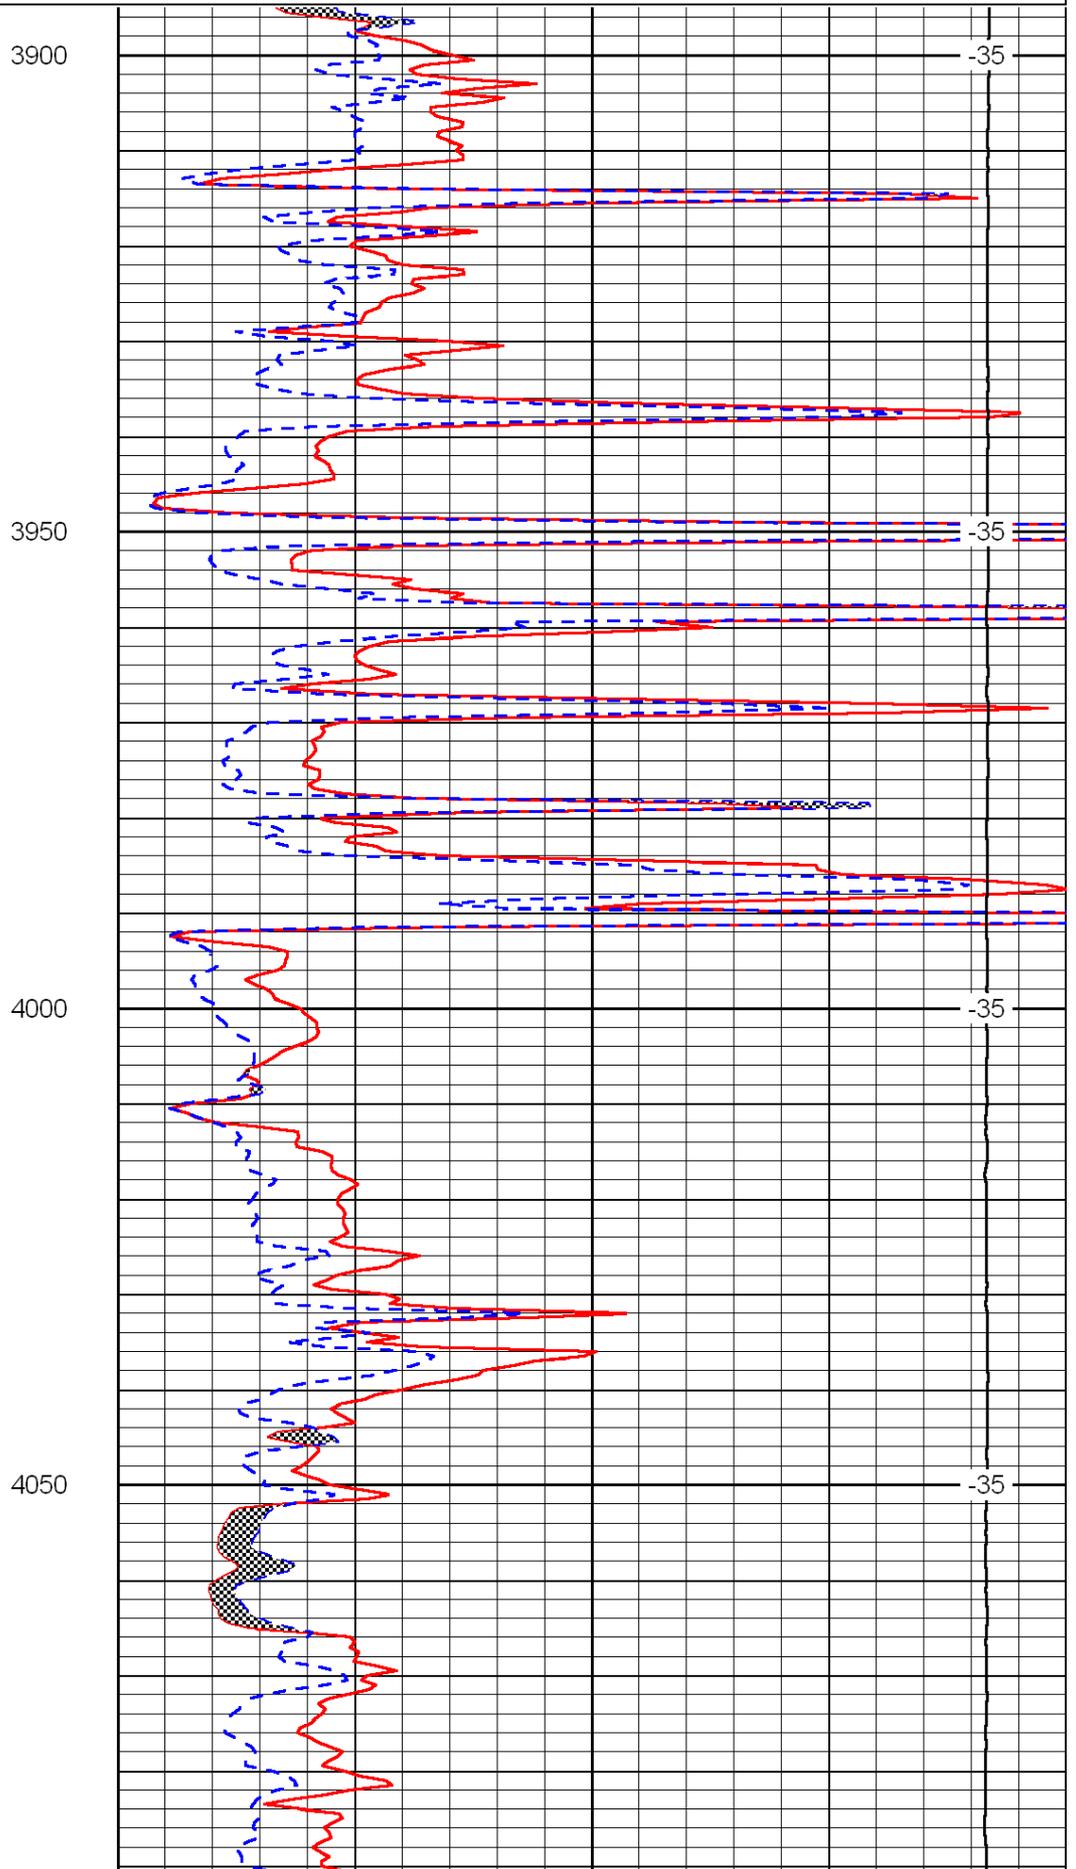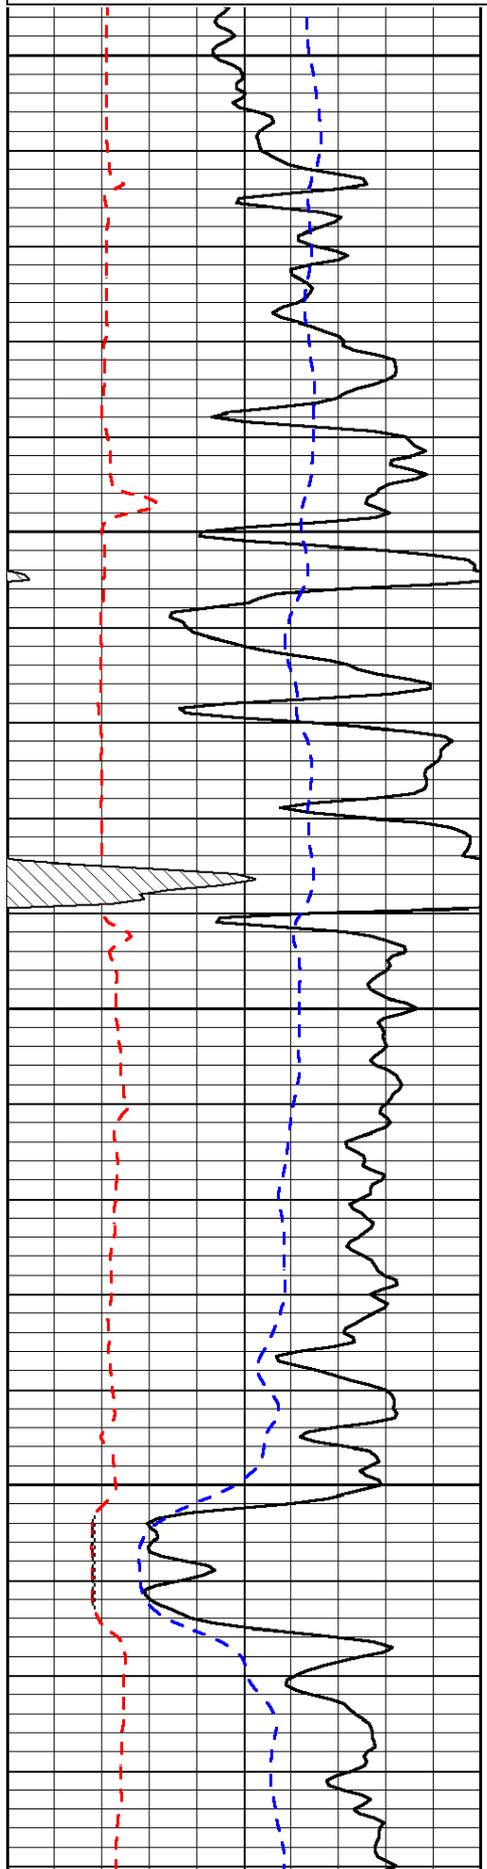

3900

-35

3950


-35

4000

-35

4050

-35

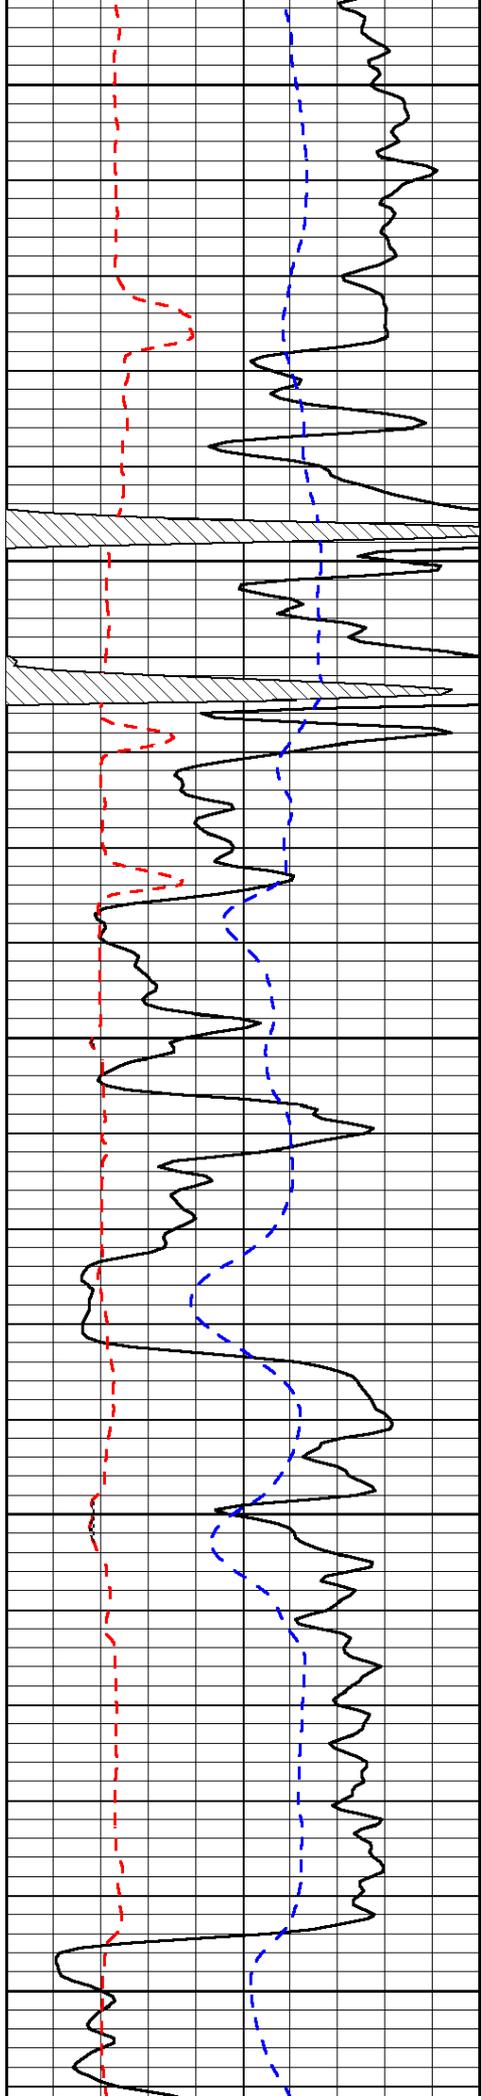


4100


4150

4200

4250

4300

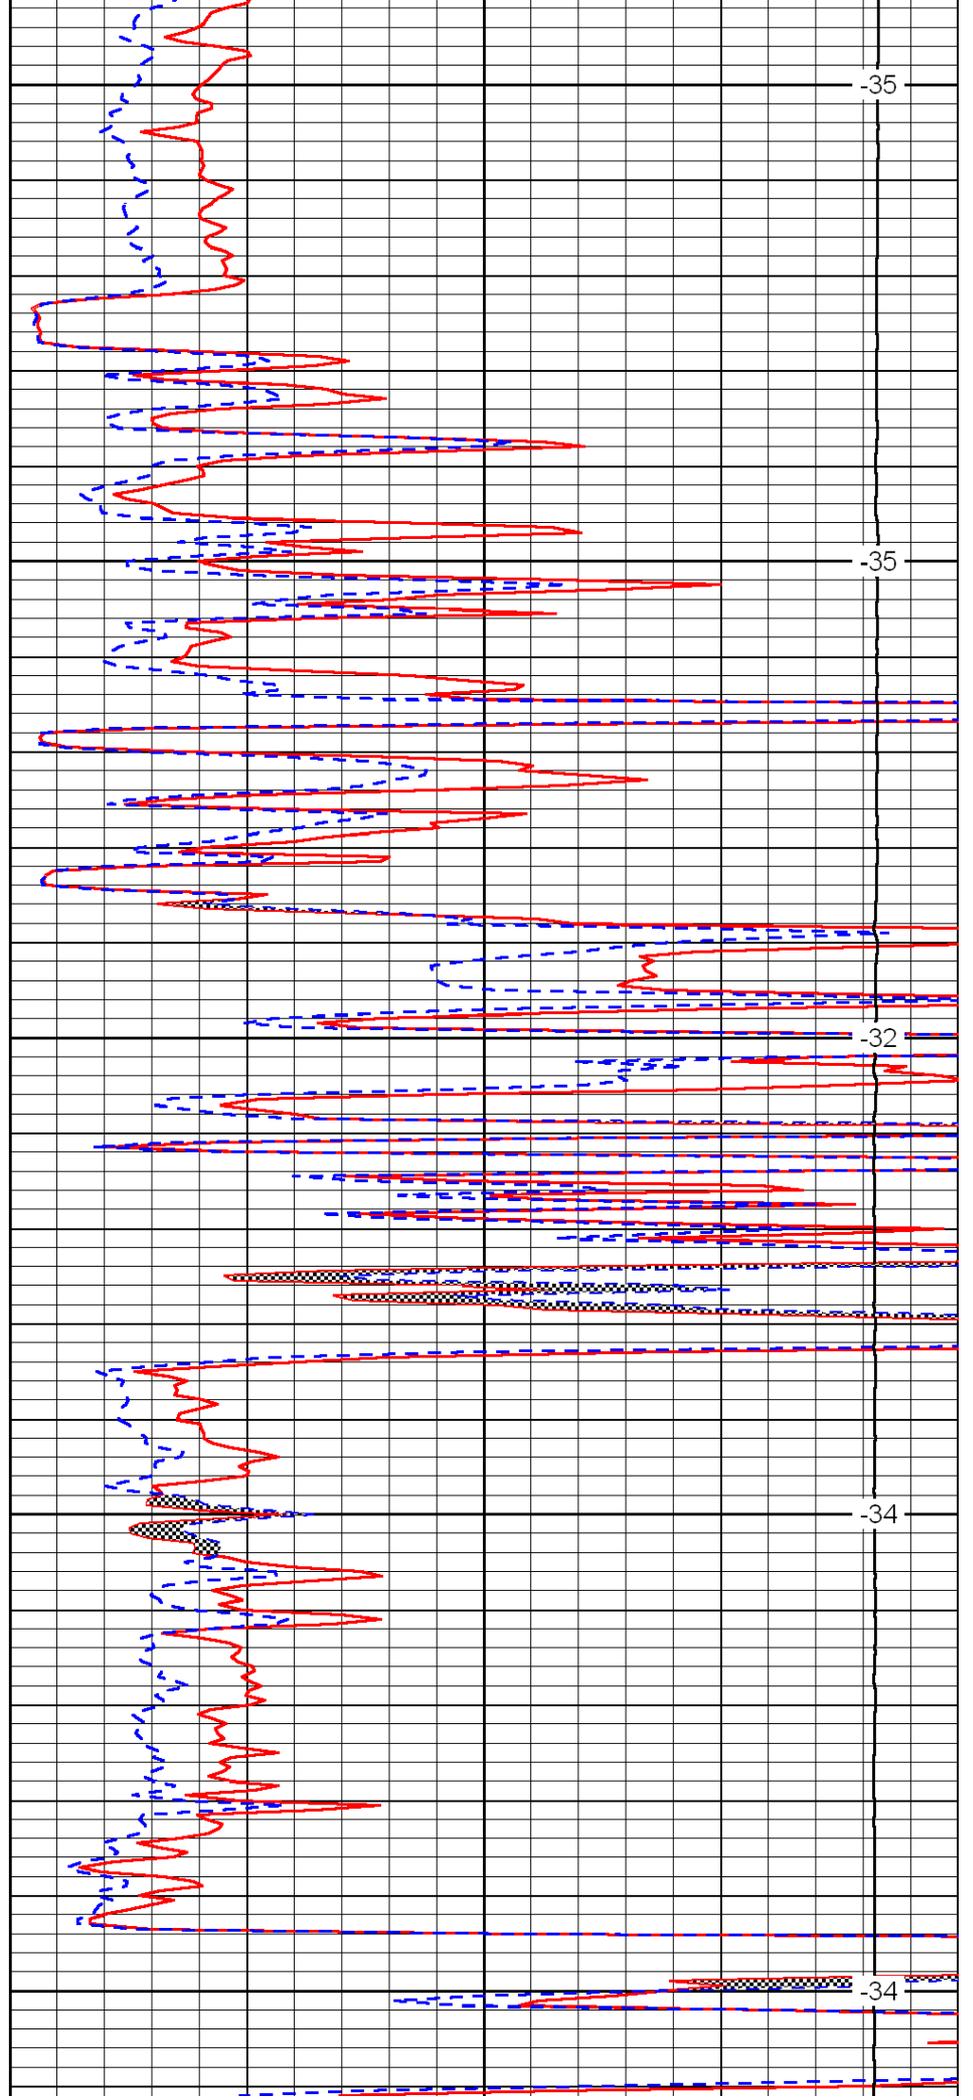

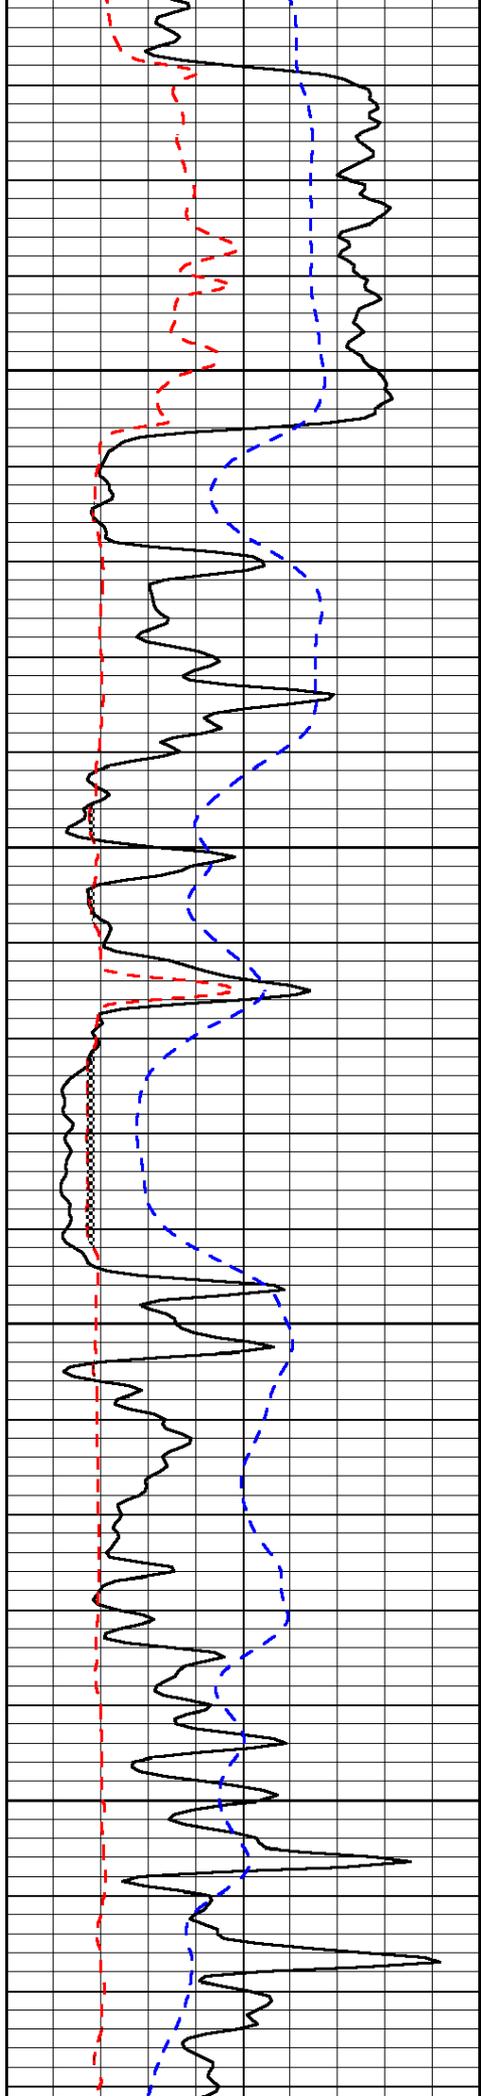


4350

4400

4450

4500

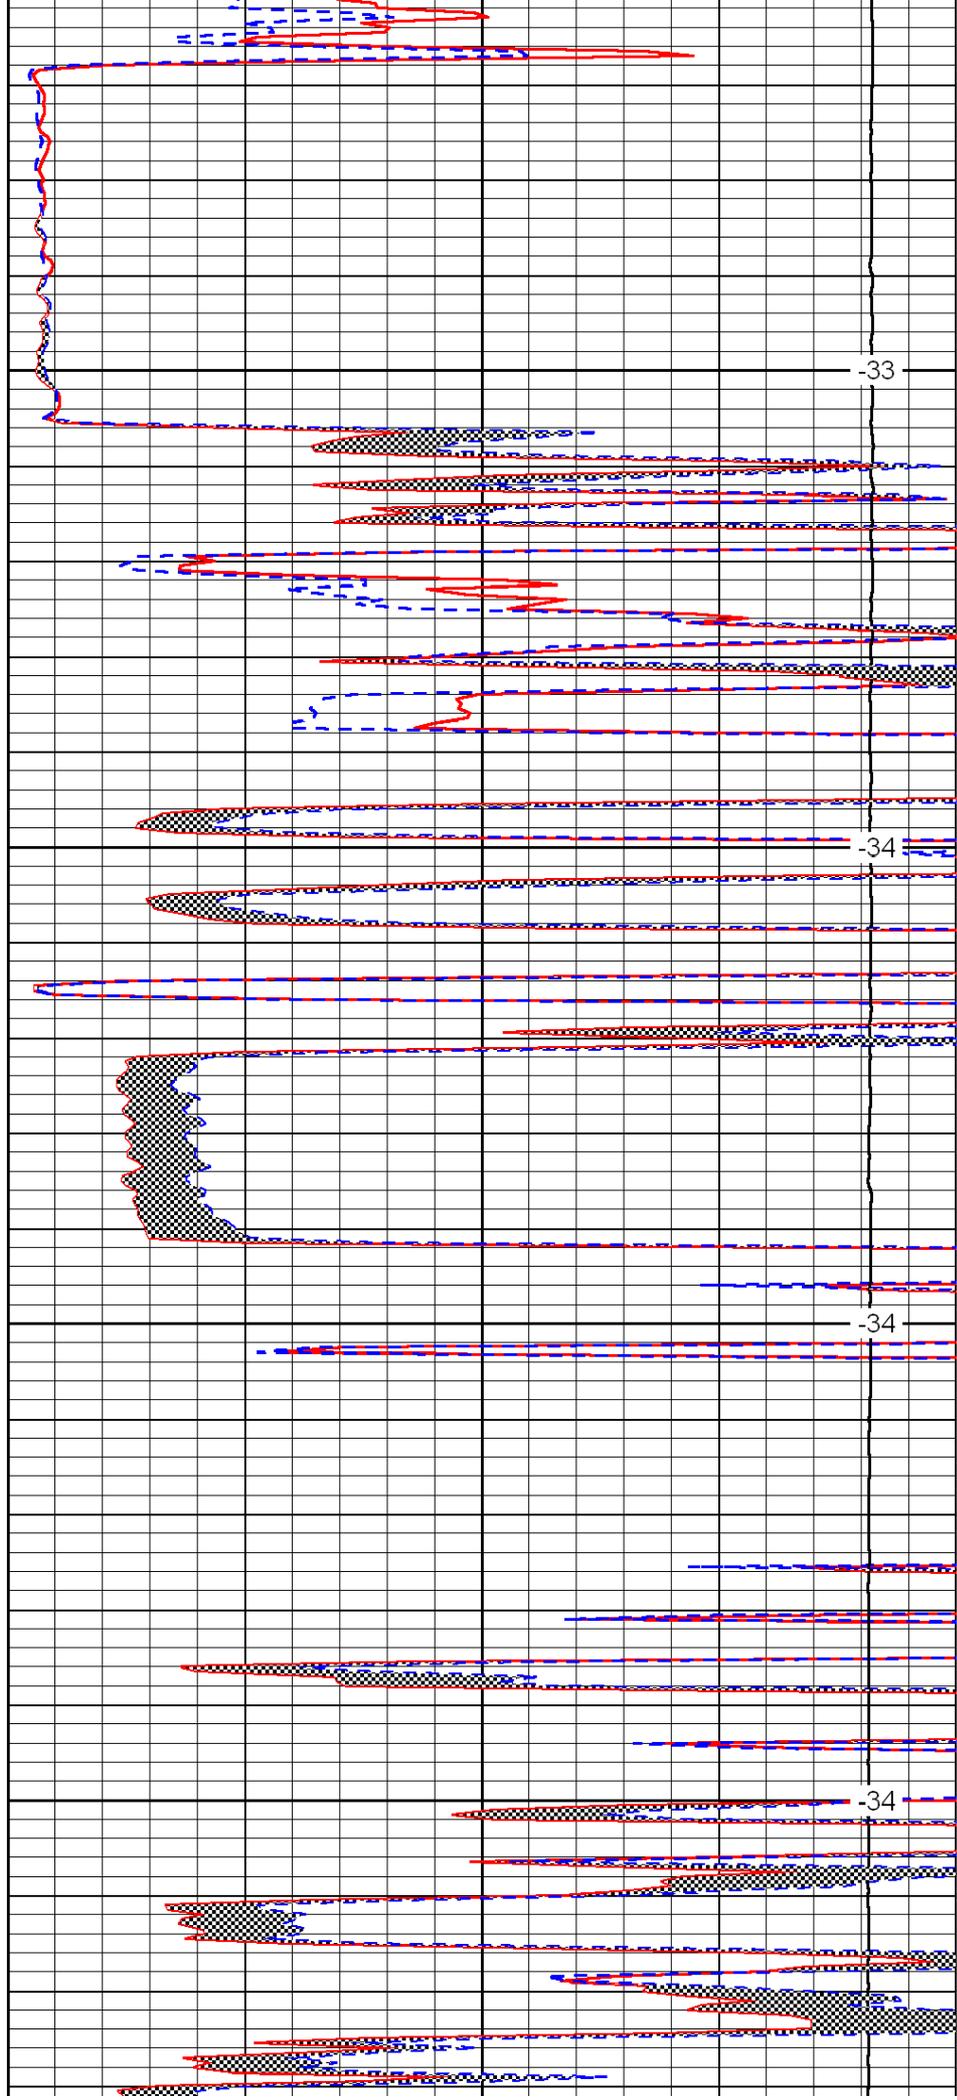


-33

-34

-34

-34

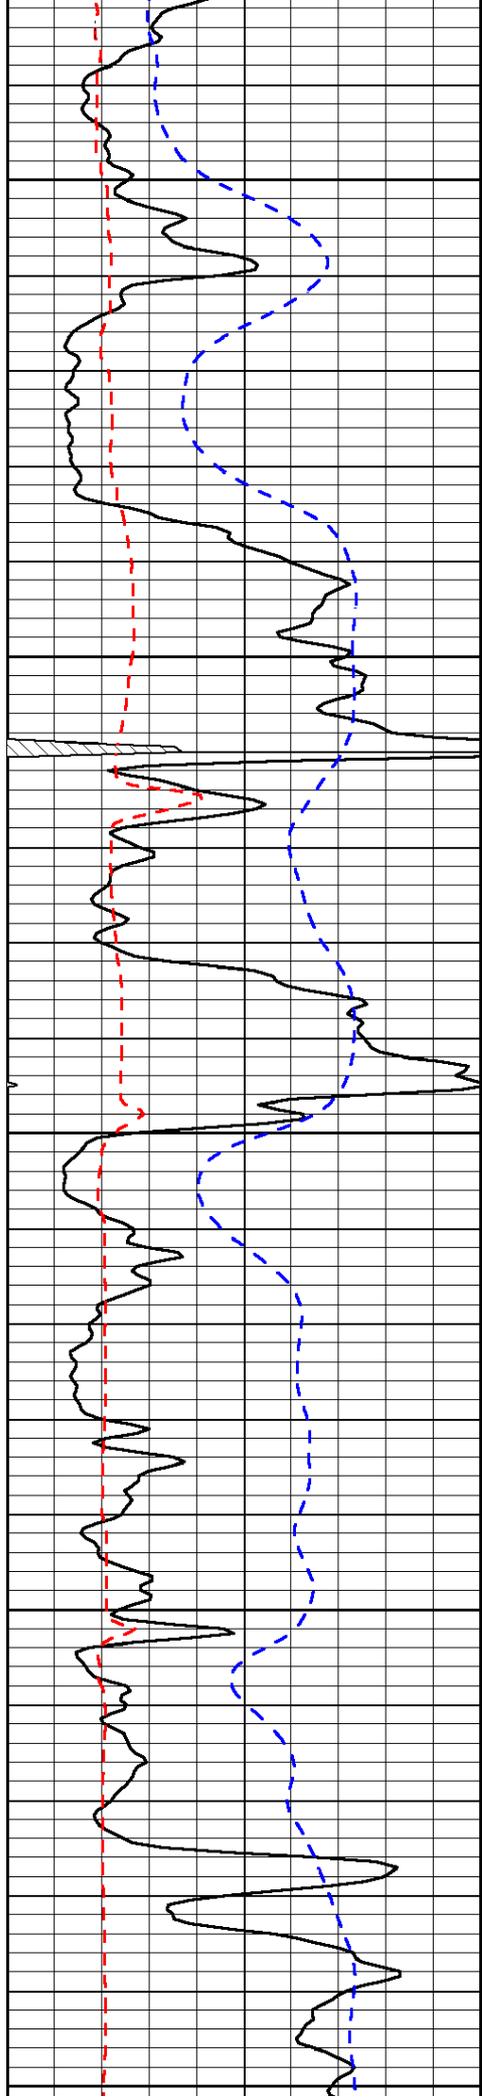


4550

4600

4650

4700

4750

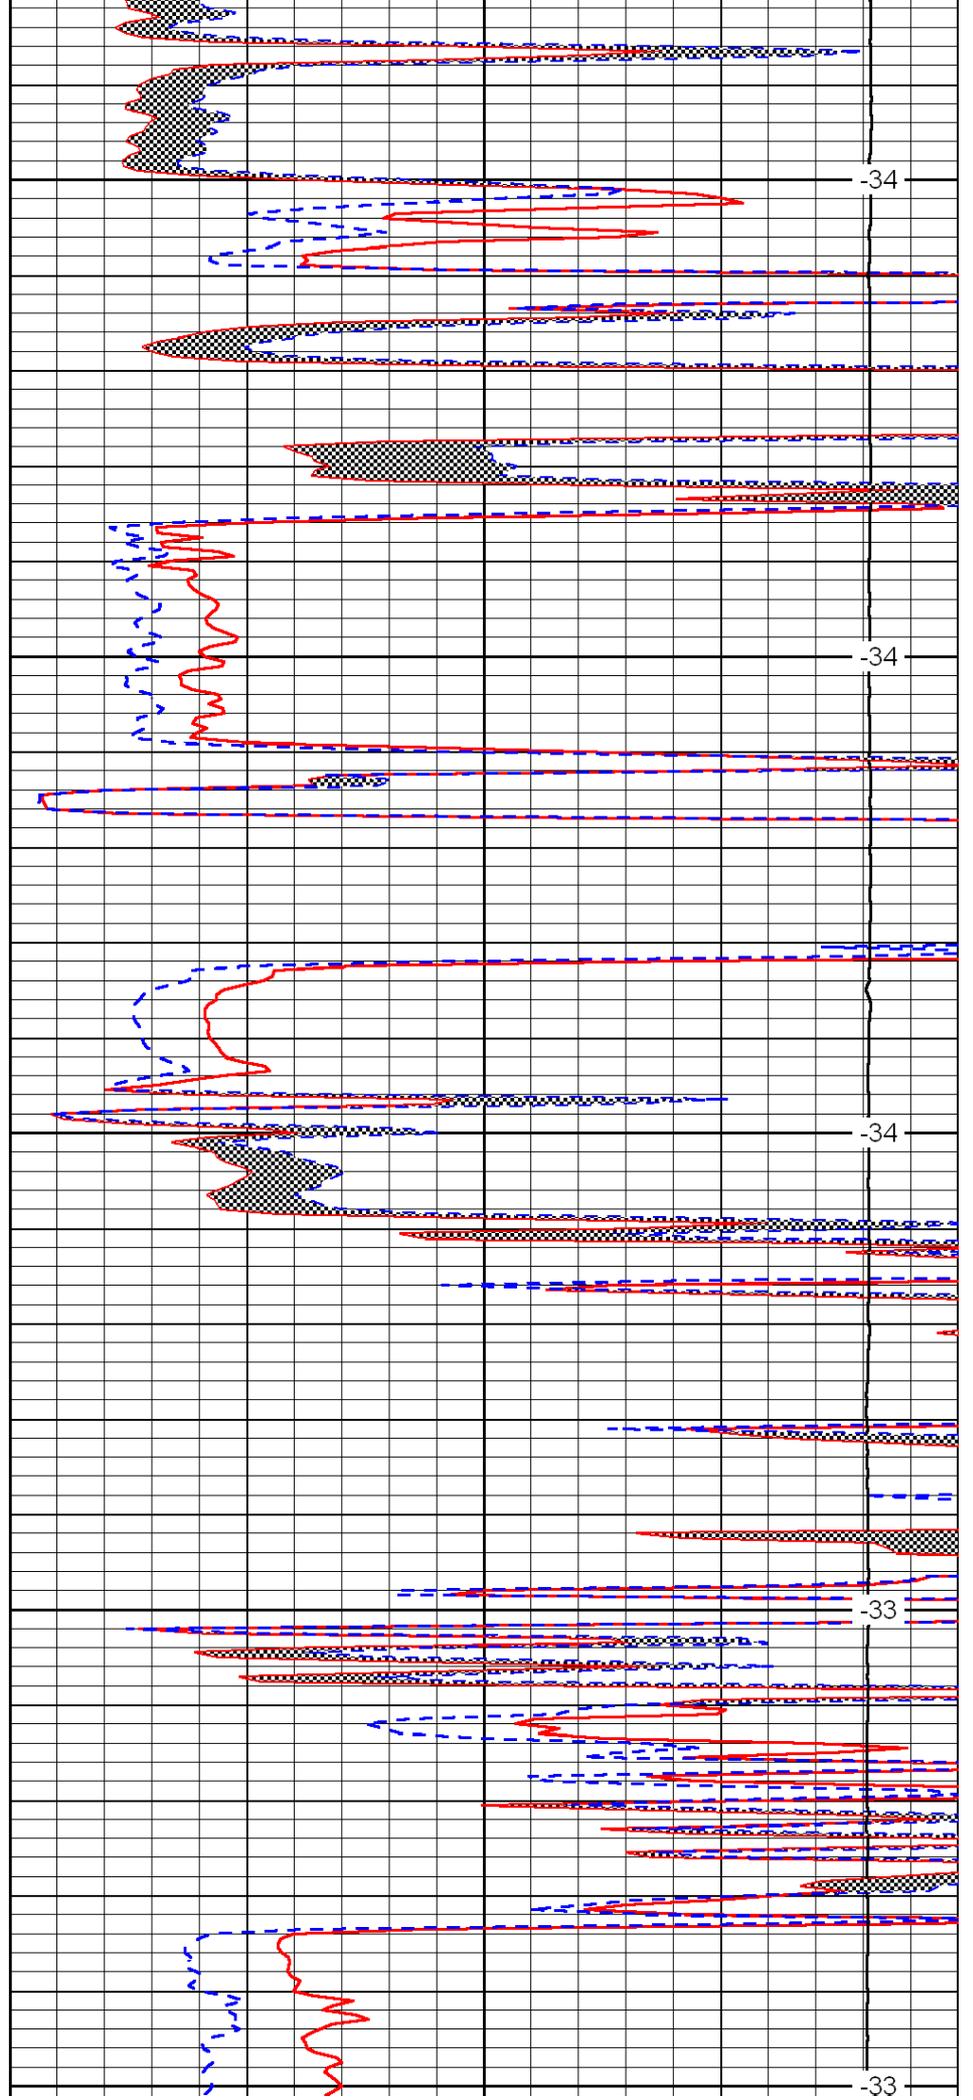


-34

-34

-34

-33

-33

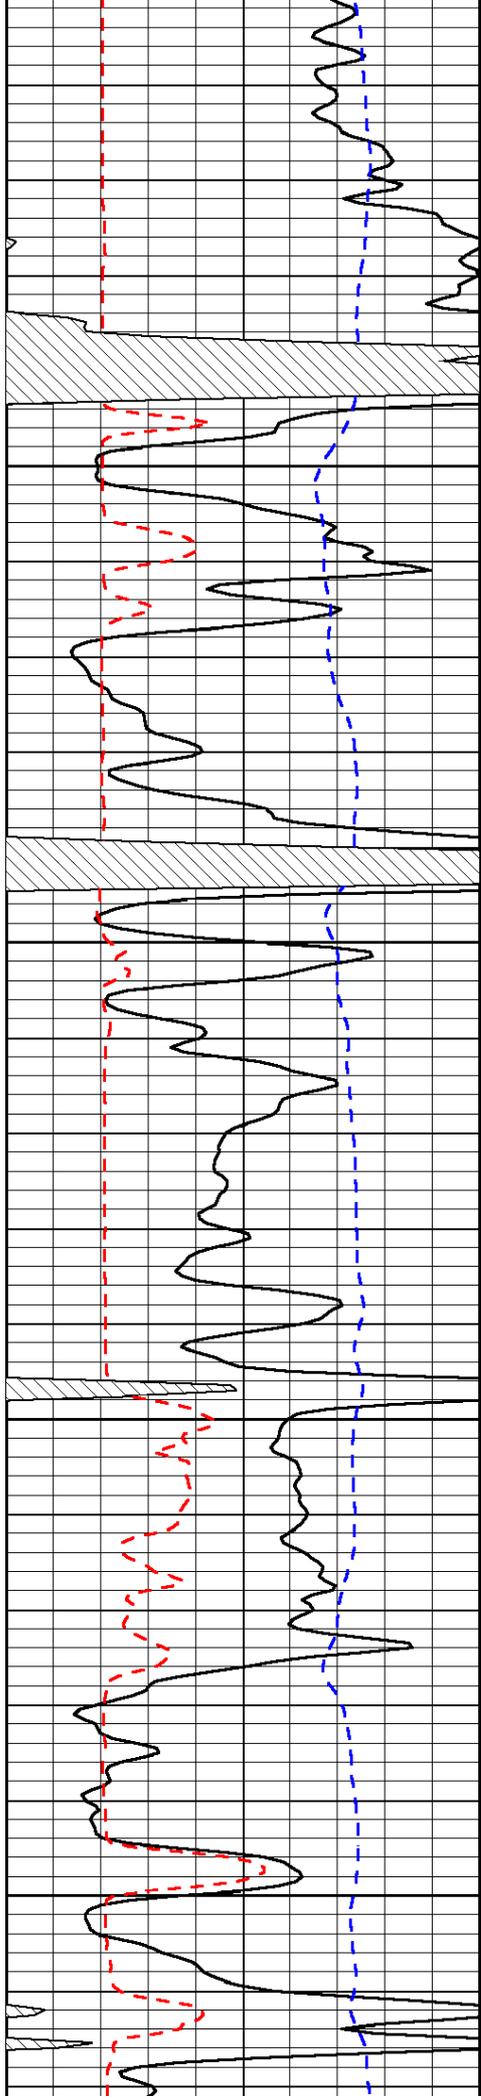



4800

4850

4900

4950

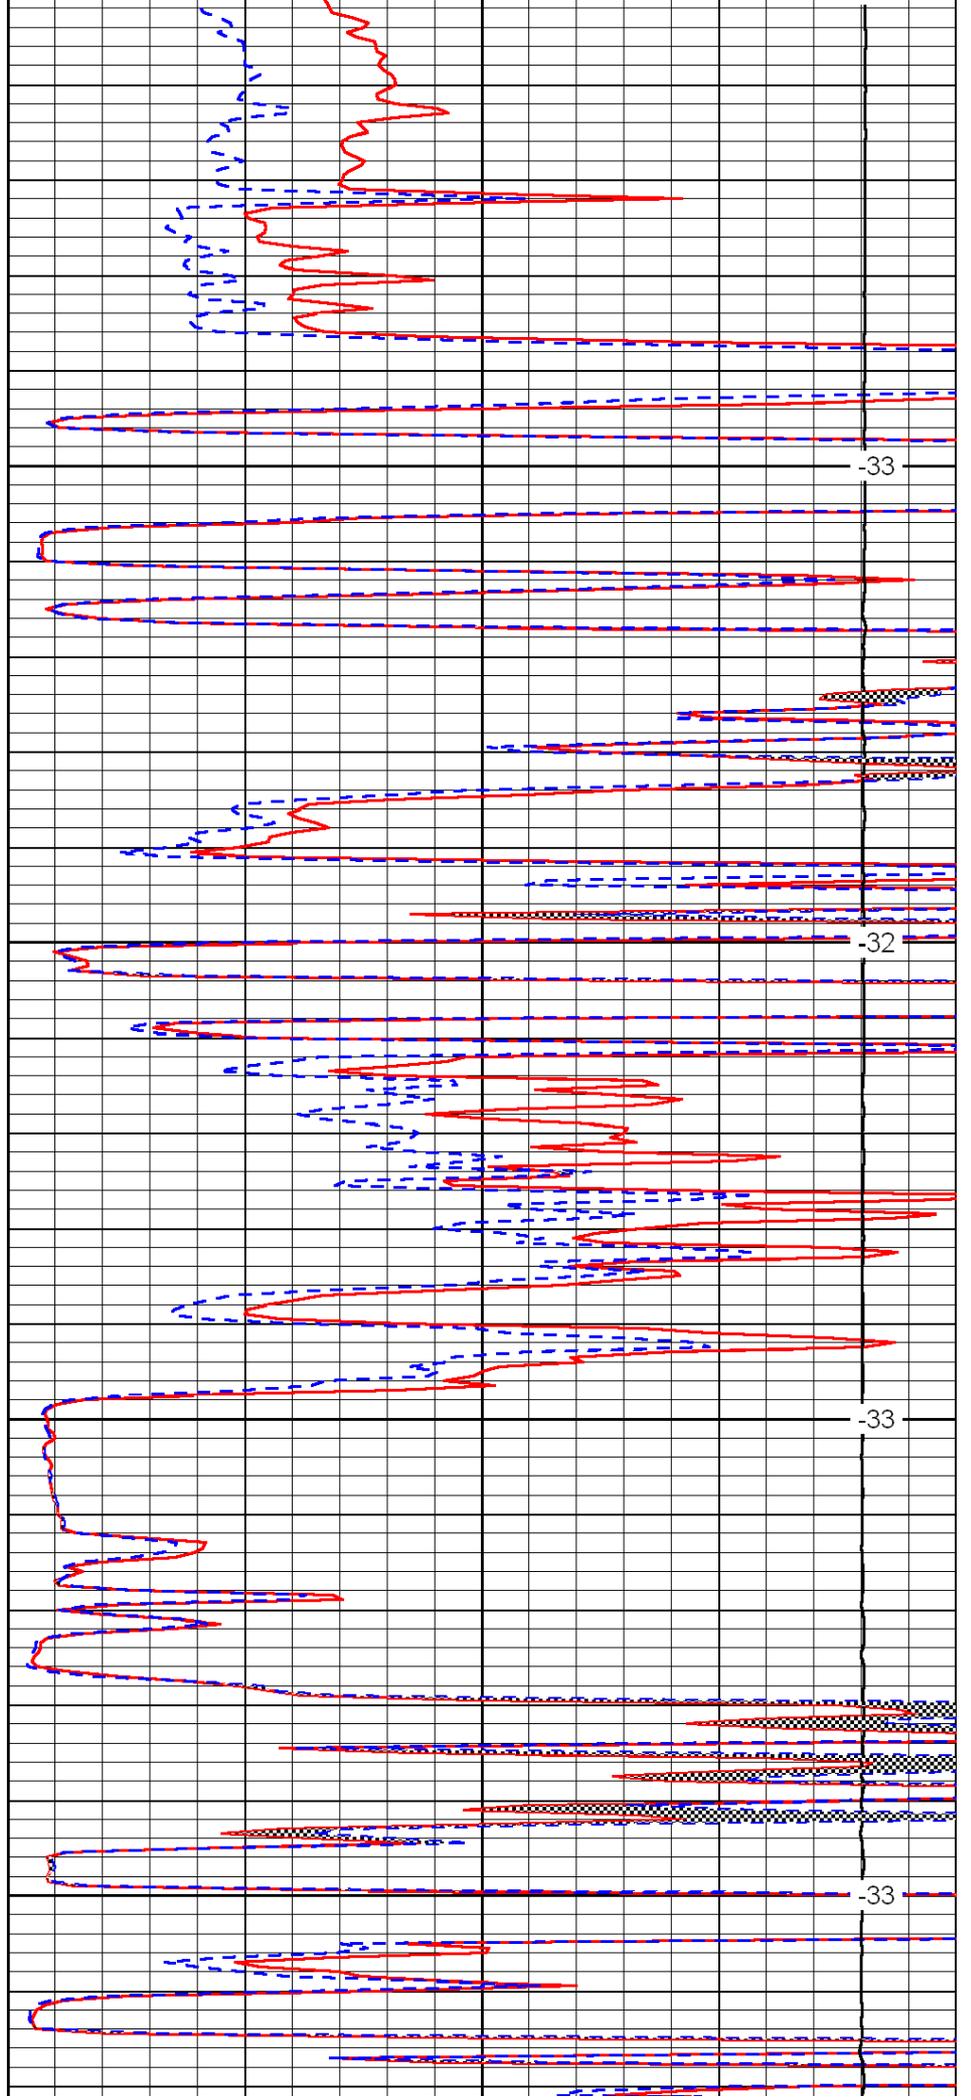

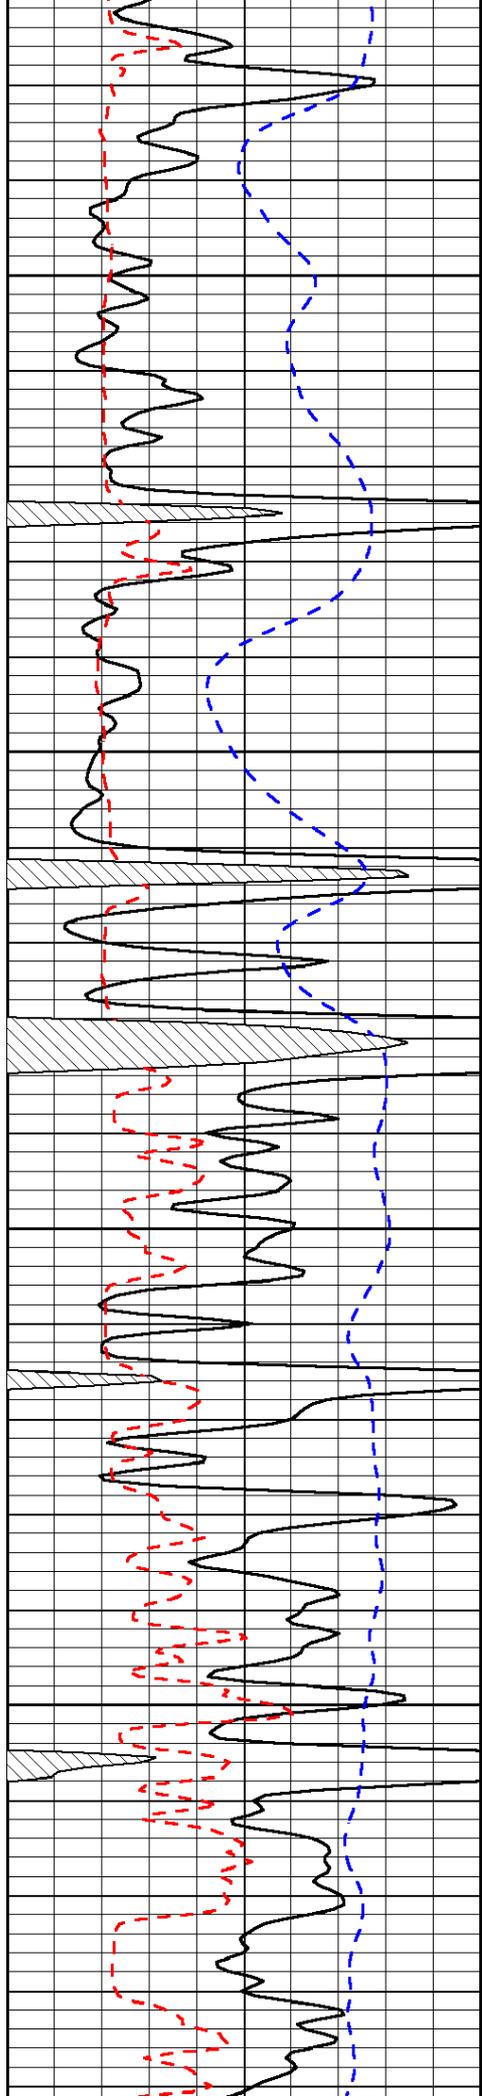


5000

5050

5100

5150

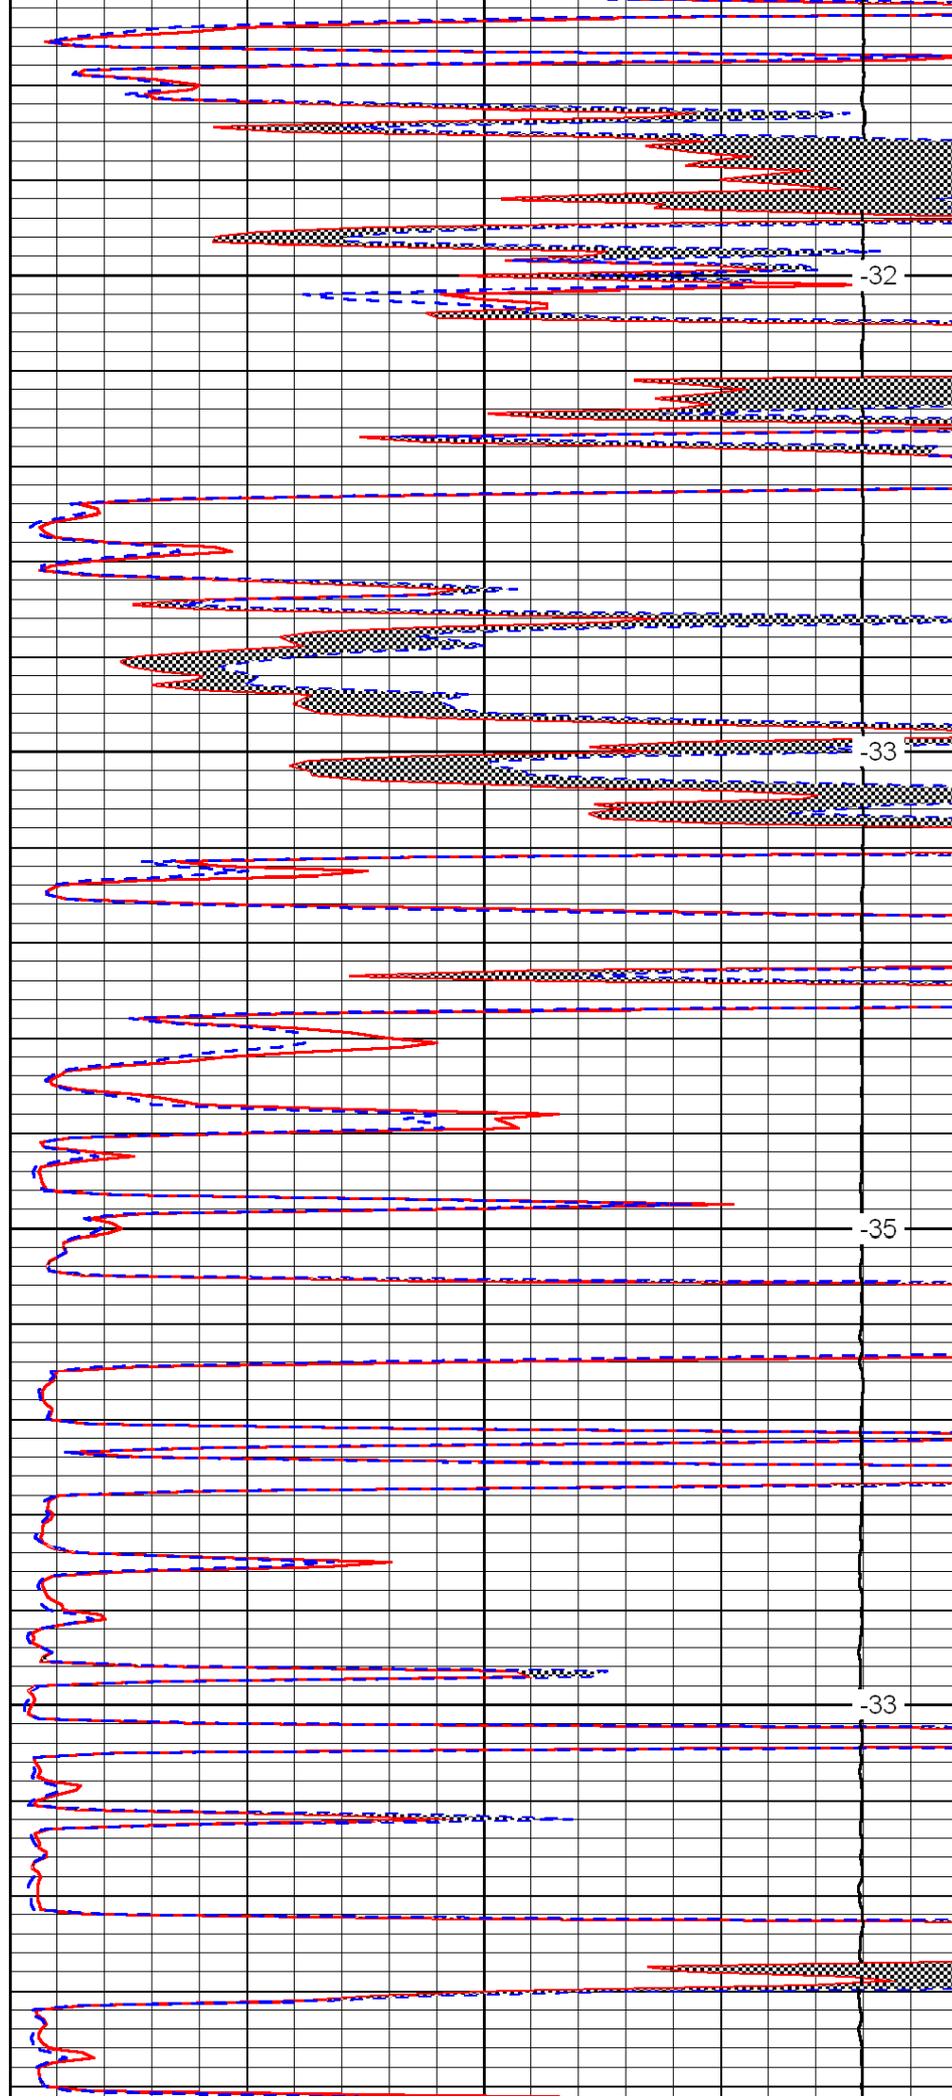


-32

-33

-35

-33

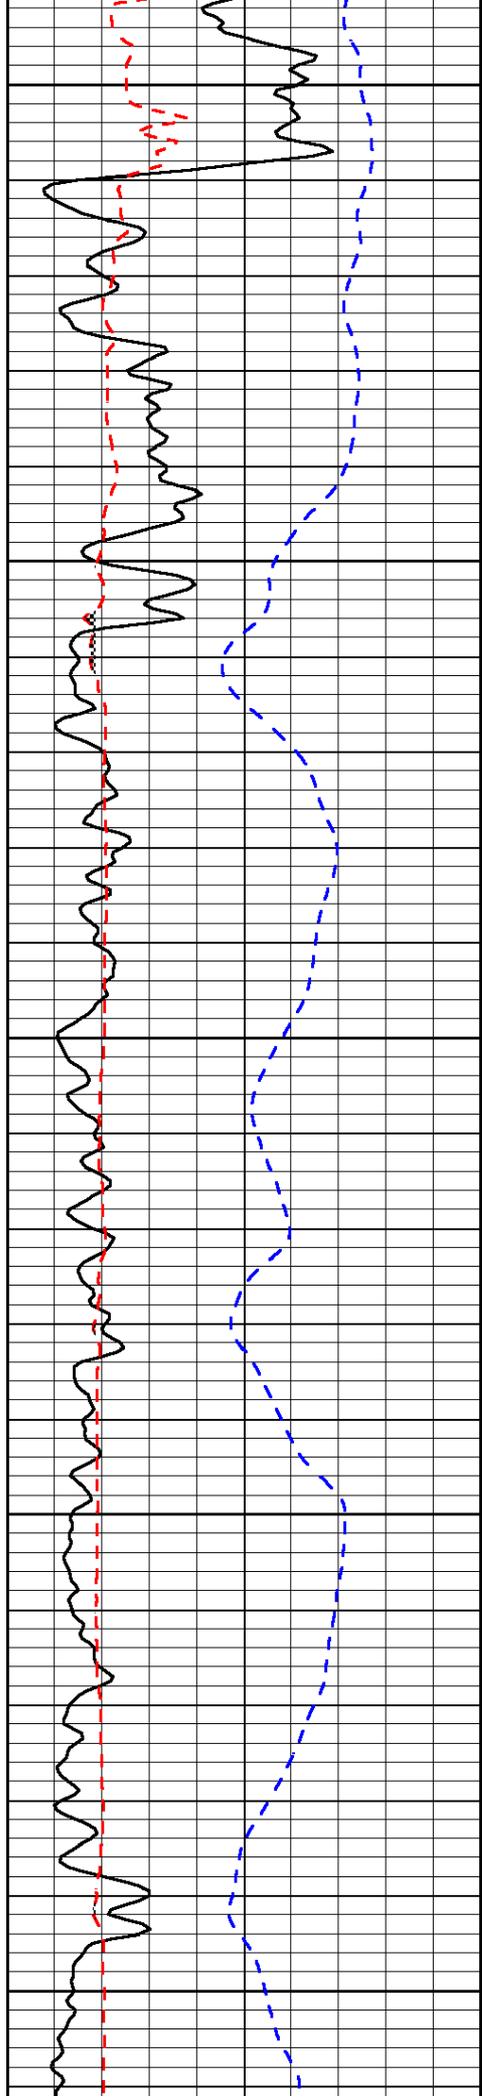

5200

-33

5250

-33

5300


-33


5350

-33

5400

-33

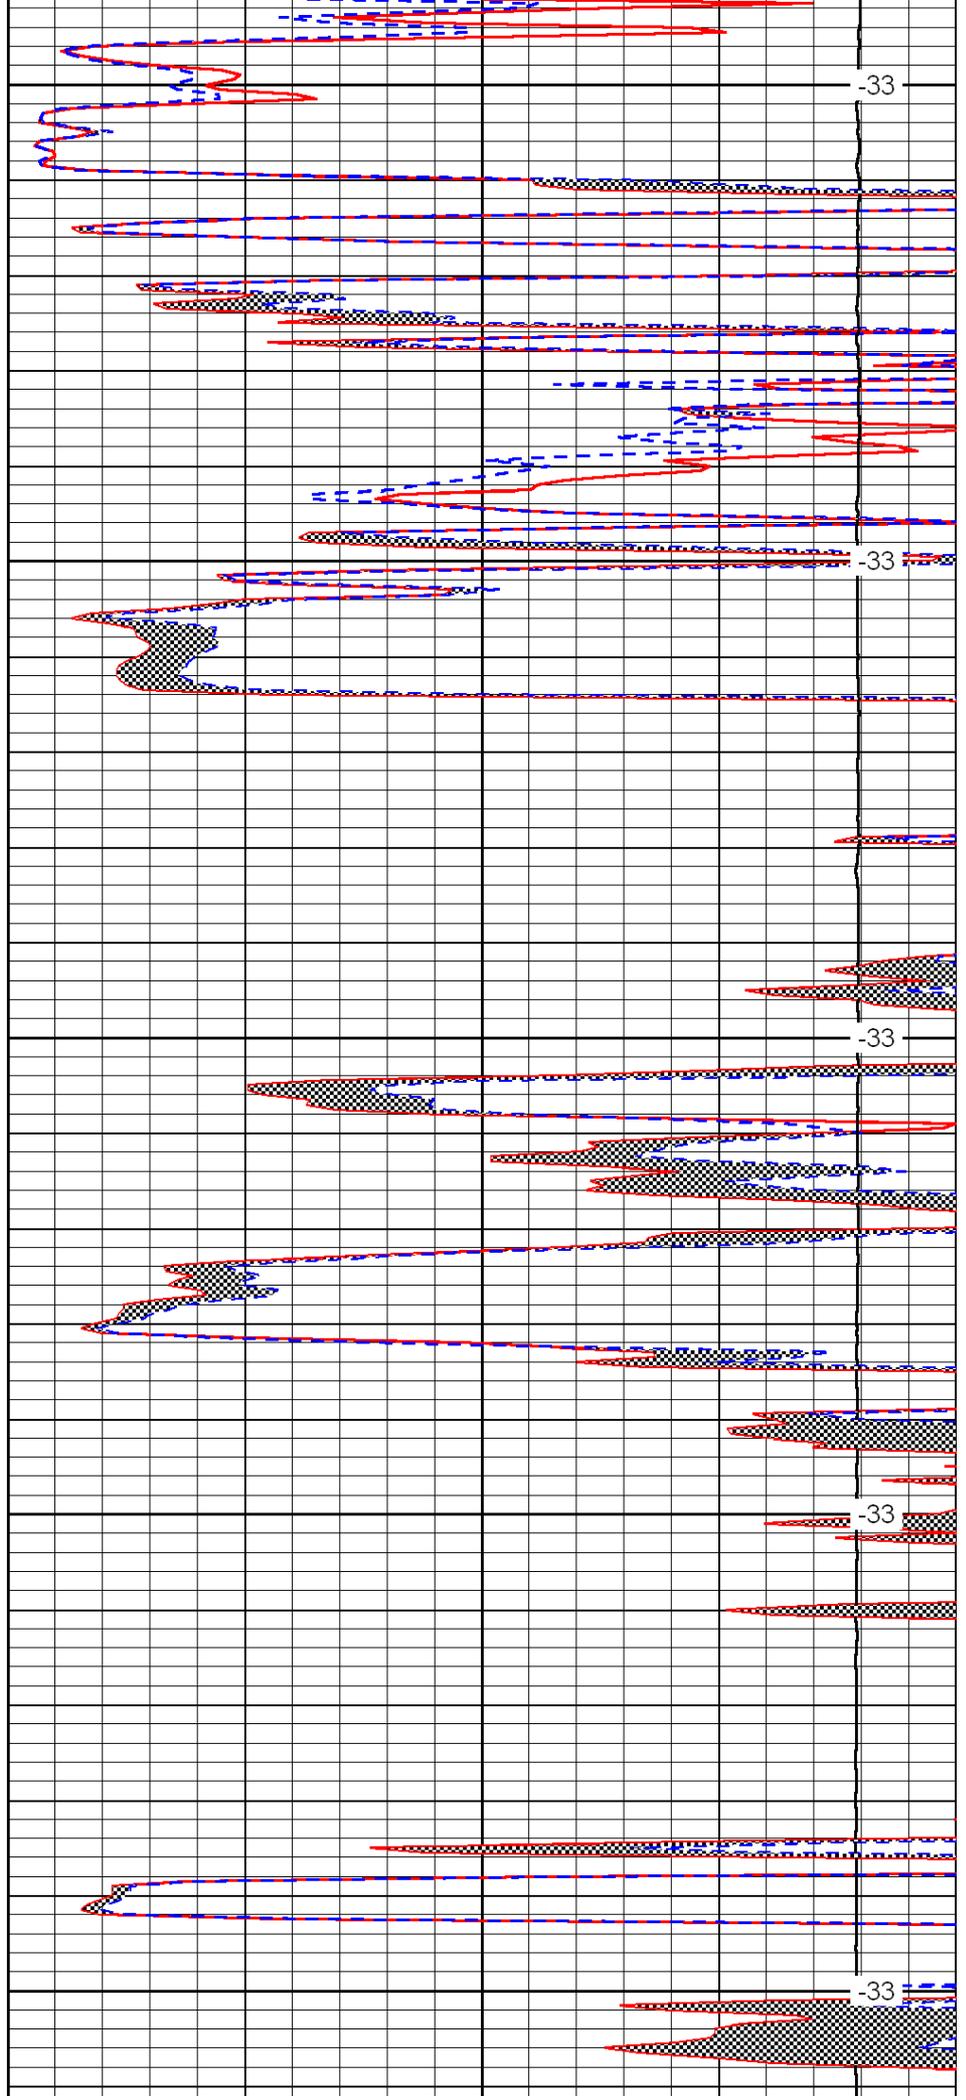

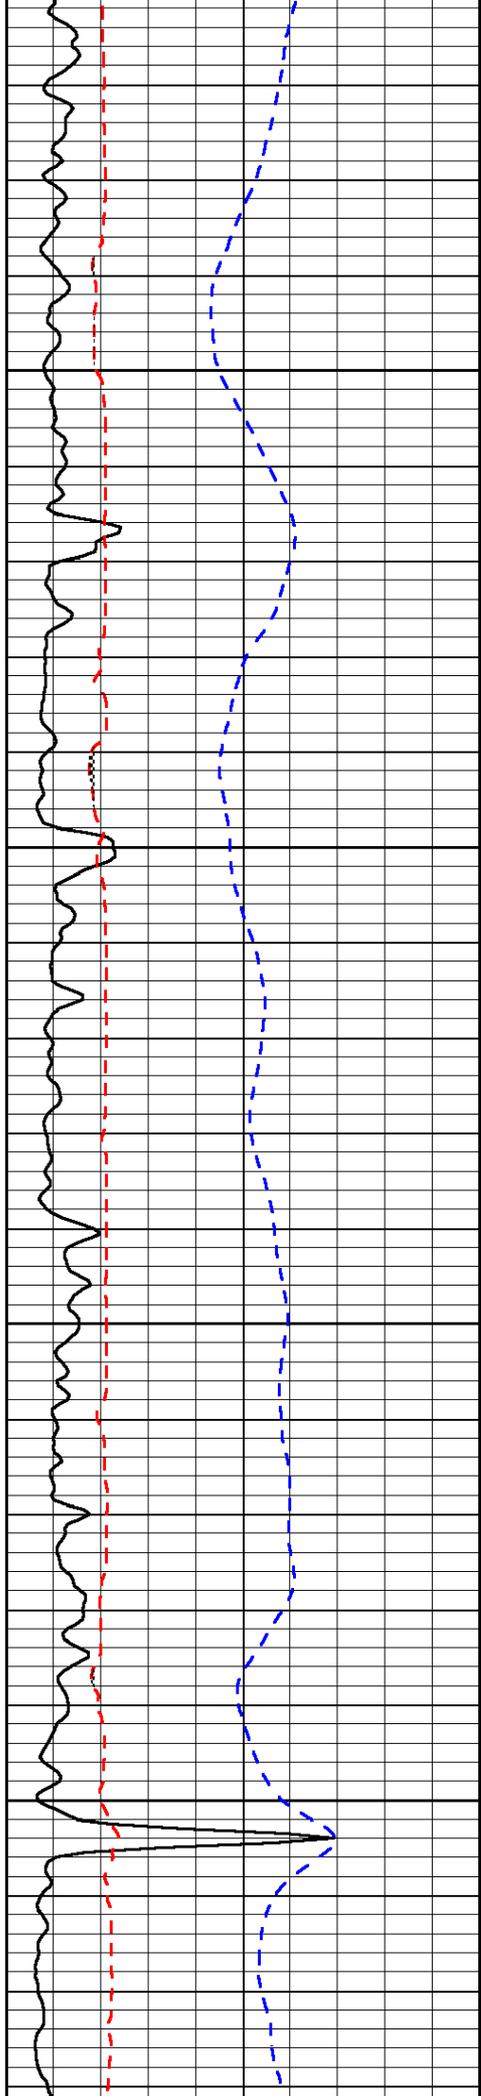


5450

5500

5550

5600

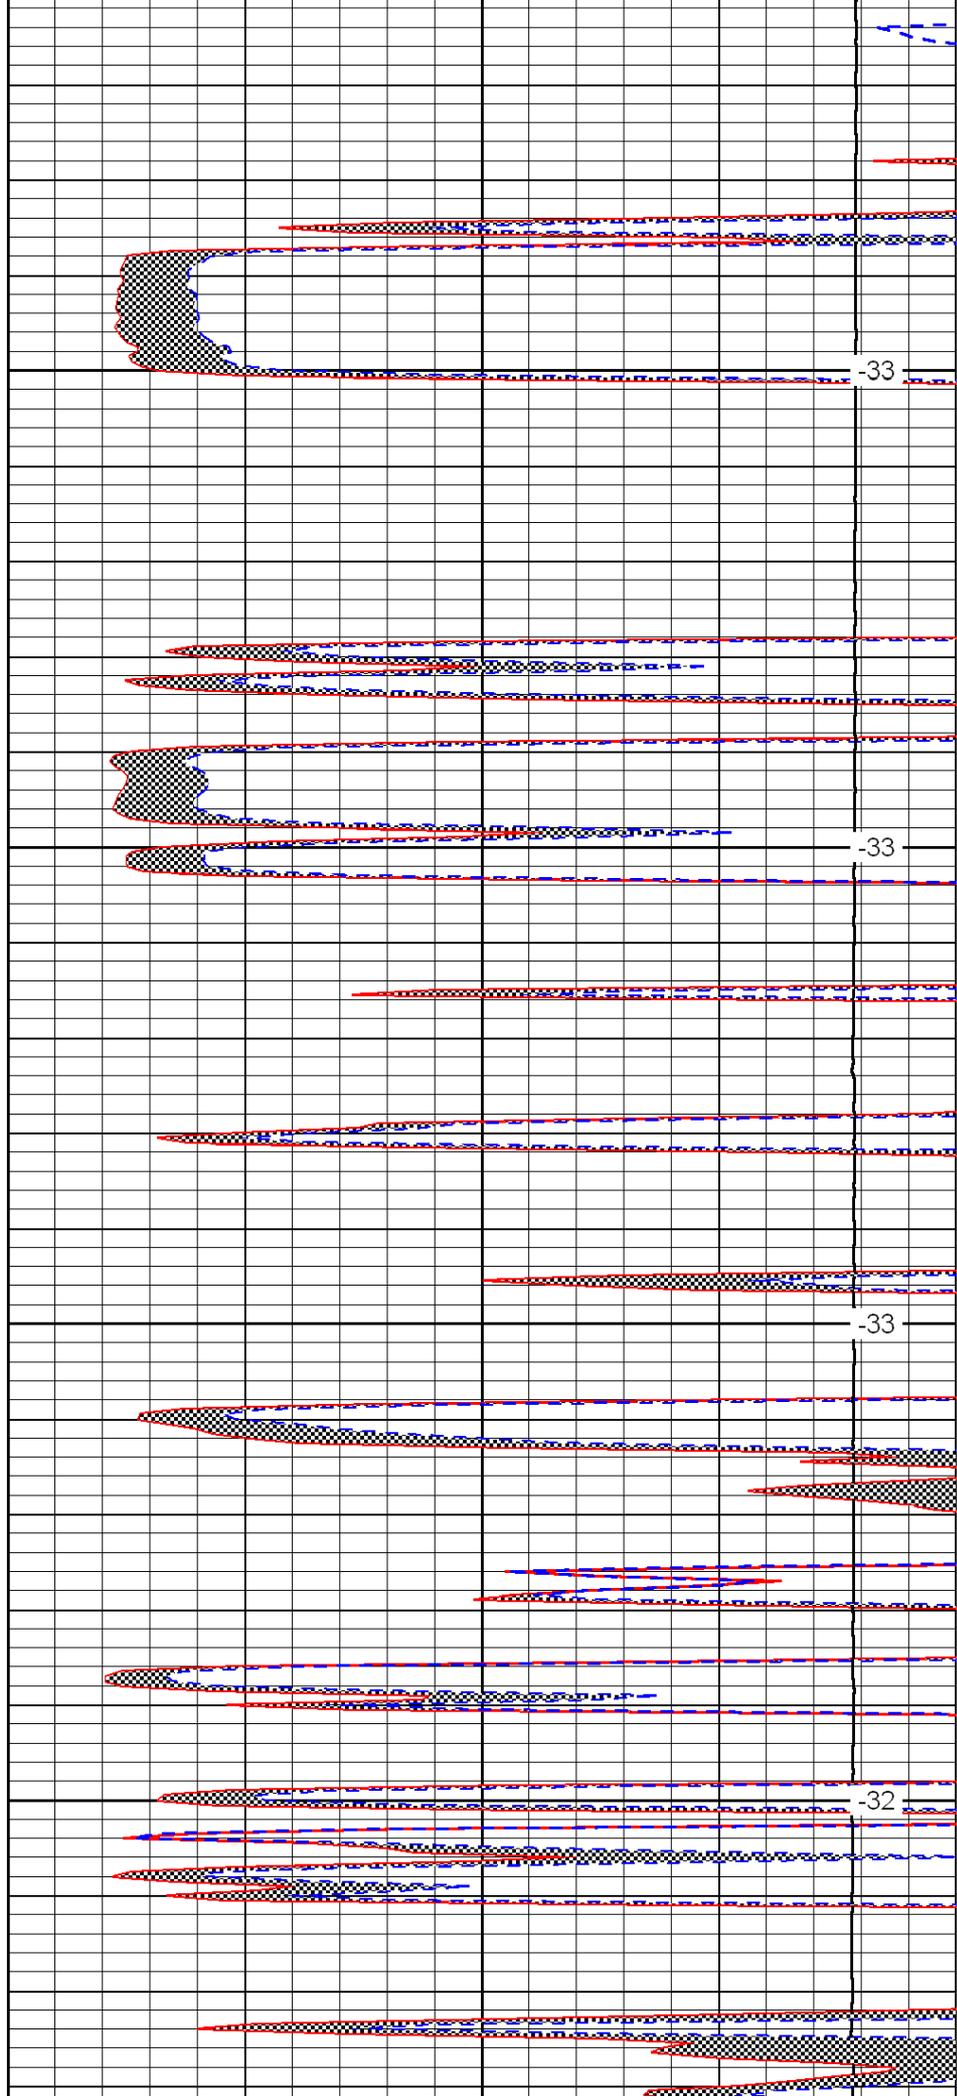


-33

-33

-33

-32

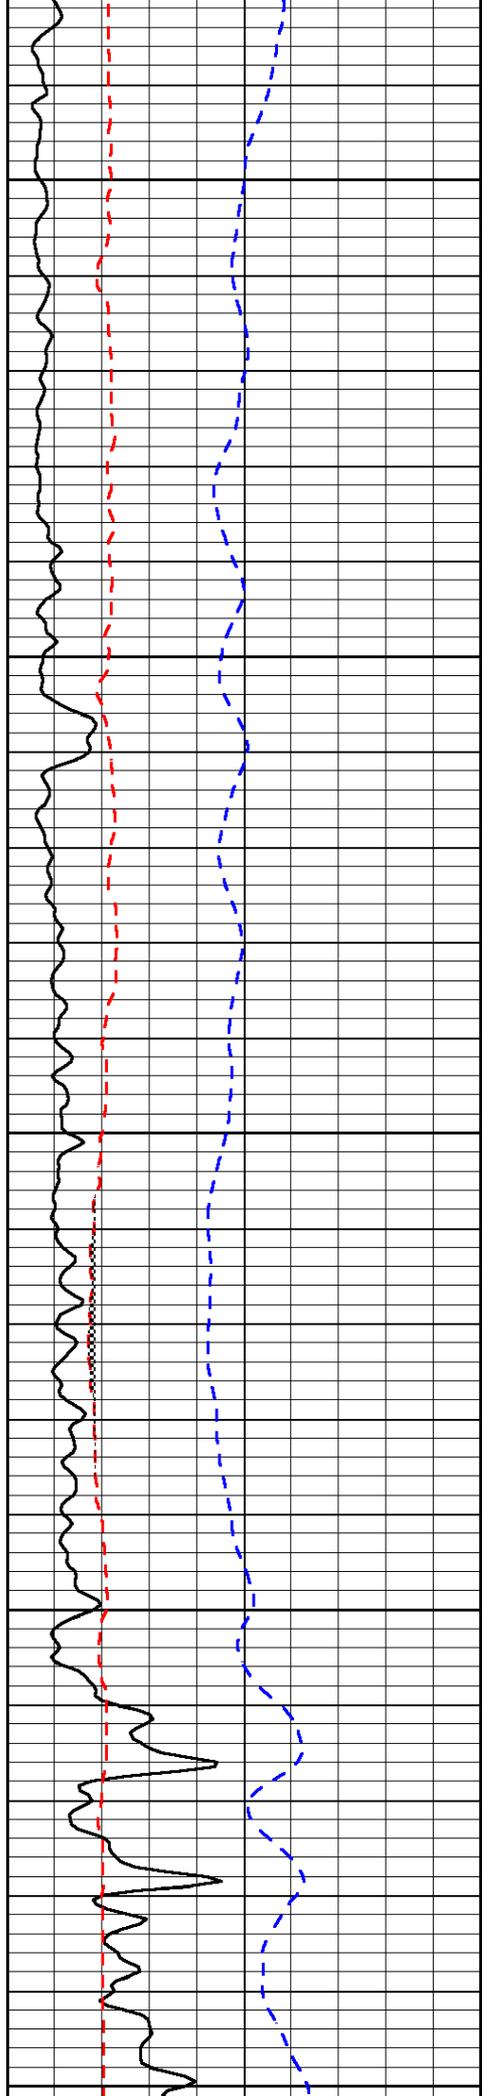


5650

5700

5750

5800

5850

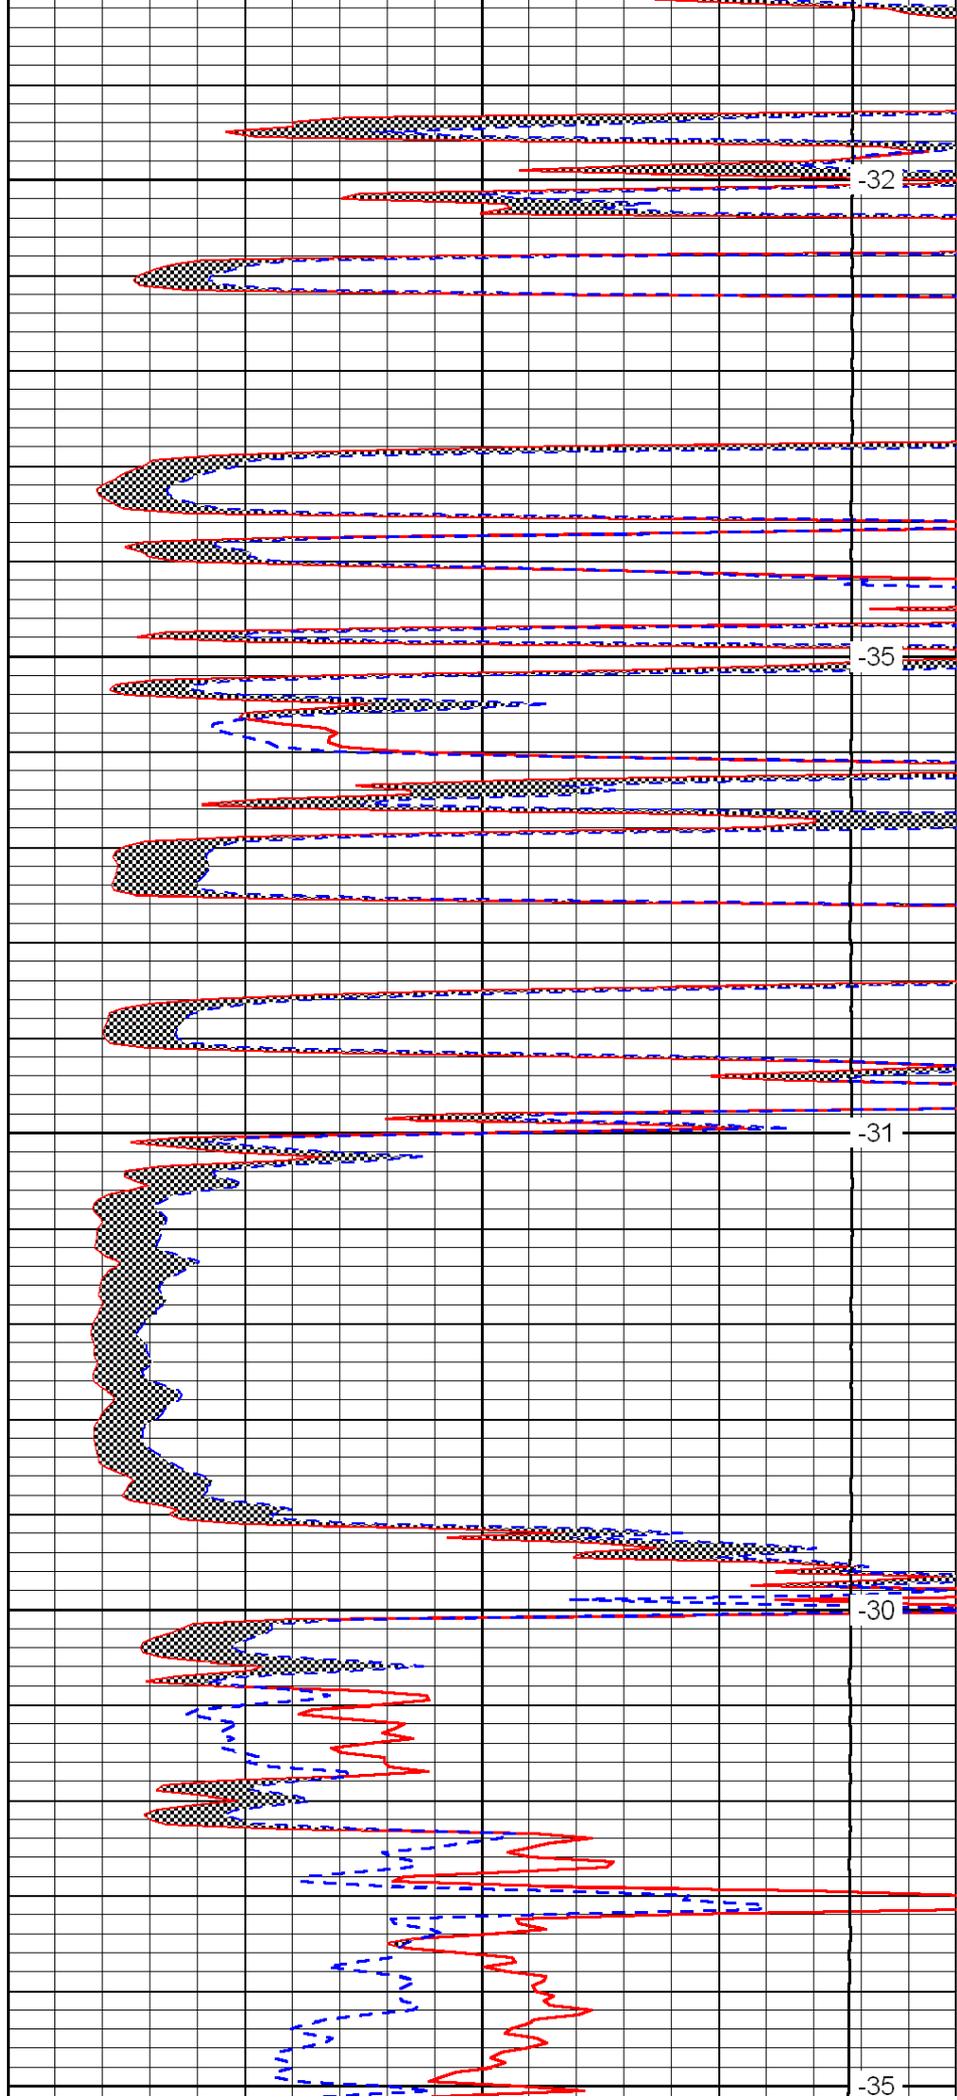


-32

-35

-31

-30

-35

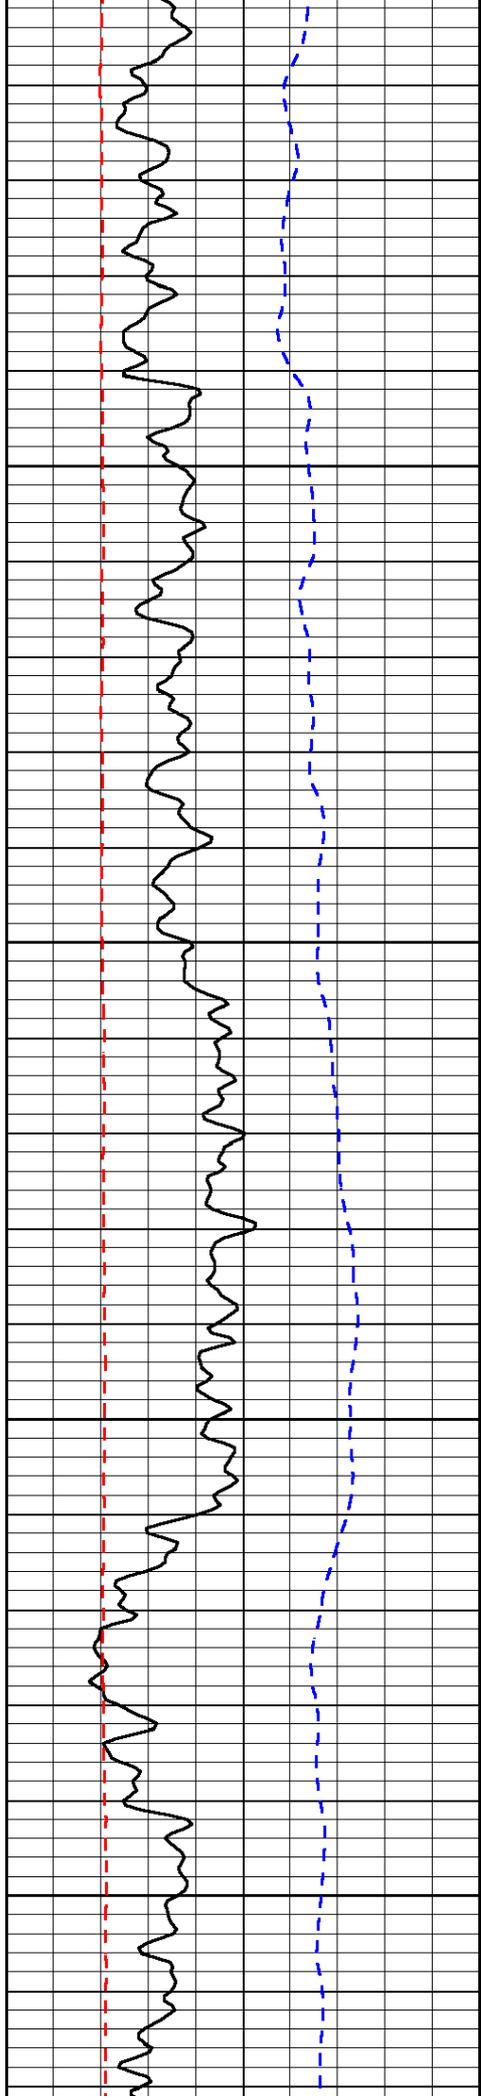


5900

5950

6000

6050

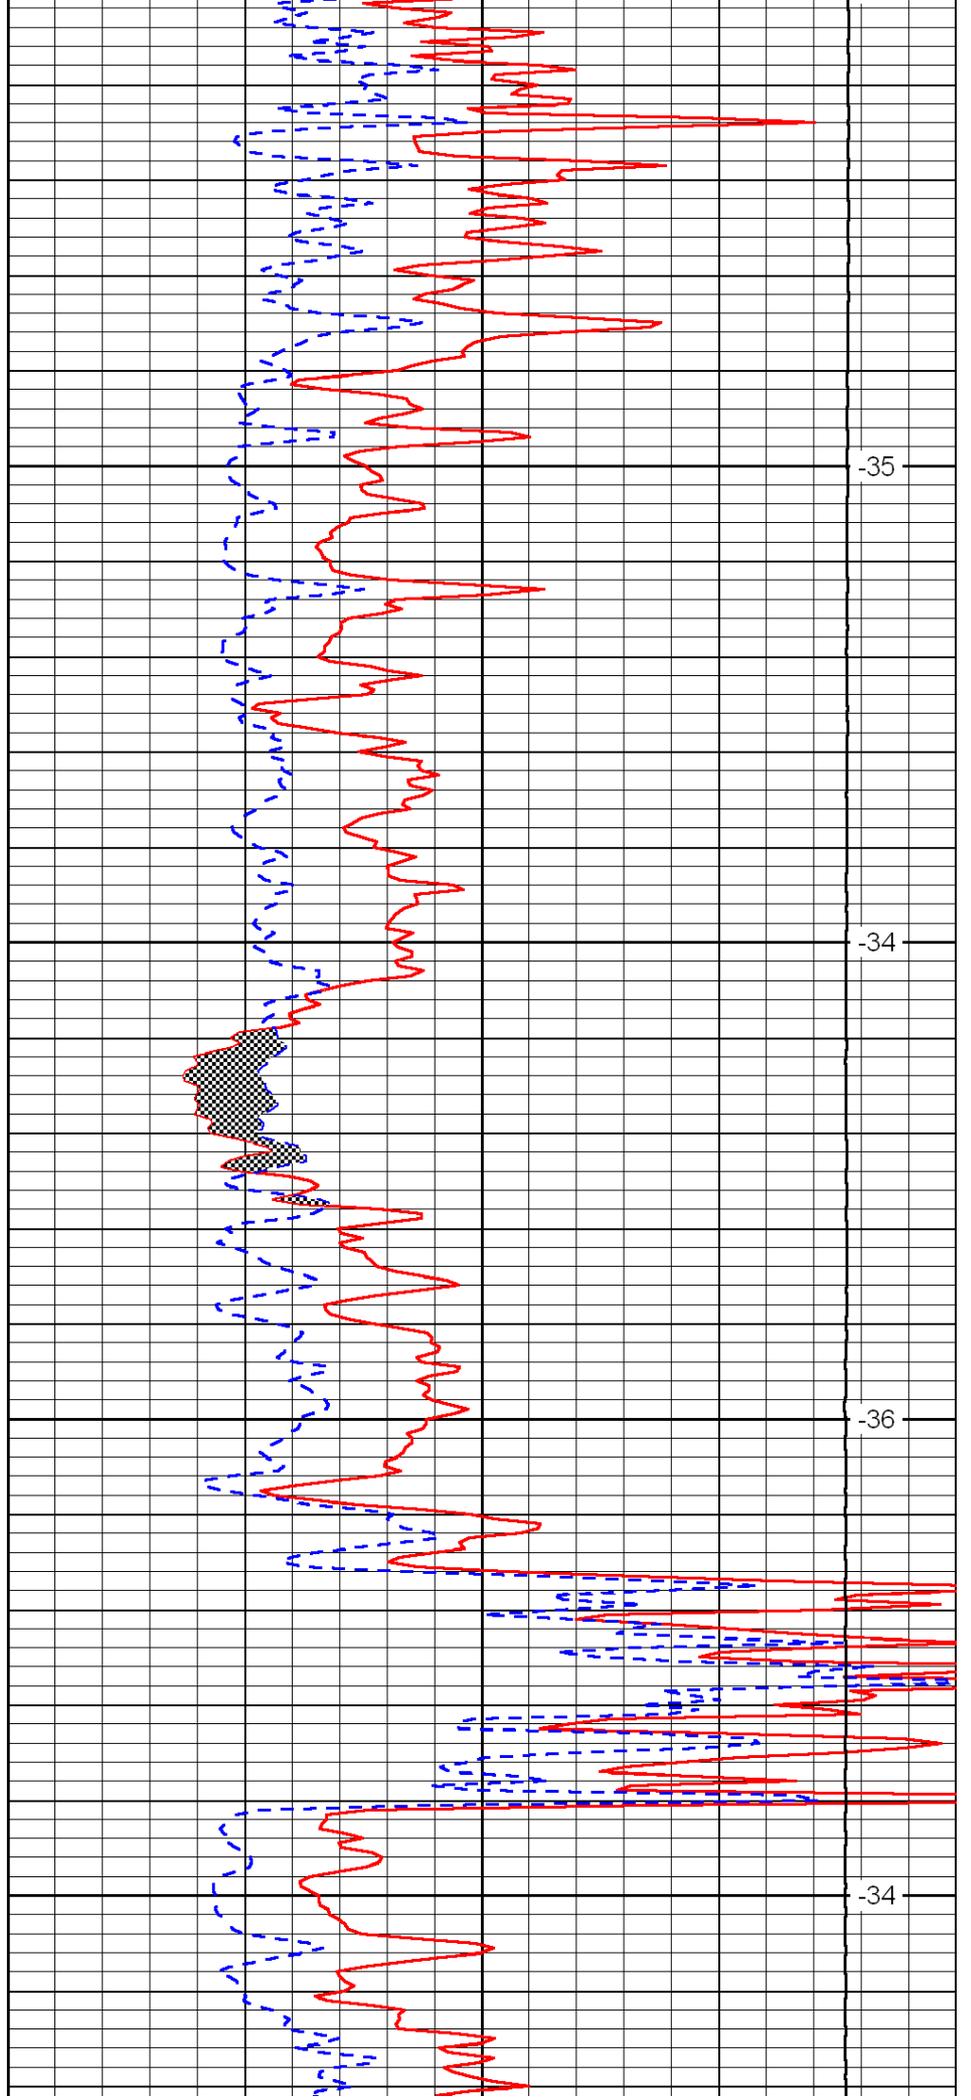


-35

-34

-36

-34

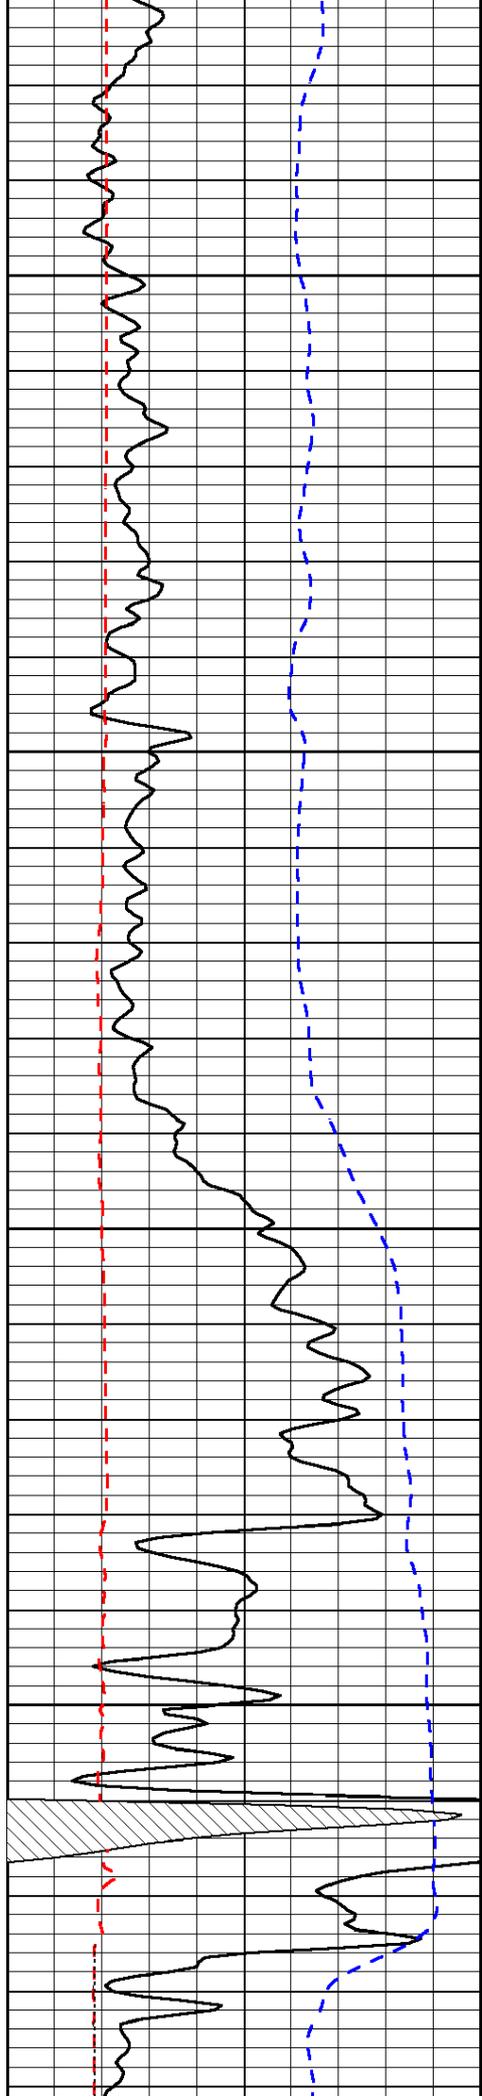

6100

6150

6200


6250



-34

-34

-30

-30

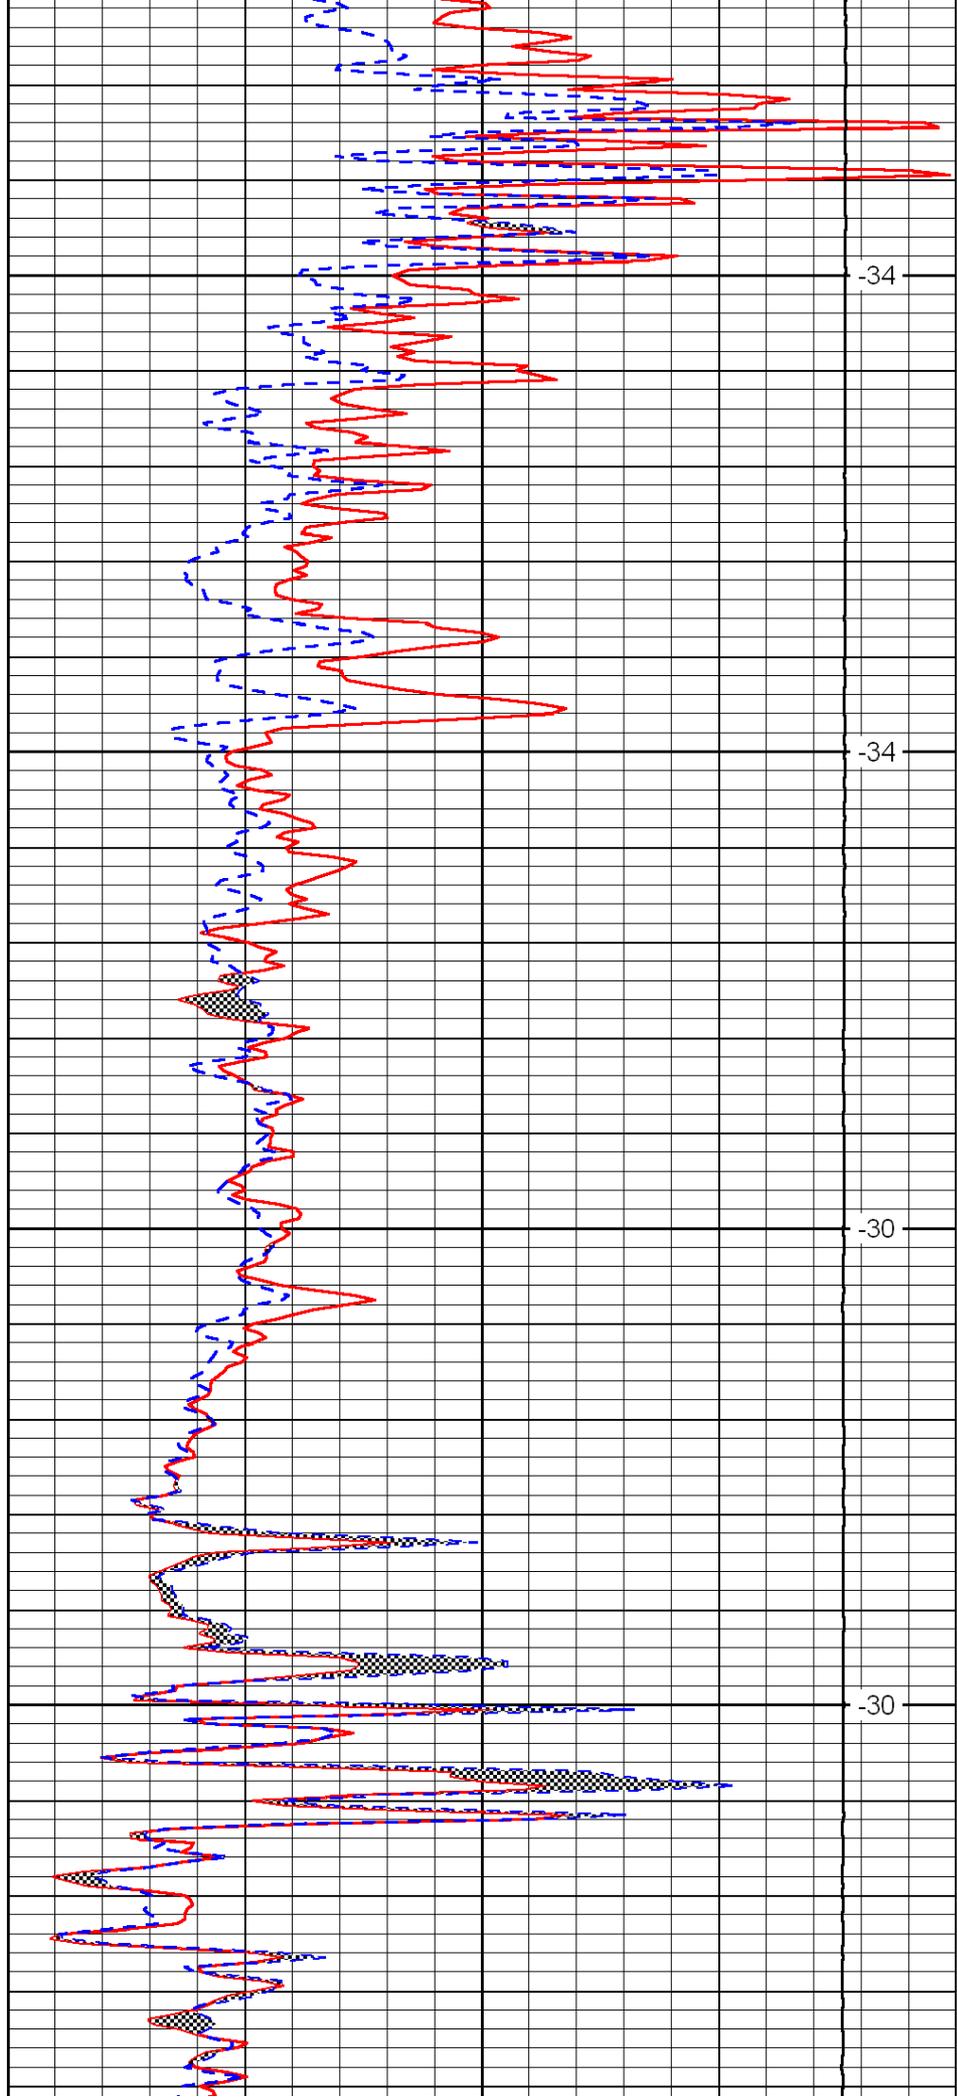

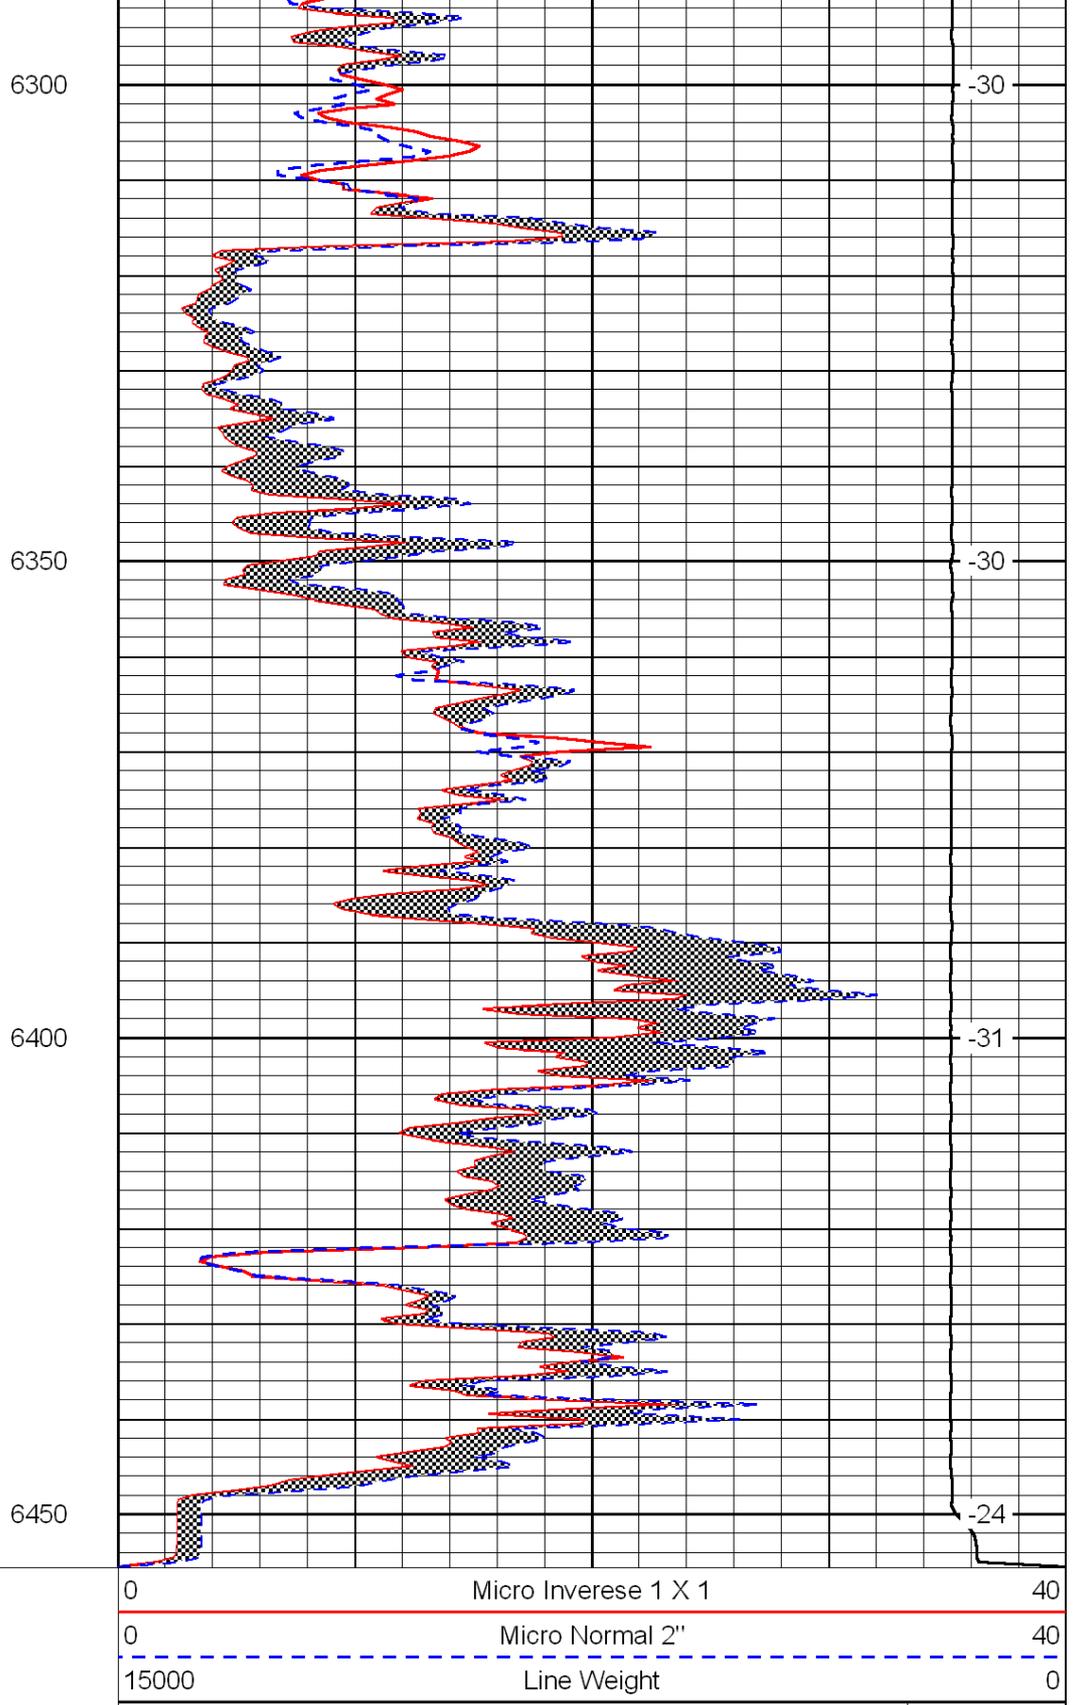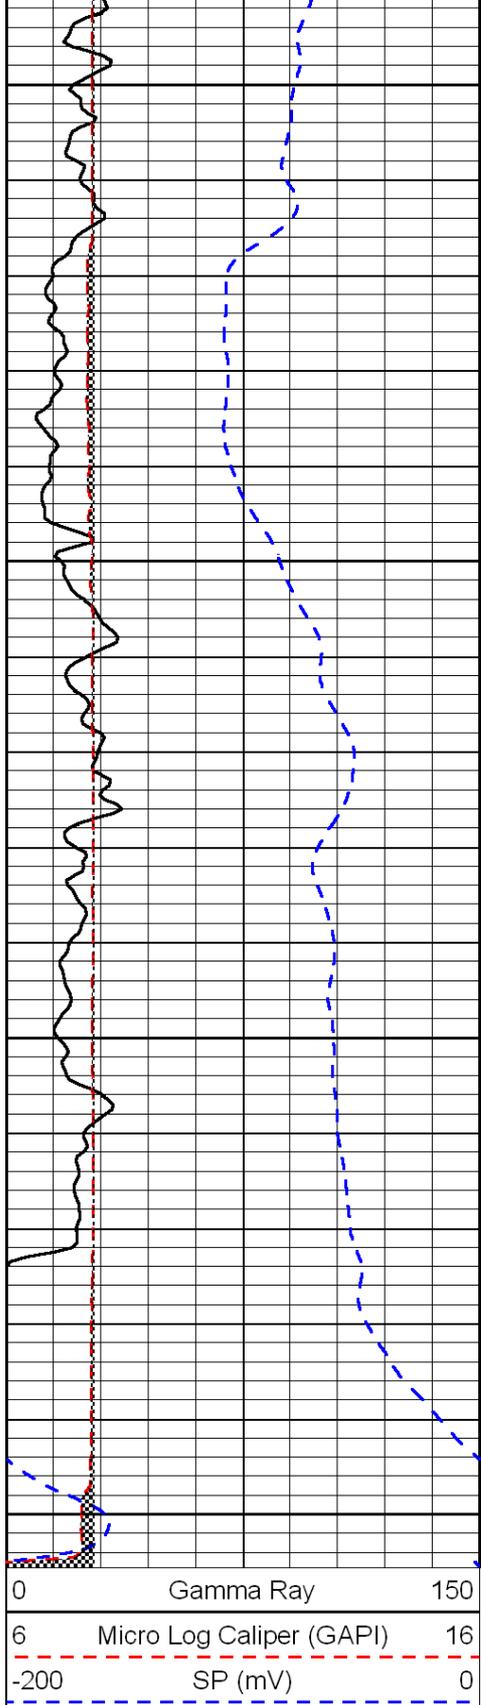

LSPD