



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No. 15-101-22,330-00-00		Company Mid-Continent Energy Operating Co.	
Well Brenner No.1-26		Location SW SE NW SW 1330' FSL & 970' FWL	
Field Wildcat		Other Services CNL/CDL DIL	
County Lane		State Kansas	
Sec: 26		Twp: 19S Rge: 27W	
Permanent Datum Ground Level		Elevation 2702	
Log Measured From Kelly Bushing		8 Ft. Above Perm. Datum	
Drilling Measured From Kelly Bushing		K.B. 2710 D.F. 2702 G.L. 2702	
Date	11/5/2011		
Run Number	Two		
Depth Driller	4702		
Depth Logger	4703		
Bottom Logged Interval	4702		
Top Log Interval	3800		
Casing Driller	8.625 @ 310		
Casing Logger	306		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	8.000		
Density / Viscosity	9.2 52		
pH / Fluid Loss	10.0 6.8		
Source of Sample	Flowline		
Rm @ Meas. Temp	.1 @ 64		
Rmf @ Meas. Temp	.08 @ 64		
Rmc @ Meas. Temp	.14 @ 64		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.05 @ 123		
Operating Rig Time	4 Hours		
Max Rec. Temp. F	123		
Equipment Number	17		
Location	Hays		
Recorded By	C. Desaire		
Witnessed By	Austin Garner		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


Thank you for using Log-Tech, Inc.
(785) 625-3858

Beeler, W to Turkey Red Rd,
7 S to 80 Rd,2 E, S Into

Charted by: _____		
Depth in Feet scaled 1:2.10		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

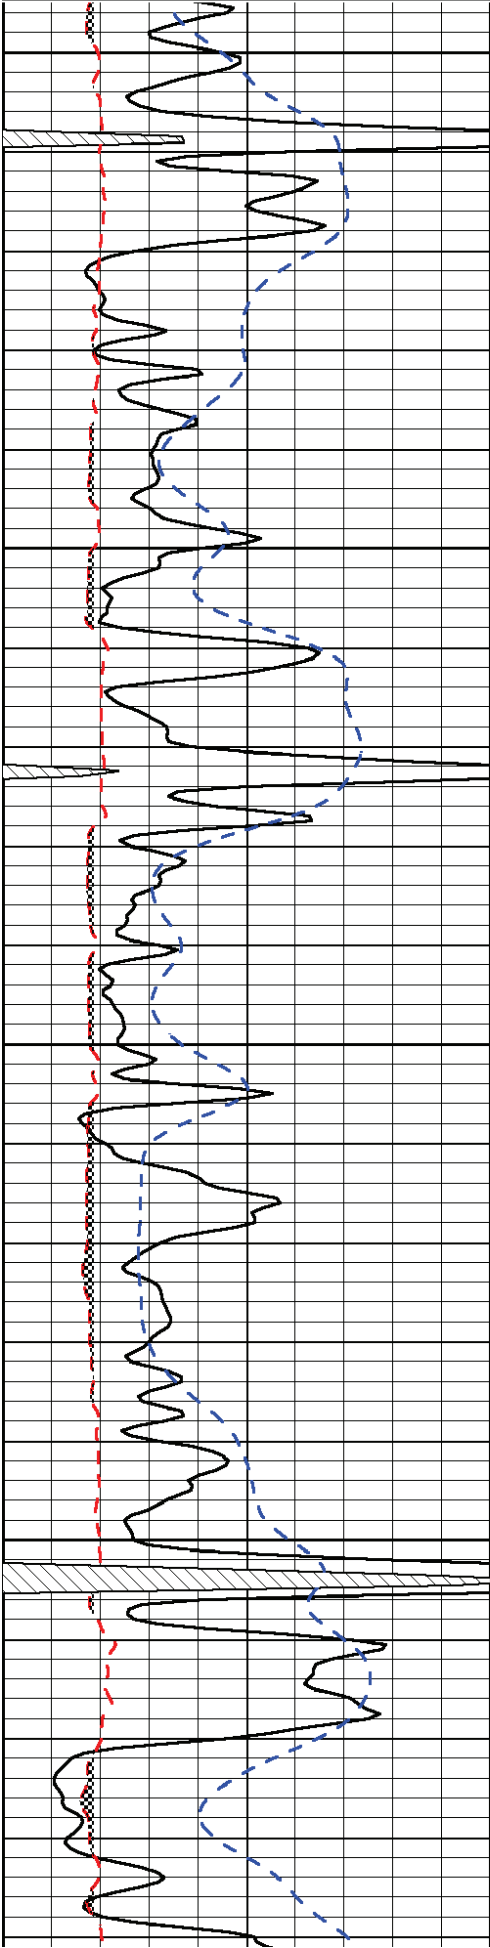


3800

3850

3900

3950

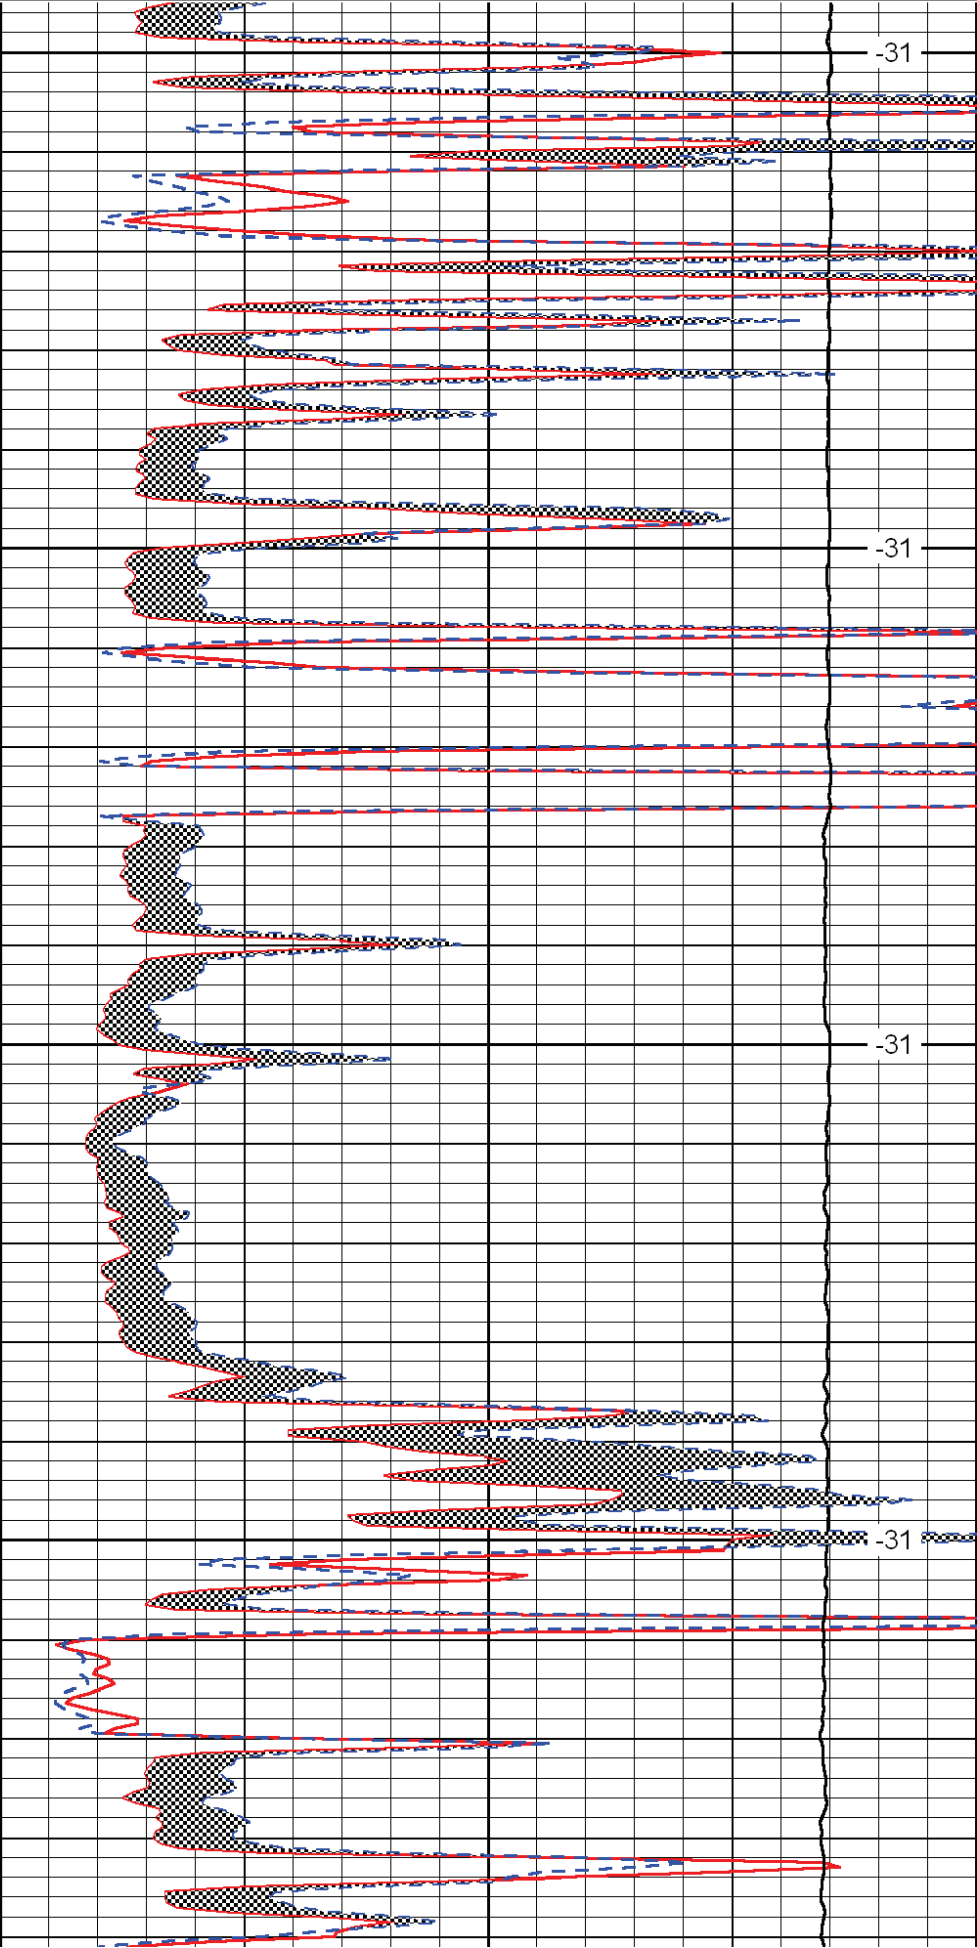


-31

-31

-31

-31

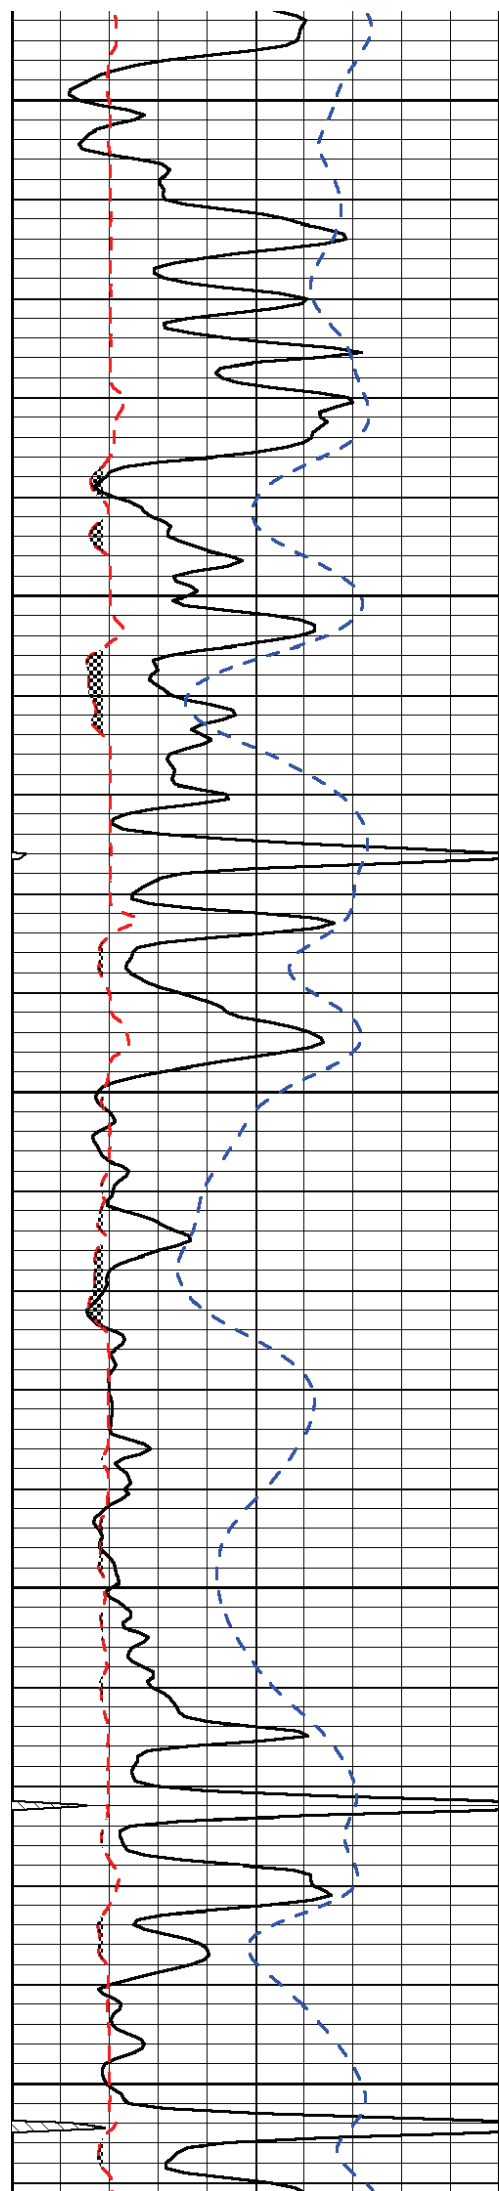


4000

4050

4100

4150

4200

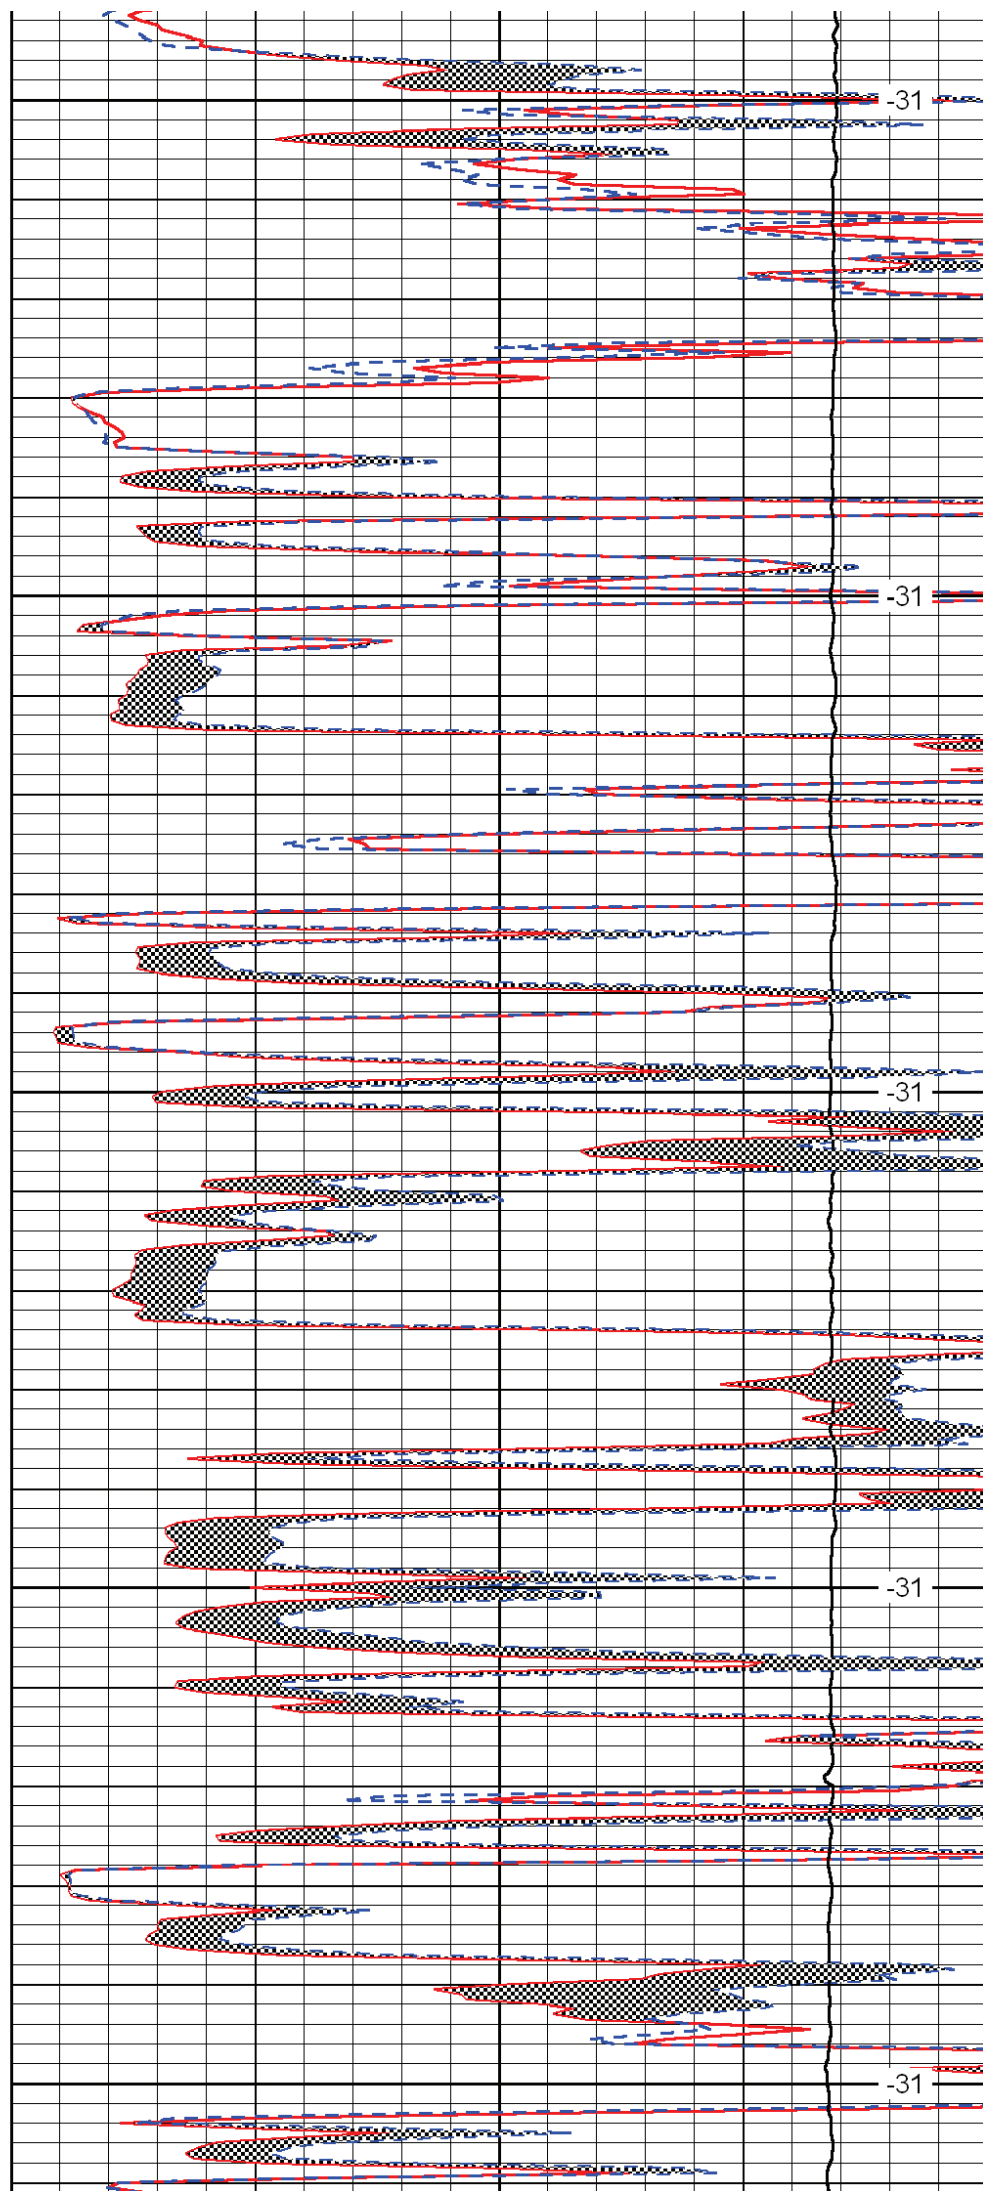


-31

-31

-31

-31

-31

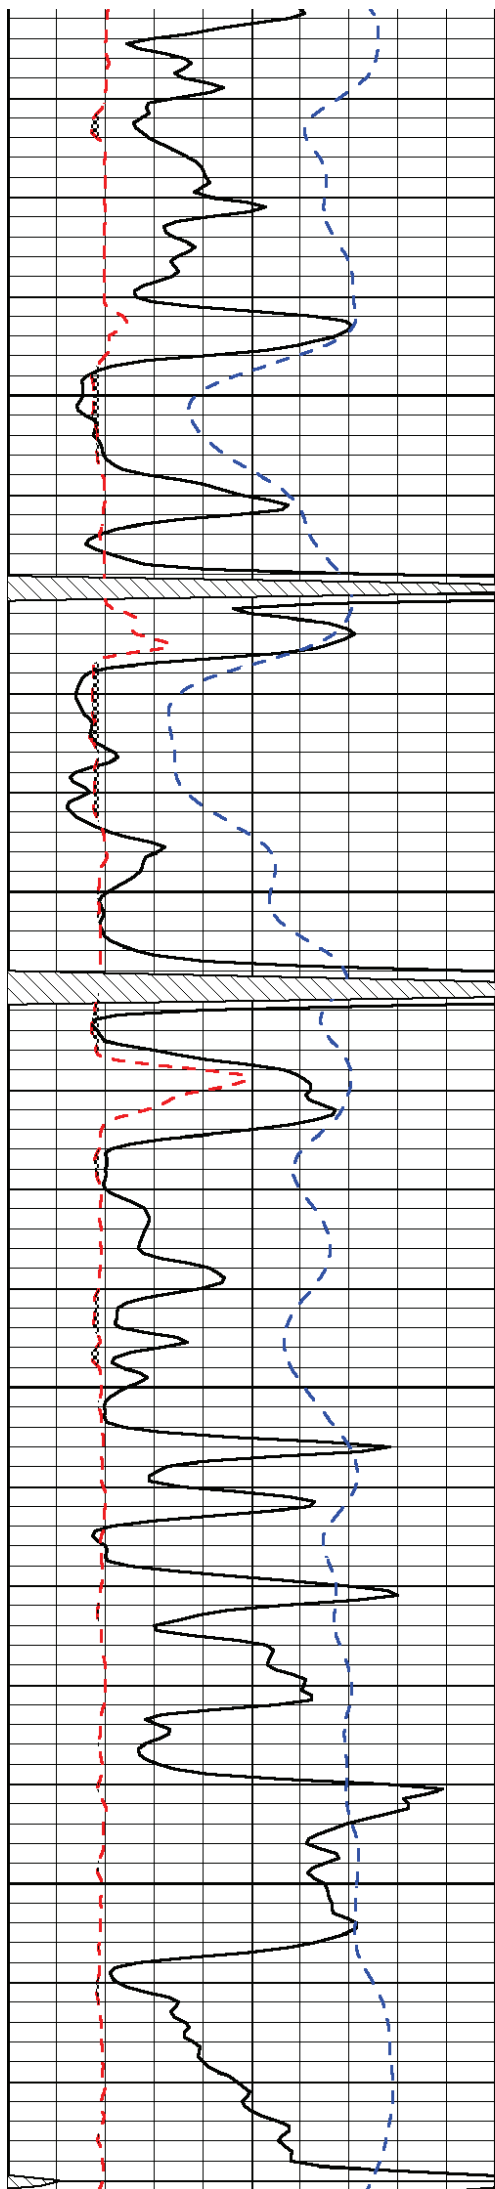


4250

4300

4350

4400

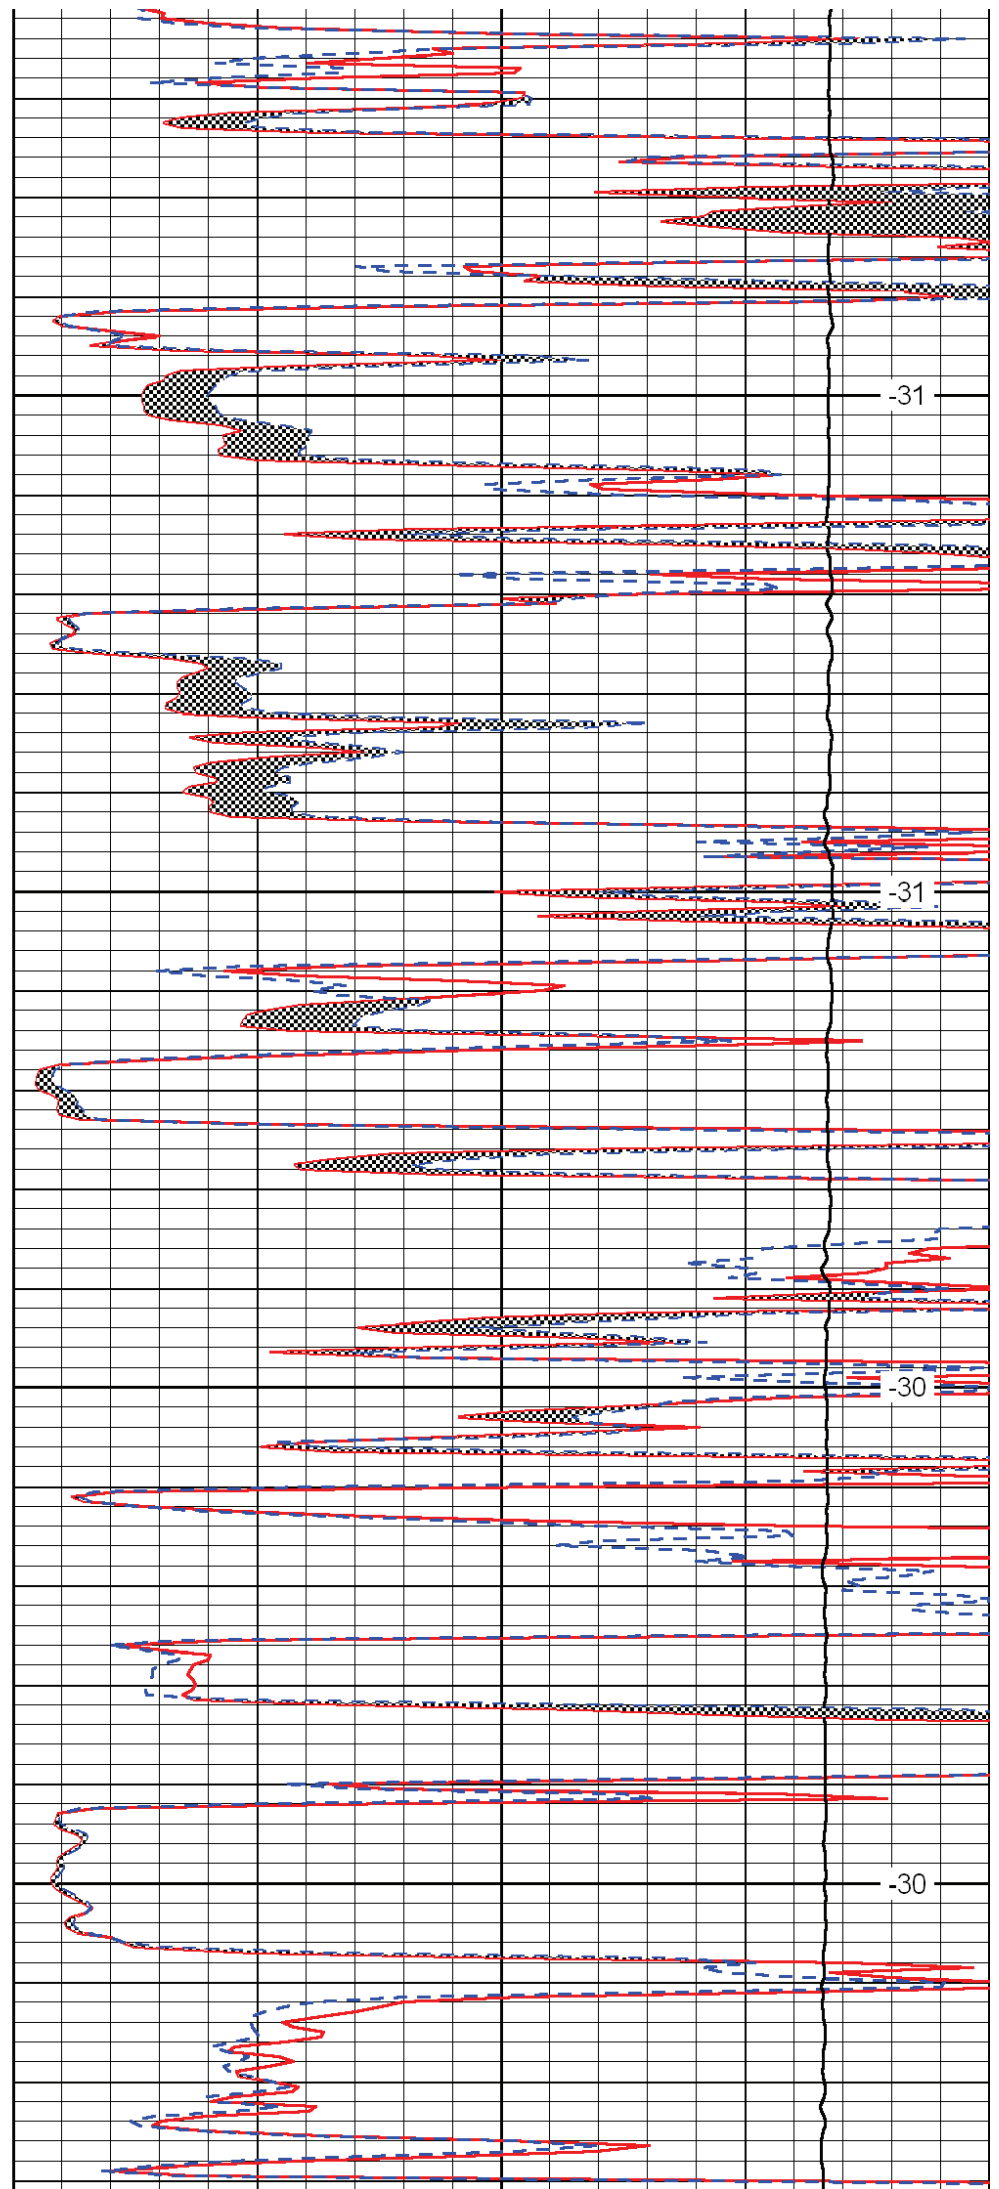


-31

-31

-30

-30

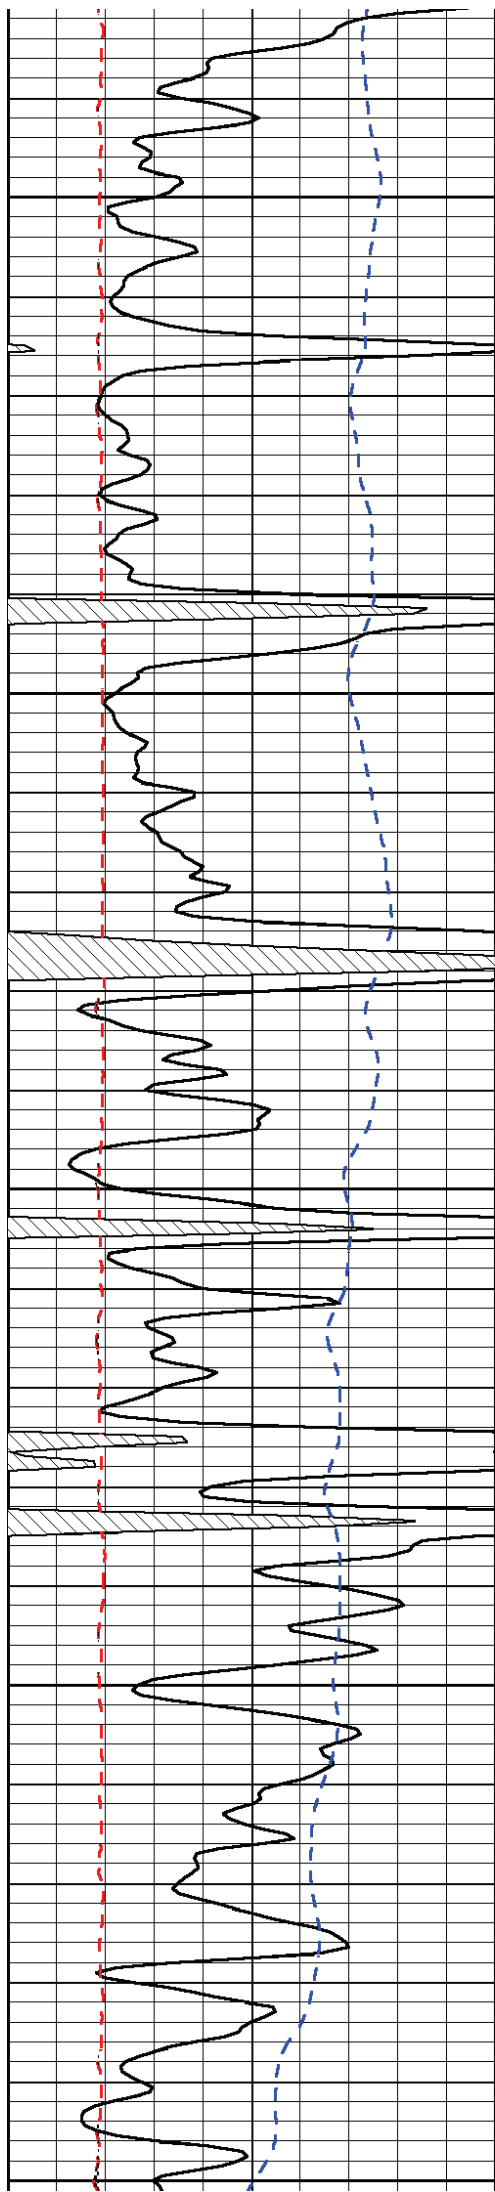


4450

4500

4550

4600

4650

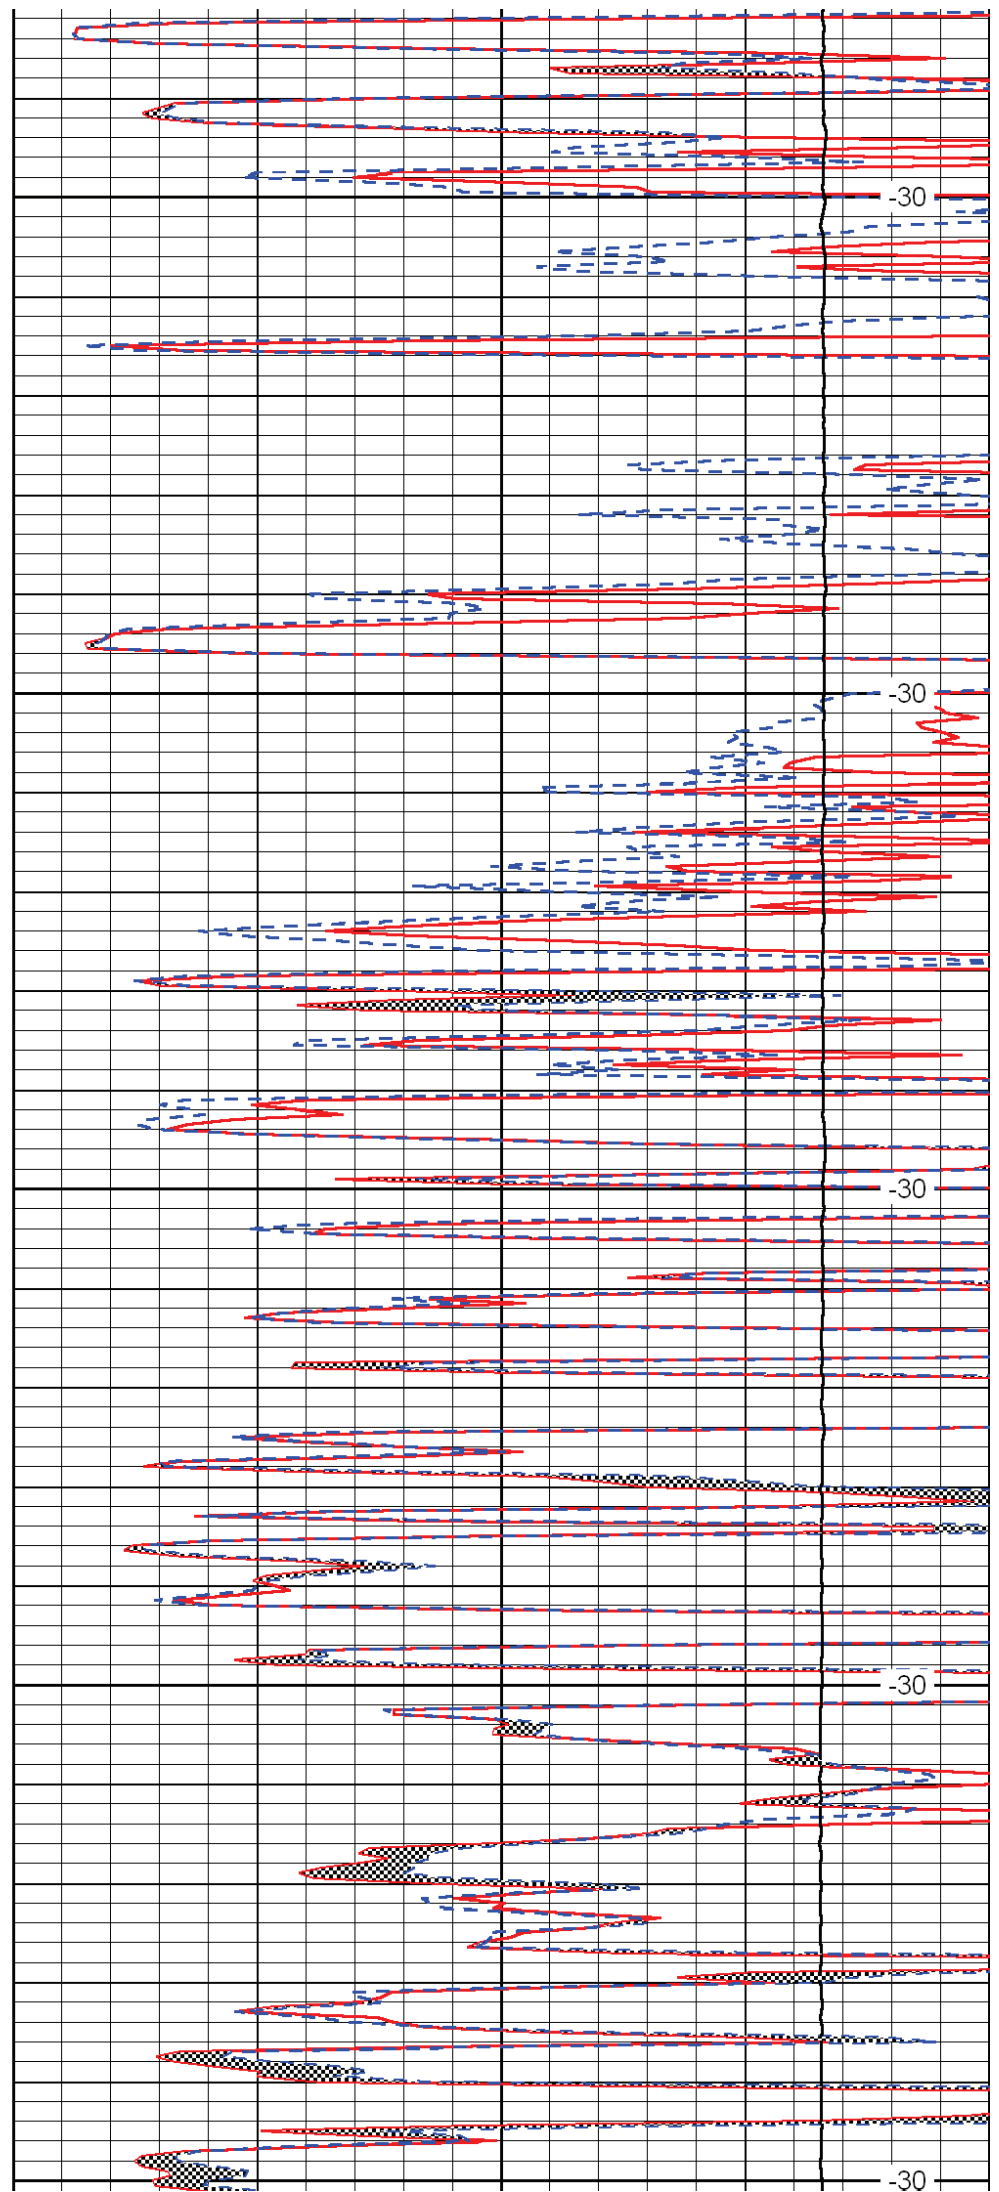


-30

-30

-30


-30

-30

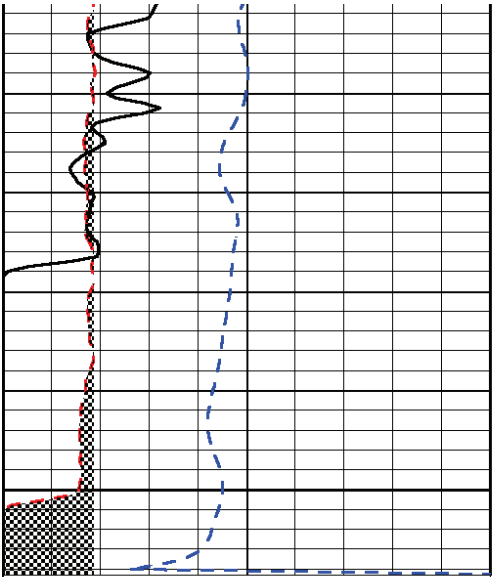

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

4700

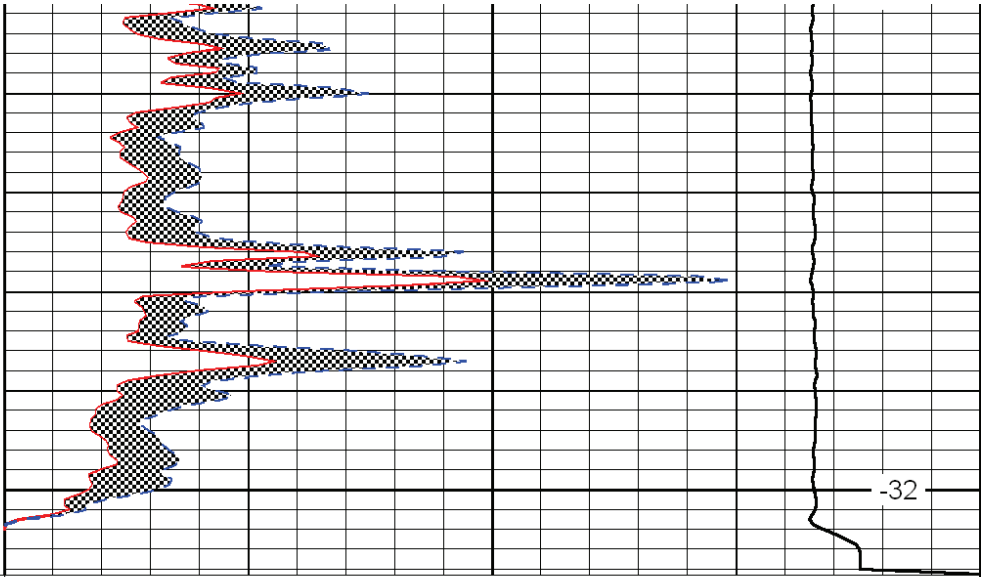

0	Micro Inverse 1 X 1	40
0	Micro Normal 2''	40
15000	Line Weight	0

-32

LSPD