



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-101-22,316-00-00

Company Larson Operating Company

Well McWhirter "E" No. 1-3

Field Wildcat

County Lane State Kansas

Location 330' FSL & 1504' FEL

Sec: 3 Twp: 18 S Rge: 28 W

Permanent Datum Ground Level Elevation 2721

Log Measured From Kelly Bushing 7 Ft. Above Perm. Datum

Drilling Measured From Kelly Bushing

Other Services
CNL/CDL
DIL

Elevation
K.B. 2728
D.F.
G.L. 2721

Date 10/28/2011

Run Number Two

Depth Driller 4660

Depth Logger 4661

Bottom Logged Interval 4660

Top Log Interval 3600

Casing Driller 8.625 @ 255

Casing Logger 255

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity, ppm CL 3100

Density / Viscosity 9.5 67

pH / Fluid Loss 10.0 8.0

Source of Sample Flowline

Rm @ Meas. Temp .7 @ 65

Rmf @ Meas. Temp .525 @ 65

Rmc @ Meas. Temp .94 @ 65

Source of Rmf / Rmc Charts

Rm @ BHT .37 @ 125

Operating Rig Time 4 1/2 Hours

Max Rec. Temp. F 125

Equipment Number 91

Location Hays

Recorded By D.Kerr

Witnessed By Bob Lewellyn Tom Larson

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Dighton KS, 3 East to Newton RD,
2 North to 170 RD, 1/4 East,
East Into (Stay Left)

Database File: larsen_mcwhirter_102811hd.db
Dataset Pathname: DIL/larstk
Presentation Format: micro
Dataset Creation: Fri Oct 28 08:45:23 2011
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	MCAL (GAPI)	16
2.875	Mud Cake (GAPI)	7.875
-200	SP	0

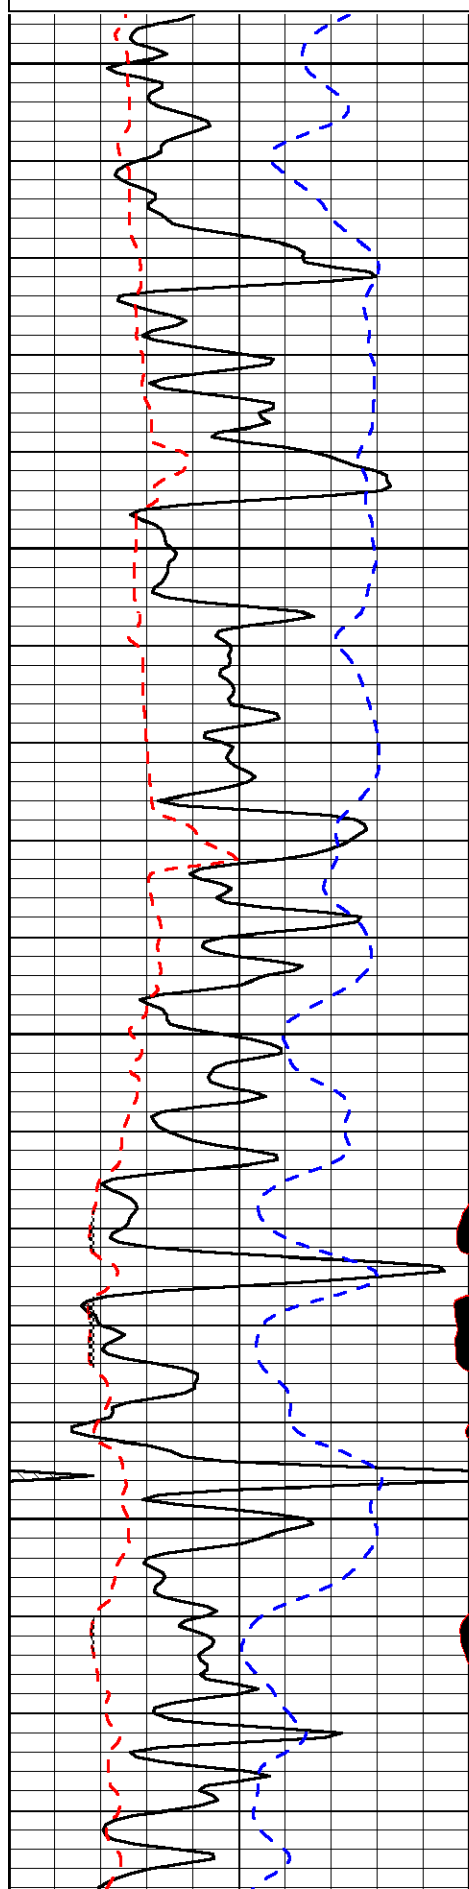


3600


3650

3700

3750

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
10000	Line Weight	0
		LSPD

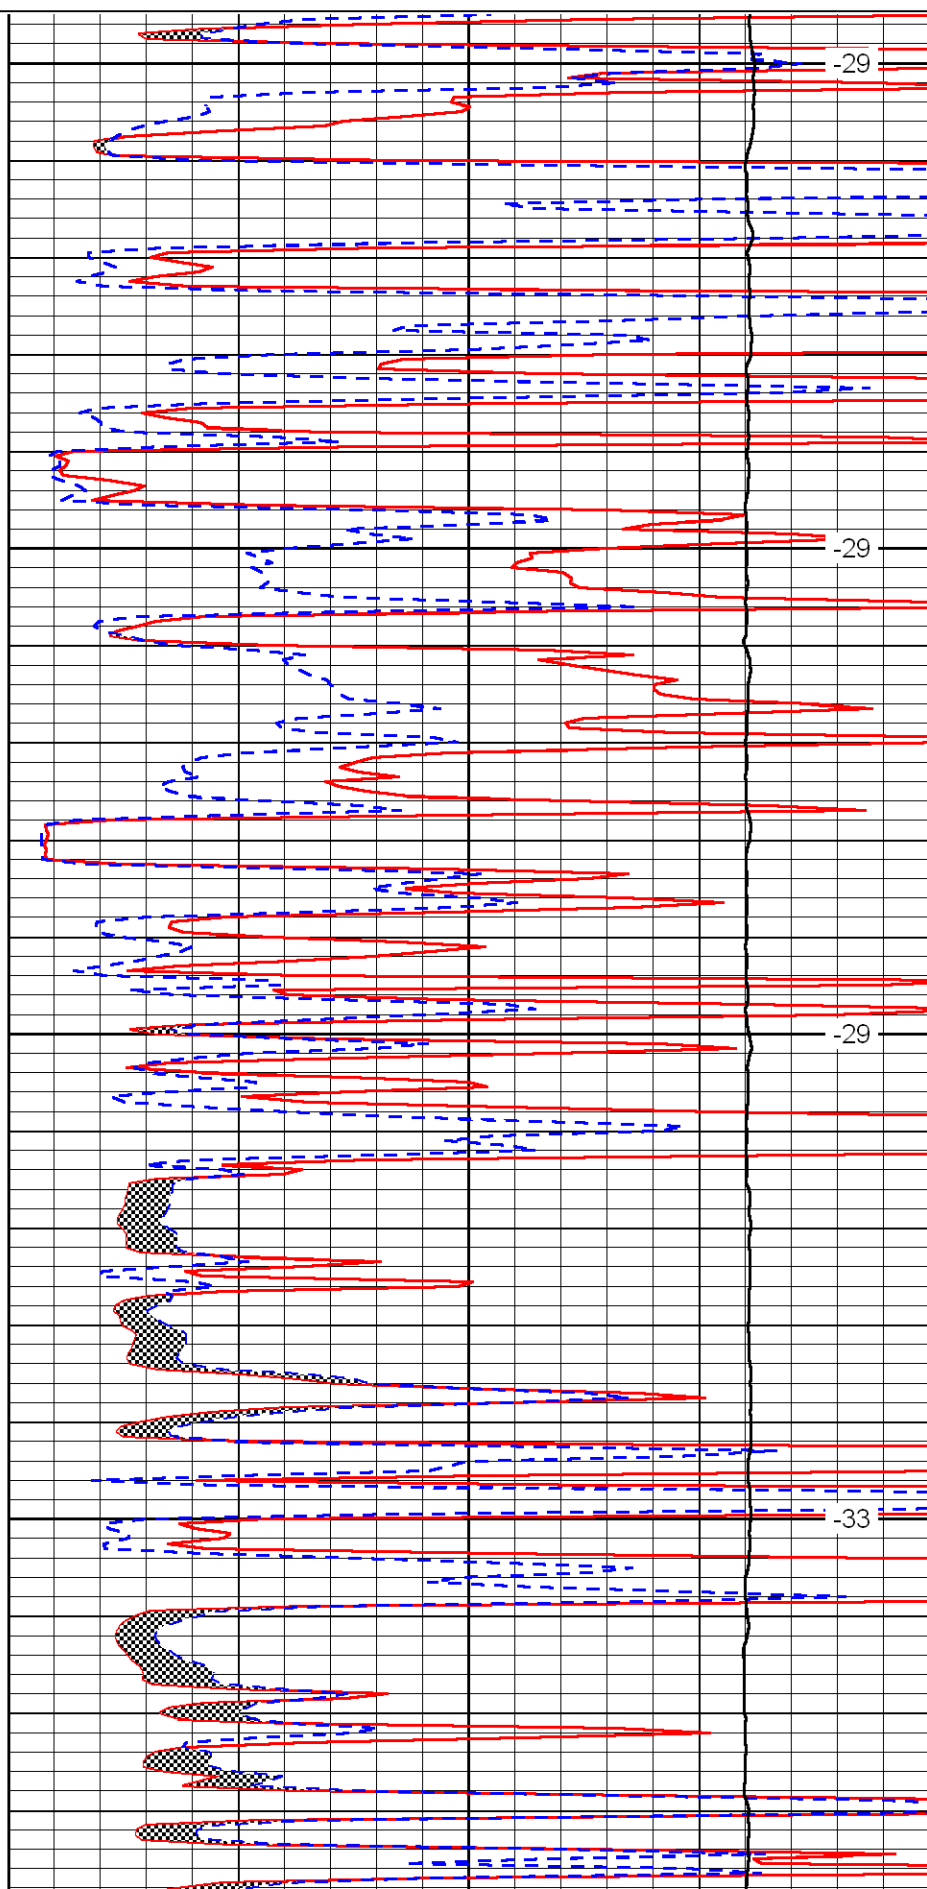

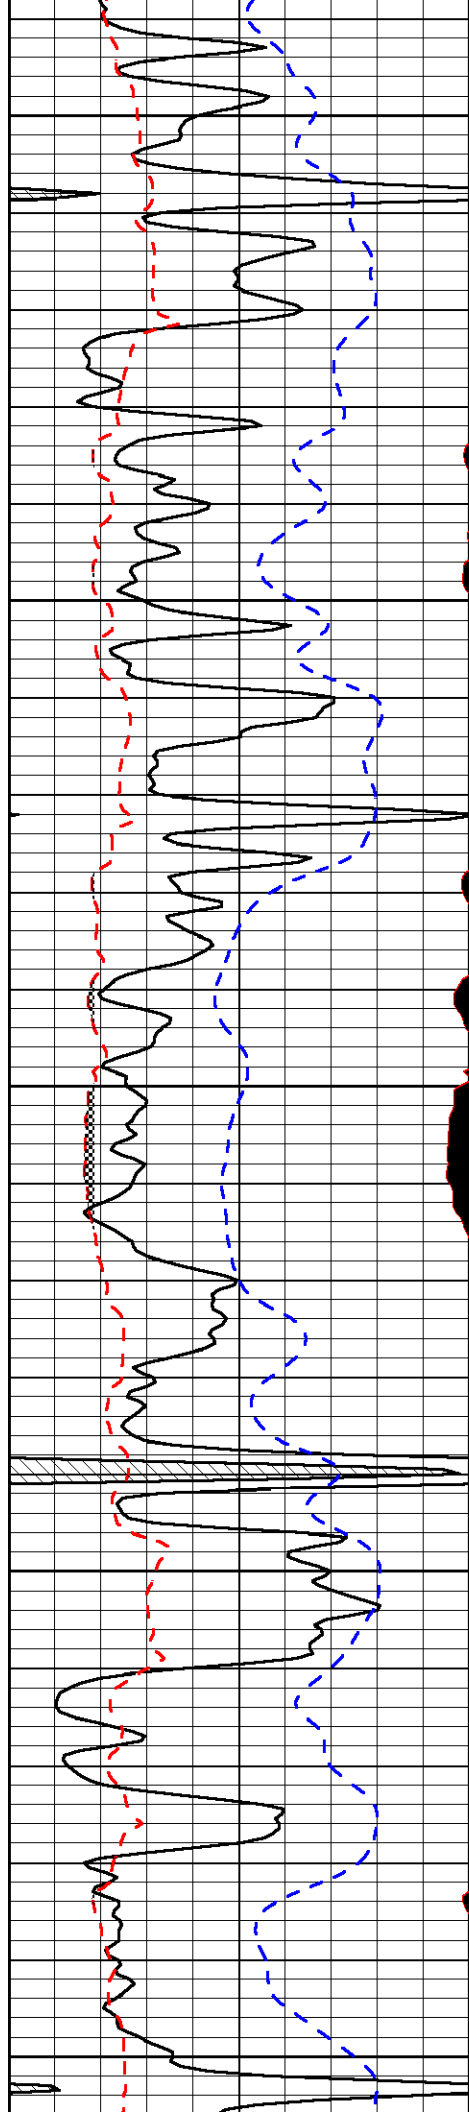


3800

3850

3900

3950

4000

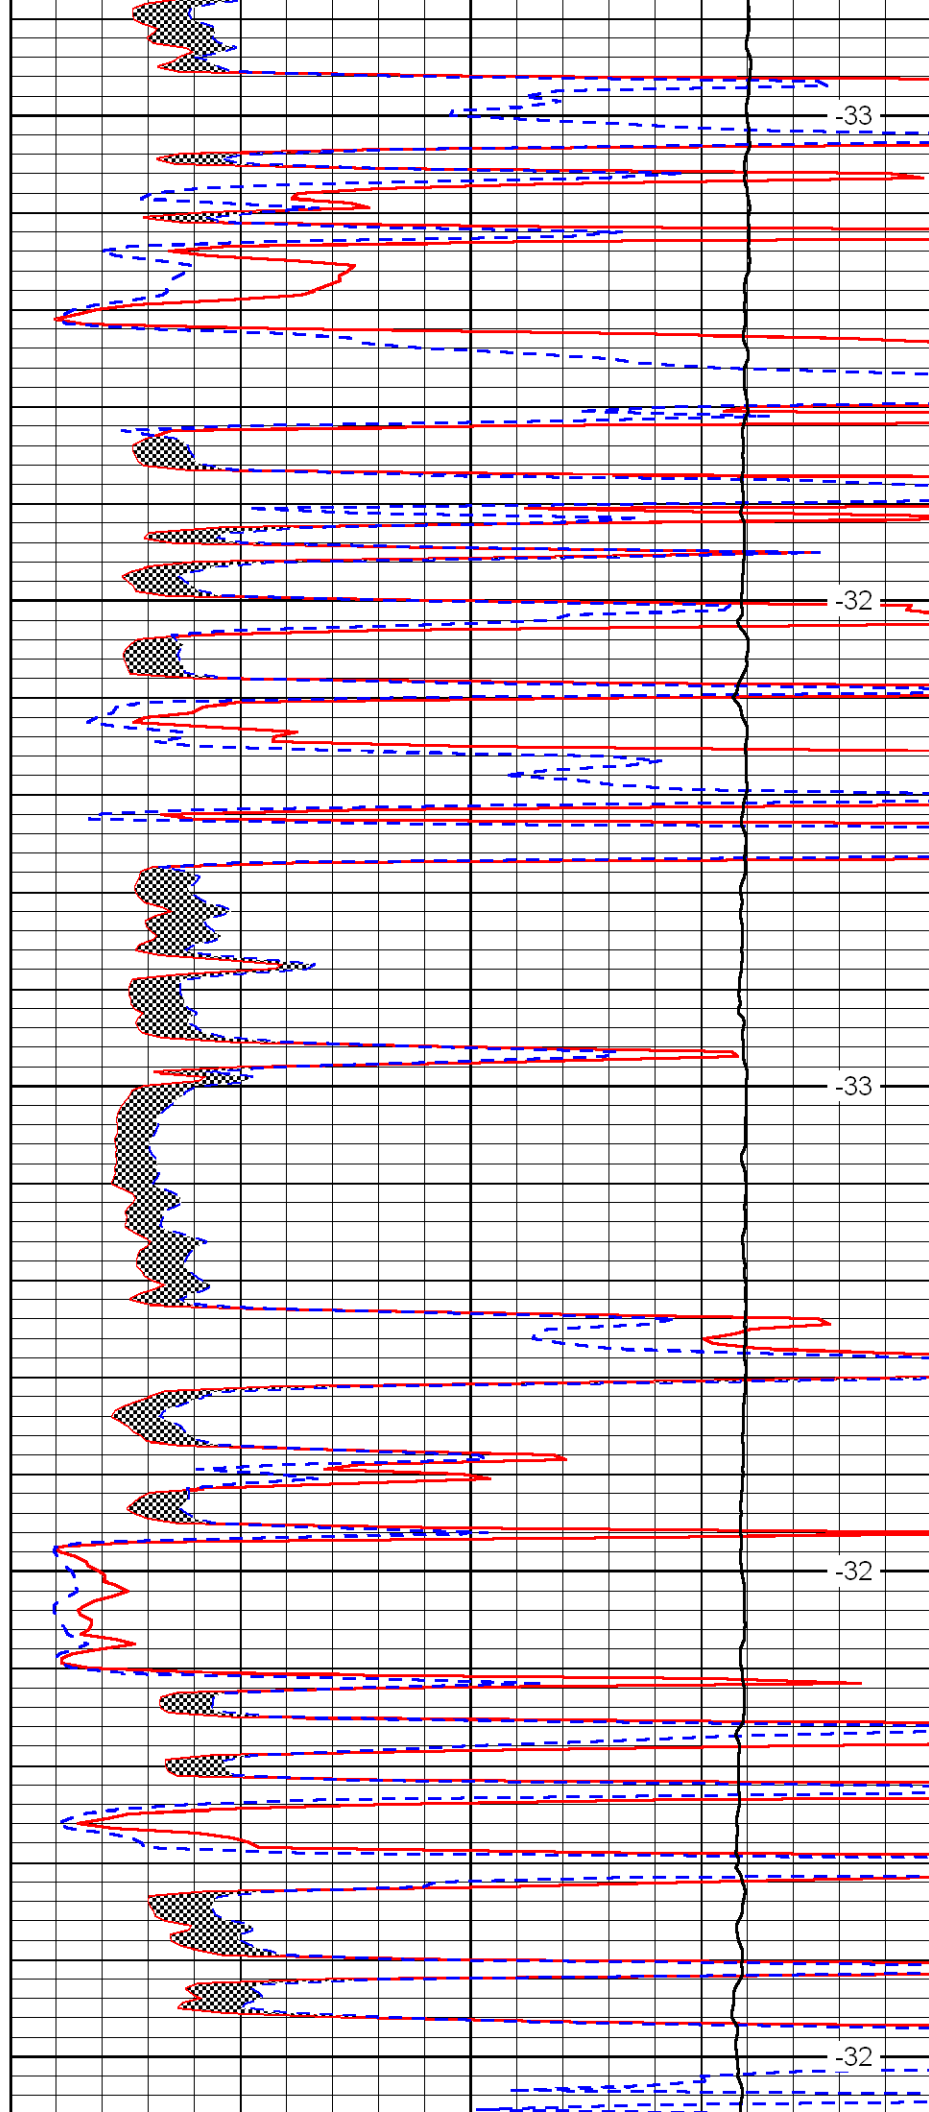


-33

-32

-33

-32

-32

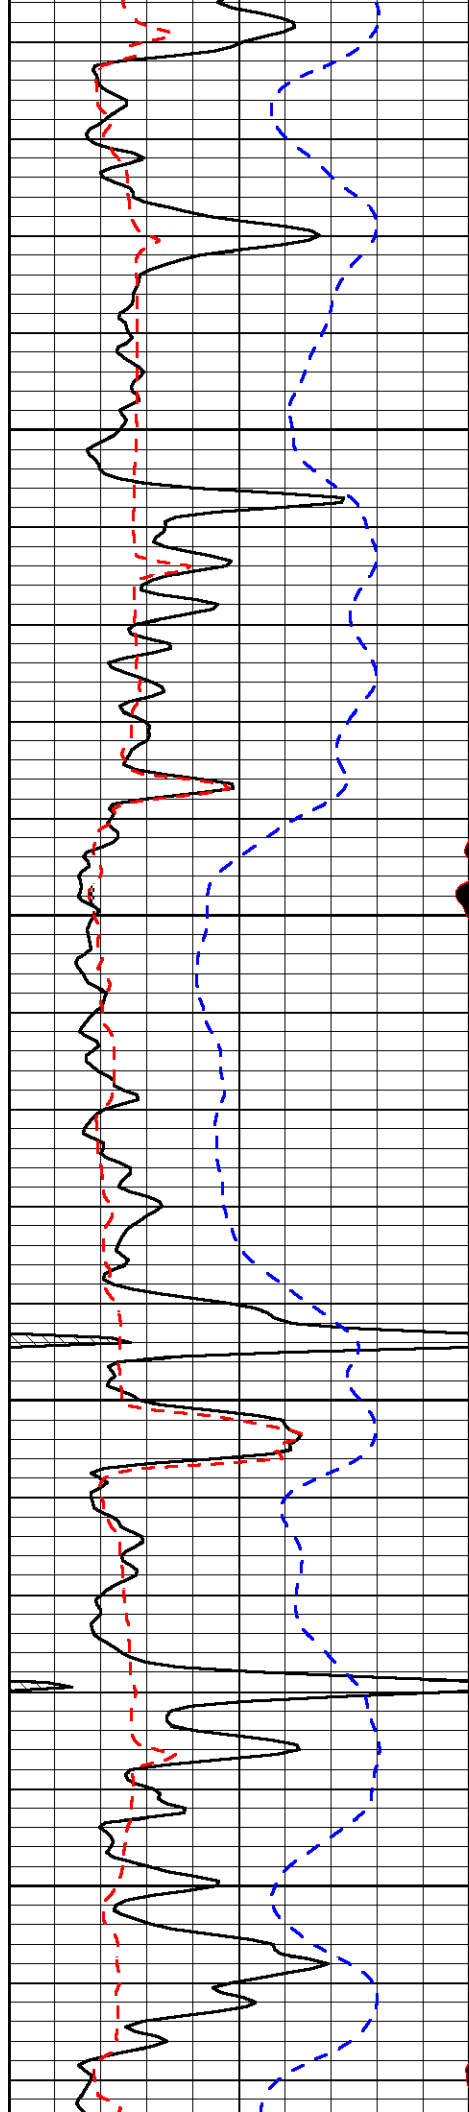


4050

4100

4150

4200

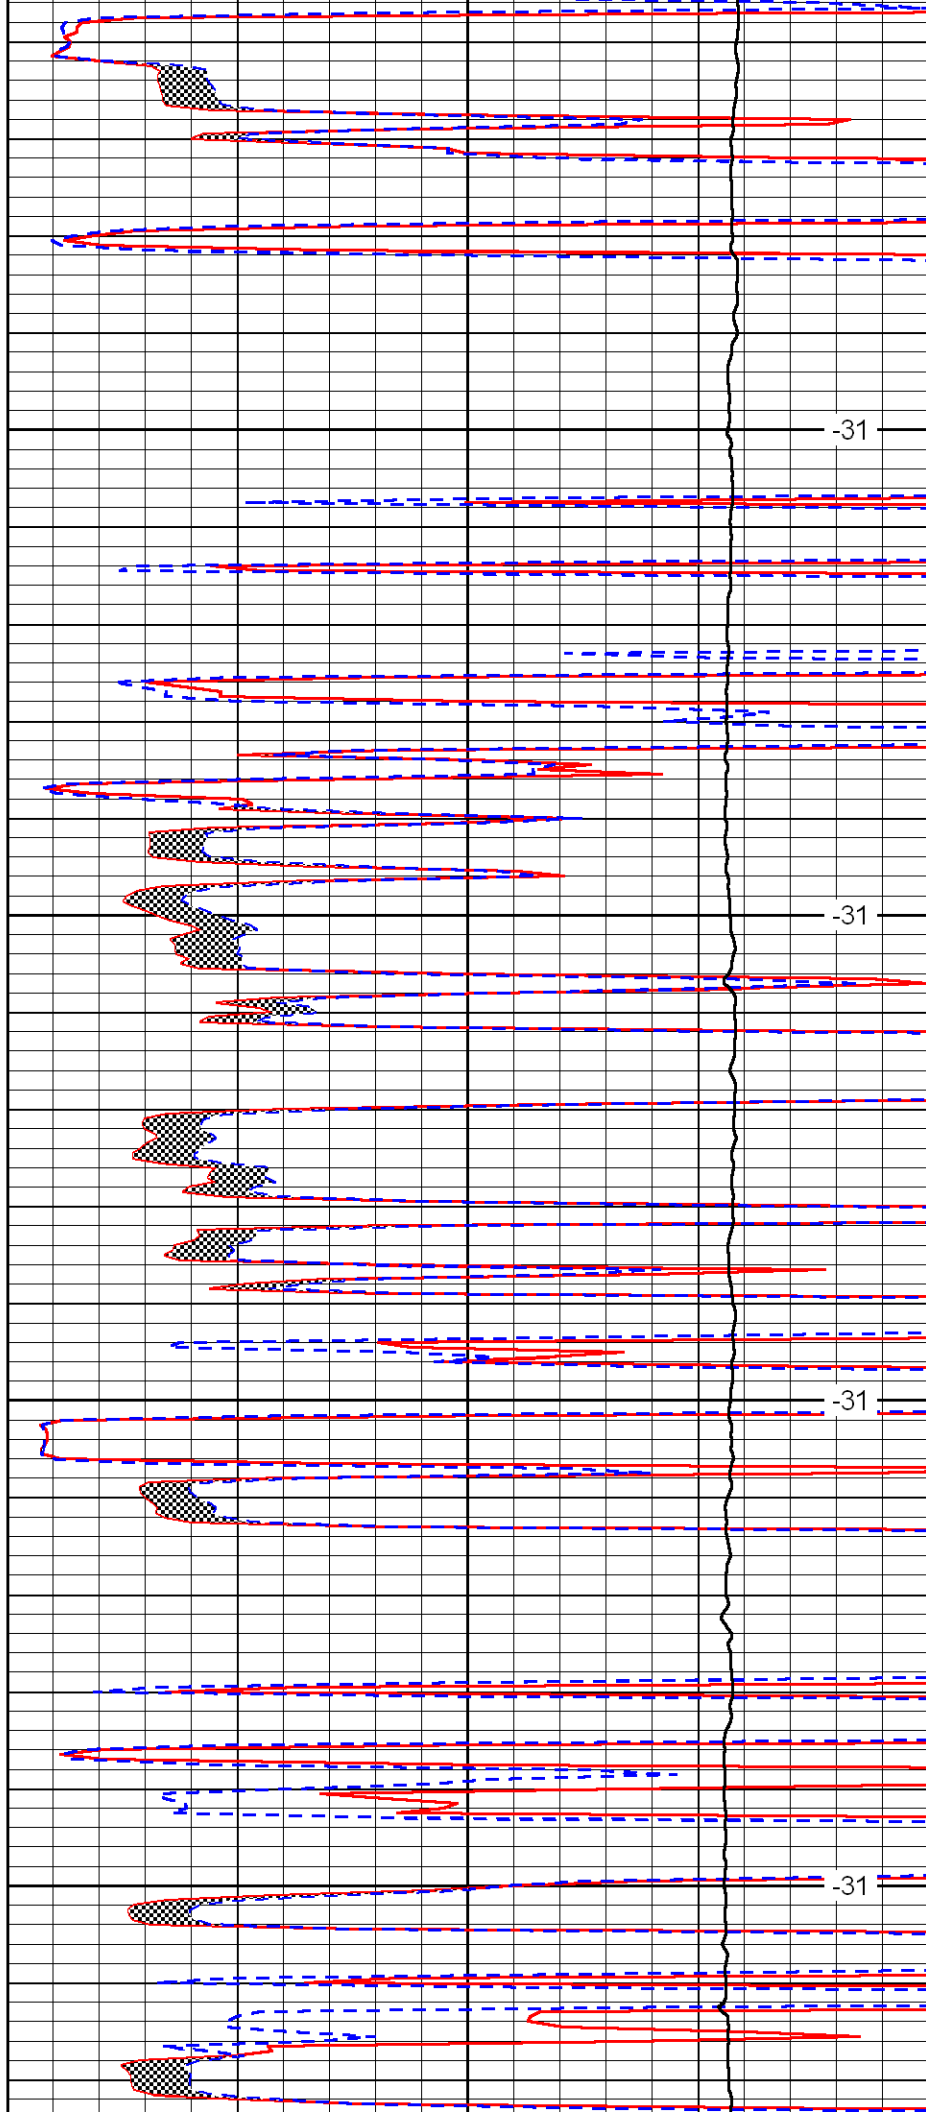


-31

-31

-31

-31

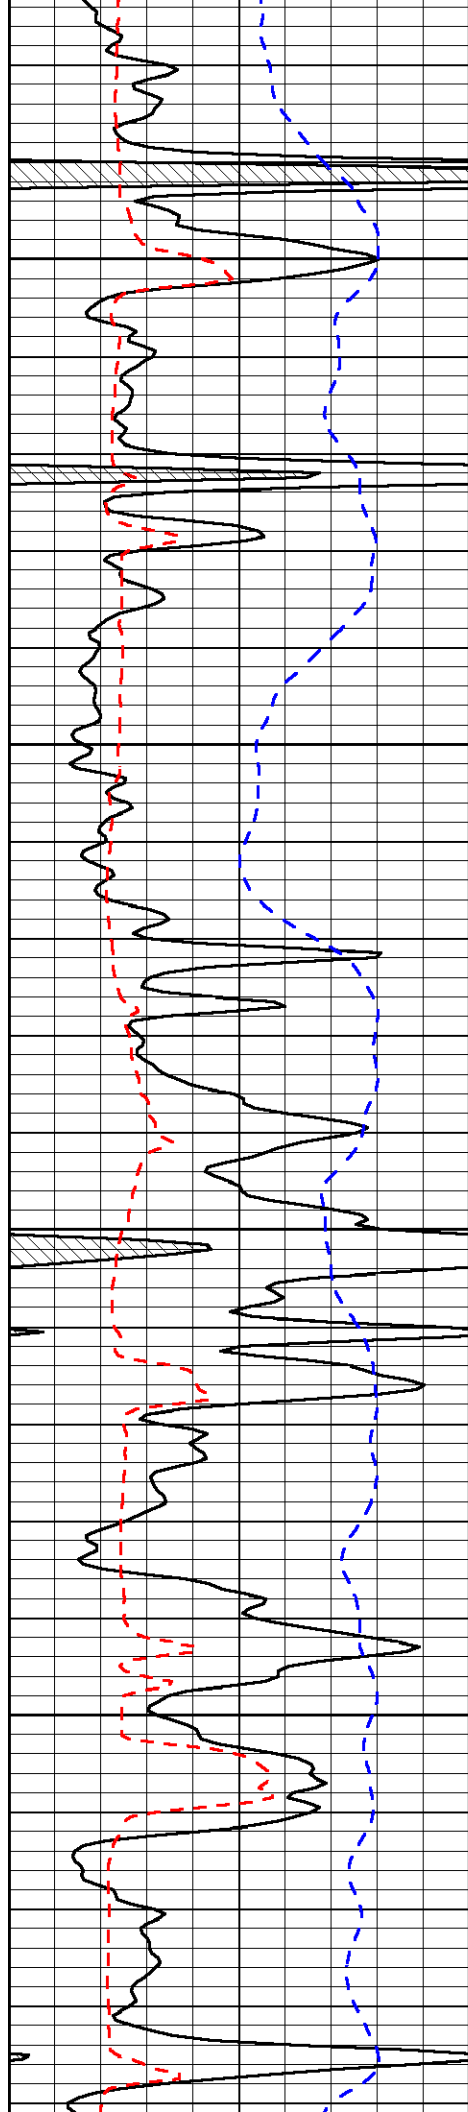



4250

4300

4350

4400

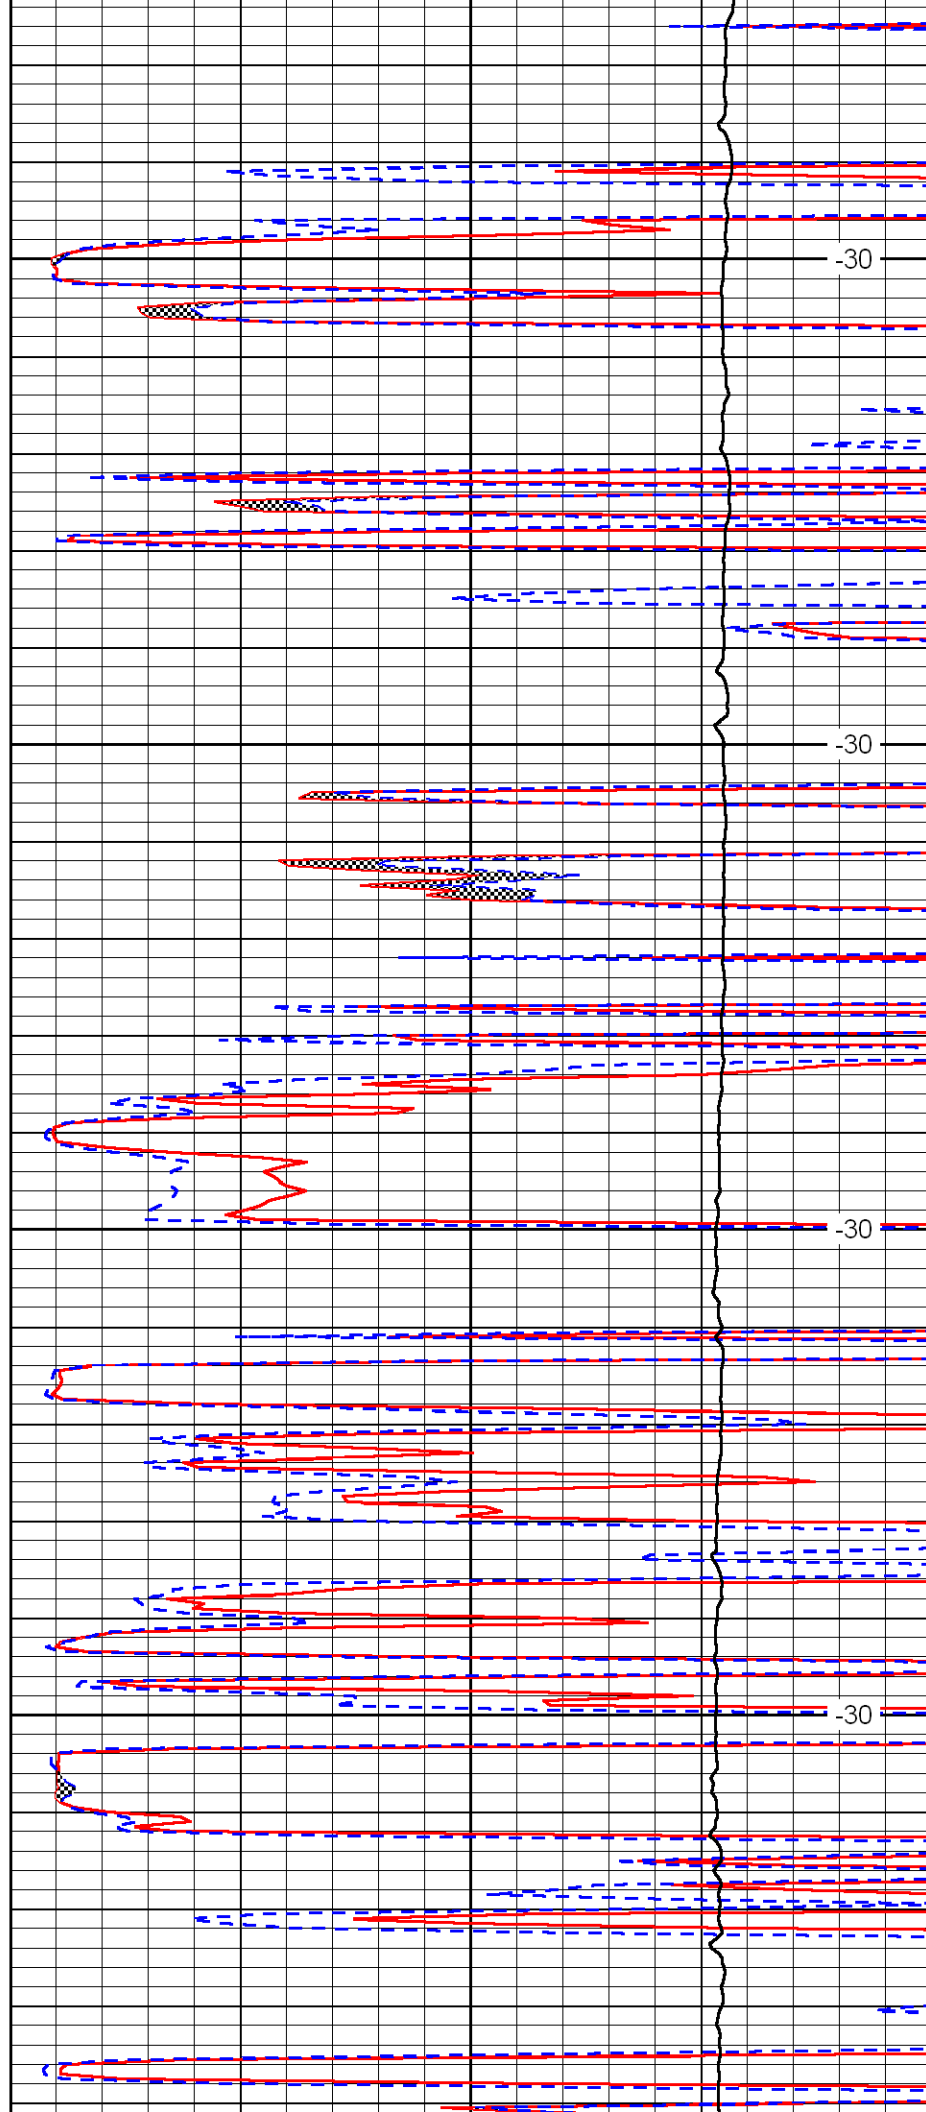

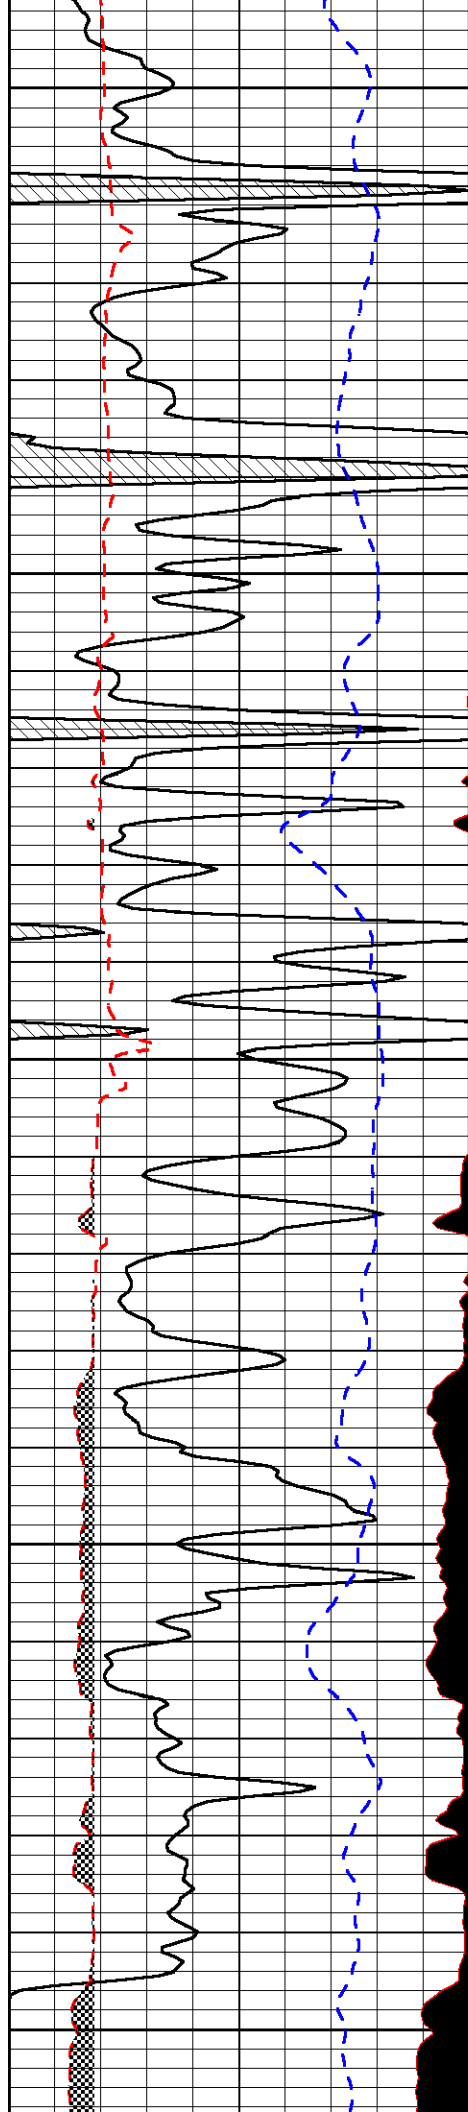


4450

4500

4550

4600

4650

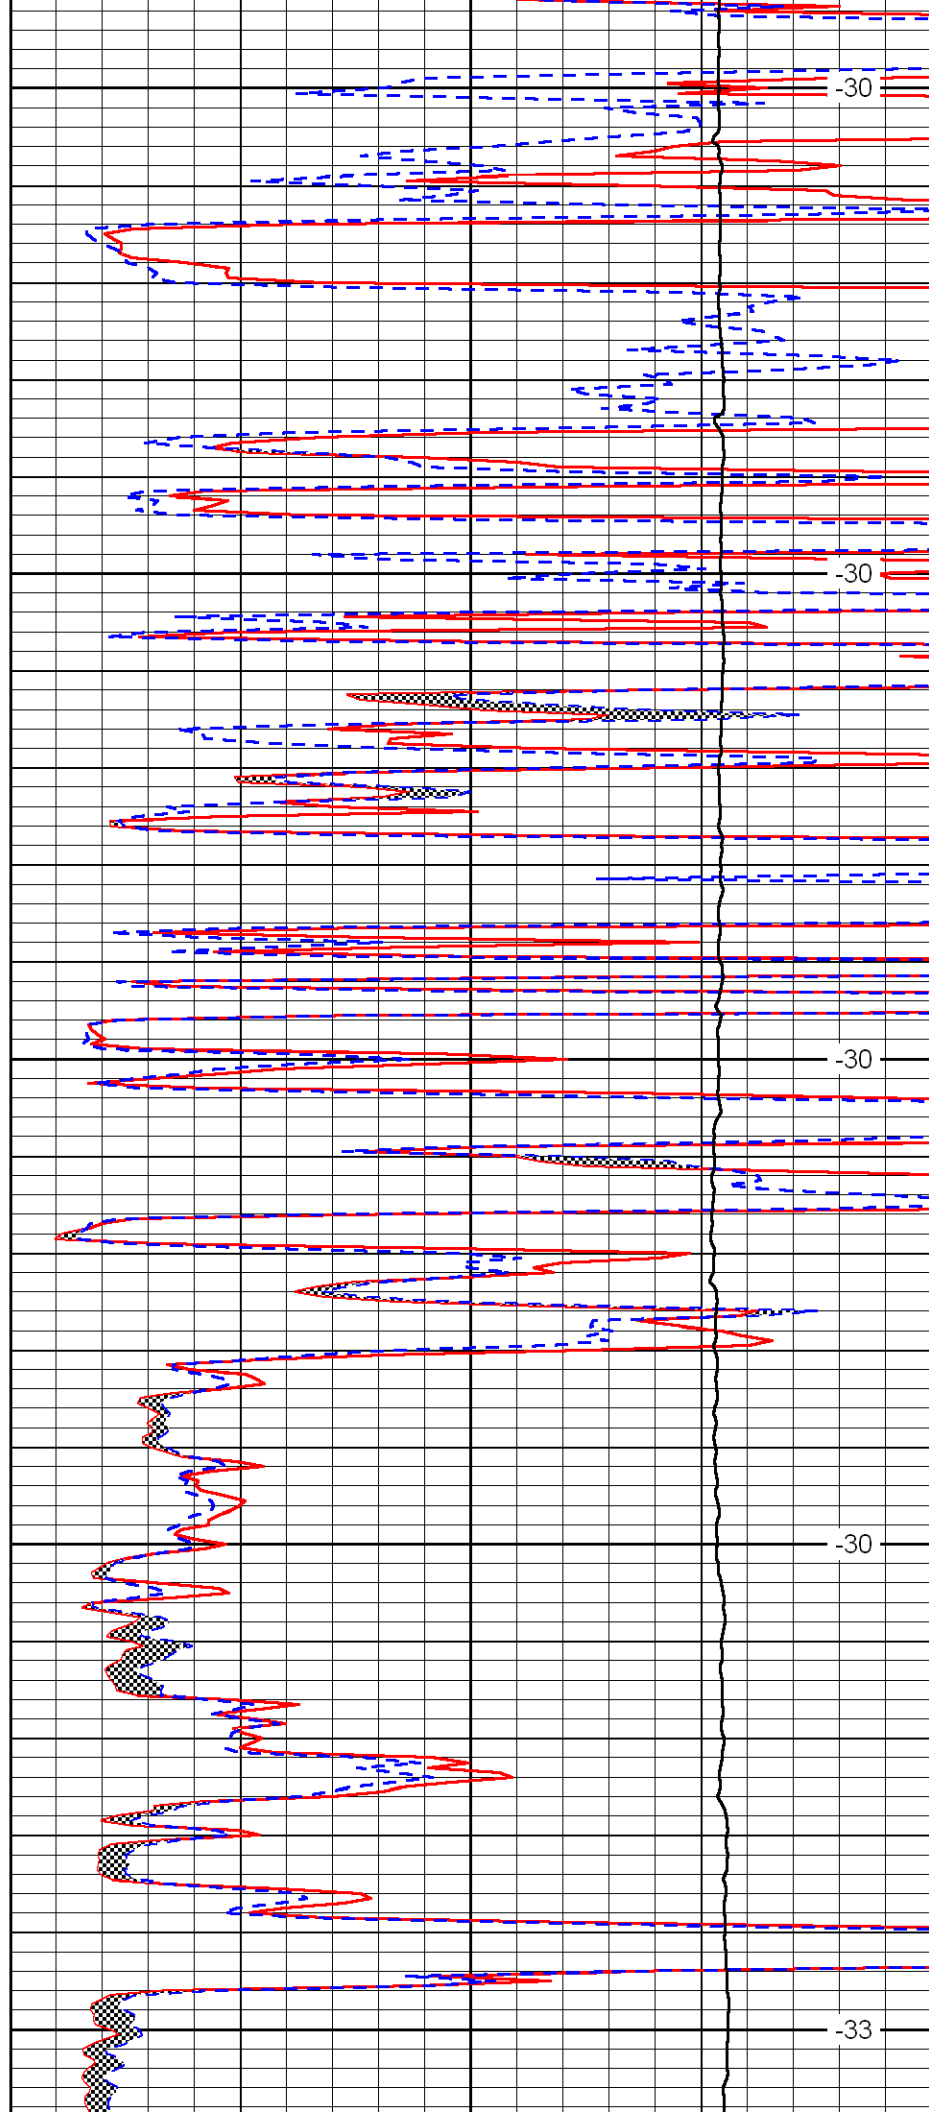

-30

-30

-30

-30

-33

