

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-101-20973-00-00  
Spot: SWSWSE Sec/Twnshp/Rge: 27-17S-27W  
330 feet from S Section Line, 2310 feet from E Section Line  
Lease Name: MUMMA Well #: 1  
County: LANE Total Vertical Depth: 4644 feet

Operator License No.: 5474  
Op Name: NORTHERN LIGHTS OIL COMPANY, L  
Address: PO BOX 164  
ANDOVER, KS 67002

PROD Size: 4.5 feet: 4644 WITH 150 SX CMT  
SURF Size: 8.625 feet: 335 WITH 210 SX CMT

#150<sup>93</sup>

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 03/23/2005 2:25 PM  
Plug Co. License No.: 6426 Plug Co. Name: EXPRESS WELL SERVICE & SUPPLY INC  
Proposal Rcvd. from: HAROLD BELLERIVE Company: NORHTERN LIGHTS OIL COMPAN Phone: (785) 635-4531

Proposed Plugging Method: PUMP 25 SX CMT & 300# HULLS. PULL TUBING & PUMP CMT. PERFORATE AT 1250' & PUMP 150 SX CMT. PRESSURE TEST. CHECK BACKSIDE.

Plugging Proposal Received By: JIM HOLLAND WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 03/23/2005 5:30 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

PUMPED 25 SX CMT & 300# HULLS TO BOTTOM. PULLED TUBING TO 1500'. PUMP 30 SX COMMON CMT W/3% CC. WAIT ONE HOUR. PRESSURE CASING TO 500# & HELD. PERFORATED AT 1250'. TIED ONTO CASING & PUMPED 150 SX CMT. PRESSURED TO 500# AND SHUT IN WITH 200#. TIED ONTO BACKSIDE & PUMPED 1/4 BBL. PRESSURED TO 500# & HELD.

Perfs:


Top	Bot	Thru	Comments
4232	4240		
4226	4230		

RECEIVED  
MAR 30 2005  
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. NO CASING RECOVERED.

Plugged through: TBG

District: 01

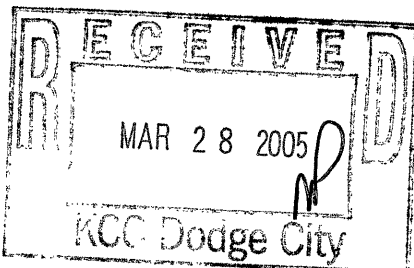

Signed

Michael Maier  
(TECHNICIAN)

INVOICED

DATE 4-4-05

INV. NO. 2005061358

