



Microresistivity
Log

DIGITAL LOG (785) 625-3858

API No. 15-101-22,324-00-00		Company TexKan Exploration, LLC.	
Well Jasper No. 1		Field Unnamed	
County Lane		State Kansas	
Location W/2 NE NE SE 2275' FSL & 400' FEL		Other Services RAG	
Sec: 28 Twp: 16 S Rge: 29 W		Elevation K.B. 2815 D.F. 2806 G.L. 2806	
Permanent Datum Ground Level		Elevation 2806	
Log Measured From Kelly Bushing		9 Ft. Above Perm. Datum	
Drilling Measured From Kelly Bushing			
Date	11/4/2011		
Run Number	Two		
Depth Driller	4600		
Depth Logger	4600		
Bottom Logged Interval	4599		
Top Log Interval	3700		
Casing Driller	8.625 @ 241		
Casing Logger	240		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	2400		
Density / Viscosity	9.4 56		
pH / Fluid Loss	10.0 7.2		
Source of Sample	Flowline		
Rm @ Meas. Temp	.95 @ 58		
Rmf @ Meas. Temp	.71 @ 58		
Rmc @ Meas. Temp	1.28 @ 58		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.44 @ 124		
Operating Rig Time	4 1/2 Hours		
Max Rec. Temp. F	124		
Equipment Number	91		
Location	Hays		
Recorded By	K. Bange		
Witnessed By	Bill Robinson		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858


Hwy 23 and Hwy 4 Jct, 1 N, 1 W, N into

Charted by: Depth in Feet scaled 1:2.15

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

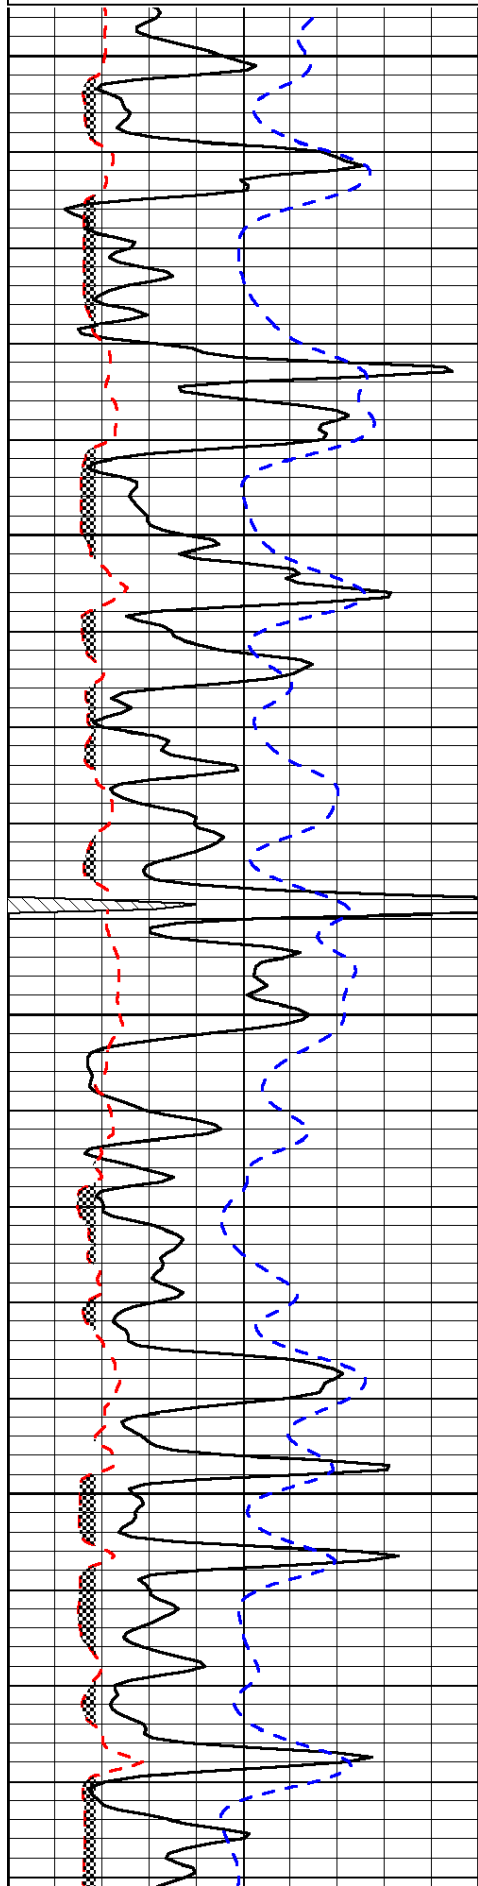


3700

3750

3800

3850

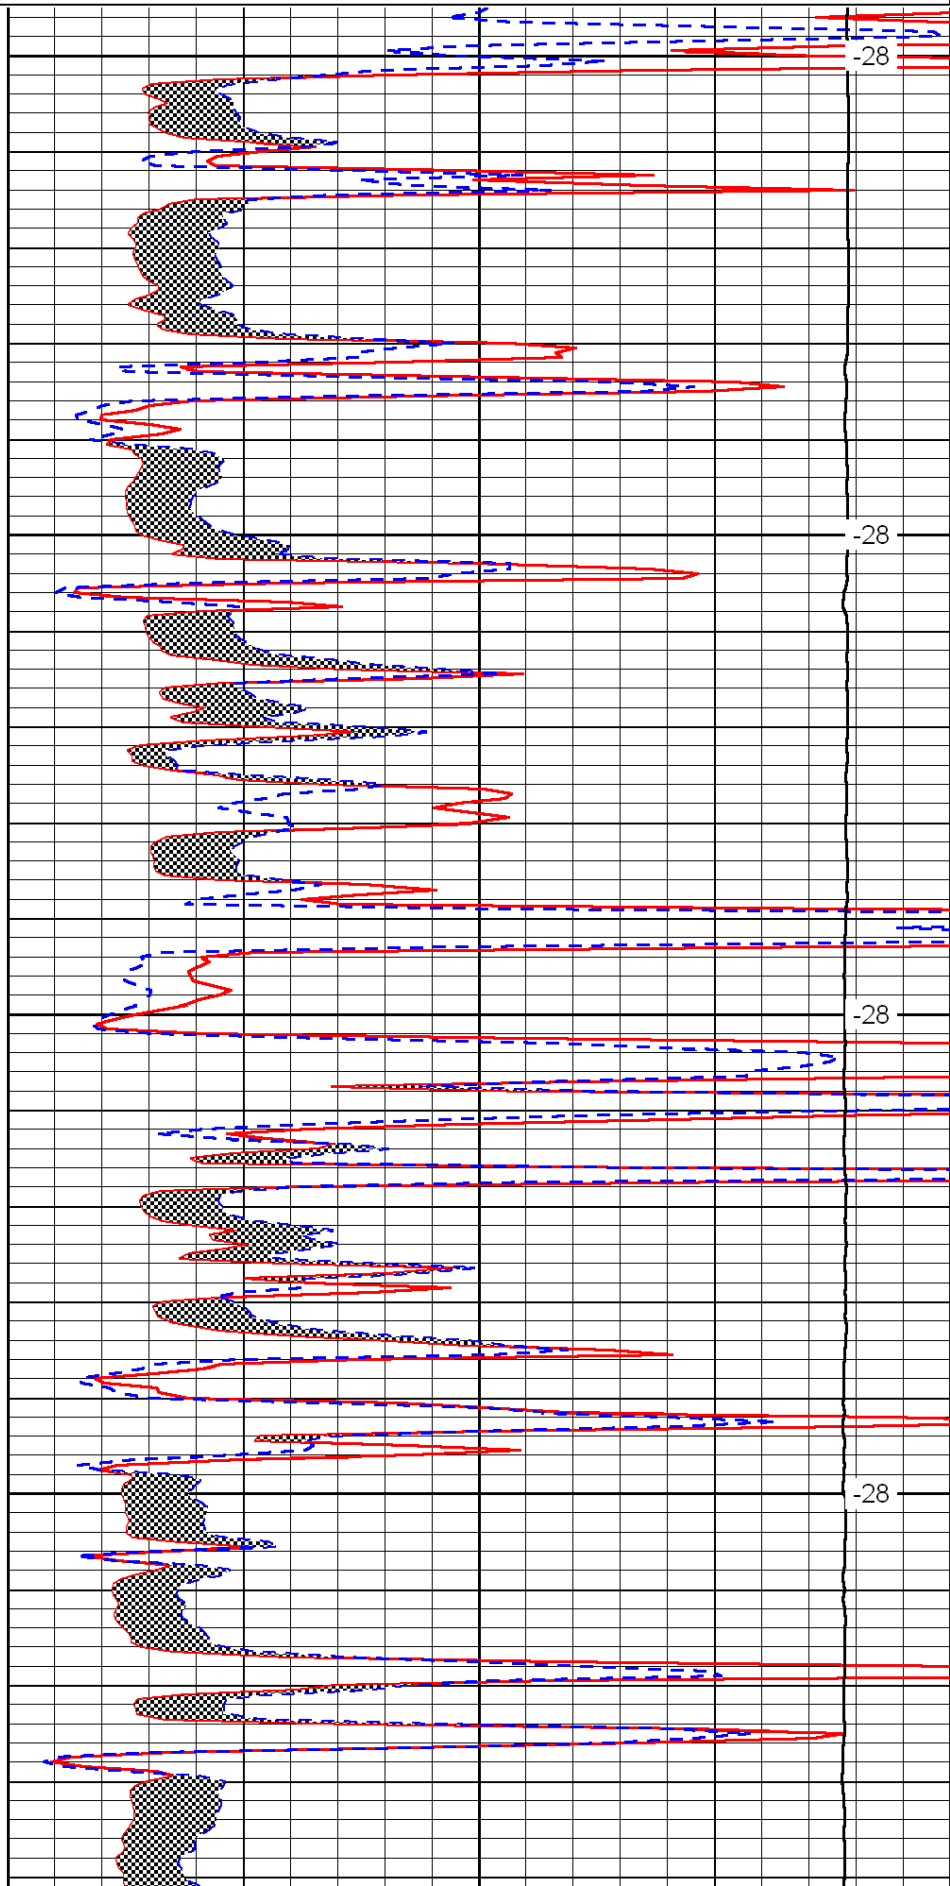


-28

-28

-28

-28

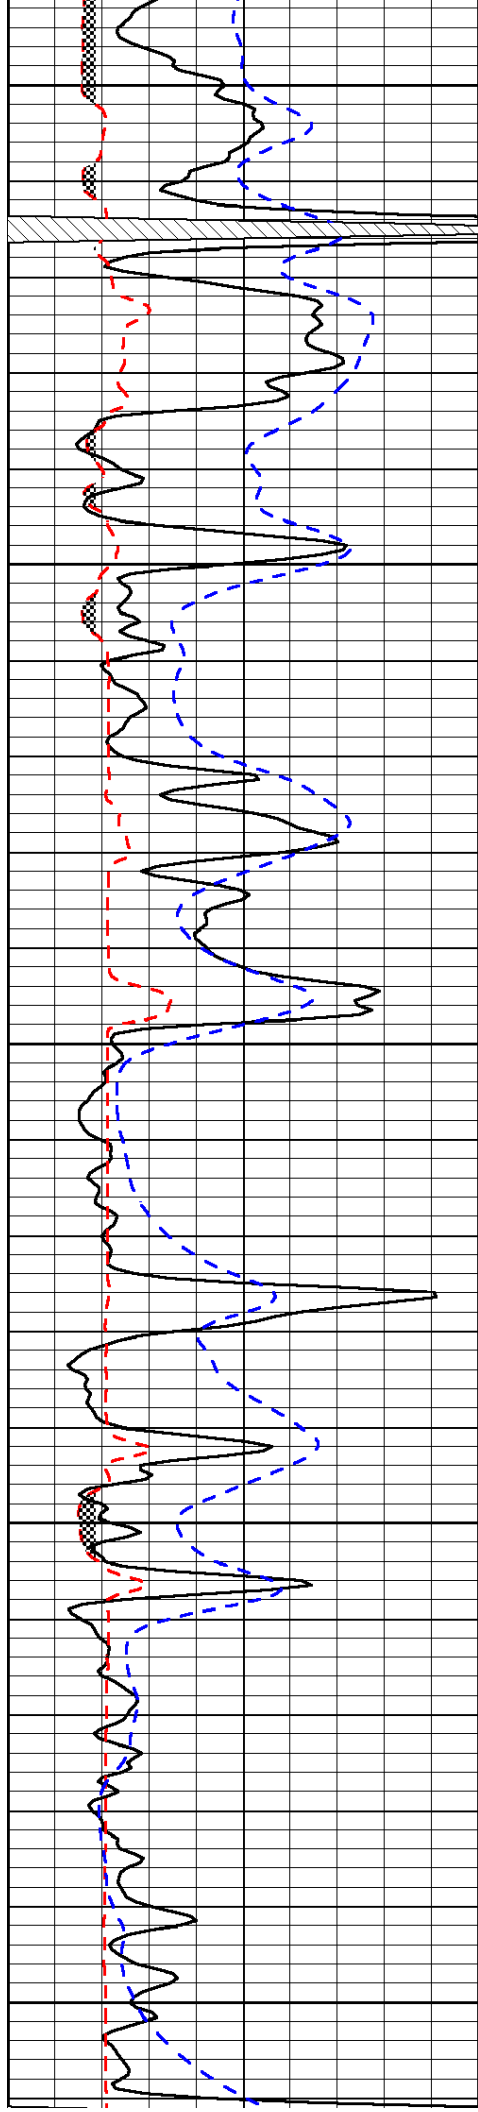


3900

3950

4000

4050

4100

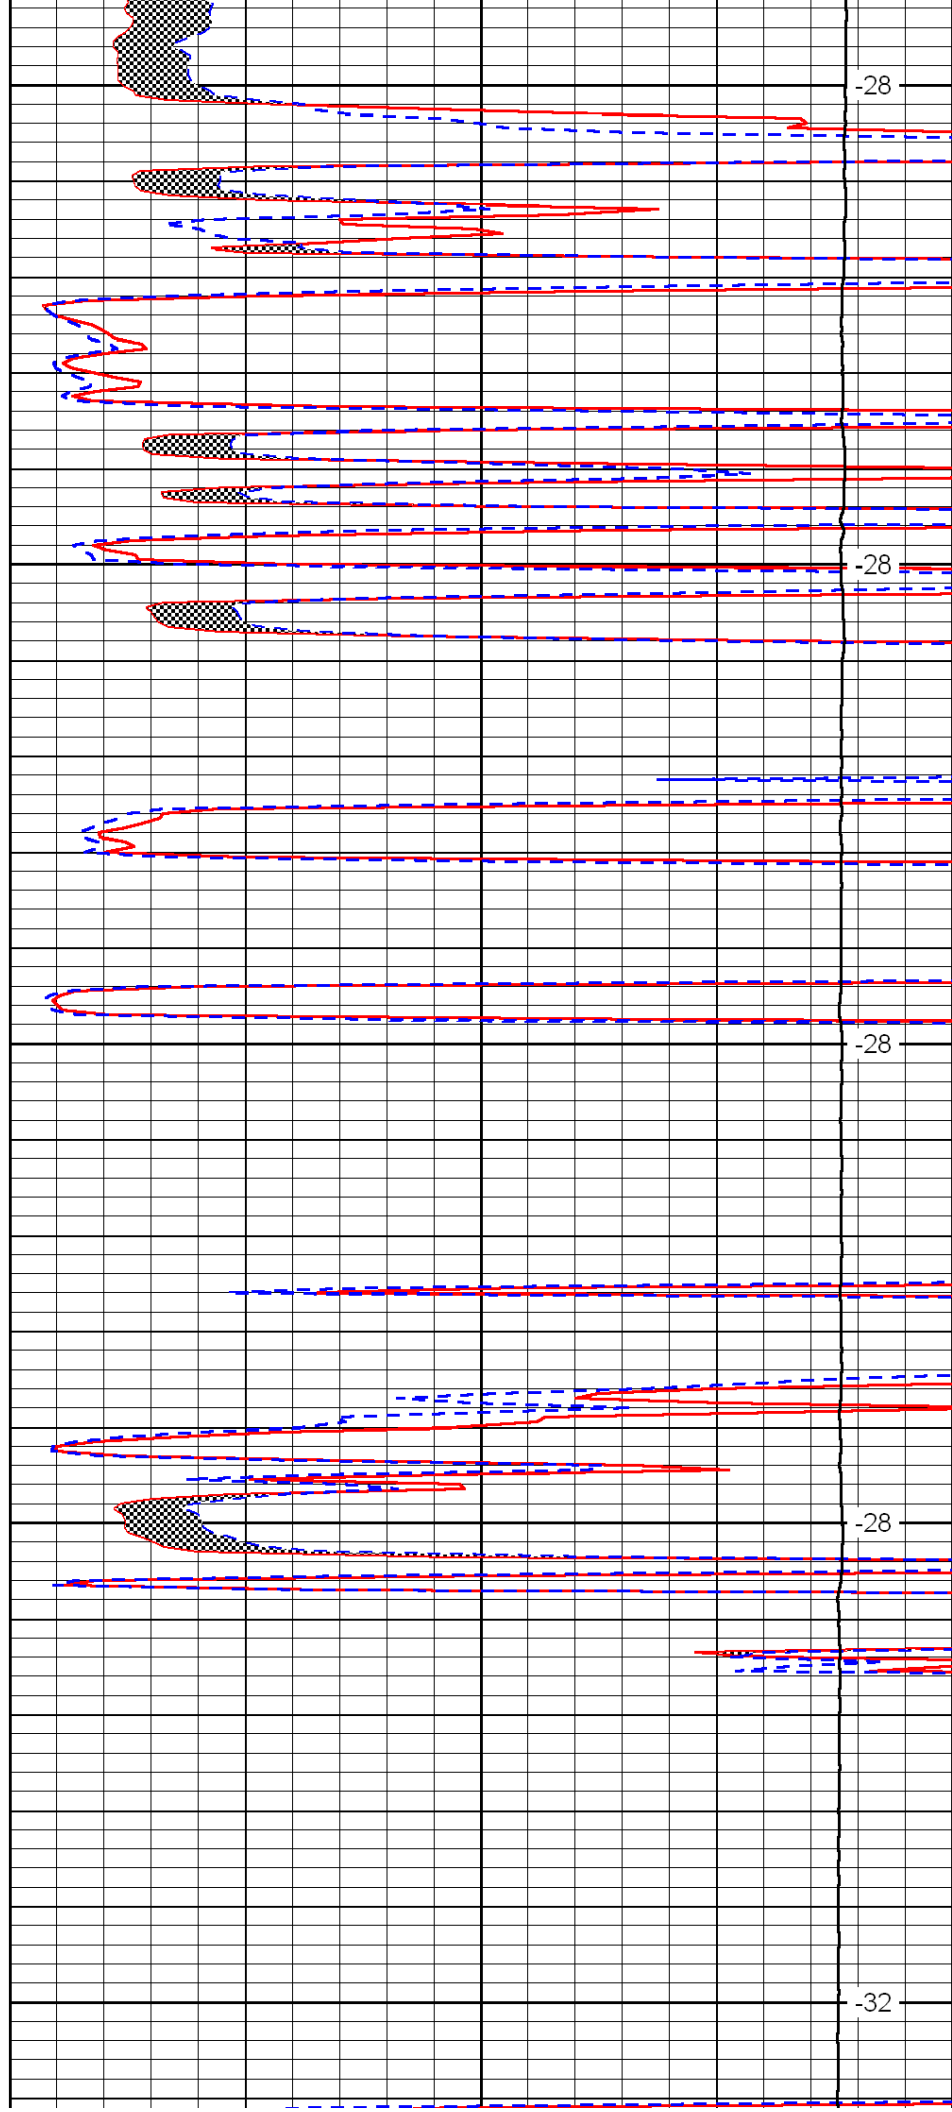


-28

-28

-28

-28

-32

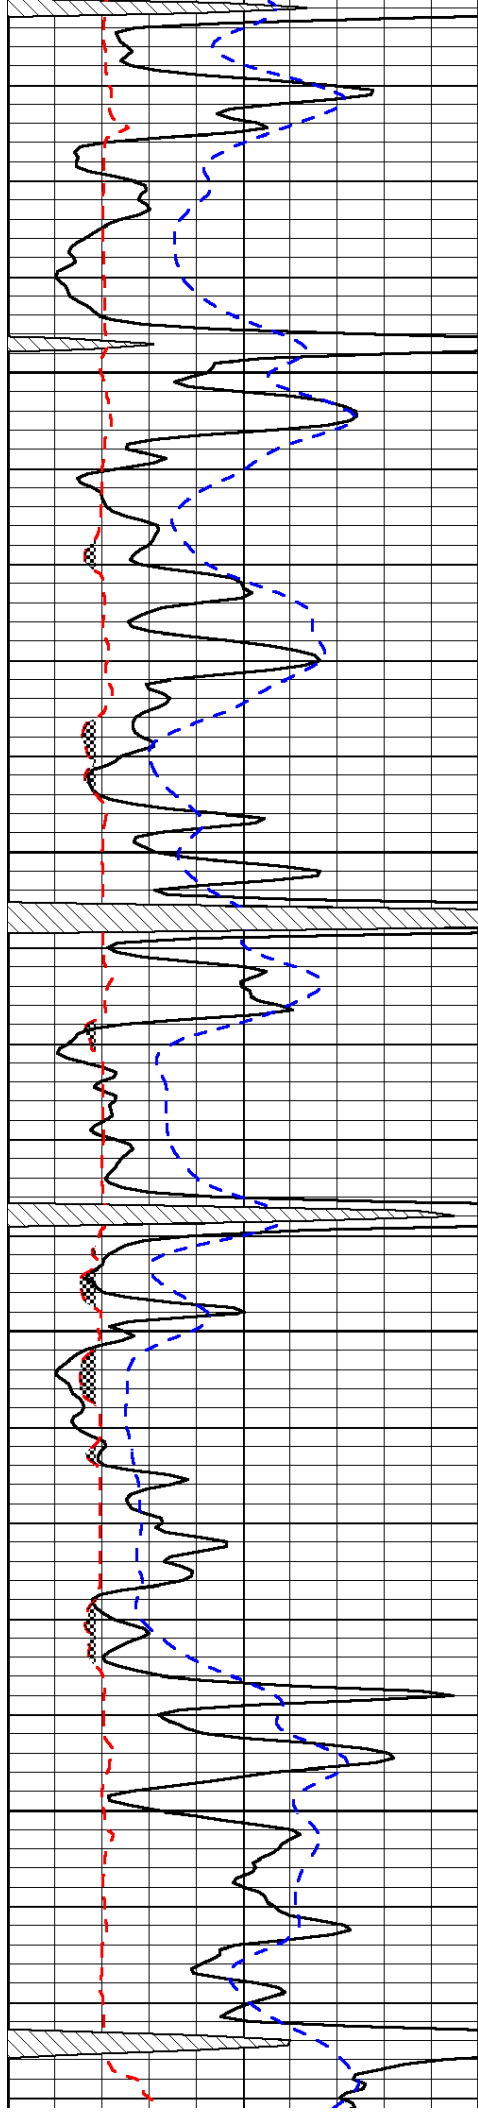



4150

4200

4250

4300

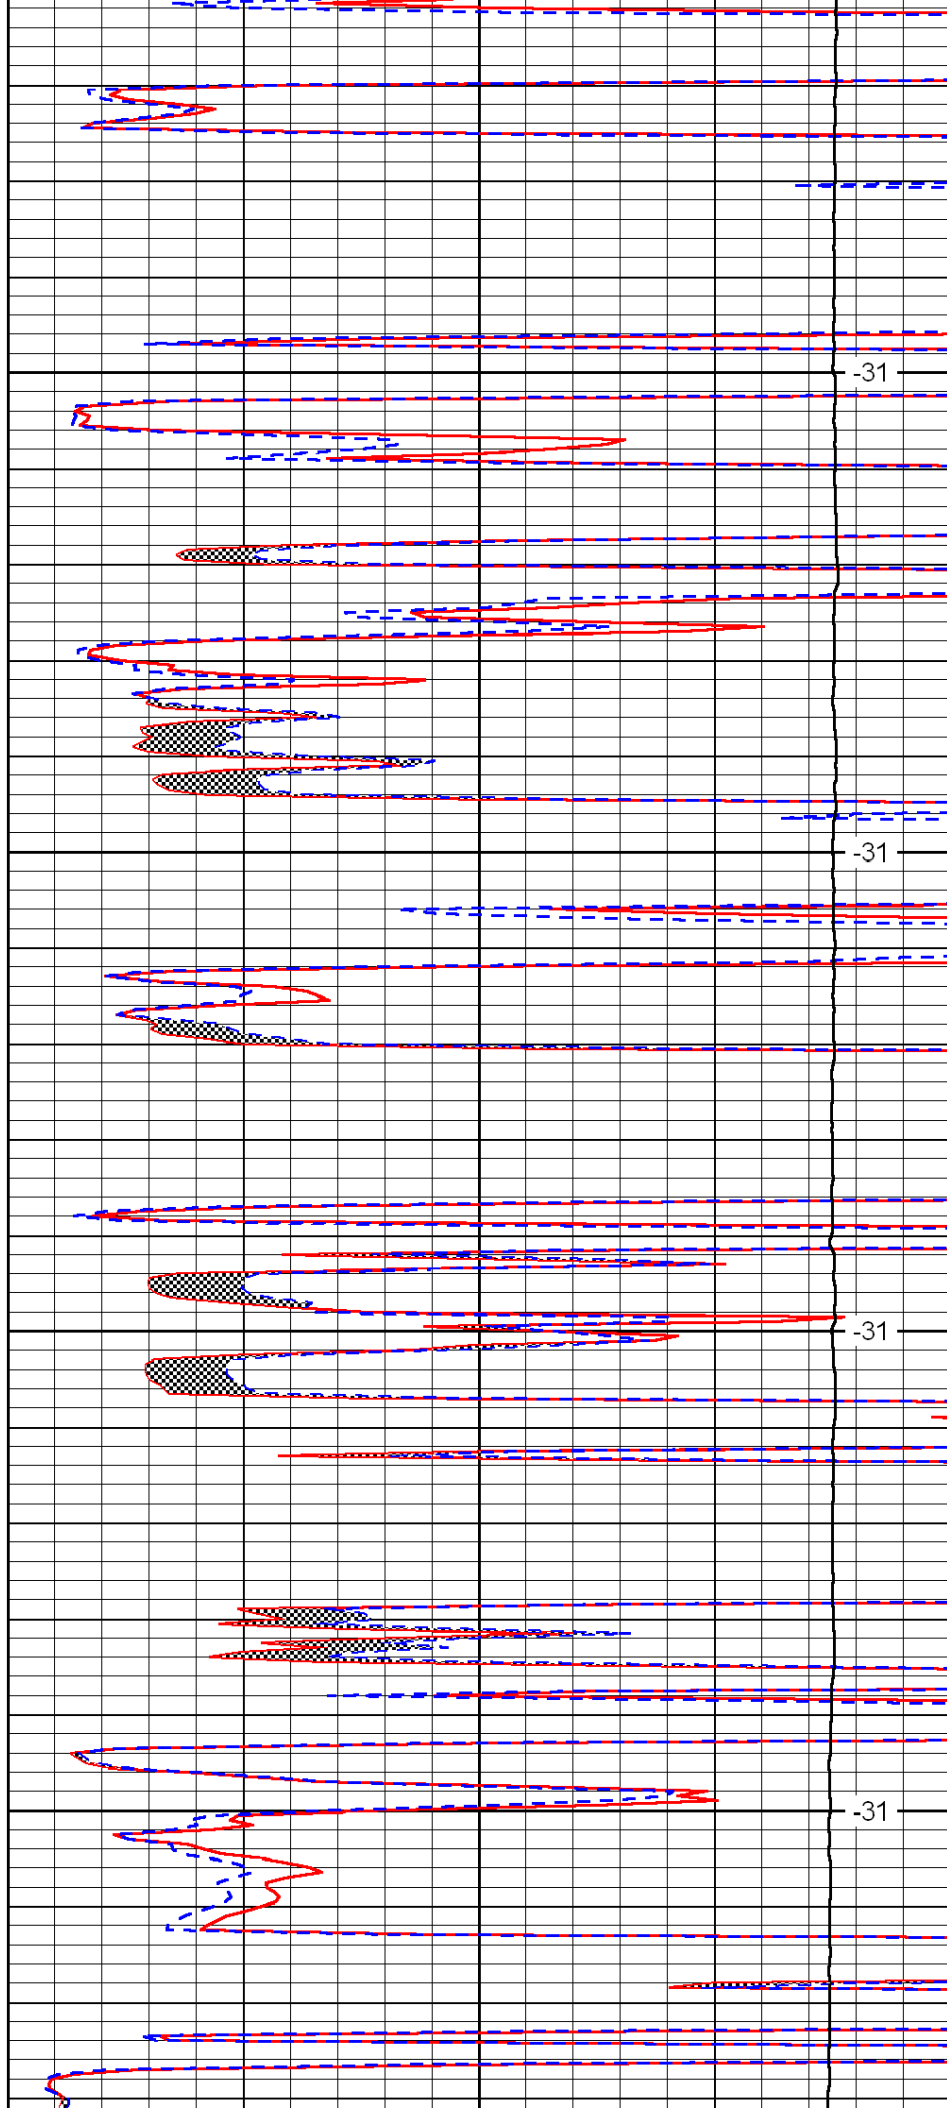

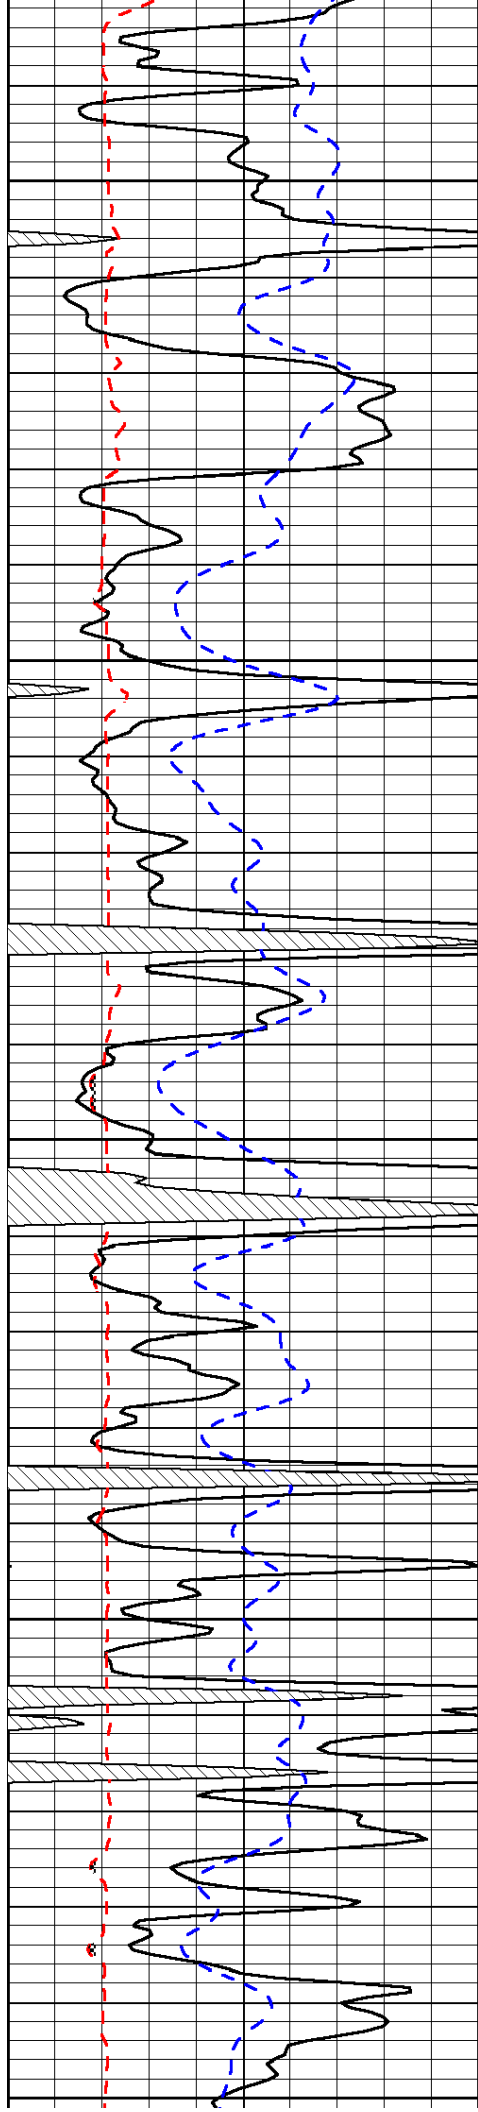


4350

4400

4450

4500

4550

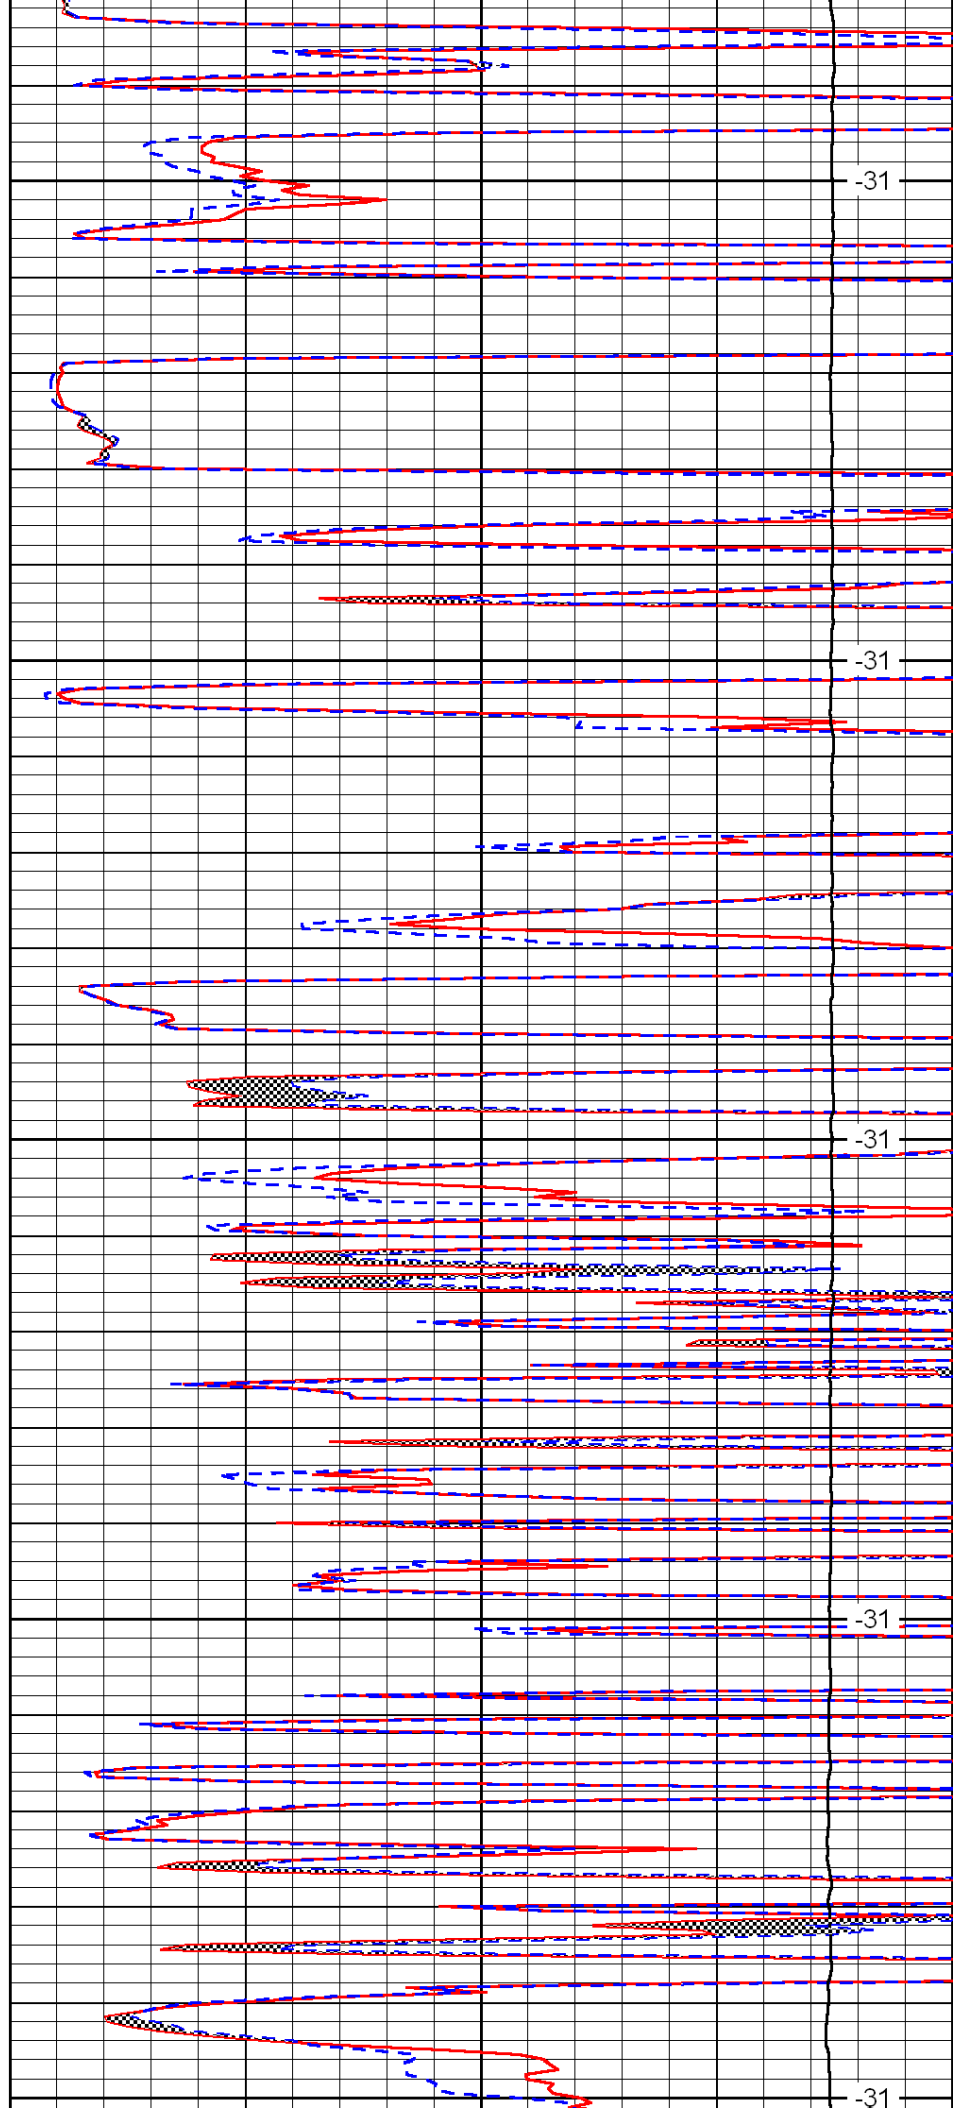


-31

-31

-31


-31

-31

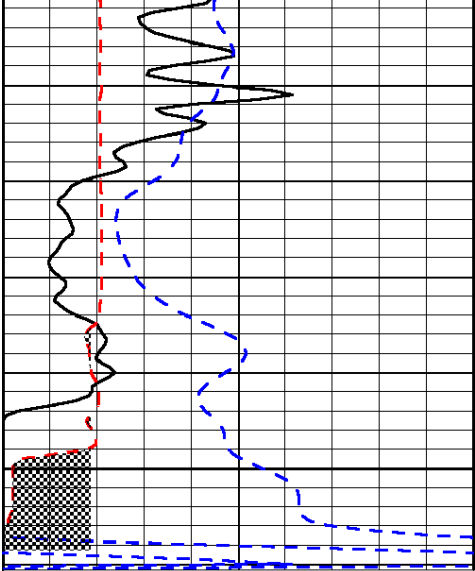

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

4600

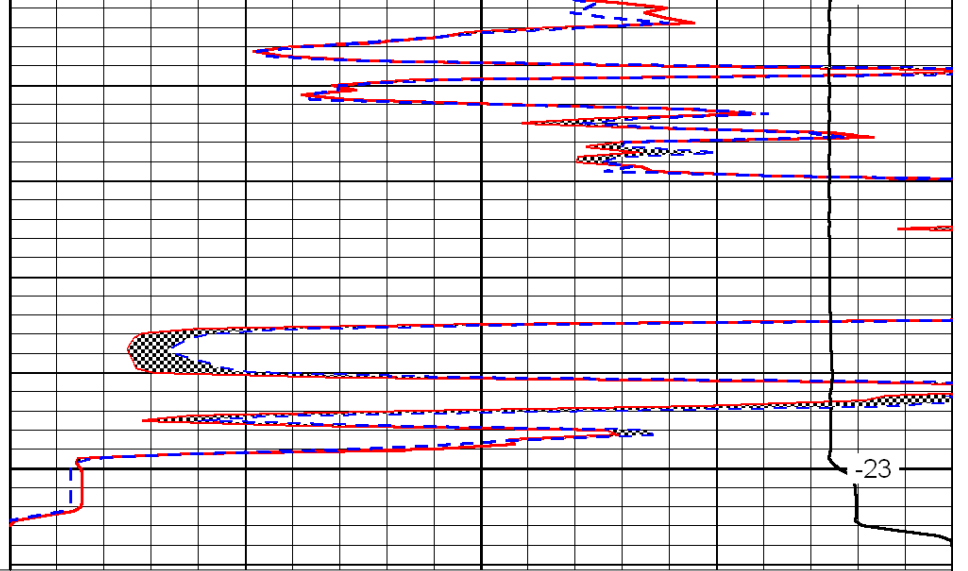

0	Micro Inverse 1 X 1	40
0	Micro Normal 2''	40
15000	Line Weight	0

LSPD