



Microresistivity Log

DIGITAL LOG (785) 625-3858

15-141-20440-00-00

API No.

Company Berexco, LLC

Well John #1

Field Wildcat

County Osborne State

Kansas

Location 3465' FSL / 2310' FWL

Other Services RAG

Sec: 34 Twp: 9S Rge: 15W

Permanent Datum Ground Level Elevation 1960
Log Measured From Kelly Bushing 11 Ft. Above Perm. Datum
Drilling Measured From Kelly Bushing

Elevation
K.B. 1971
D.F. 1960
G.L. 1960

Date 1/10/2012

Run Number Two

Depth Driller 3700

Depth Logger 3700

Bottom Logged Interval 3699

Top Log Interval 2700

Casing Driller 8.625 @ 308

Casing Logger 302

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity, ppm CL 7000

Density / Viscosity 9.4 58

pH / Fluid Loss 10.0 9.6

Source of Sample Flowline

Rm @ Meas. Temp 1.60 @ 70

Rmf @ Meas. Temp 1.20 @ 70

Rmc @ Meas. Temp 2.16 @ 70

Source of Rmf / Rmc Charts

Rm @ BHT 0.99 @ 113

Operating Rig Time 3 Hours

Max Rec. Temp. F 113

Equipment Number 15

Location Hays

Recorded By R. Barnhart

Witnessed By Bryan Bynog

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858



Natoma, KS:
1/2E to Rd. 657, 3N to Rd. 230,
1E, S into


Database File: c:\warrior\data\berexco_john #1\berexcohd.db
Dataset Pathname: rag/berrag
Presentation Format: micro
Dataset Creation: Tue Jan 10 17:48:21 2012
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

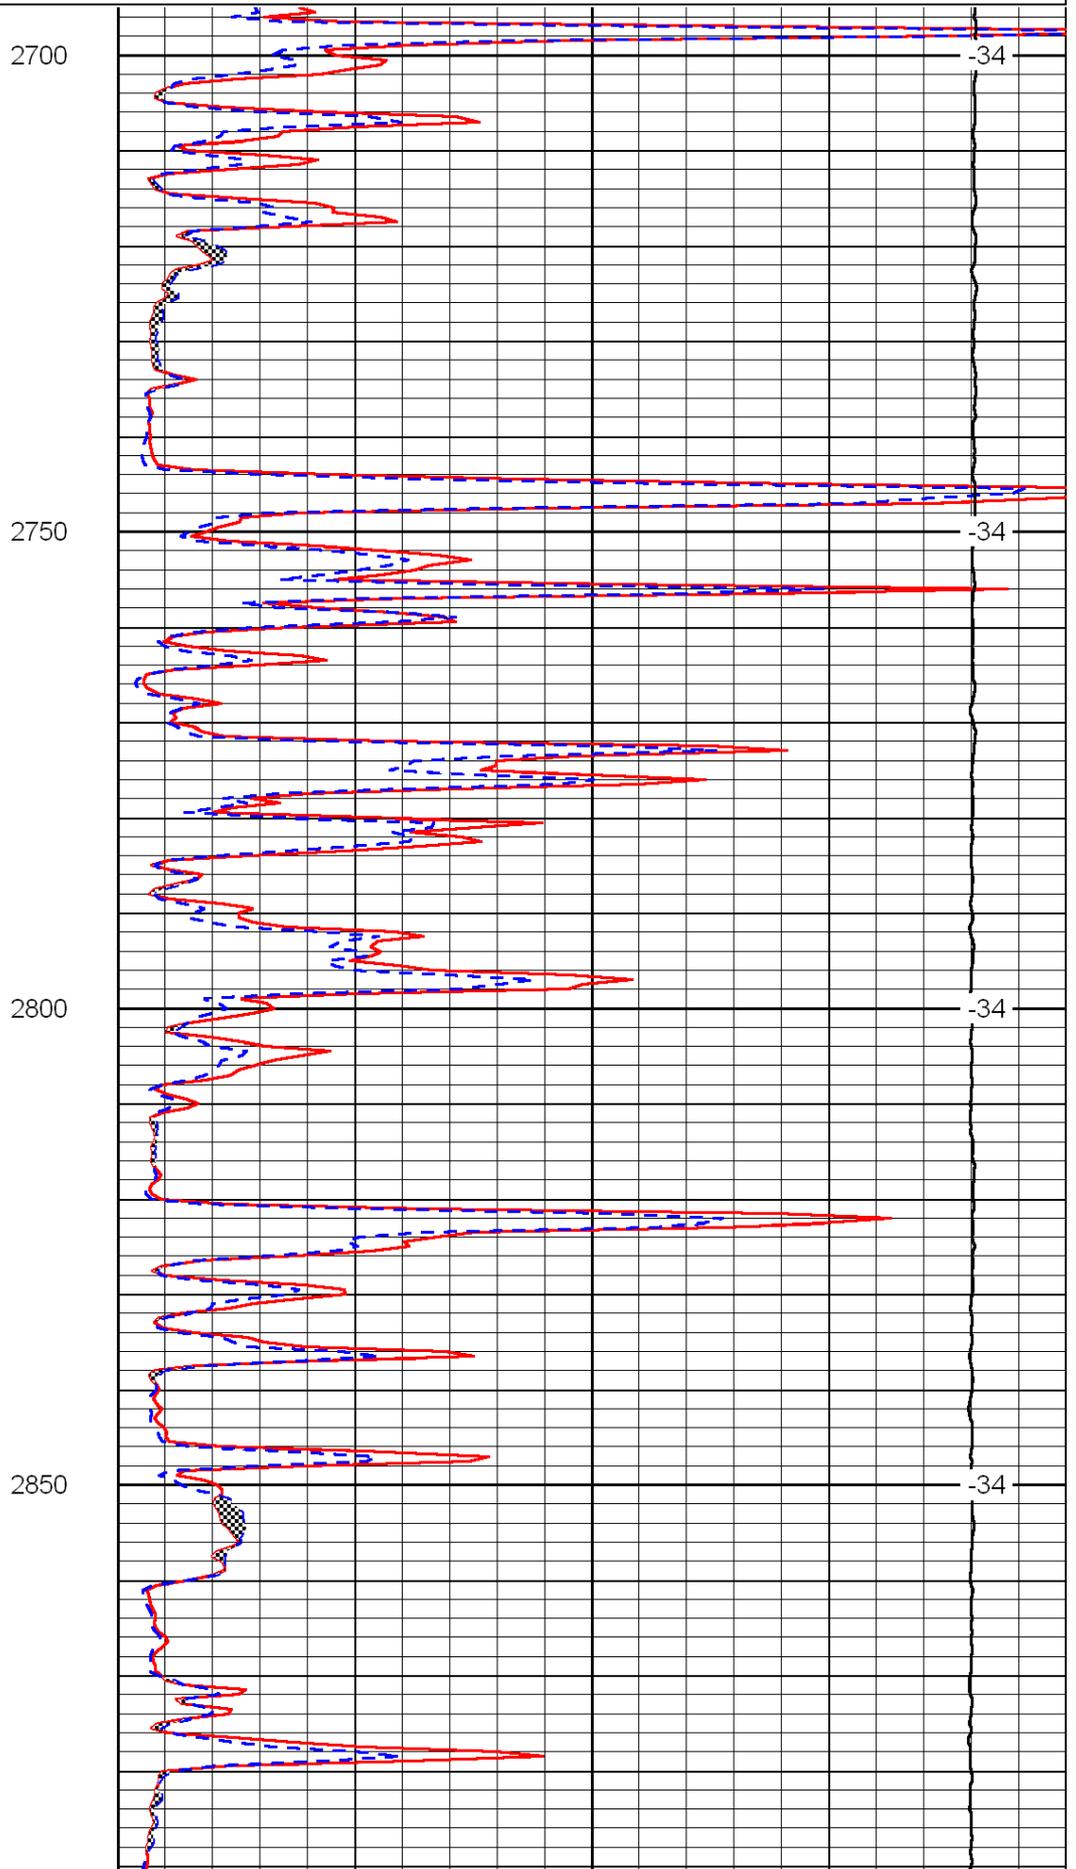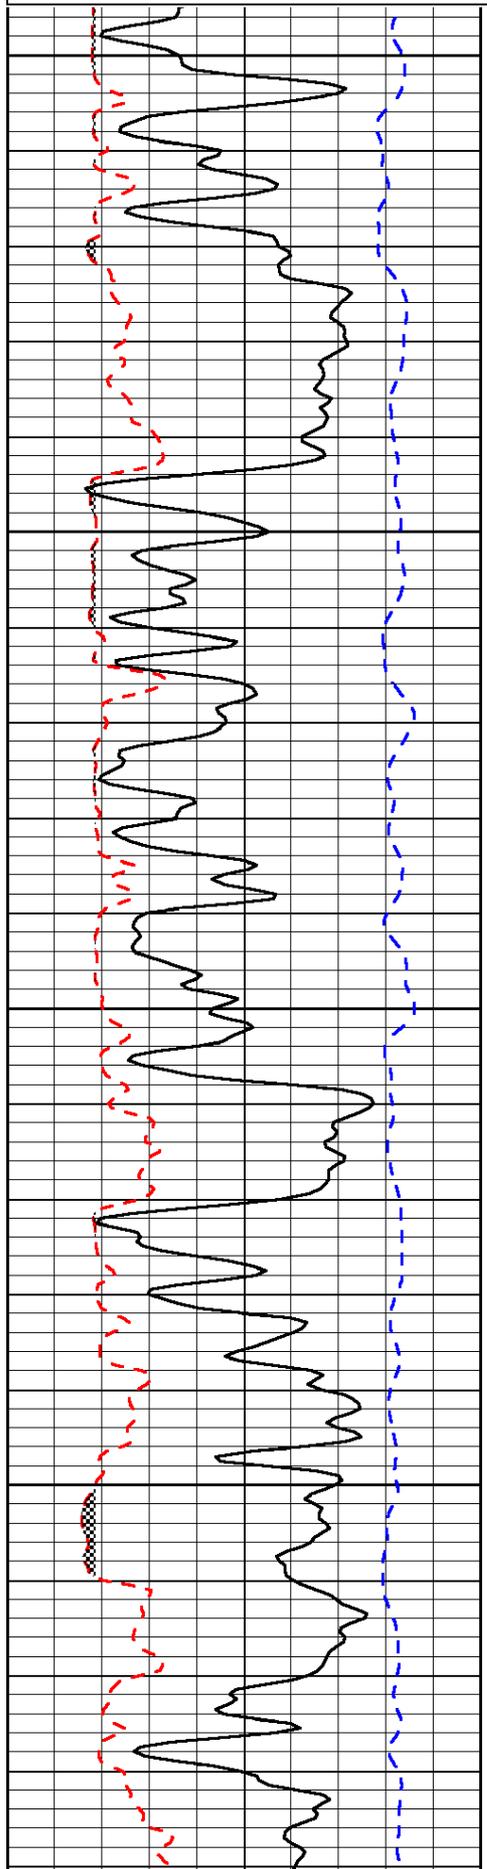

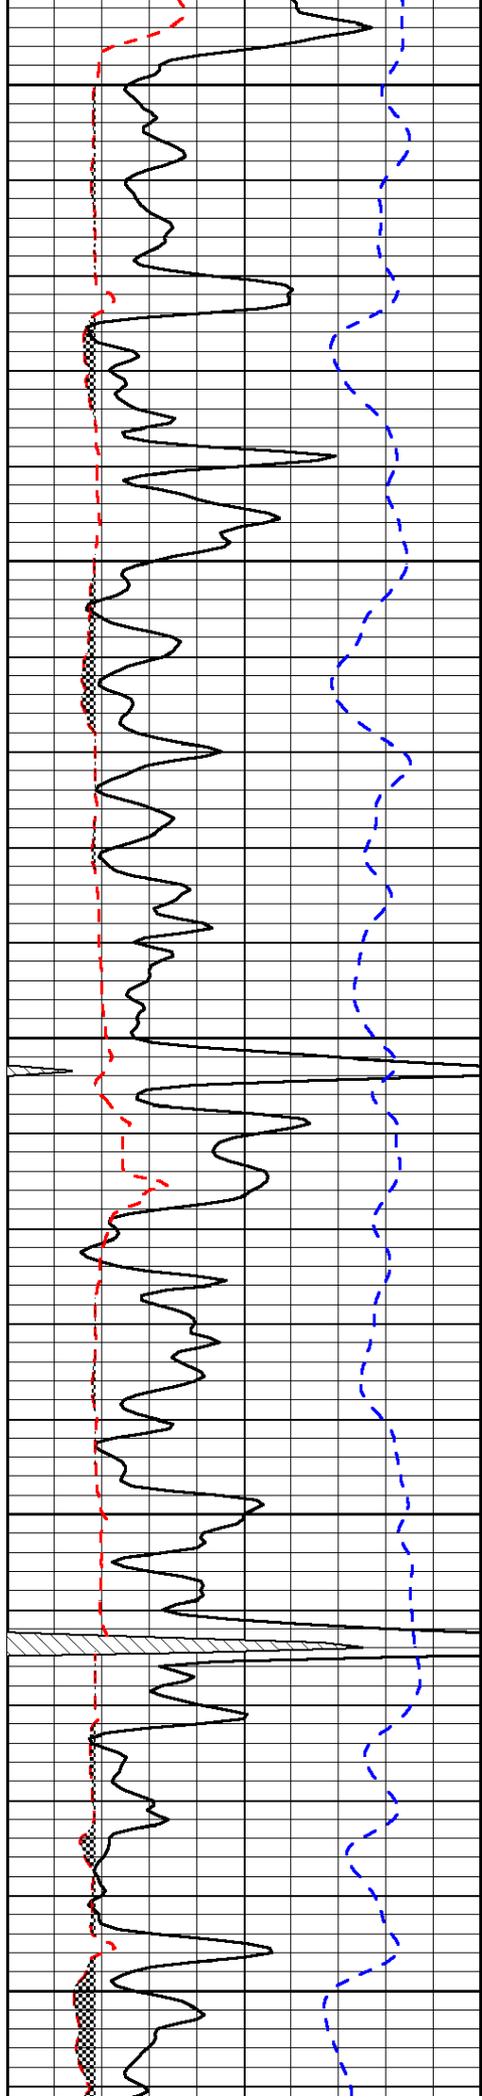


2900

2950

3000

3050

3100

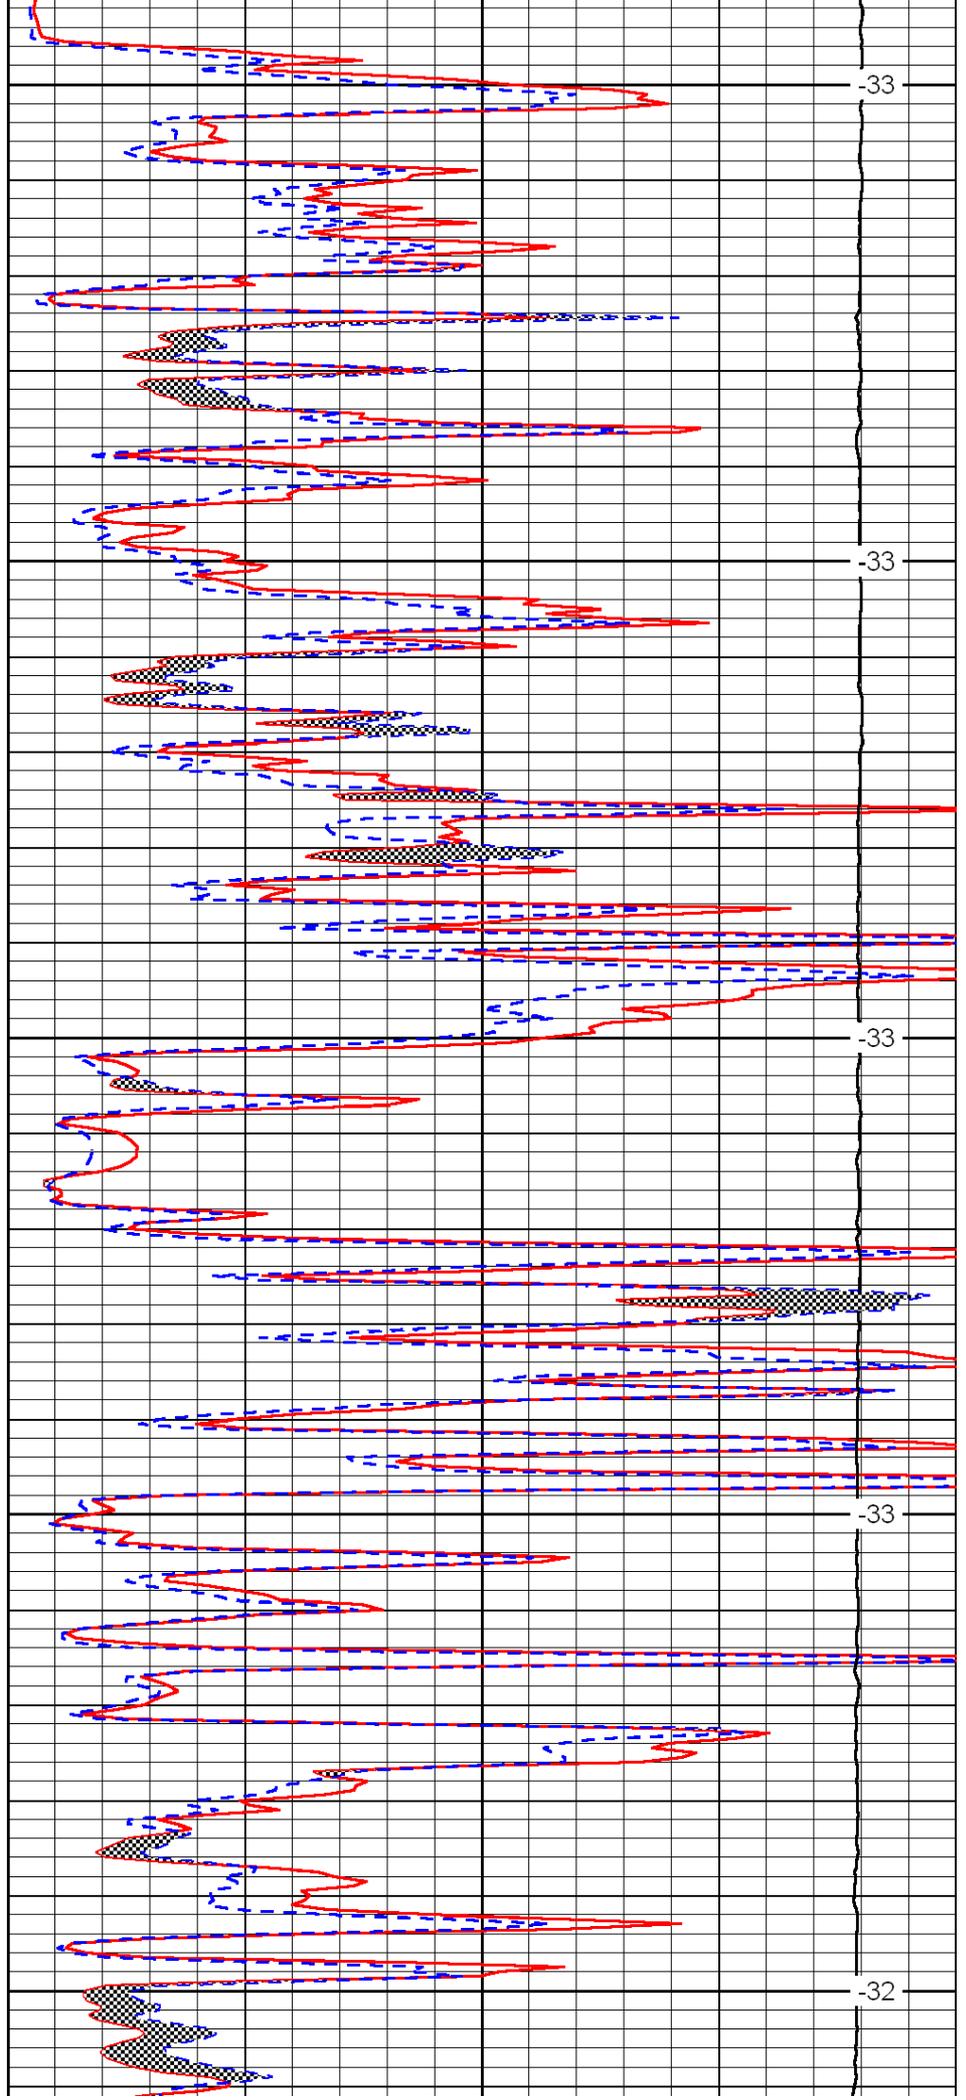


-33

-33

-33

-33

-32

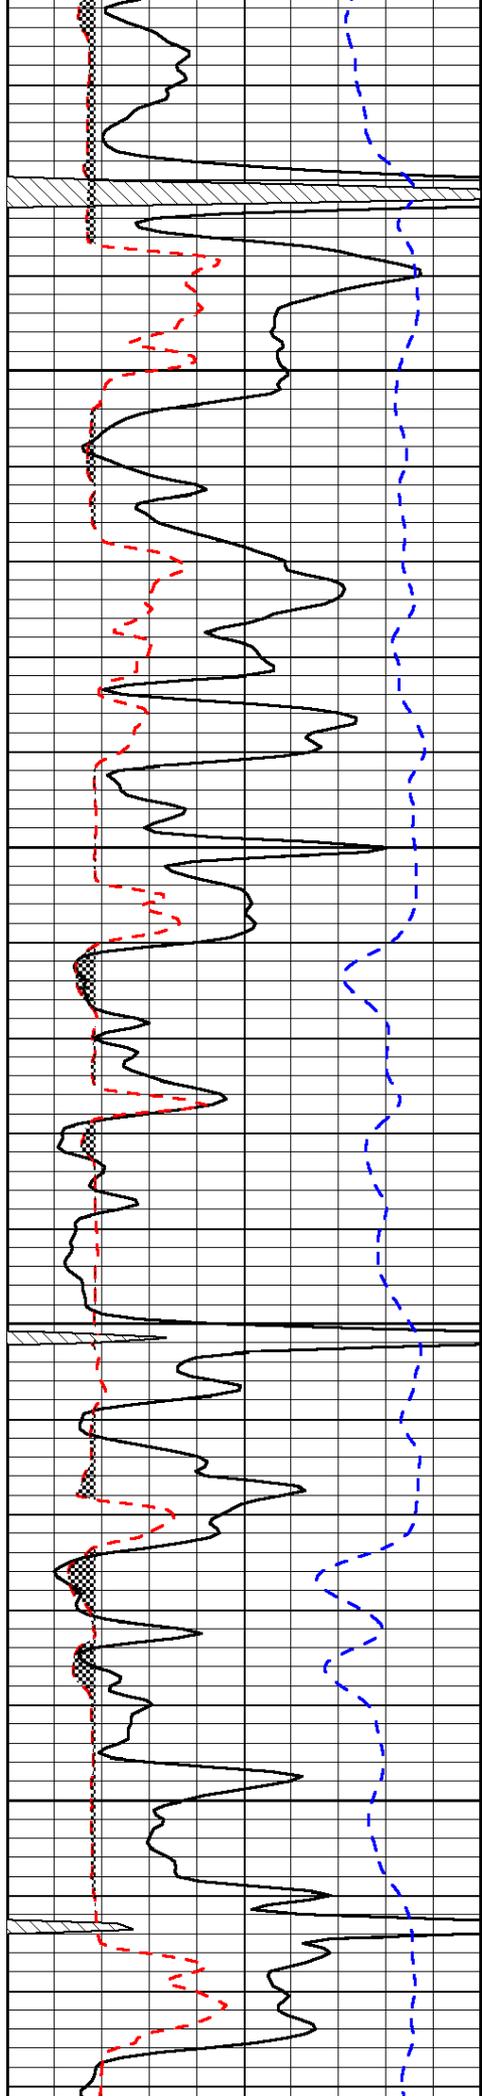


3150

3200

3250

3300

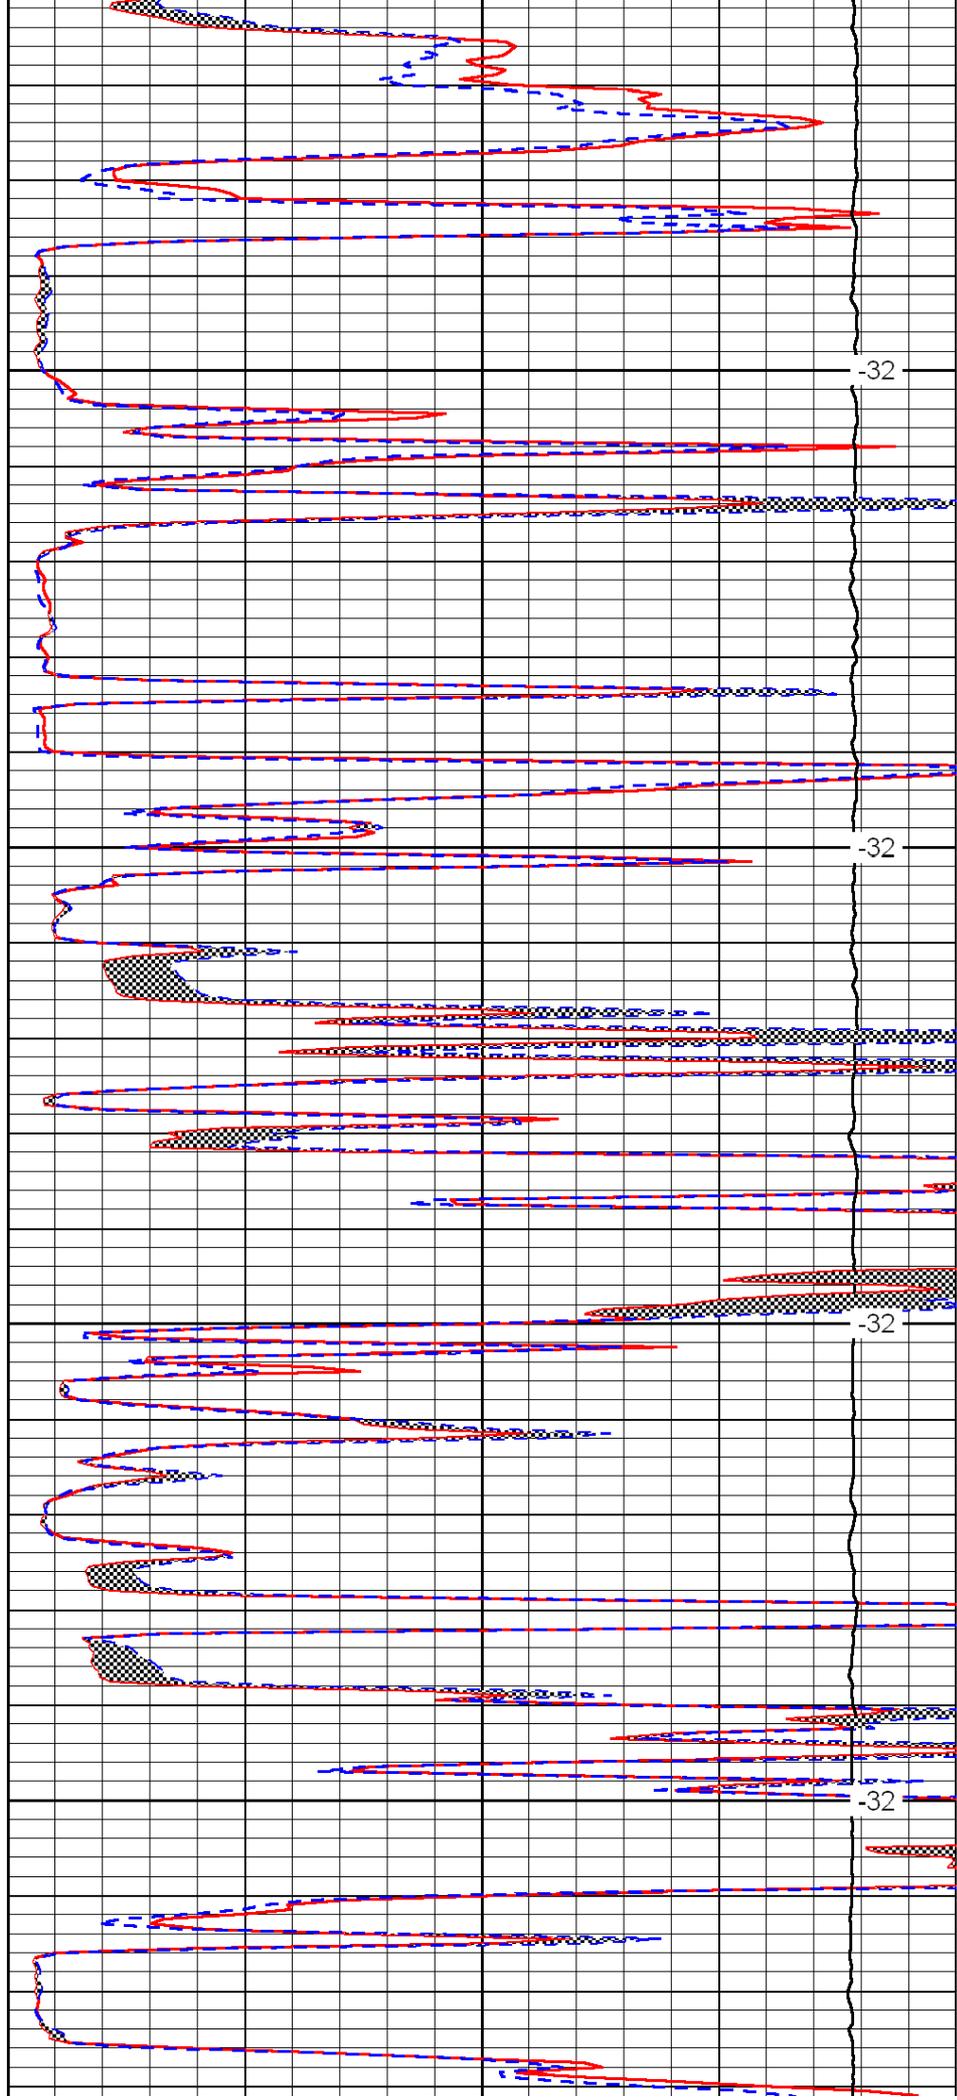


-32


-32

-32


-32

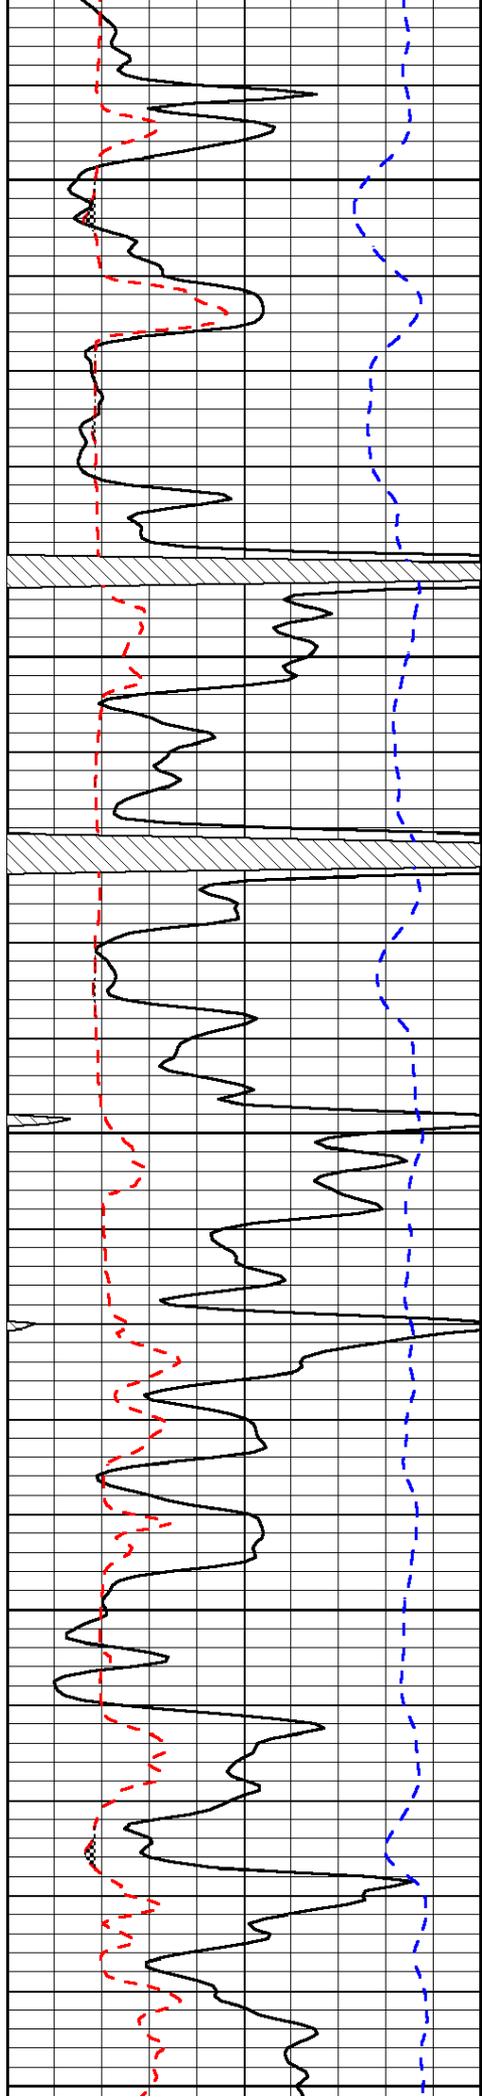


3350
3400
3450
3500
3550

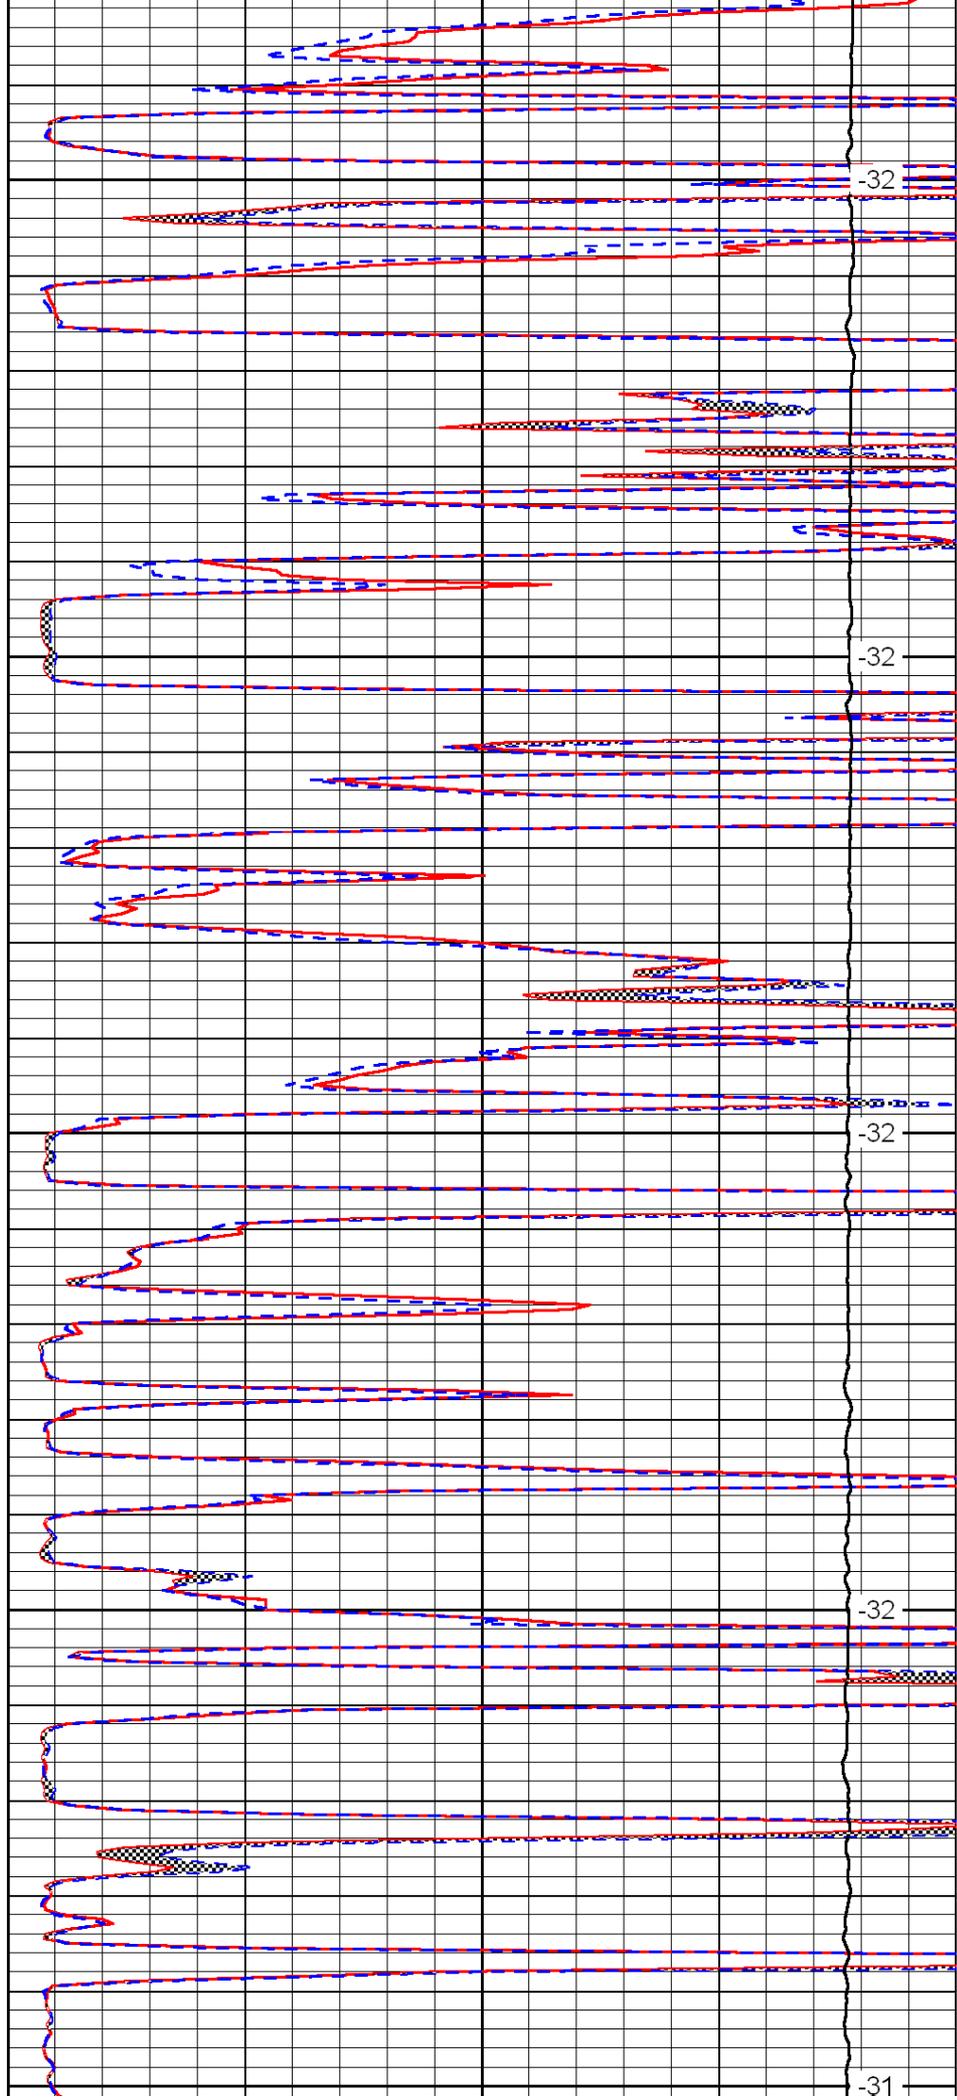

-32
-32
-32
-32
-31

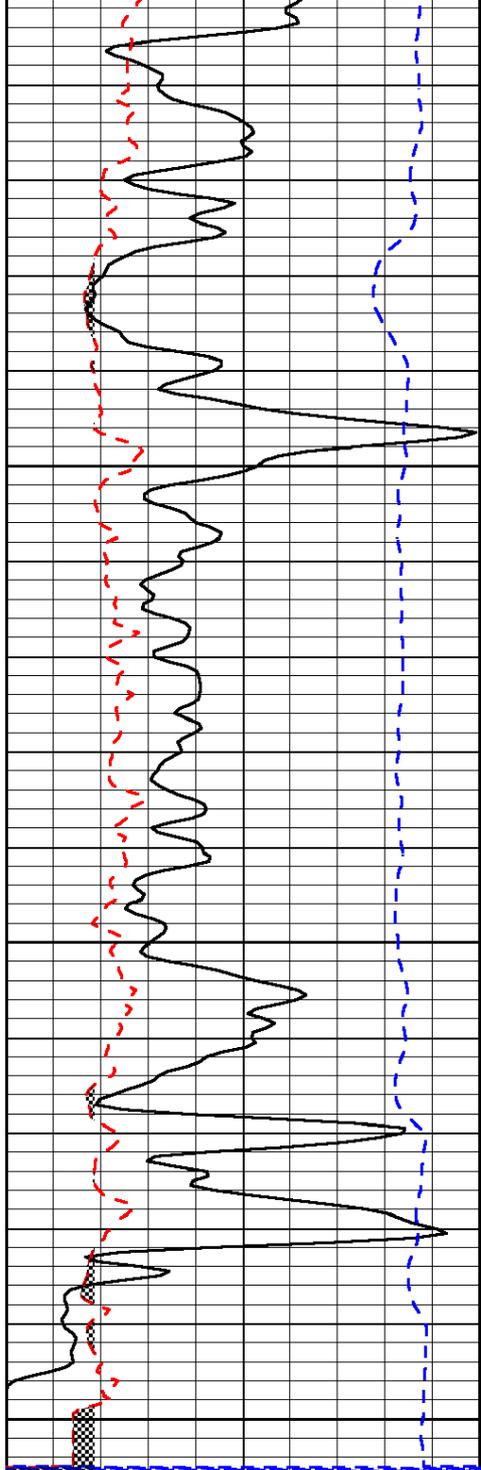

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

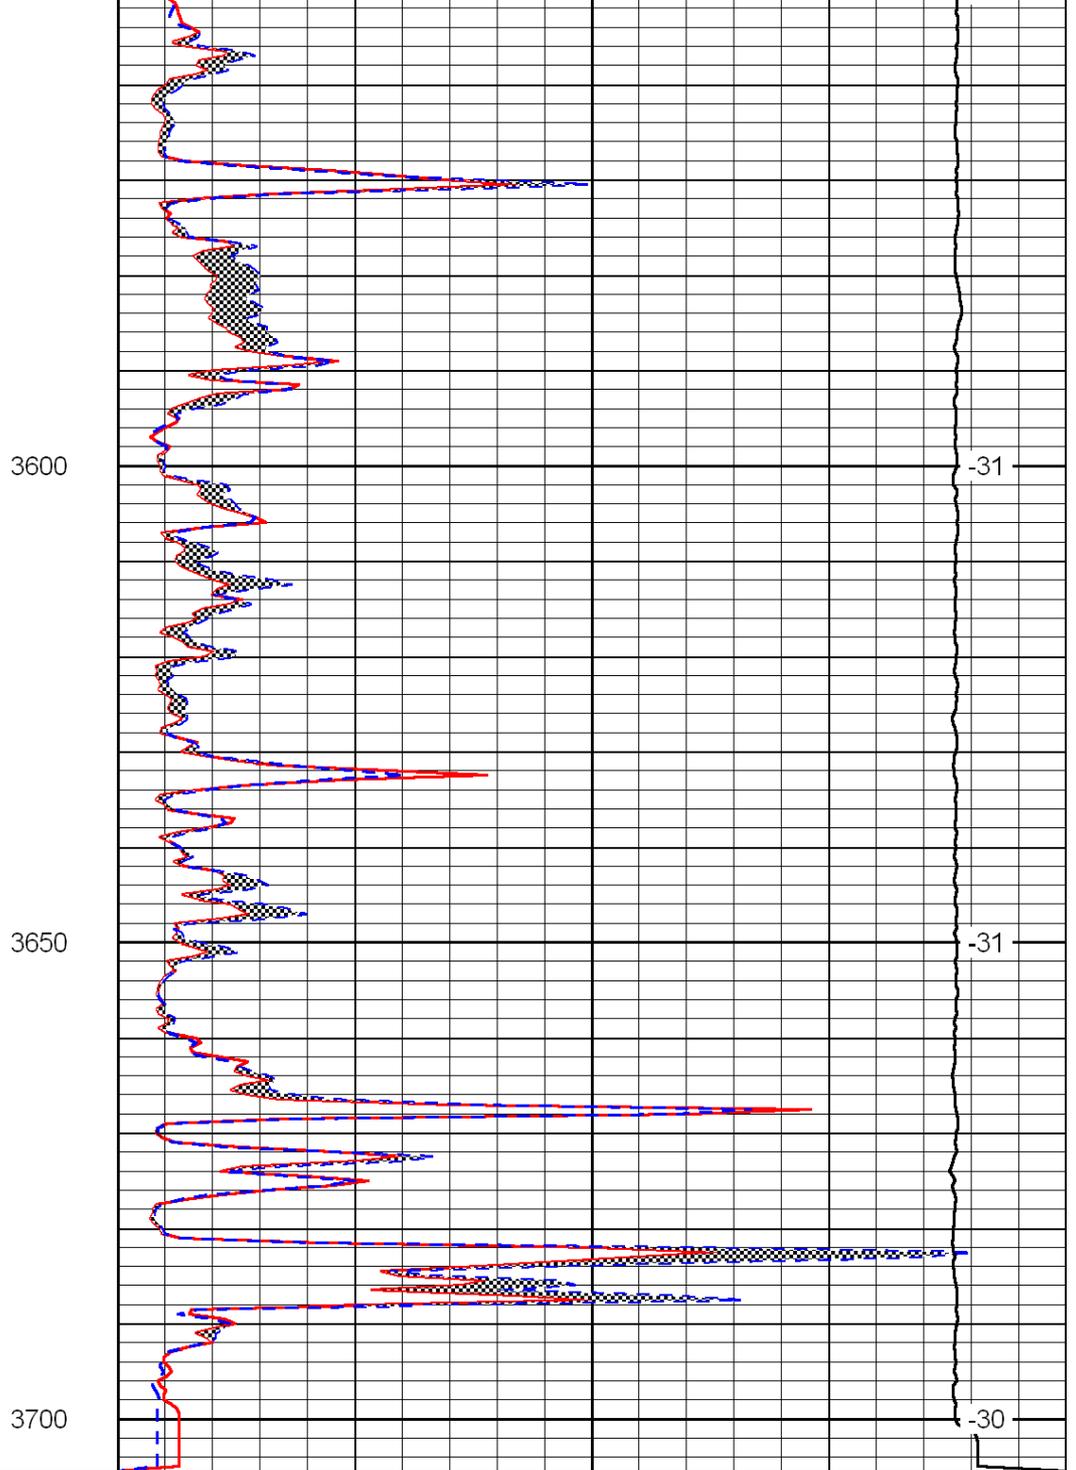

0	Micro Inverse 1 X 1	40
0	Micro Normal 2''	40
15000	Line Weight	0

LSPD