



Microresistivity
Log

DIGITAL LOG (785) 625-3858

API No.		Company L. D. Drilling, Inc.	
15-009-25,645-00-00		Well CJ & M, Inc. No. 1-24	
Field Unruh		County Barton State Kansas	
Location NE SW SW SE 355' FSL & 2235' FEL		Other Services CNL/CDL DIL	
Sec: 24 Twp: 20 S Rge: 15 W		Elevation	
Permanent Datum Ground Level		K.B. 1920	
Log Measured From Kelly Bushing		D.F. 1915	
Drilling Measured From Kelly Bushing		G.L. 1915	
Date	1/6/2012		
Run Number	Two		
Depth Driller	3700		
Depth Logger	3698		
Bottom Logged Interval	3697		
Top Log Interval	2800		
Casing Driller	8,625 @ 894		
Casing Logger	889		
Bit Size	8.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	18,000		
Density / Viscosity	9.3 68		
pH / Fluid Loss	9.0 16.8		
Source of Sample	Flowline		
Rm @ Meas. Temp	.28 @ 63		
Rmf @ Meas. Temp	.21 @ 63		
Rmc @ Meas. Temp	.38 @ 63		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.16 @ 113		
Operating Rig Time	4 1/2 Hours		
Max Rec. Temp. F	113		
Equipment Number	17		
Location	Hays		
Recorded By	D. Martin	B. Becker	
Witnessed By	Kim Shoemaker		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Dundee, KS
3 1/2 W (1/2 W past 80 Rd), N Into

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

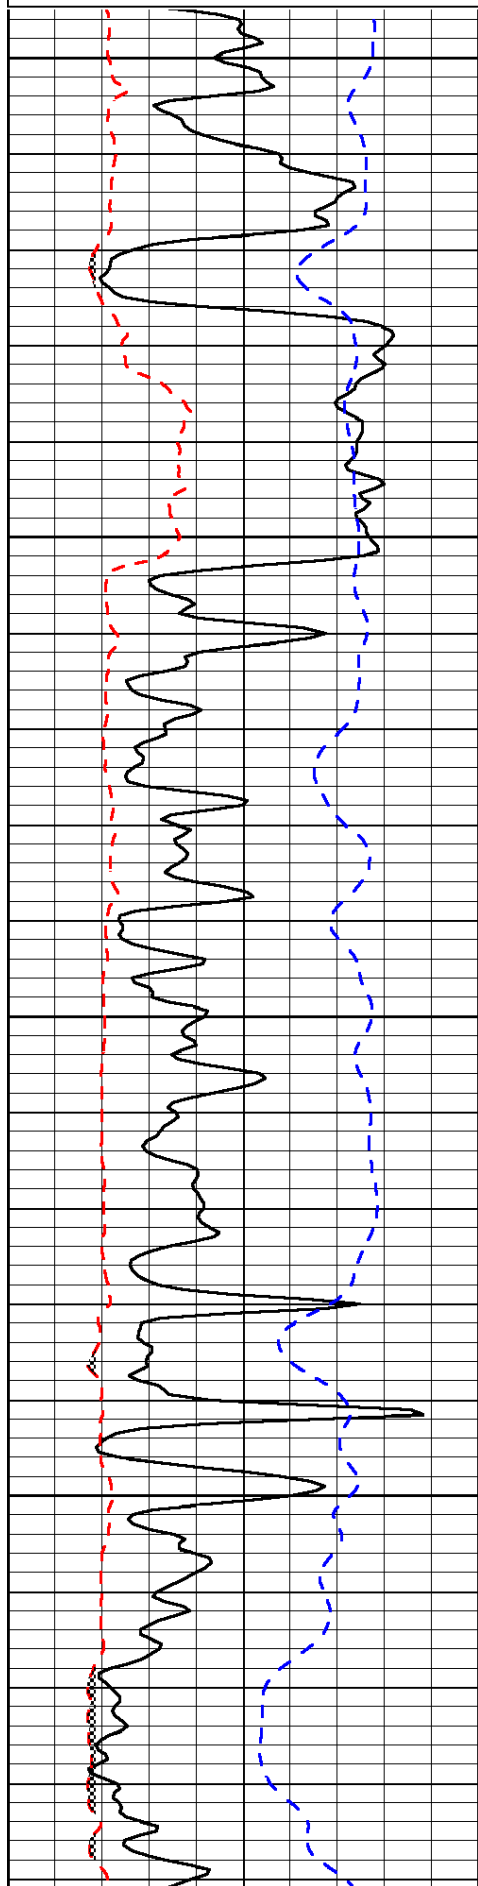


2800

2850

2900

2950


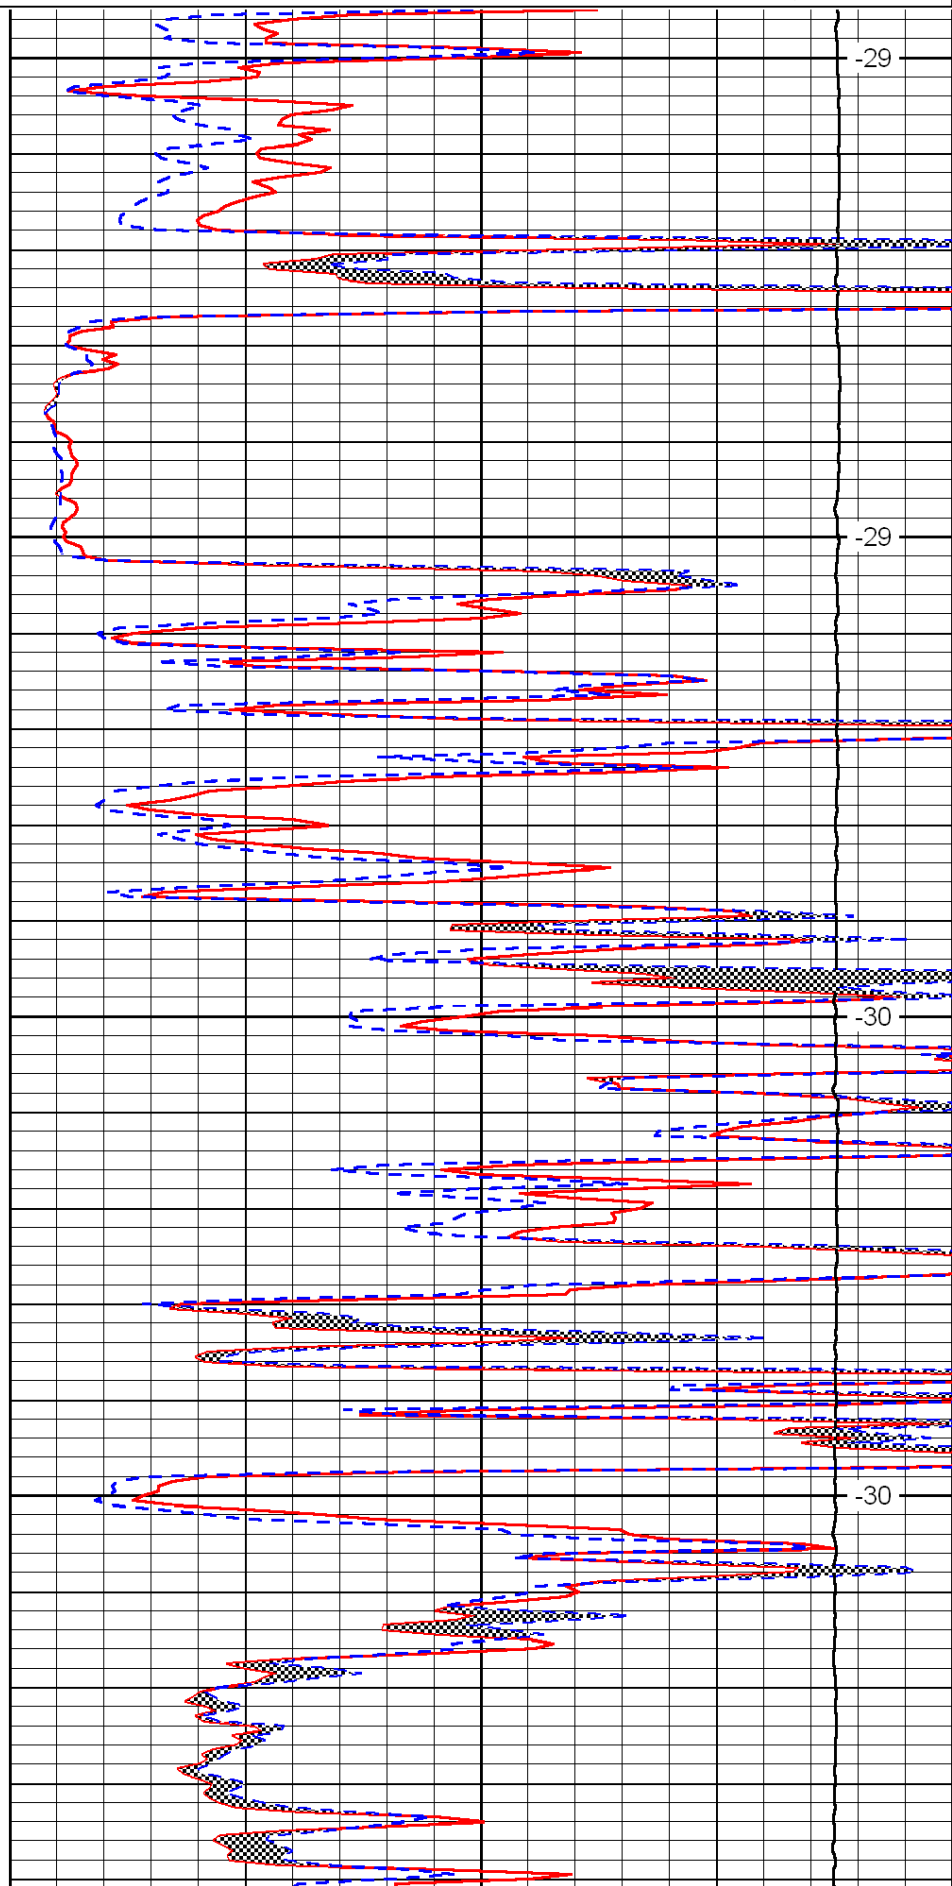



-29

-29

-30

-30

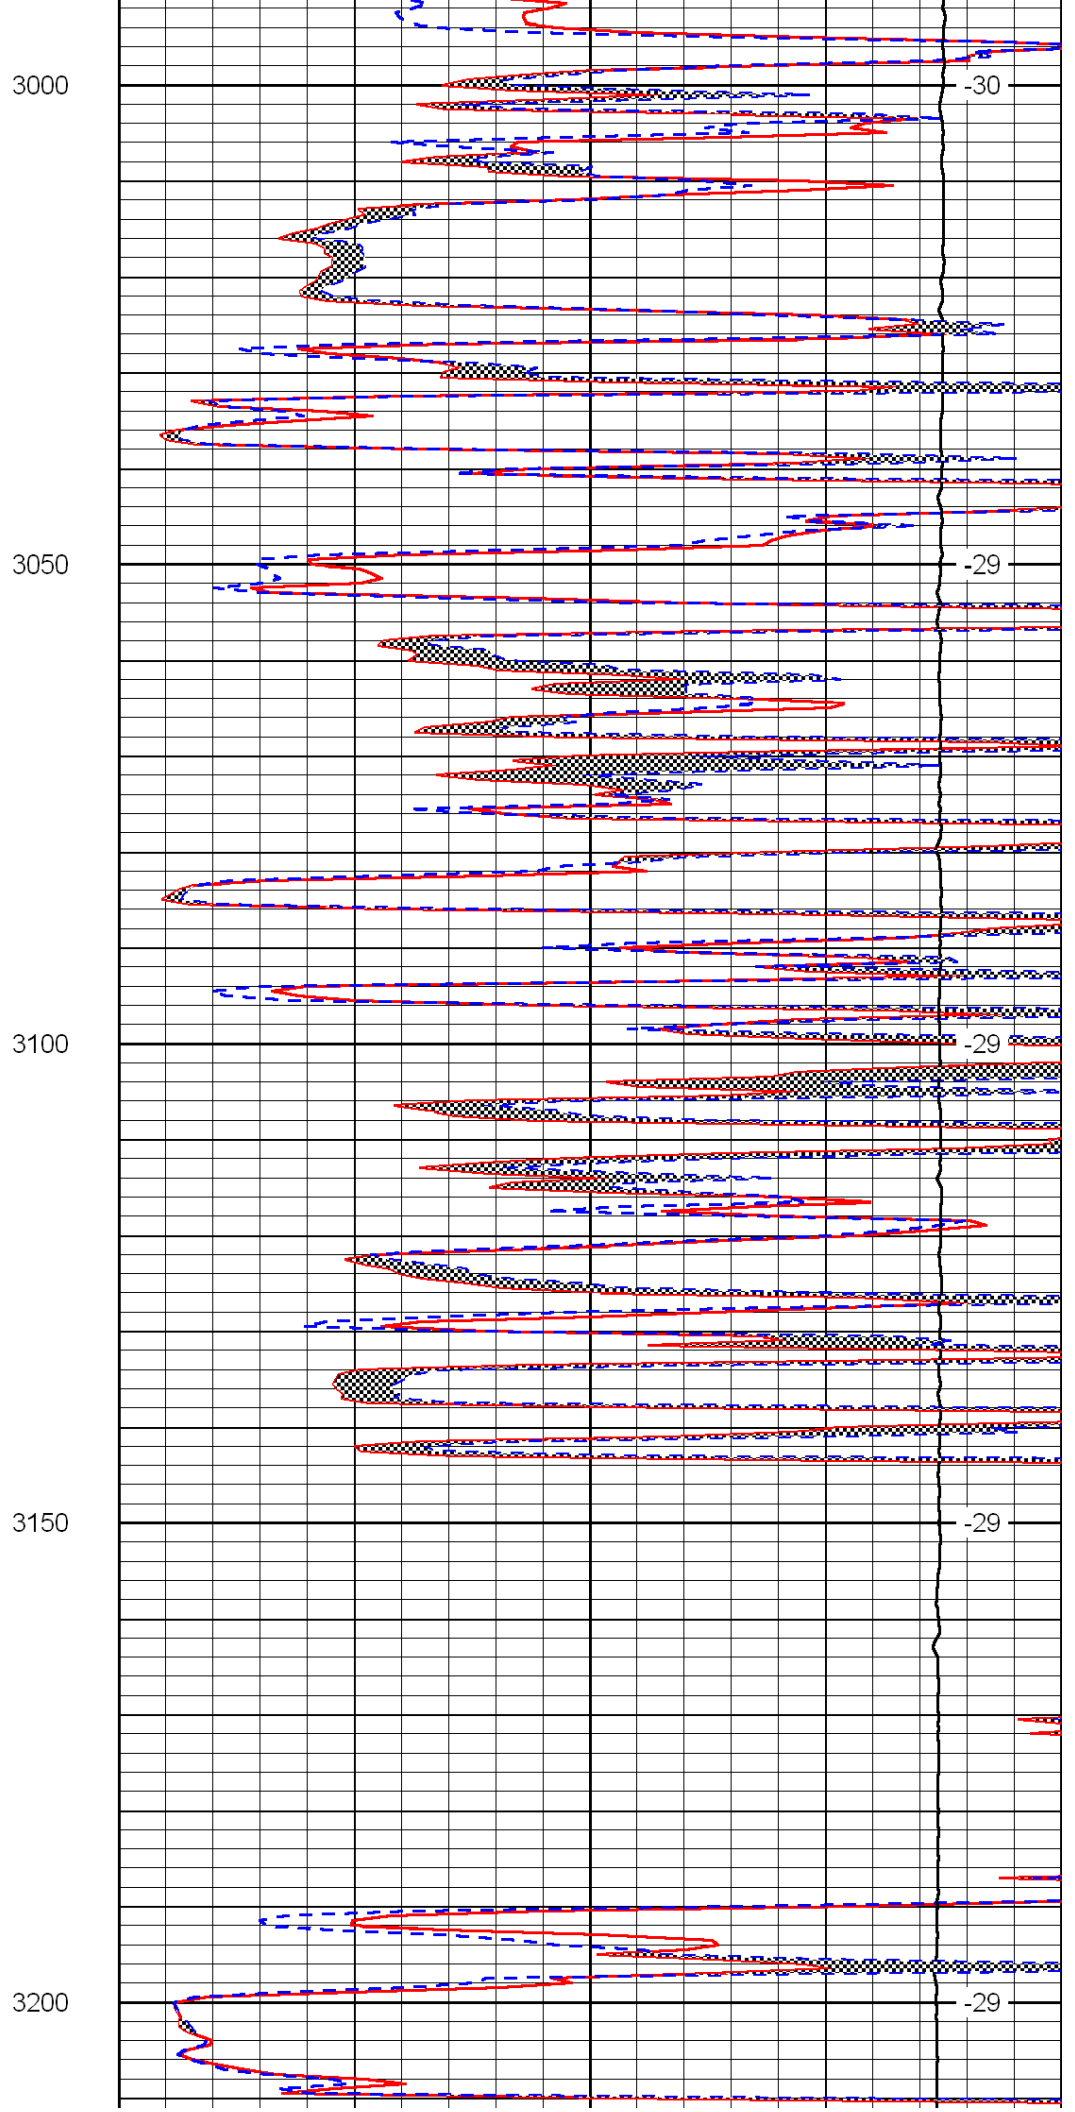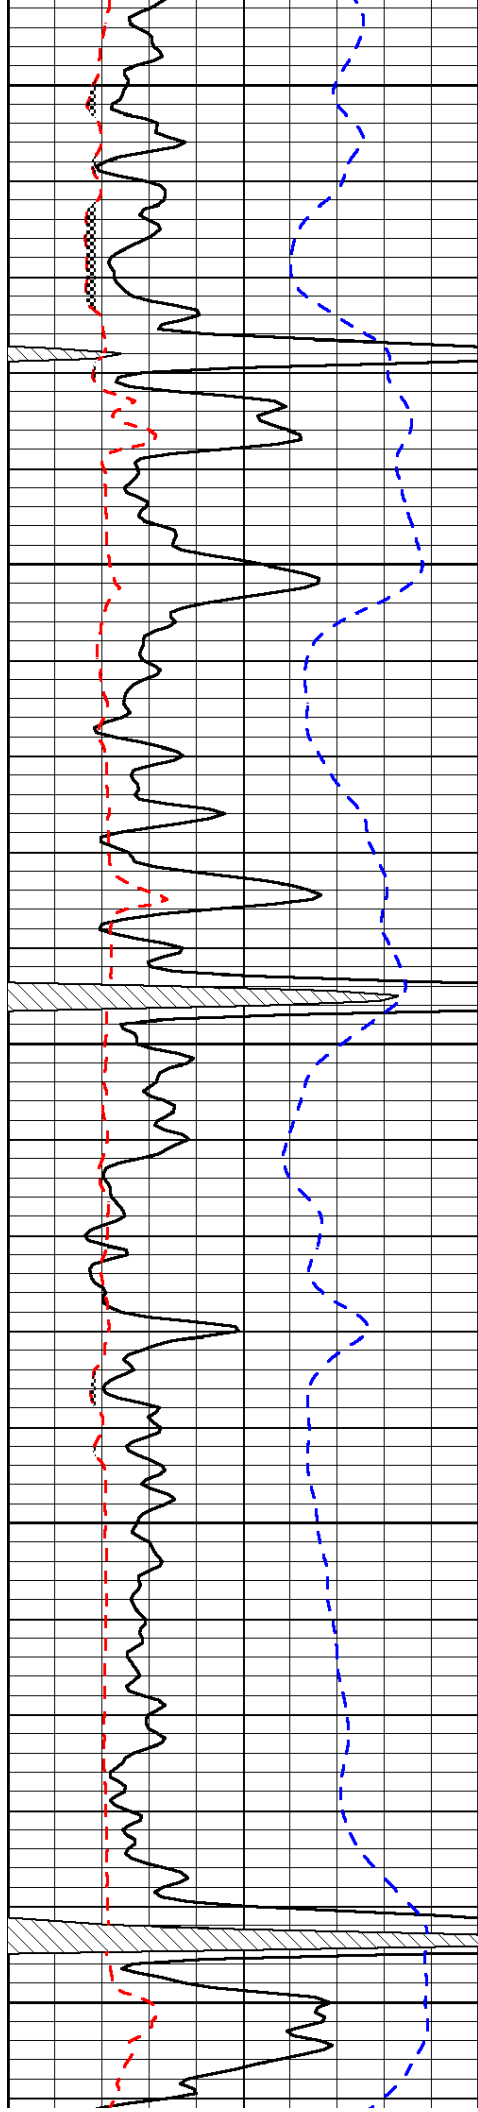

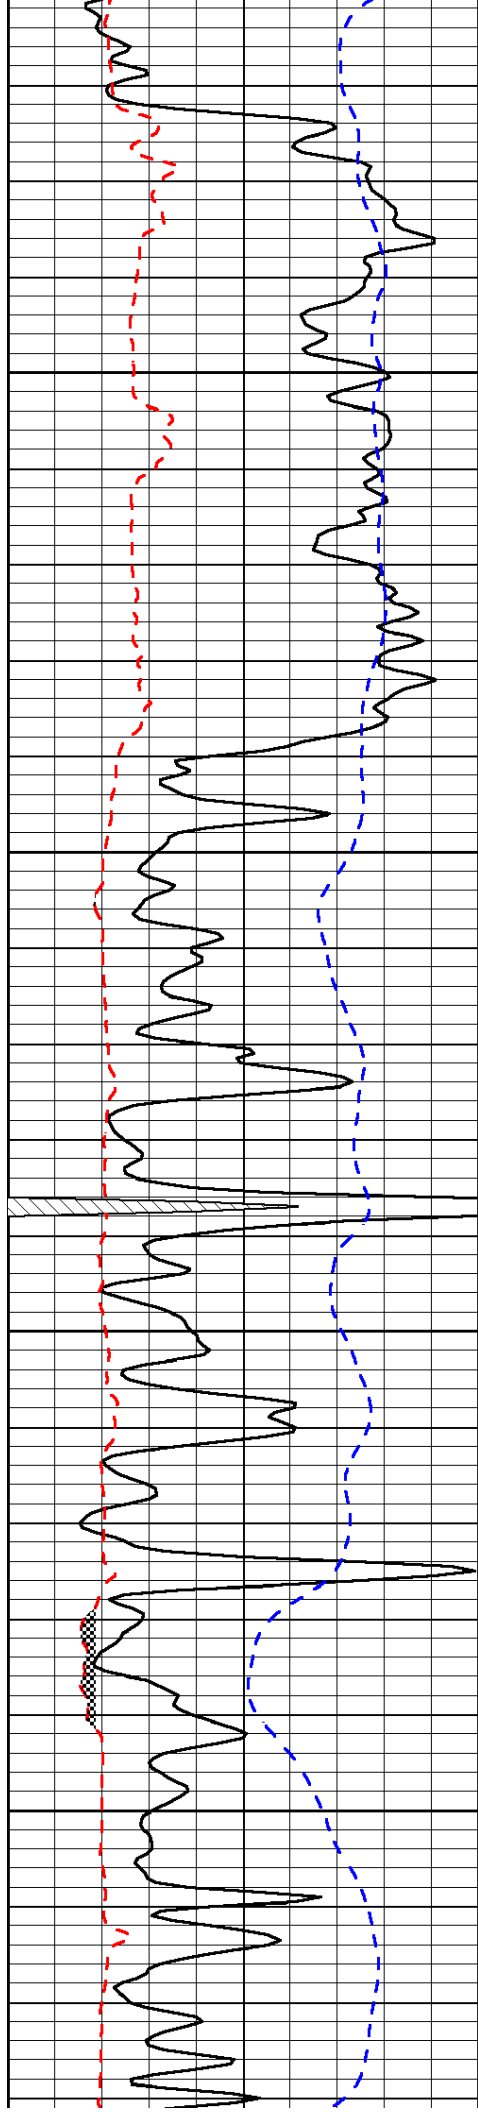


3250

3300

3350

3400

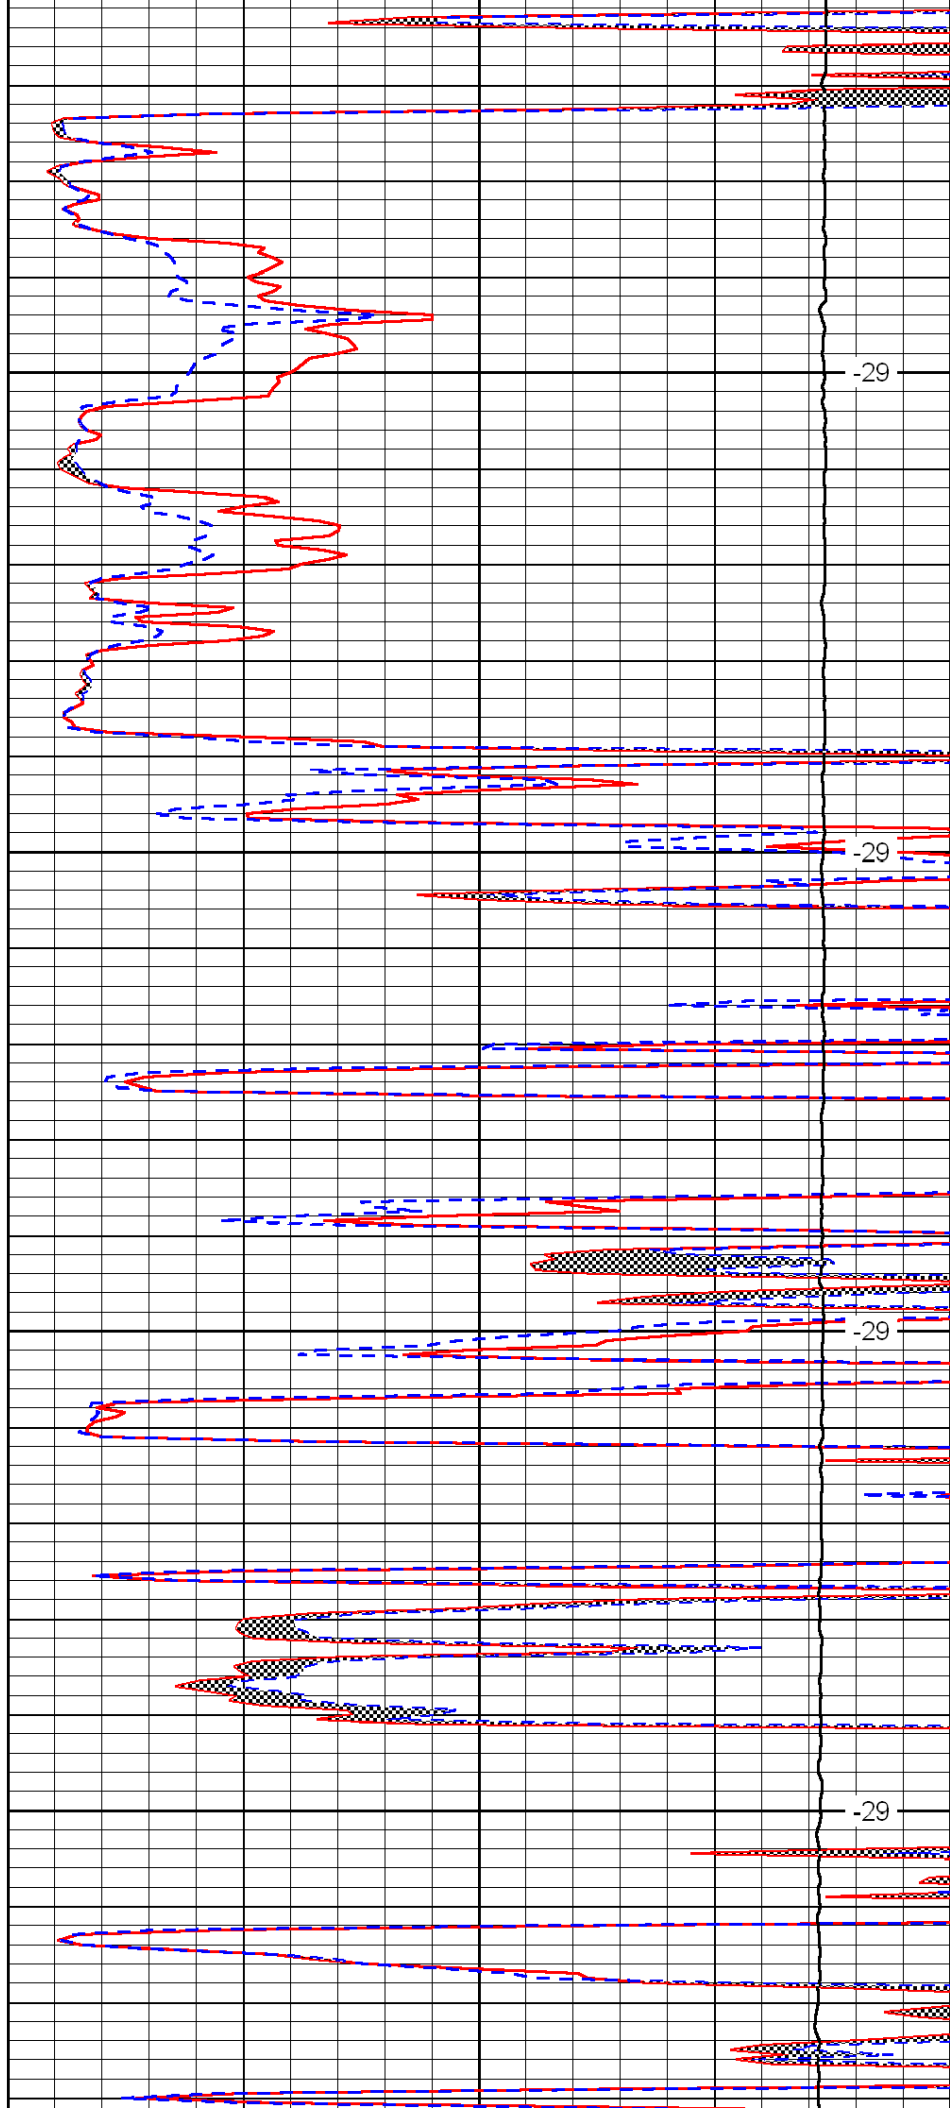


-29

-29

-29

-29

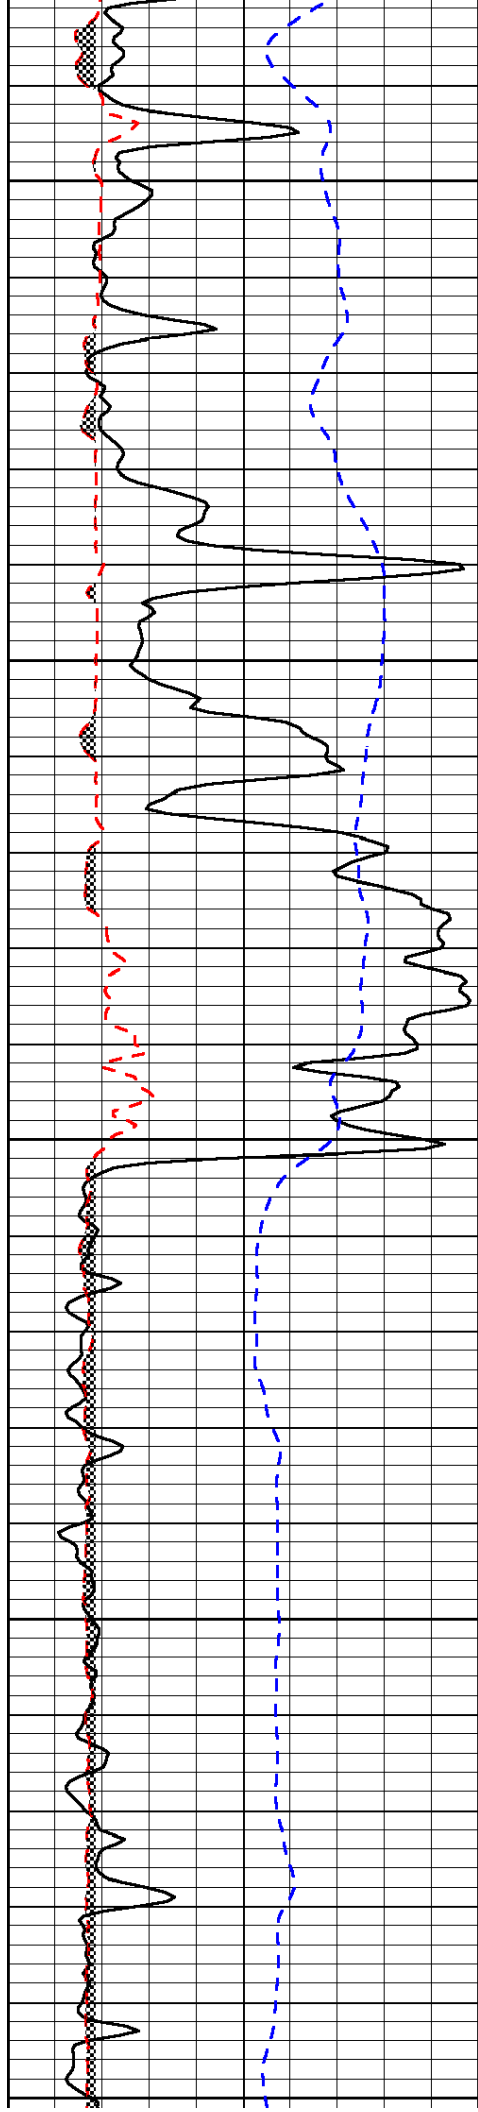


3450

3500

3550

3600

3650

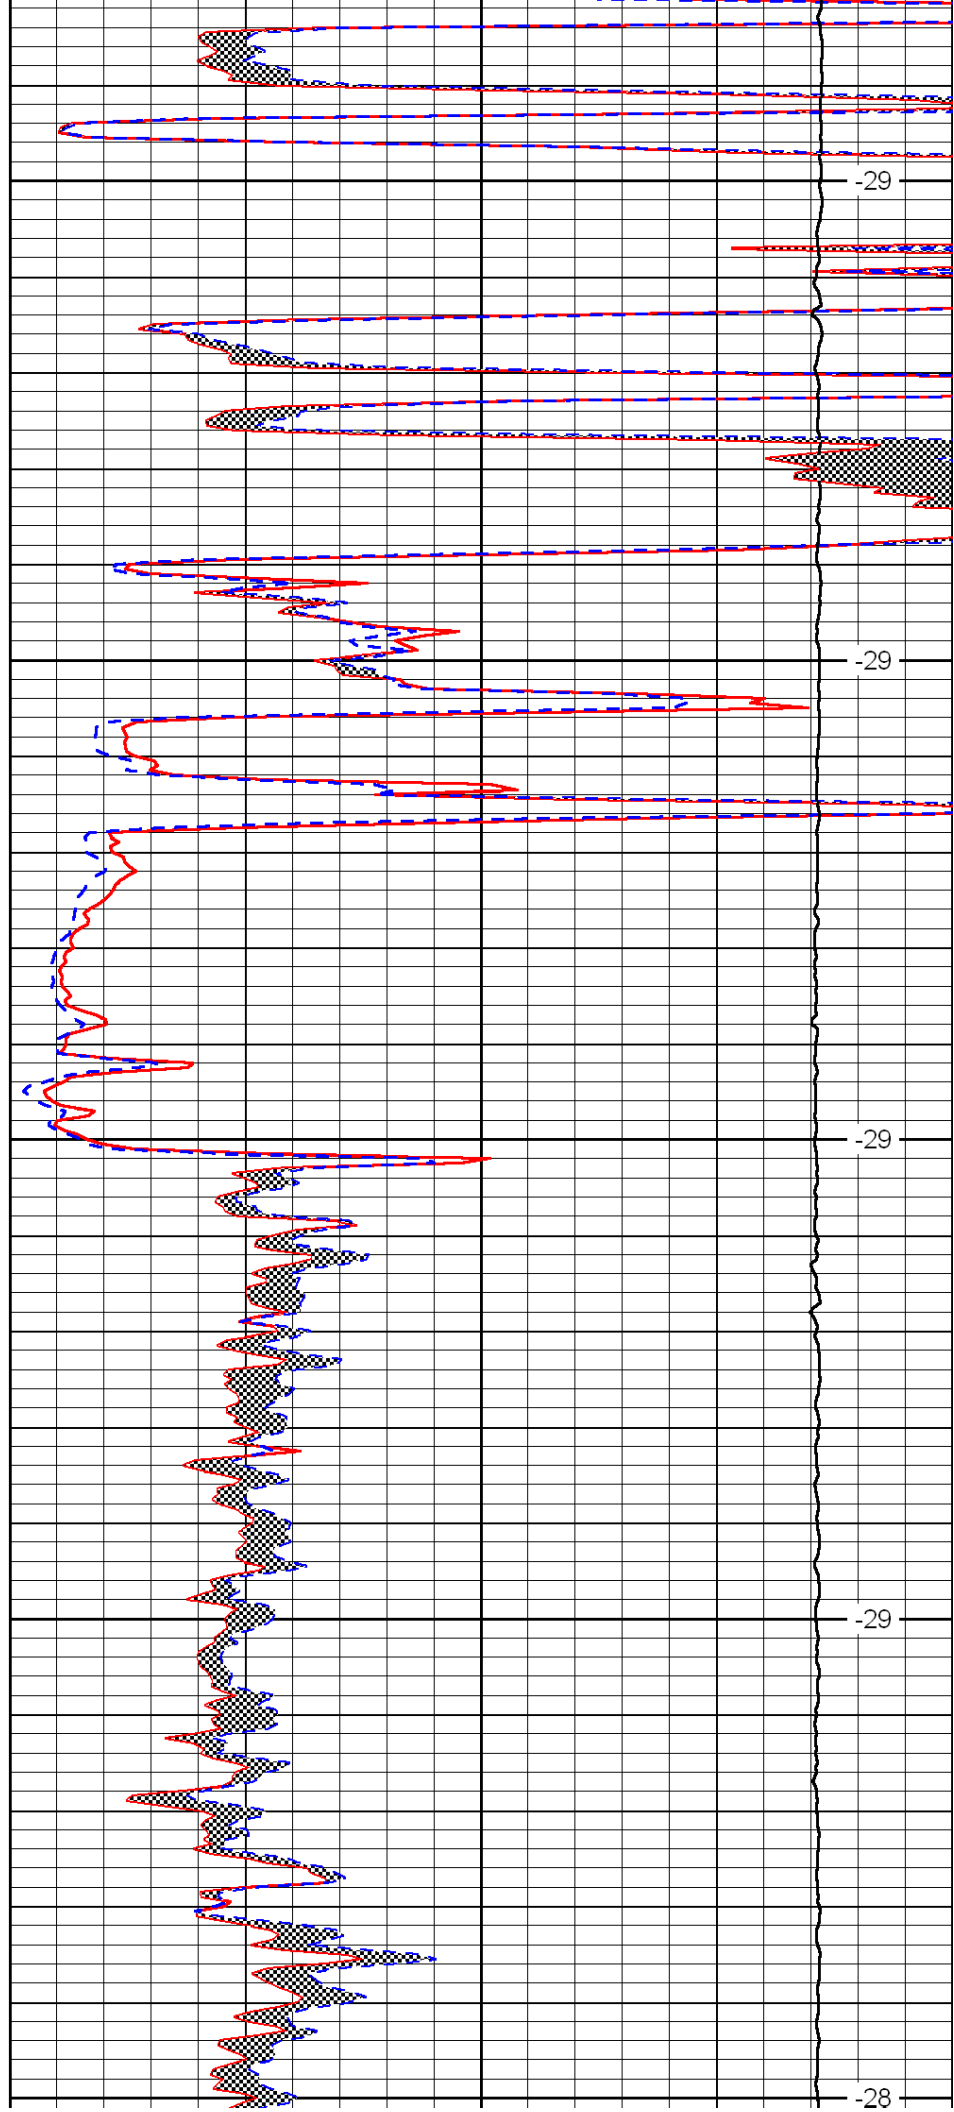


-29

-29


-29

-29

-28

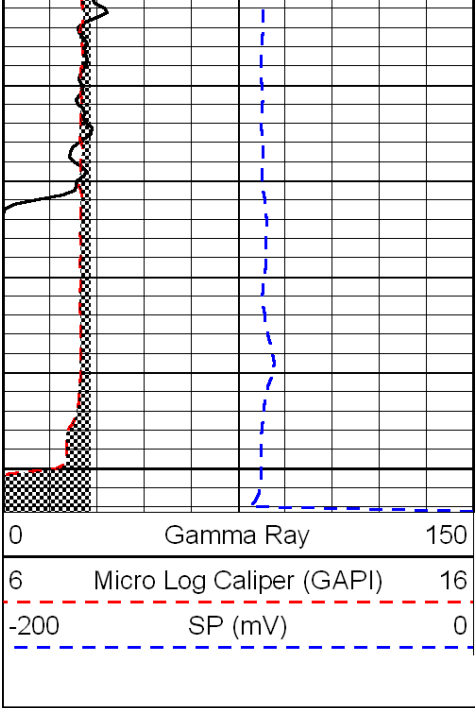

3700

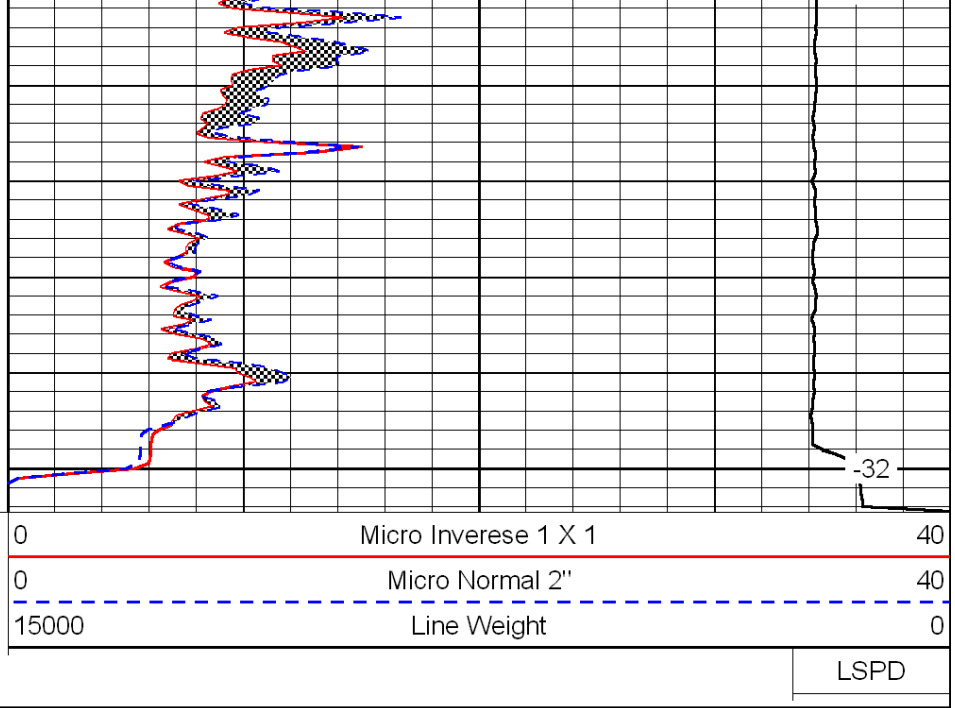

LSPD