



Microresistivity
Log

DIGITAL LOG (785) 625-3858

API No.		Company Kahan and Associates, Inc.	
15-009-25,627-00-00		Well Ney No.5	
		Field Kraft-Prusa	
		County Barton State Kansas	
Location		NW/NW/NE 330' FNL & 2310' FEL	
Sec: 17		Twp: 16S Rge: 11W	
Permanent Datum Ground Level		Elevation 1855	
Log Measured From Kelly Bushing		7 Ft. Above Perm. Datum	
Drilling Measured From Kelly Bushing		K.B. 1862 D.F. 1862 G.L. 1855	
Date		11/8/2011	
Run Number		Two	
Depth Driller		3340	
Depth Logger		3340	
Bottom Logged Interval		3339	
Top Log Interval		1850	
Casing Driller		8.625 @ 432	
Casing Logger		429	
Bit Size		7.875	
Type Fluid in Hole		Chemical	
Salinity, ppm CL		4.500	
Density / Viscosity		9.2 48	
pH / Fluid Loss		9.5 9.2	
Source of Sample		Flowline	
Rm @ Meas. Temp		.47 @ 58	
Rmf @ Meas. Temp		.35 @ 58	
Rmc @ Meas. Temp		.63 @ 58	
Source of Rmf / Rmc		Charts	
Rm @ BHT		.25 @ 109	
Operating Rig Time		4 1/2 Hours	
Max Rec. Temp. F		109	
Equipment Number		17	
Location		Hays	
Recorded By		C. Desaire	
Witnessed By		David Wilson	



<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.



Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858


Claflin KS, 7 N,
2 W, 3 N, 1/2 E, S Into

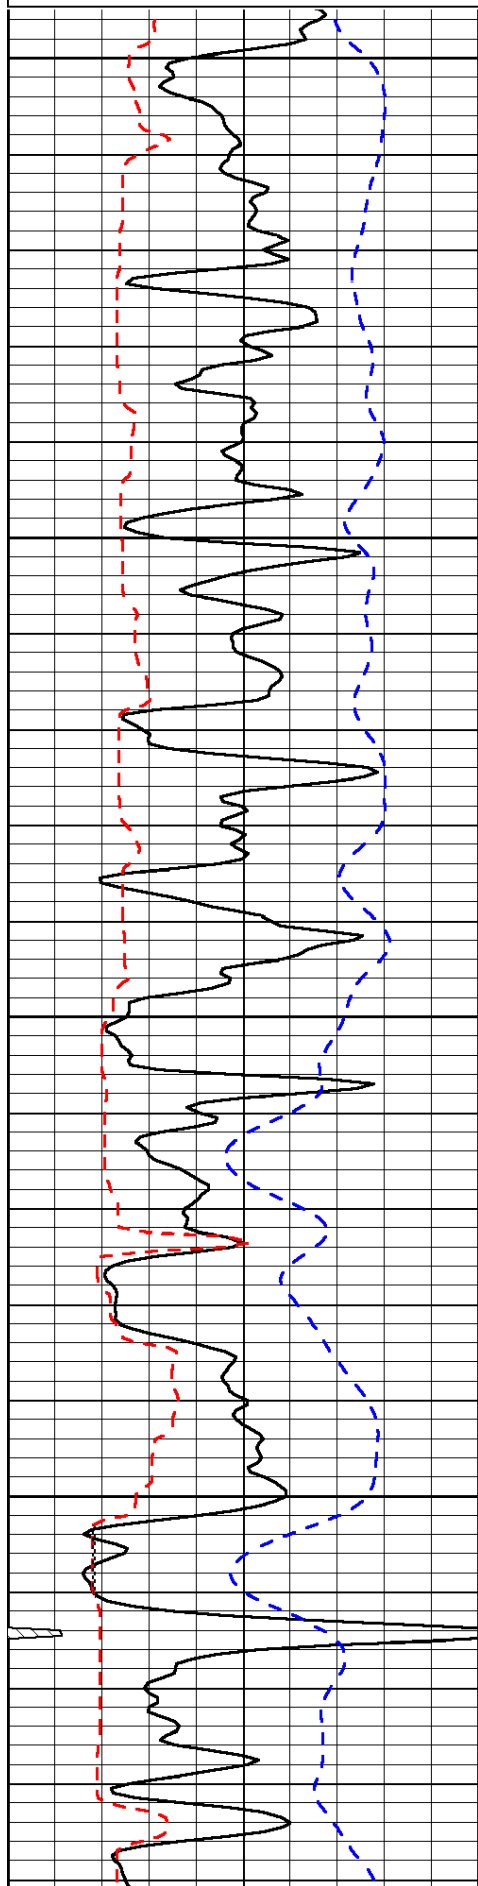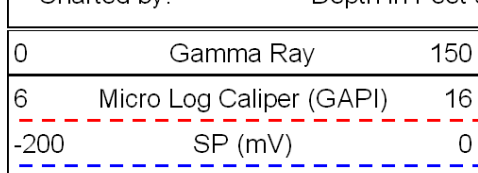

1850
1900
1950
2000

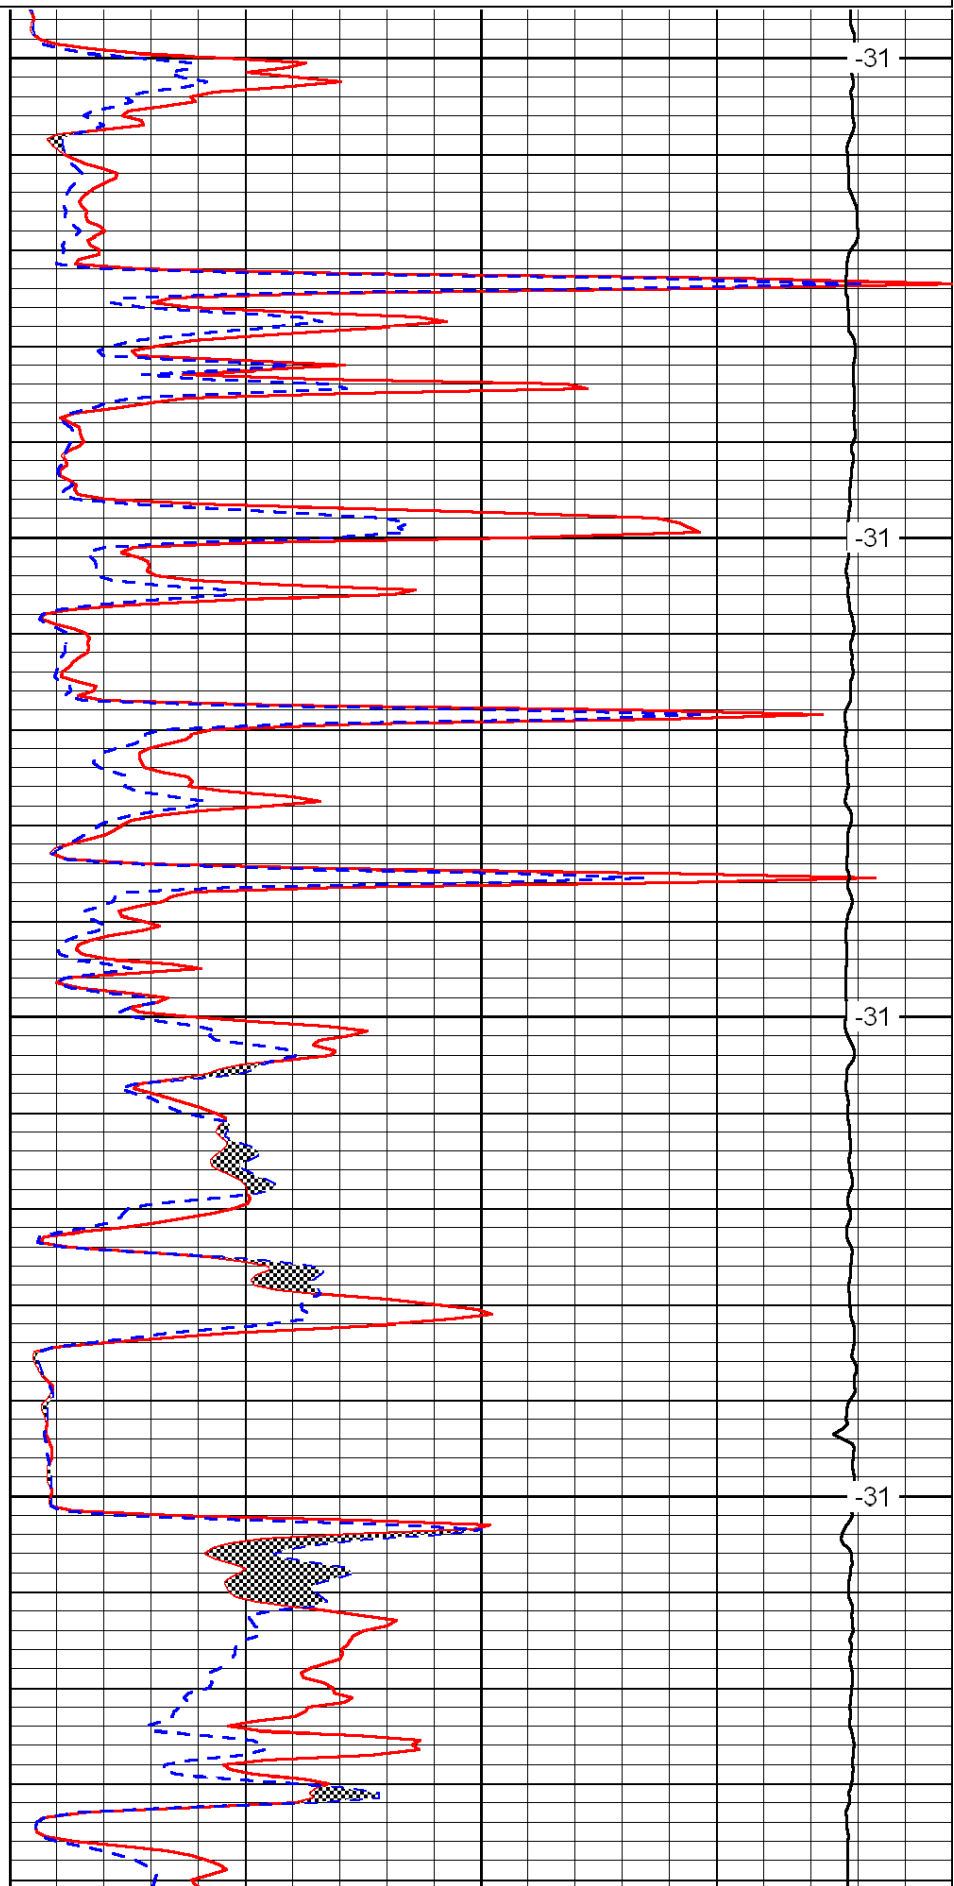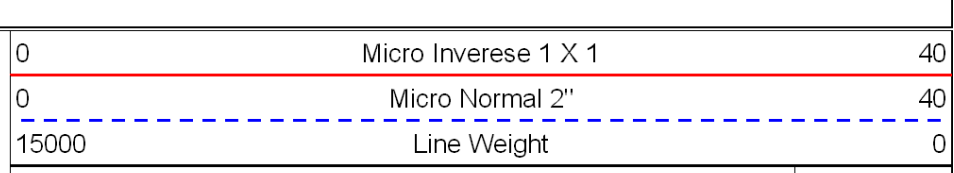

-31
-31
-31
-31

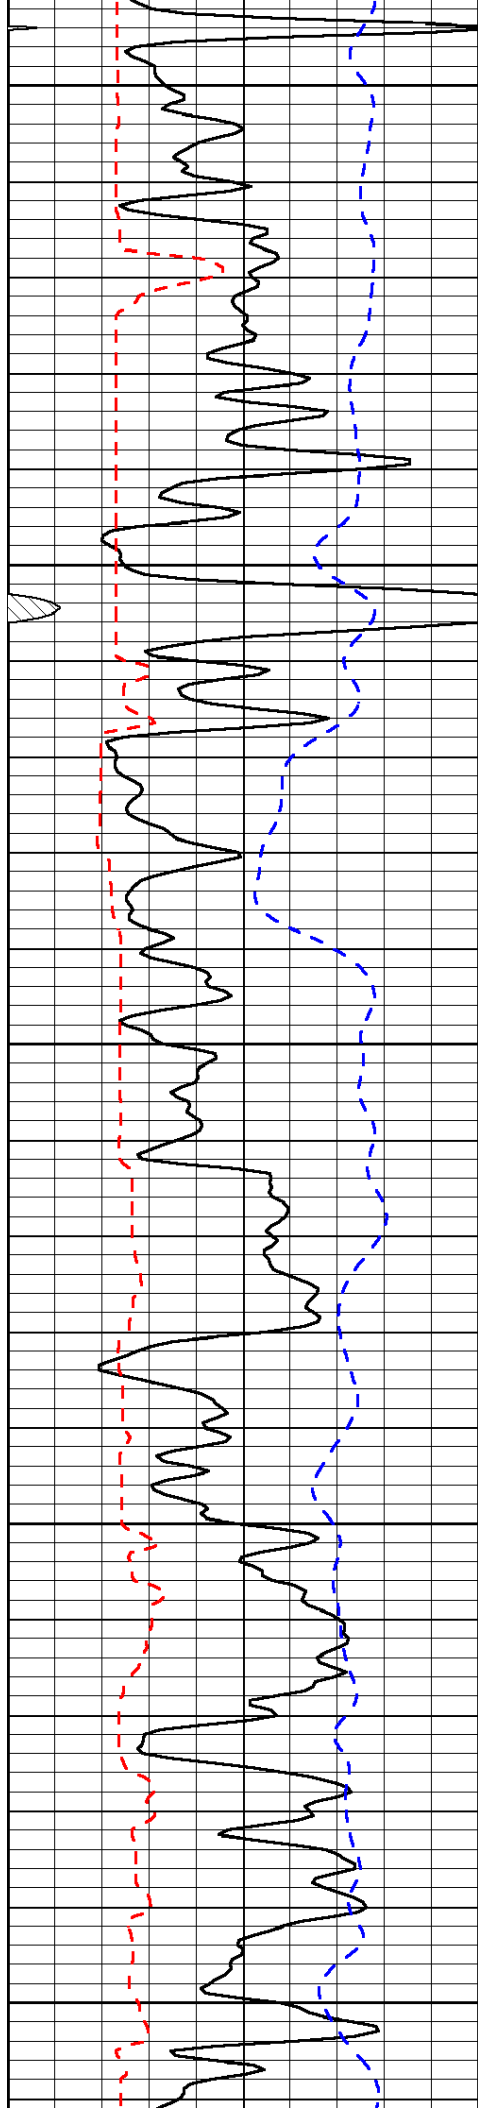


2050

2100

2150

2200

2250

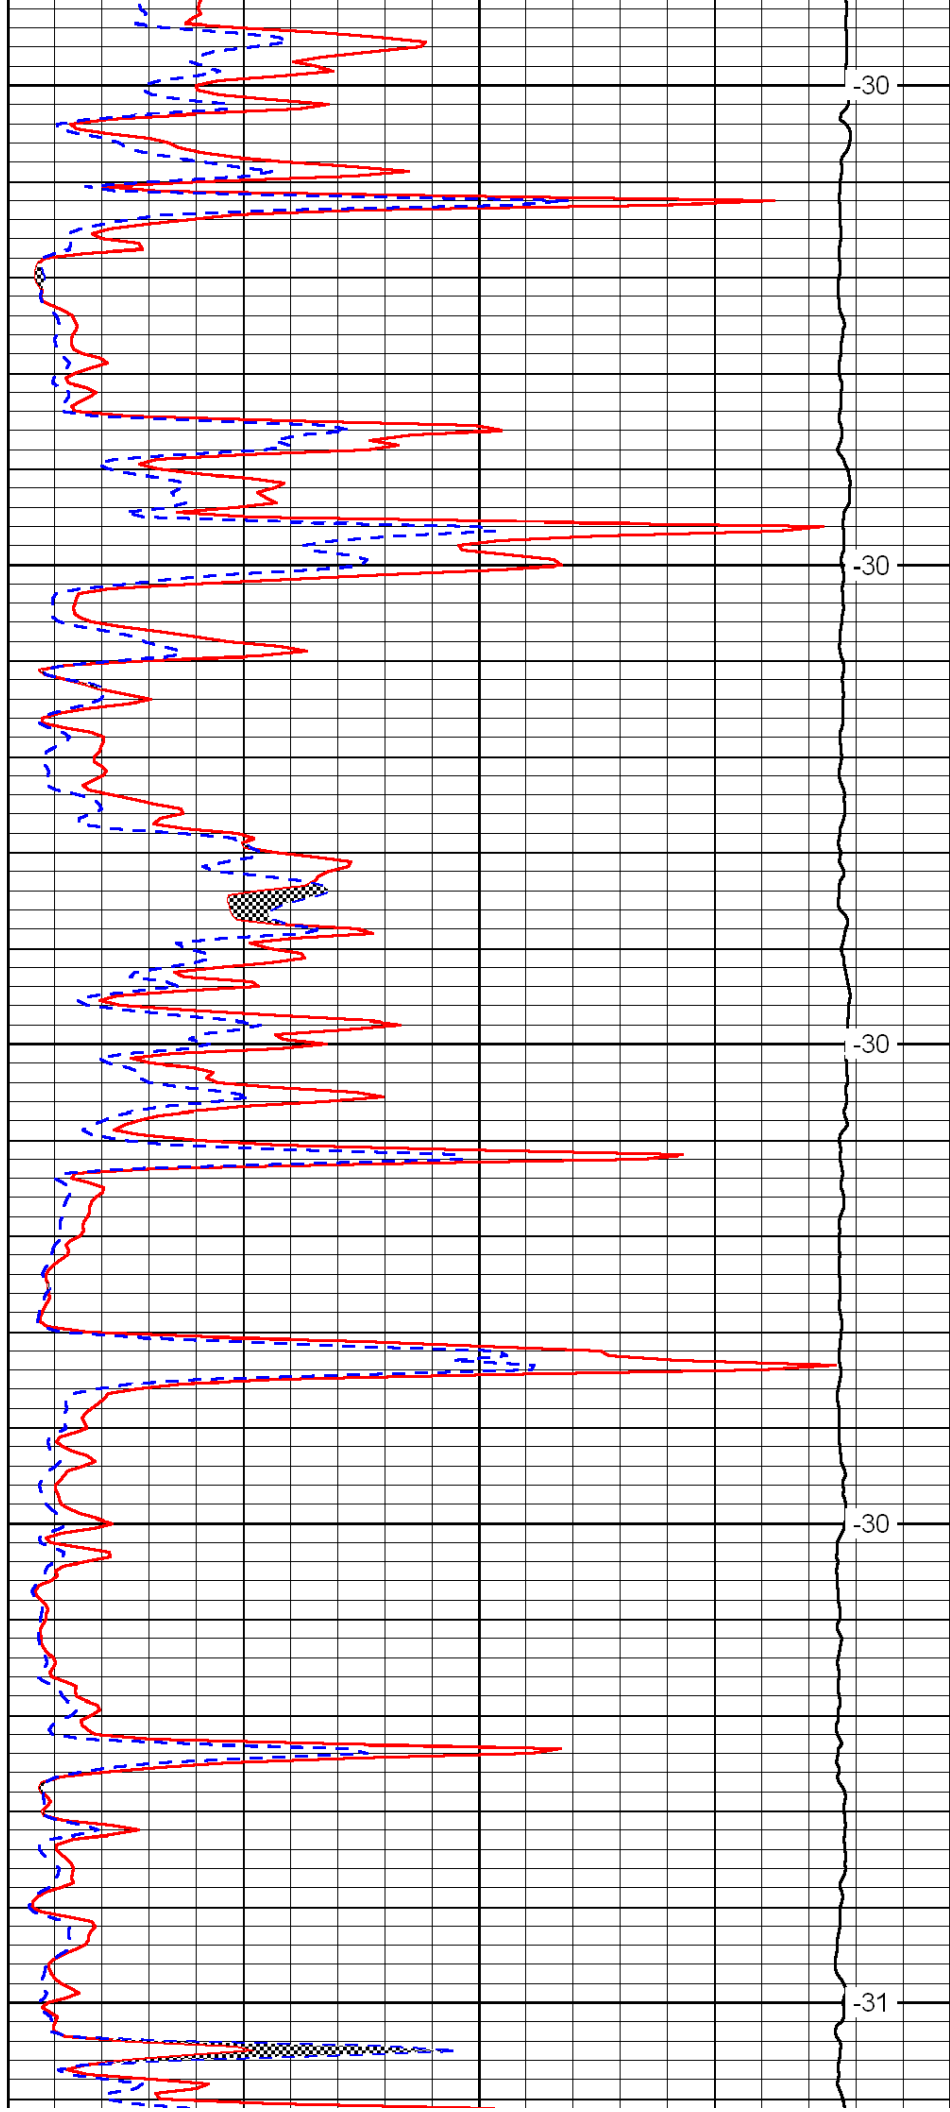



-30



-30


-30

-30

-31

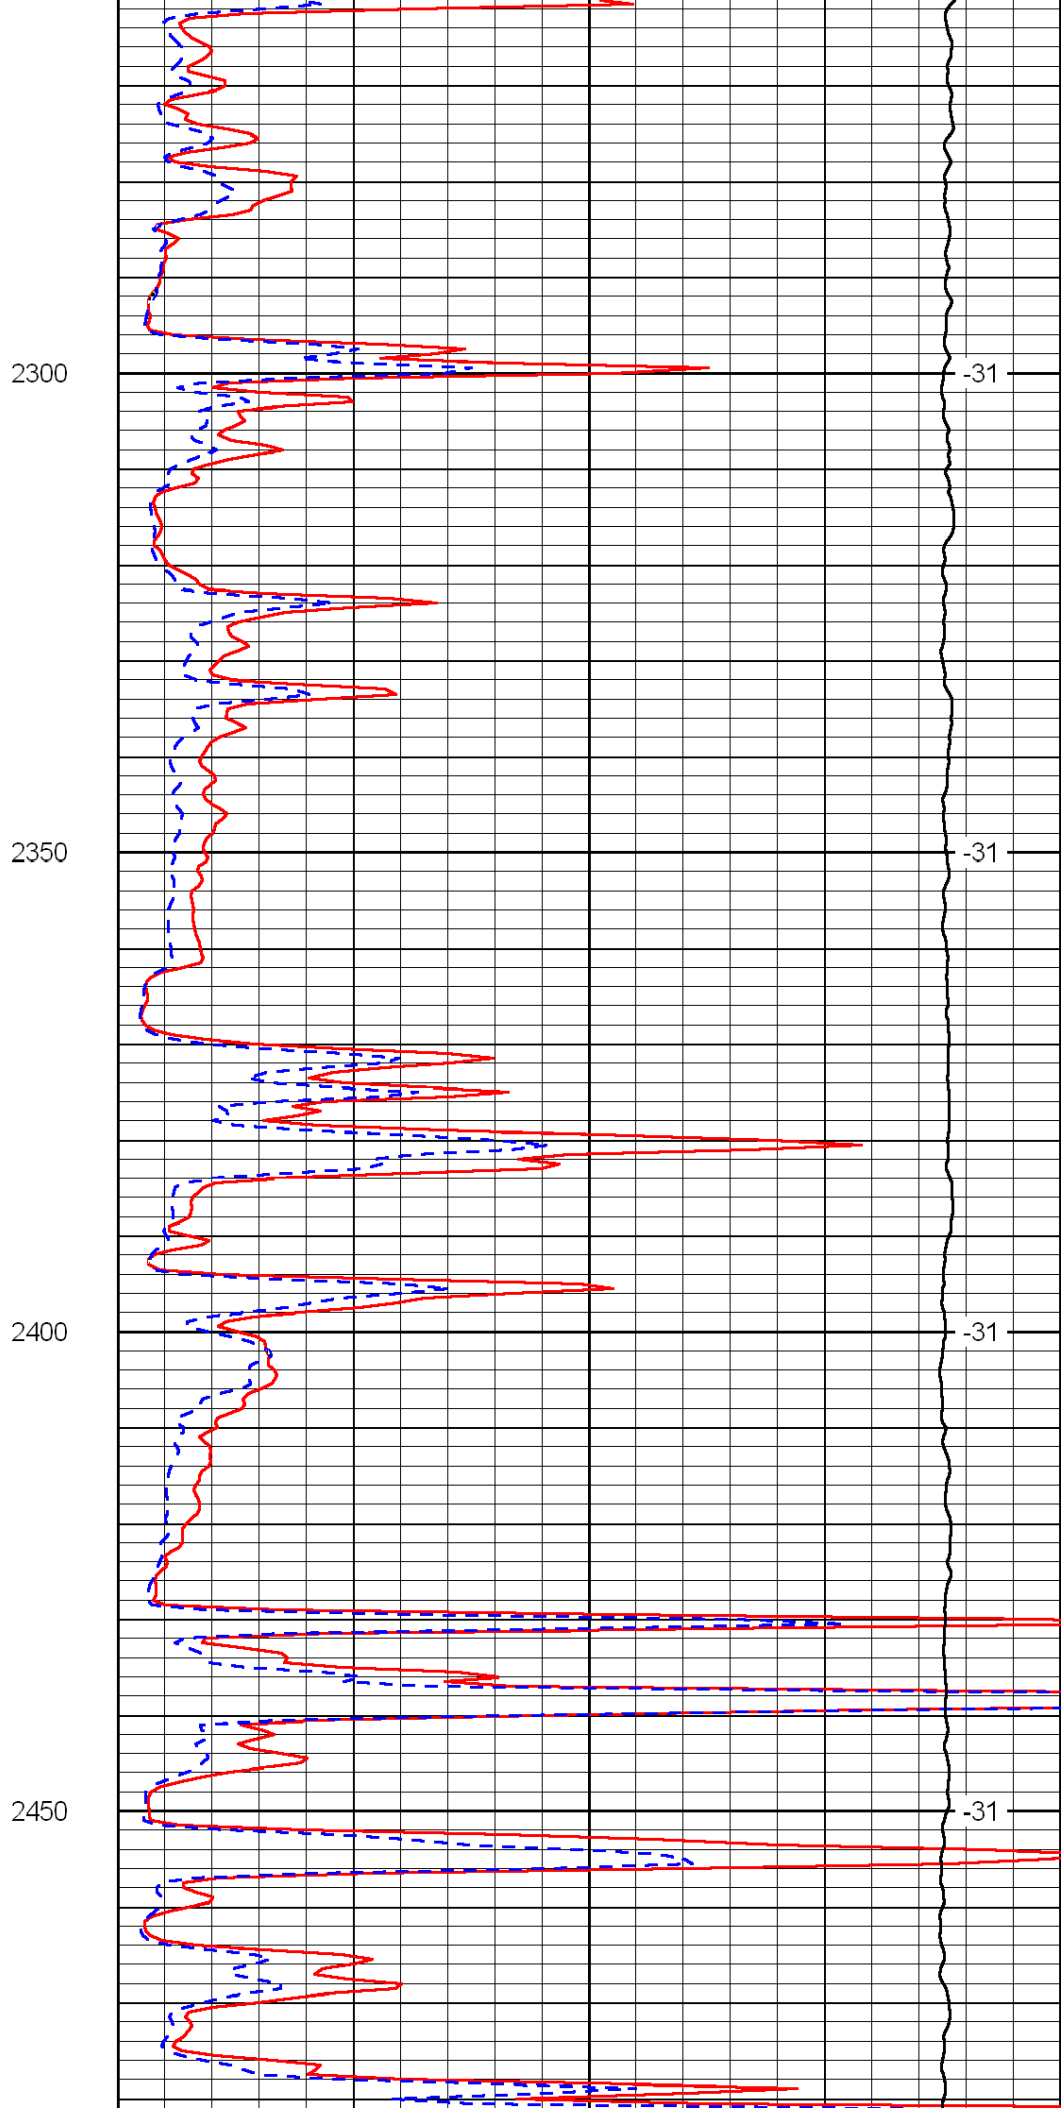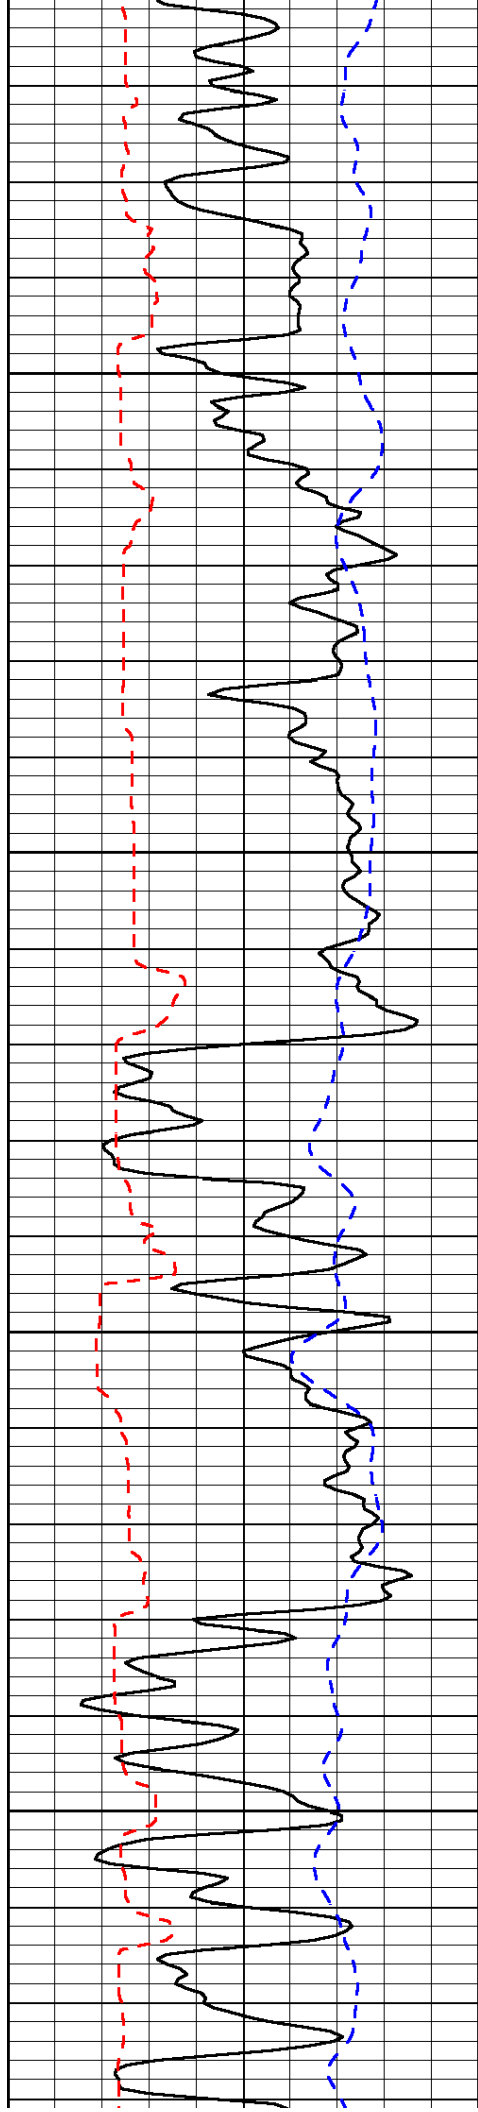

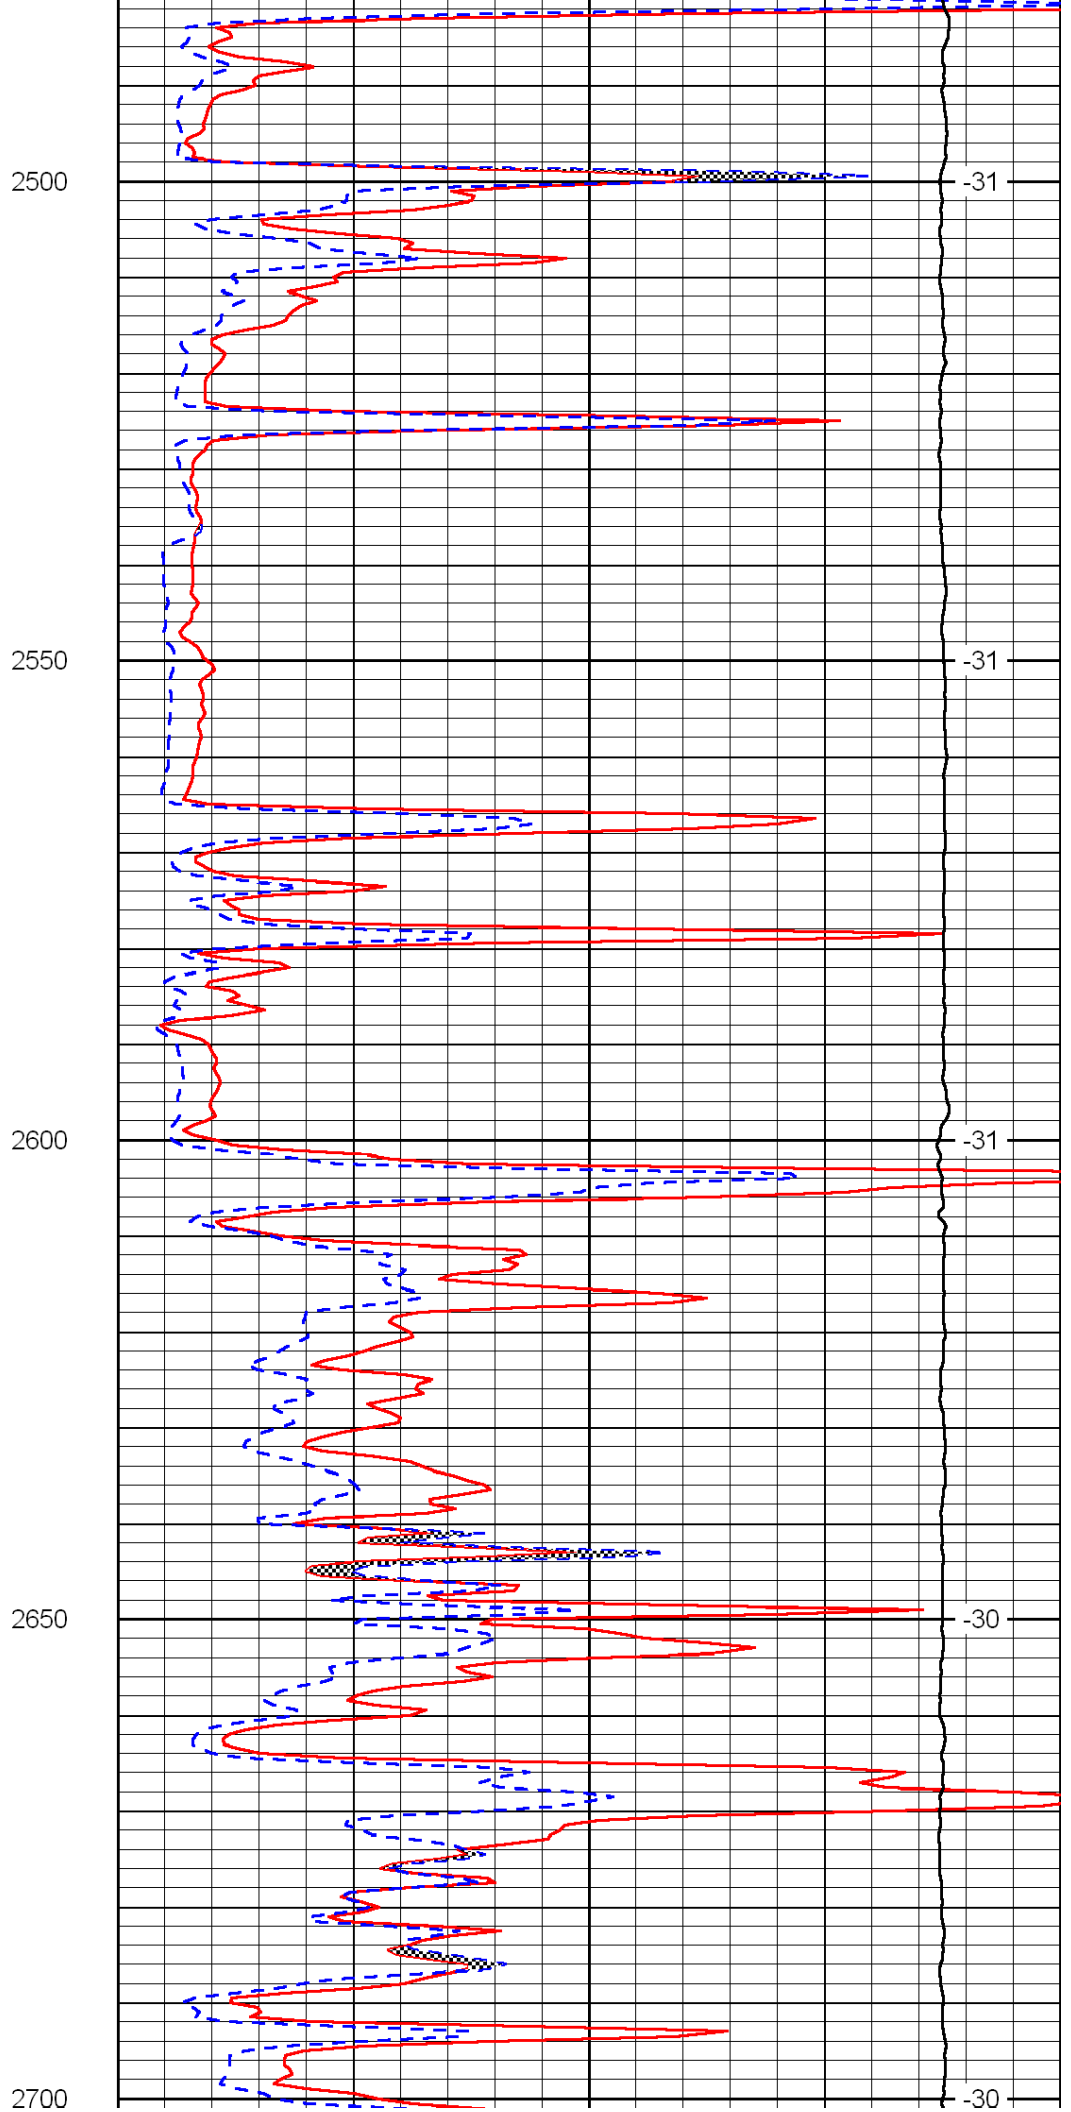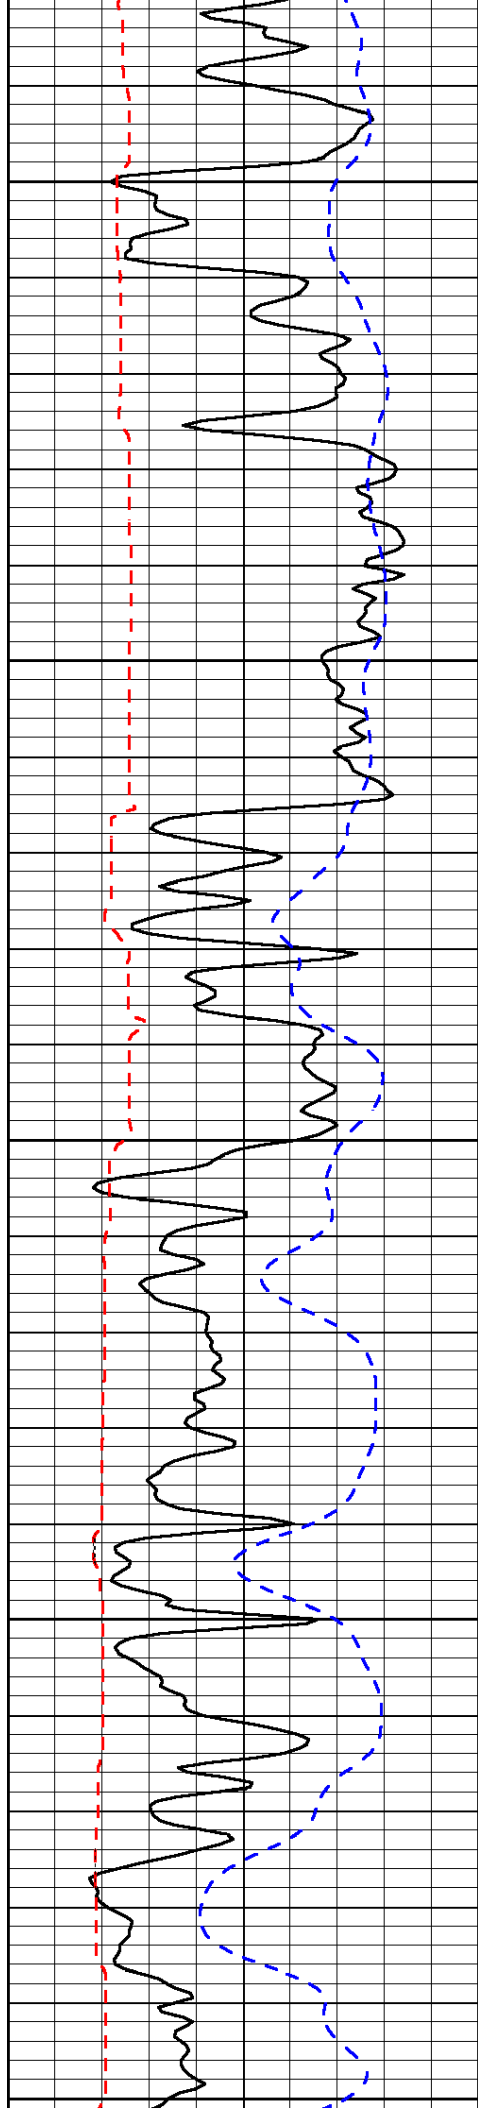

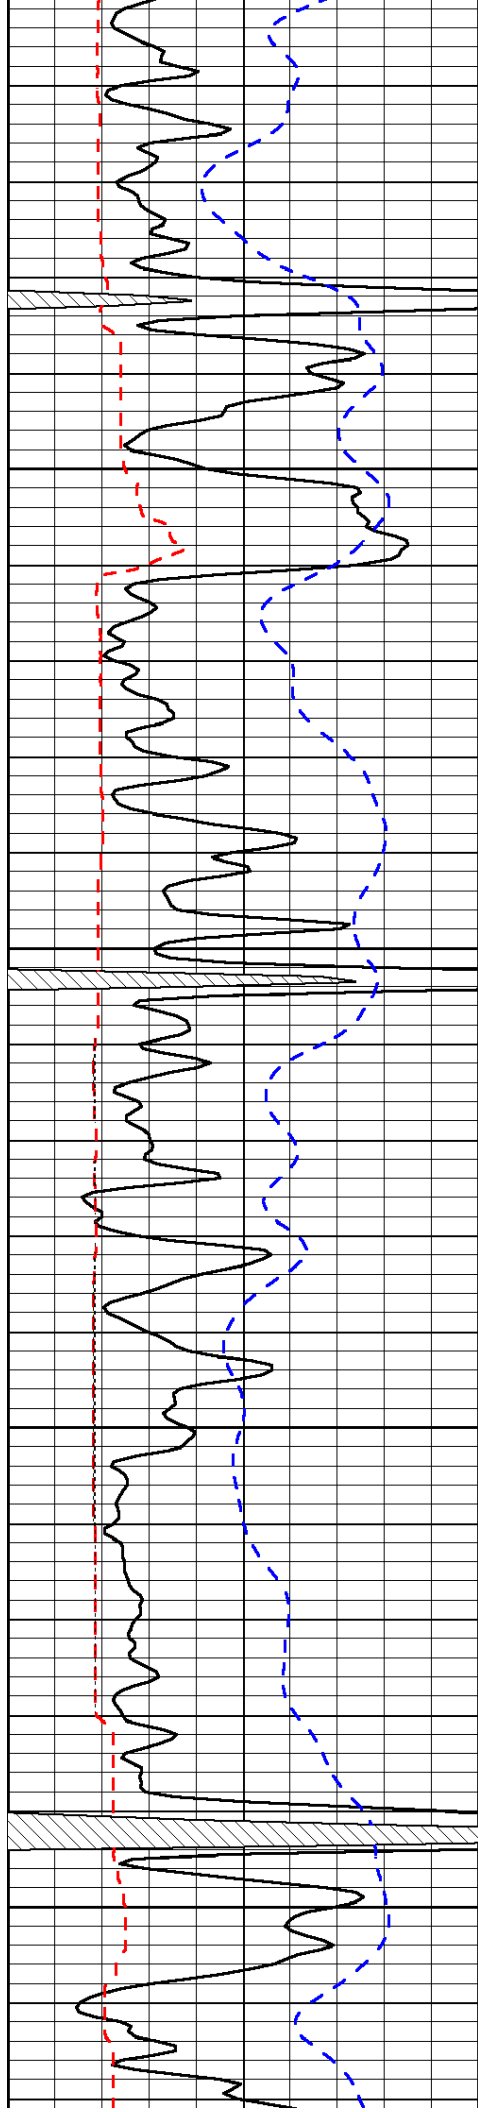


2750

2800

2850

2900

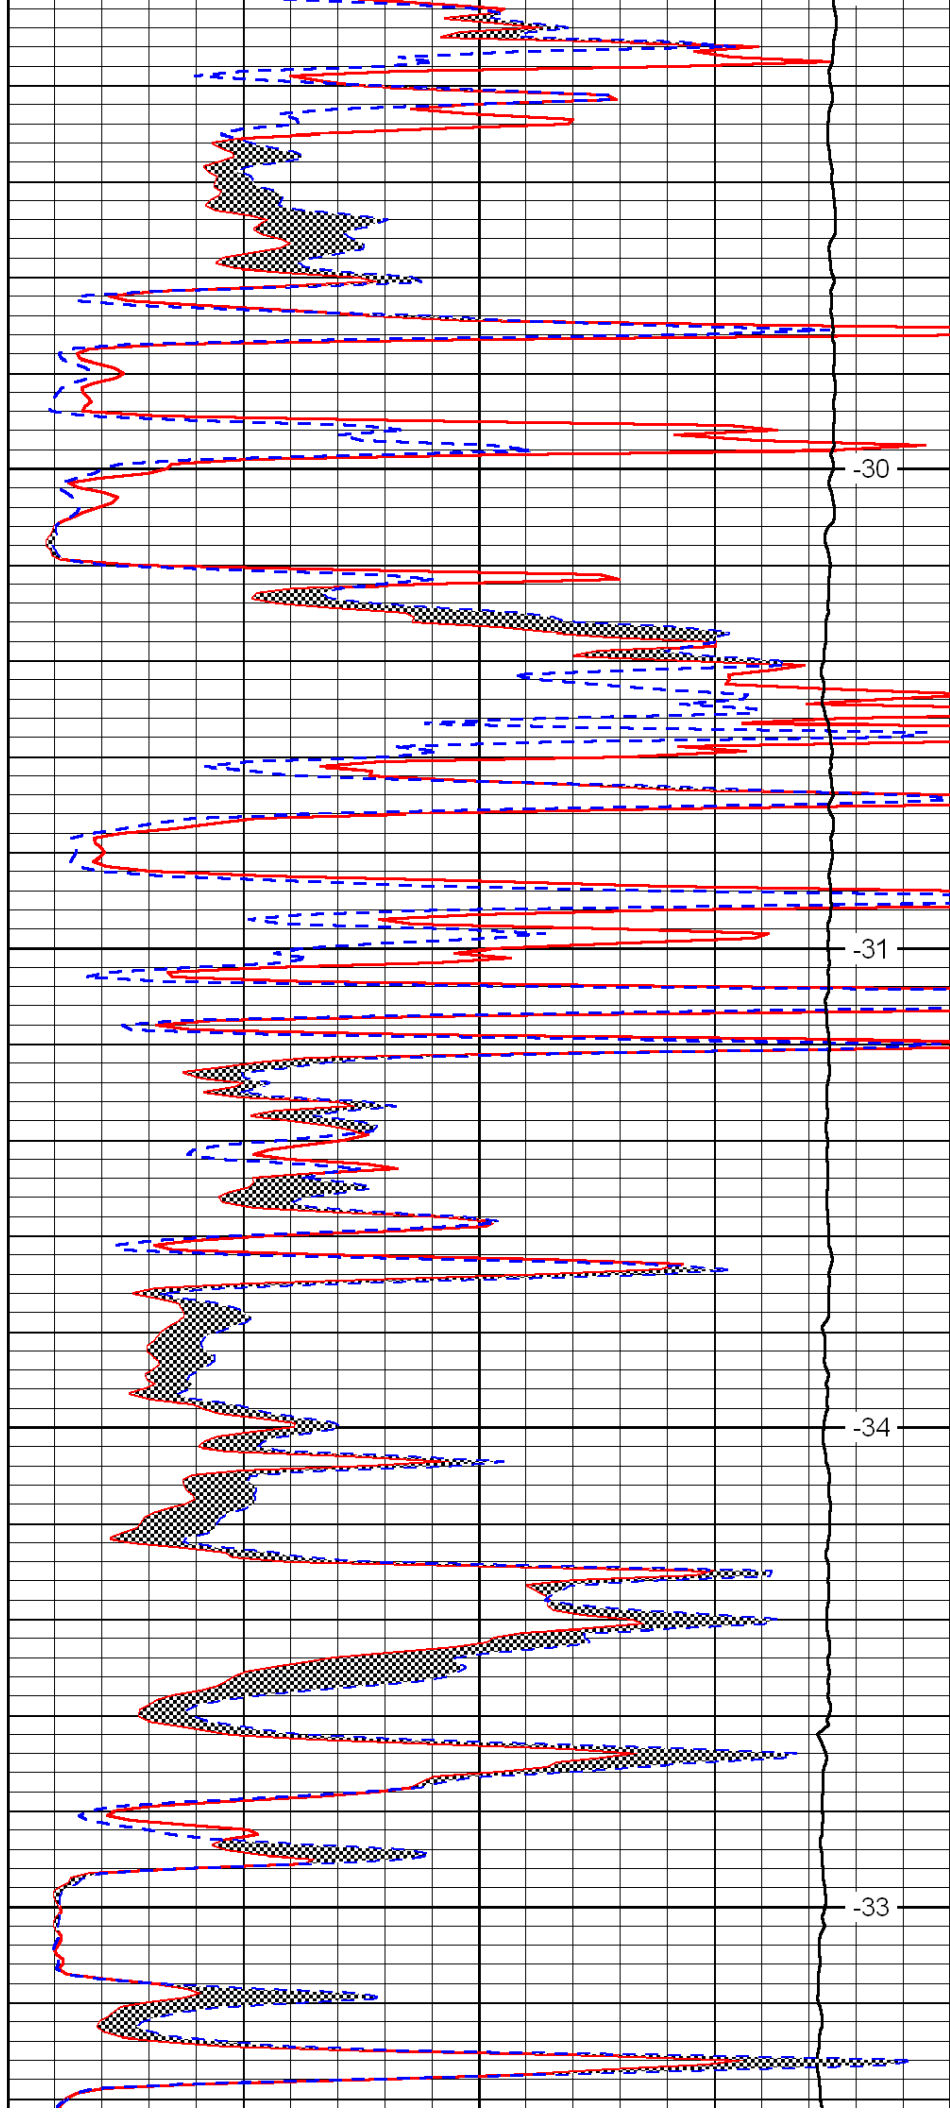


-30

-31

-34

-33

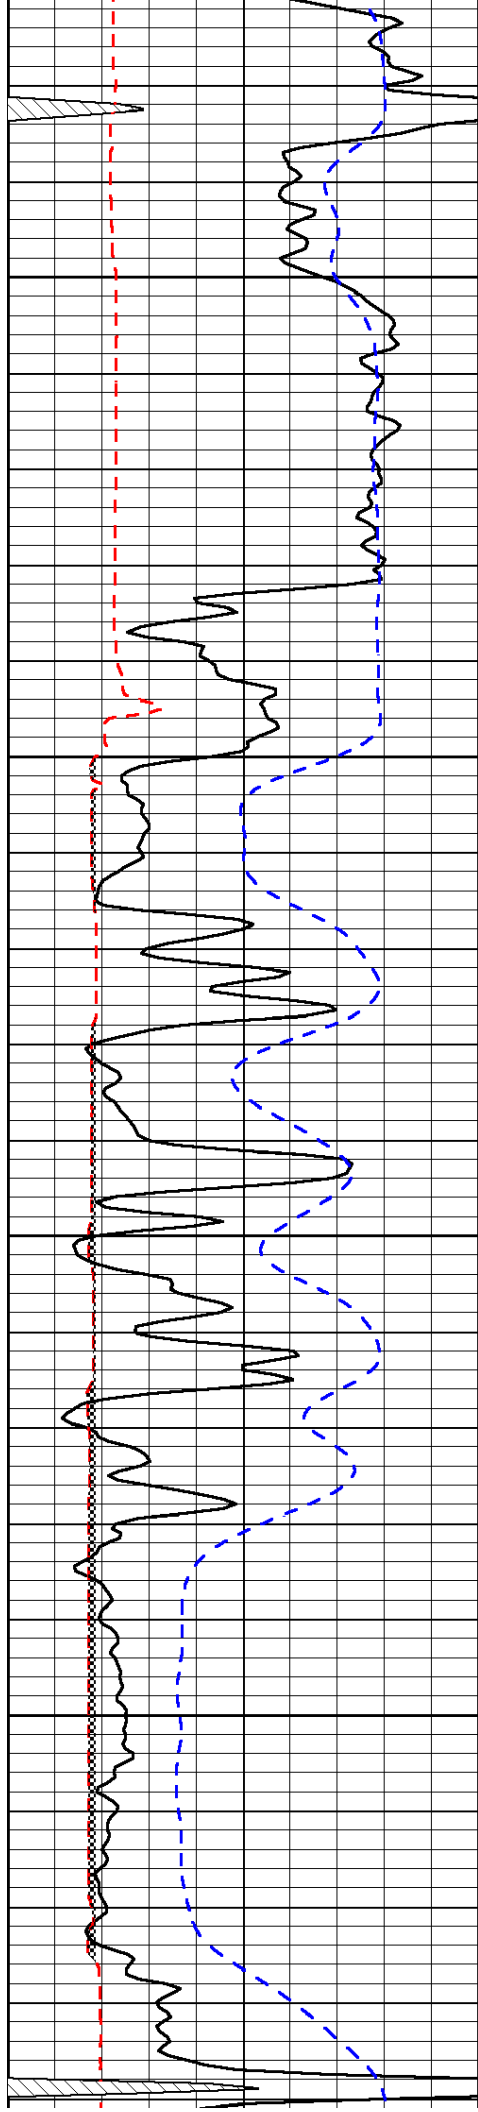


2950

3000

3050

3100

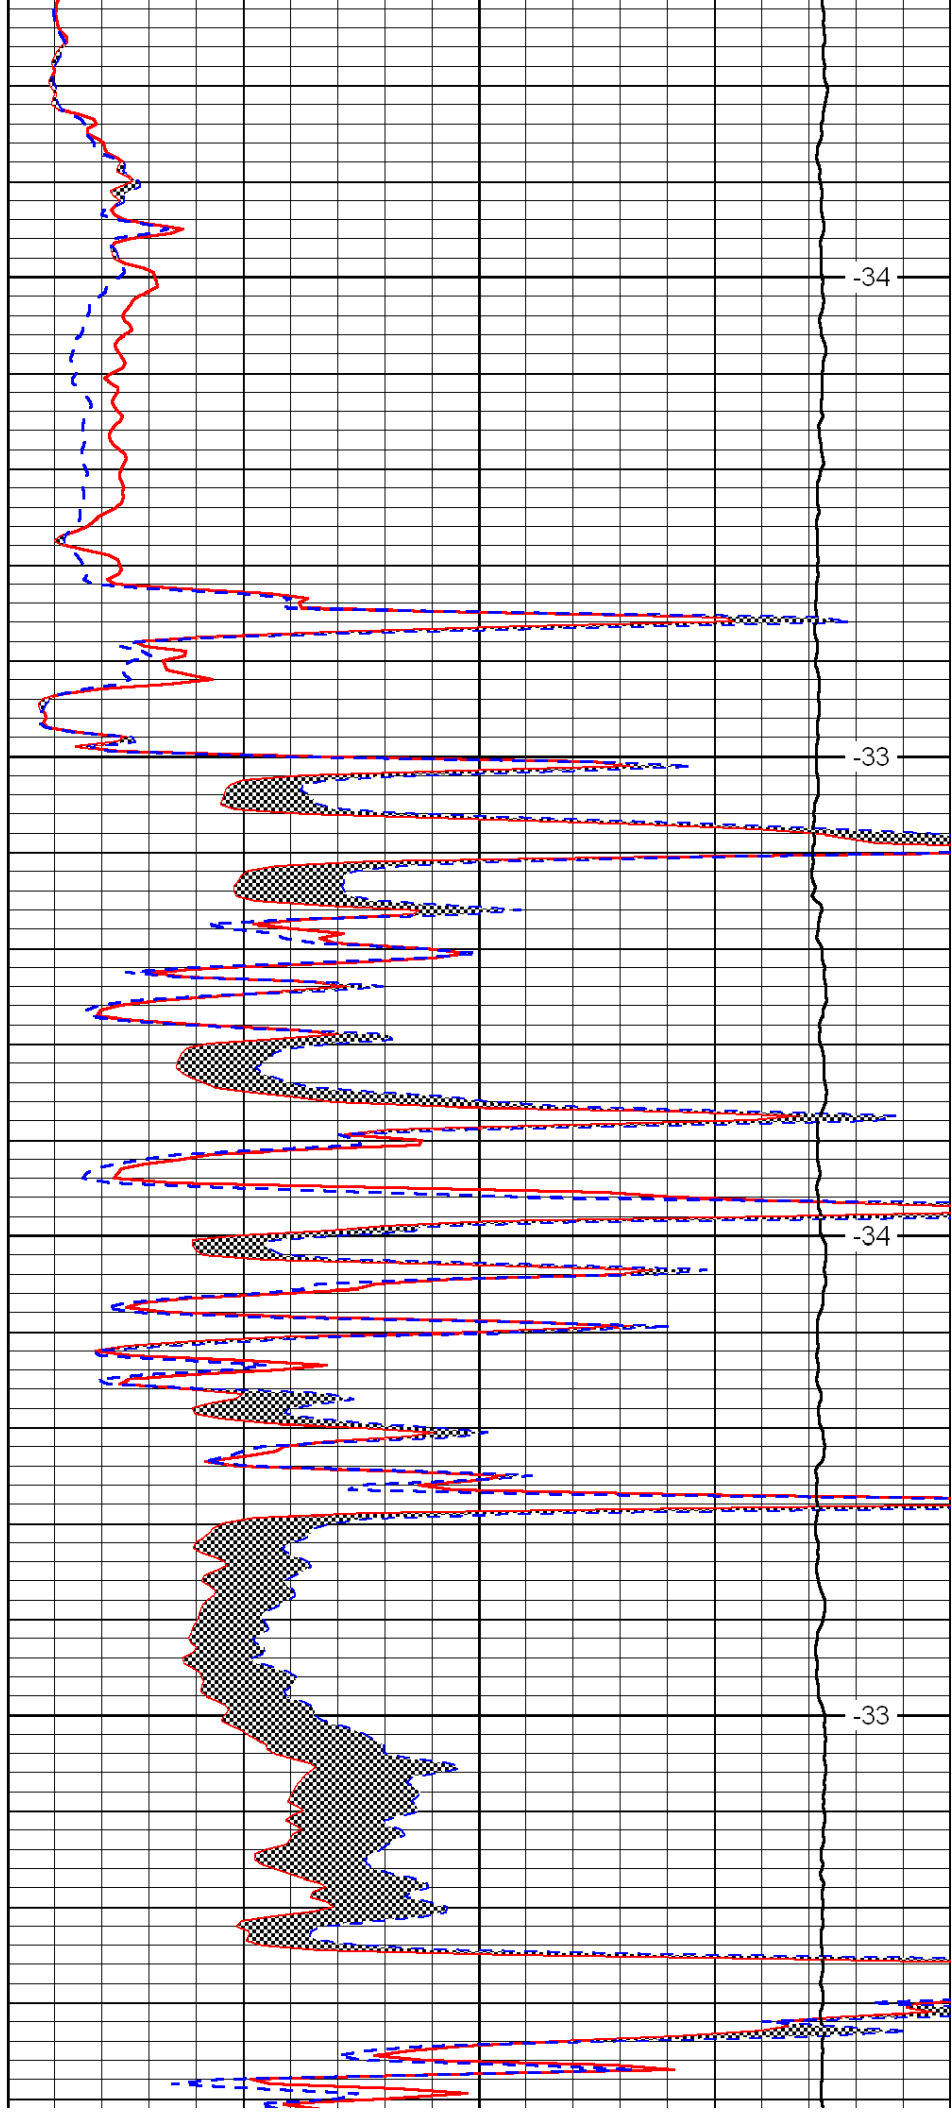


-34

-33

-34

-33

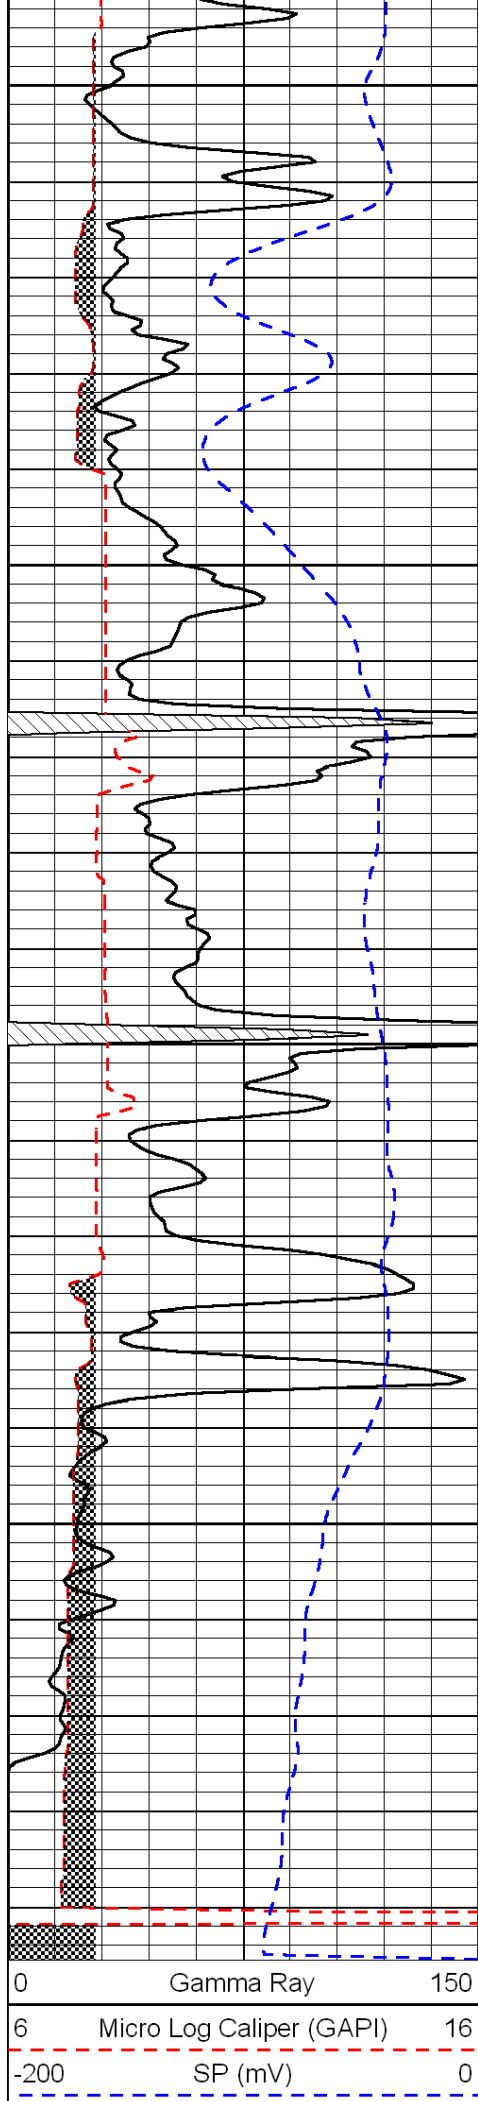

3150

3200

3250

3300

