



Microresistivity
Log

DIGITAL LOG (785) 625-3858

API No.		Company		Castle Resources, Inc.	
15-167-23,747-00-00		Well		Hachmeister No. 1	
		Field		Wildcat	
		County		Russell State Kansas	
Location		NE SE SW SE 380' FSL & 1,390' FEL		Other Services CNL/CDL DIL	
Sec: 6		Twp: 11S		Rge: 15W	
Permanent Datum		Ground Level		Elevation 2051	
Log Measured From		Kelly Bushing		8 Ft. Above Perm. Datum	
Drilling Measured From		Kelly Bushing		K.B. 2059 D.F. 2051 G.L. 2051	
Date		10/23/2011			
Run Number		Two			
Depth Driller		3700			
Depth Logger		3725			
Bottom Logged Interval		3724			
Top Log Interval		3150			
Casing Driller		8.625 @ 242			
Casing Logger		236			
Bit Size		7.875			
Type Fluid in Hole		Chemical			
Salinity, ppm CL		3000			
Density / Viscosity		9.0 48			
pH / Fluid Loss		11.0 5.2			
Source of Sample		Flowline			
Rm @ Meas. Temp		.76 @ 70			
Rmf @ Meas. Temp		.57 @ 70			
Rmc @ Meas. Temp		1.03 @ 70			
Source of Rmf / Rmc		Charts			
Rm @ BHT		.47 @ 113			
Operating Rig Time		4 Hours			
Max Rec. Temp. F		113			
Equipment Number		10			
Location		Hays			
Recorded By		J. Long			
Witnessed By		Jerry Green			

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Natoma, South to County Line, 100 Yards West, 1/2 South, East Into

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

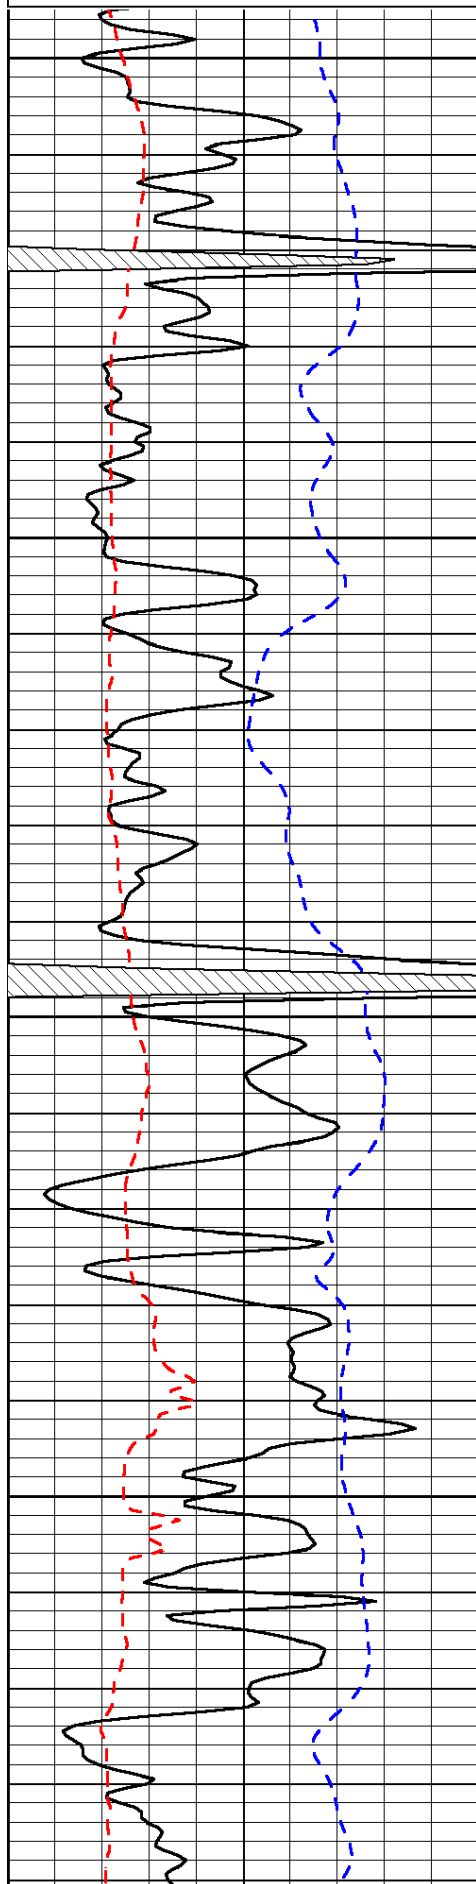

3150


3200

3250

3300

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

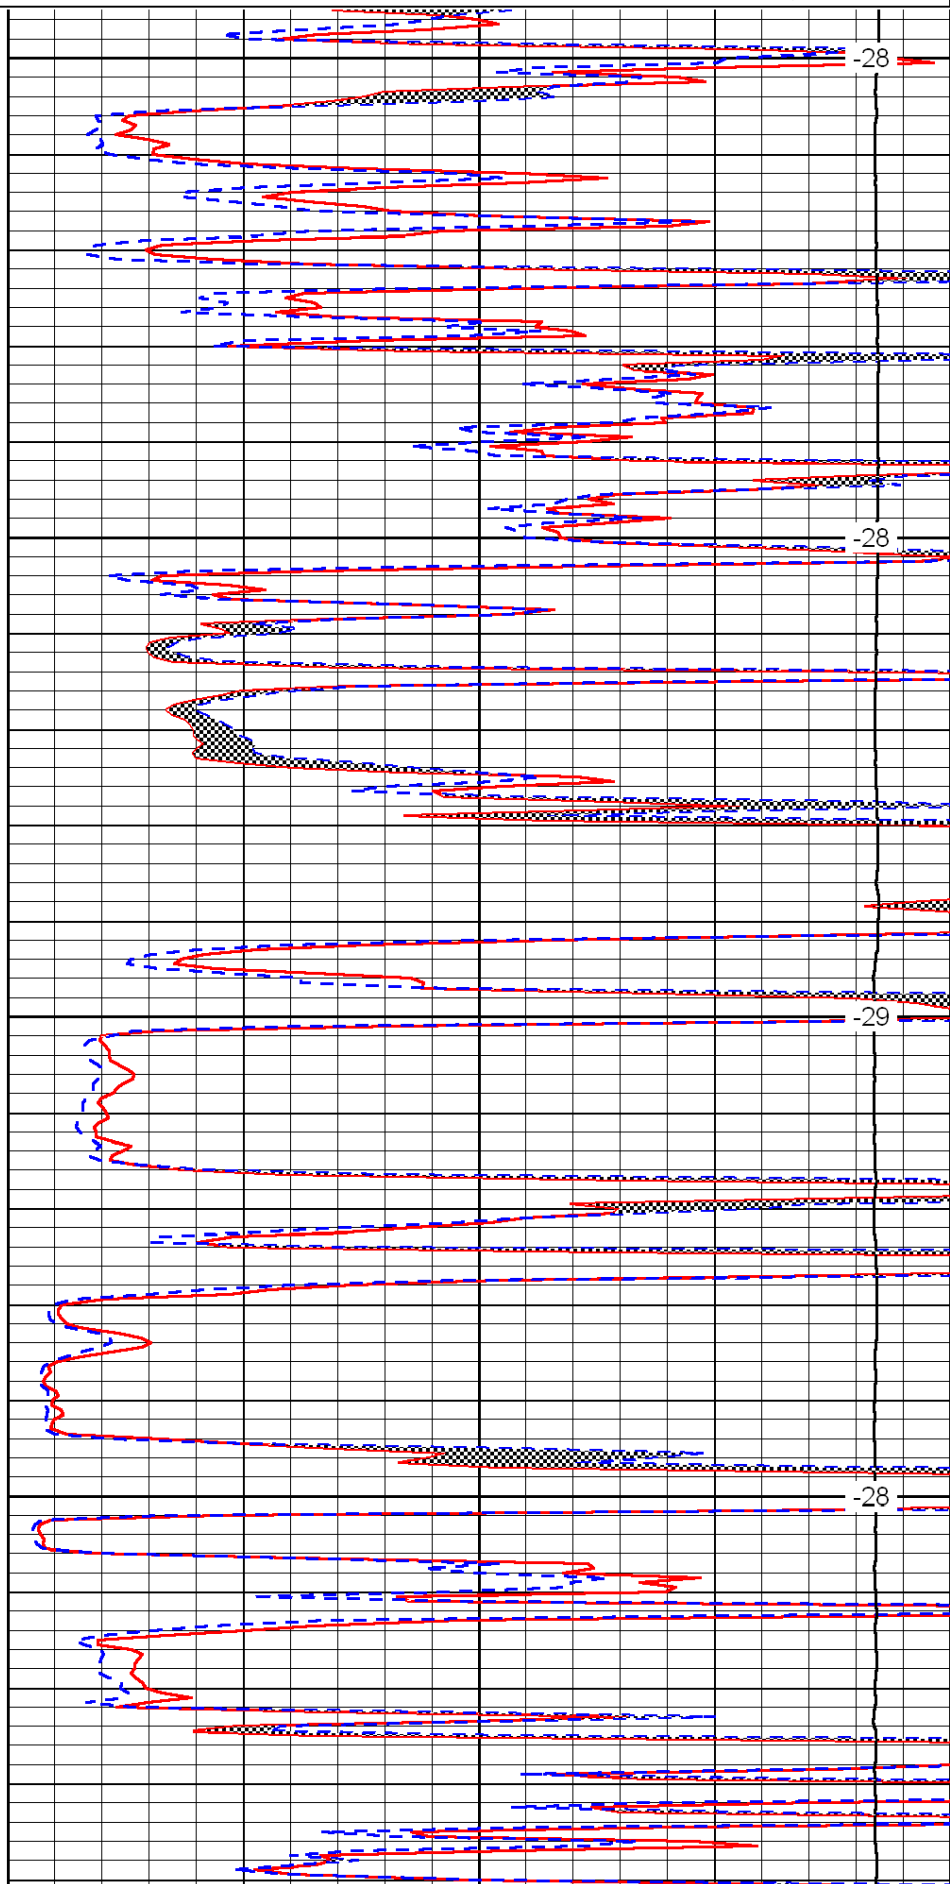


-28

-28

-29

-28

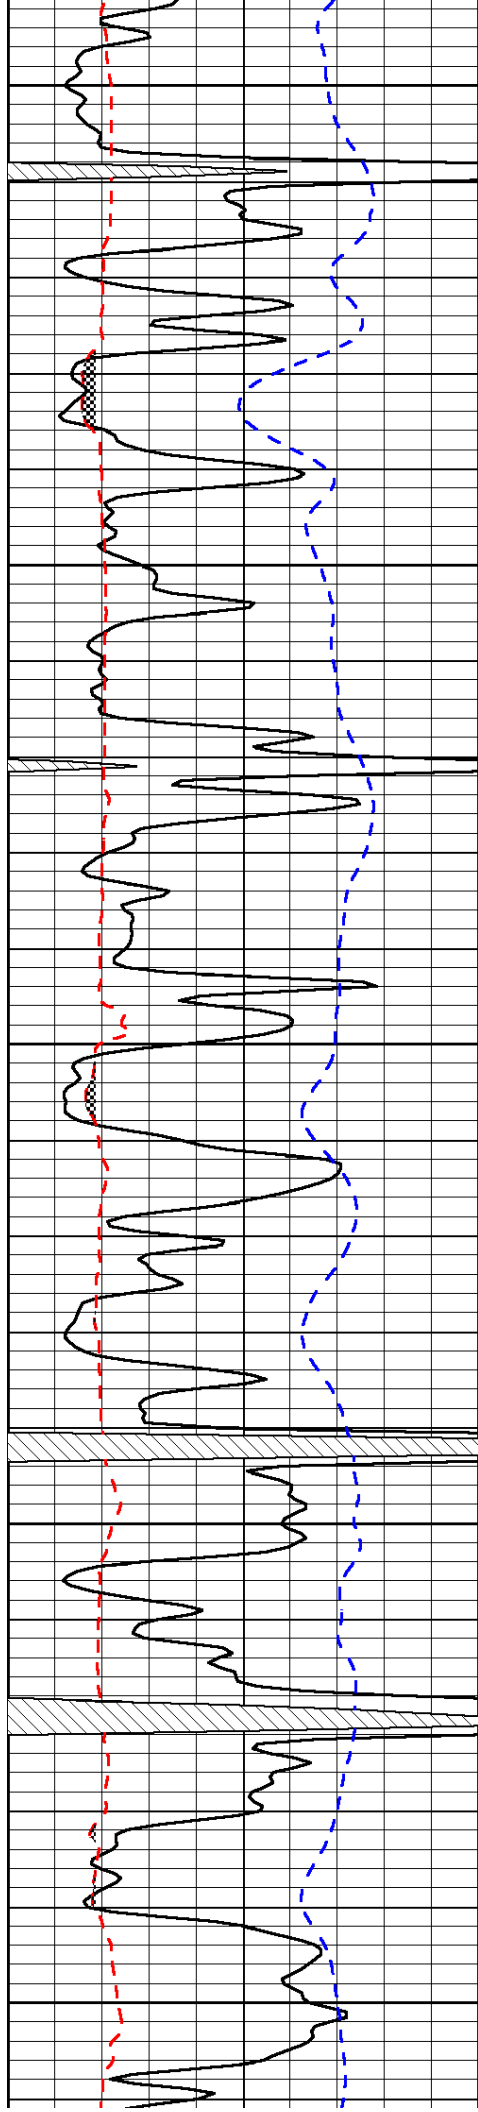


3350

3400

3450

3500

3550

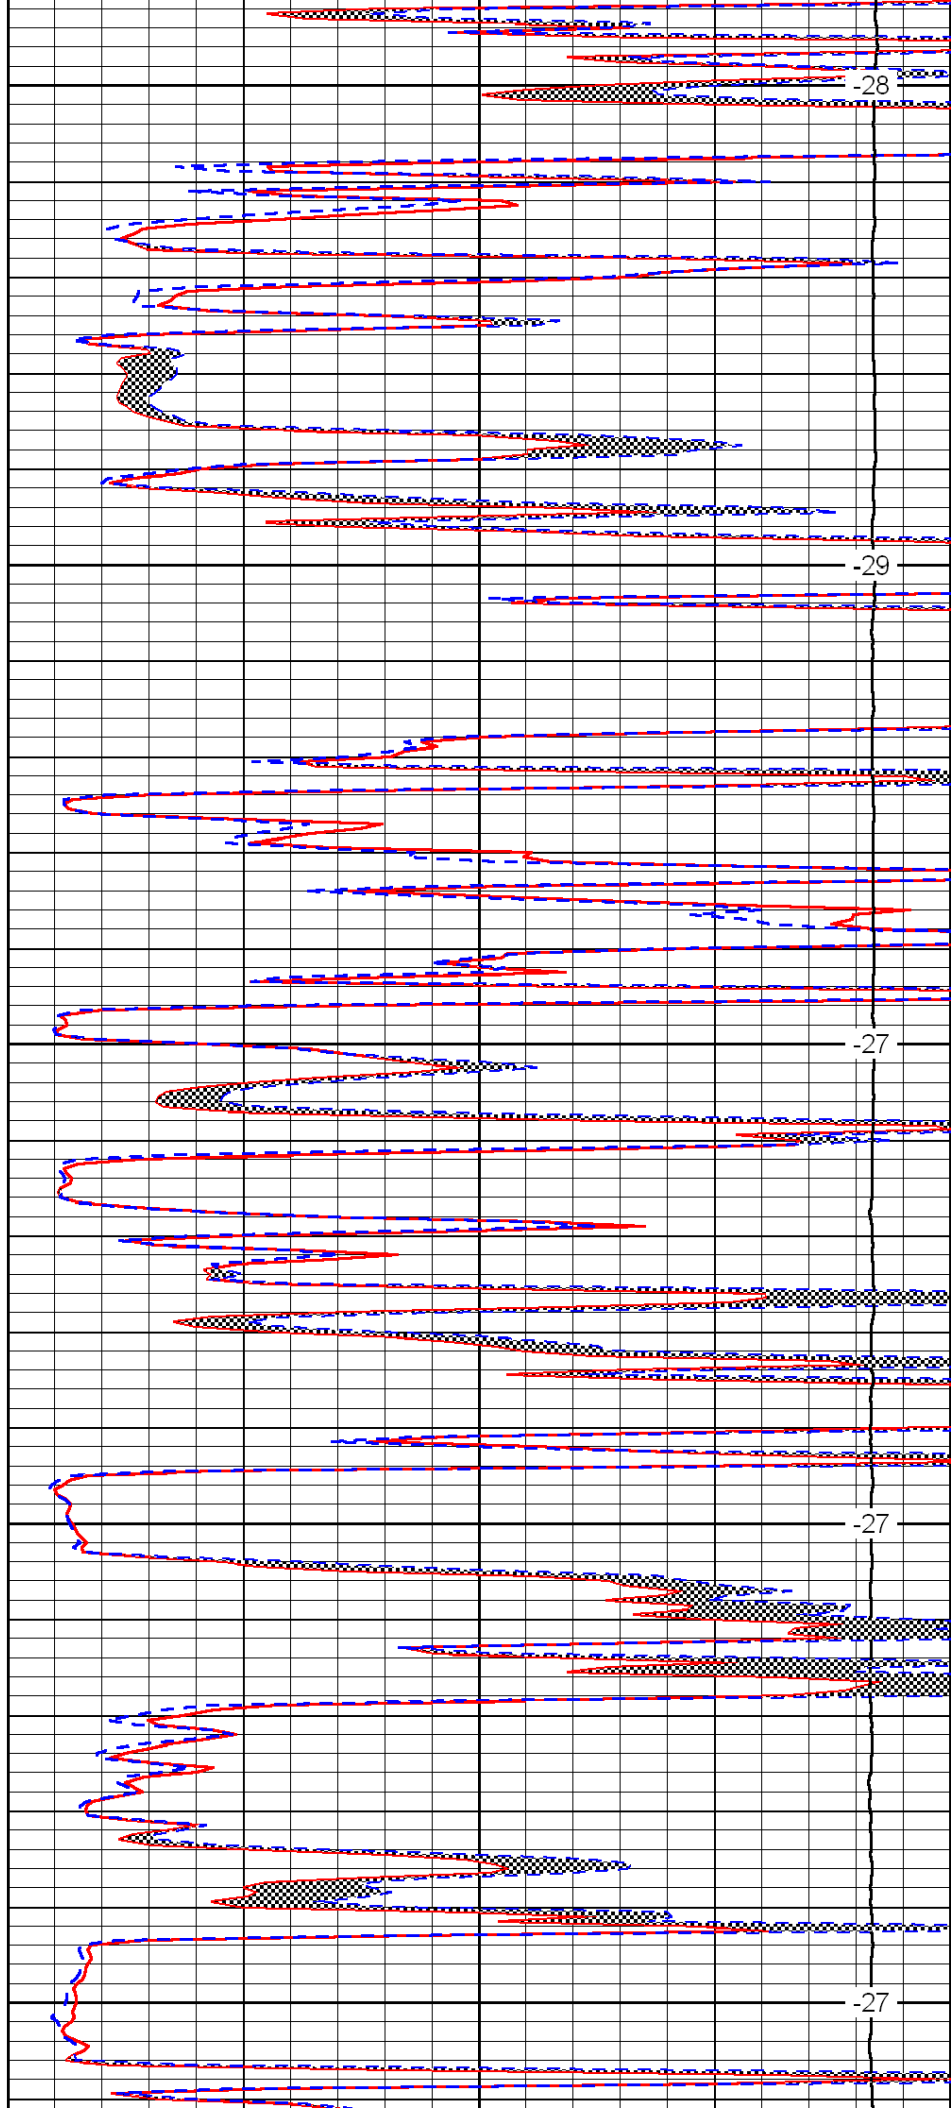

-28

-29

-27

-27

-27

