



Microresistivity
Log

DIGITAL LOG (785) 625-3858

API No.		Company Brito Oil Company, Inc.	
15-193-20828-00-00		Well Hansen Farms #1-11	
Field Wildcat		County Thomas State Kansas	
Location W2 E2 W2 W2 2640' FSL / 810' FWL		Other Services CNL / CDL DIL	
Sec: 11 Twp: 10S Rge: 32W		Elevation K.B. 3052 D.F. 3047 G.L. 3047	
Permanent Datum Ground Level		Elevation 3047	
Log Measured From Kelly Bushing		5 Ft. Above Perm. Datum	
Drilling Measured From Kelly Bushing			
Date	1/7/2012		
Run Number	Two		
Depth Driller	4705		
Depth Logger	4709		
Bottom Logged Interval	4708		
Top Log Interval	3700		
Casing Driller	8.625 @ 219		
Casing Logger	216		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	2400		
Density / Viscosity	9.2 46		
pH / Fluid Loss	9.5 8.0		
Source of Sample	Flowline		
Rm @ Meas. Temp	1.40 @ 50		
Rmf @ Meas. Temp	1.05 @ 50		
Rmc @ Meas. Temp	1.89 @ 50		
Source of Rmf / Rmc	Charts		
Rm @ BHT	0.57 @ 123		
Operating Rig Time	4 Hours		
Max Rec. Temp. F	123		
Equipment Number	15		
Location	Hays		
Recorded By	R. Barnhart		
Witnessed By	Vern Schrag		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Oakley, KS:
Rexford Exit, 1/2N, E into

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

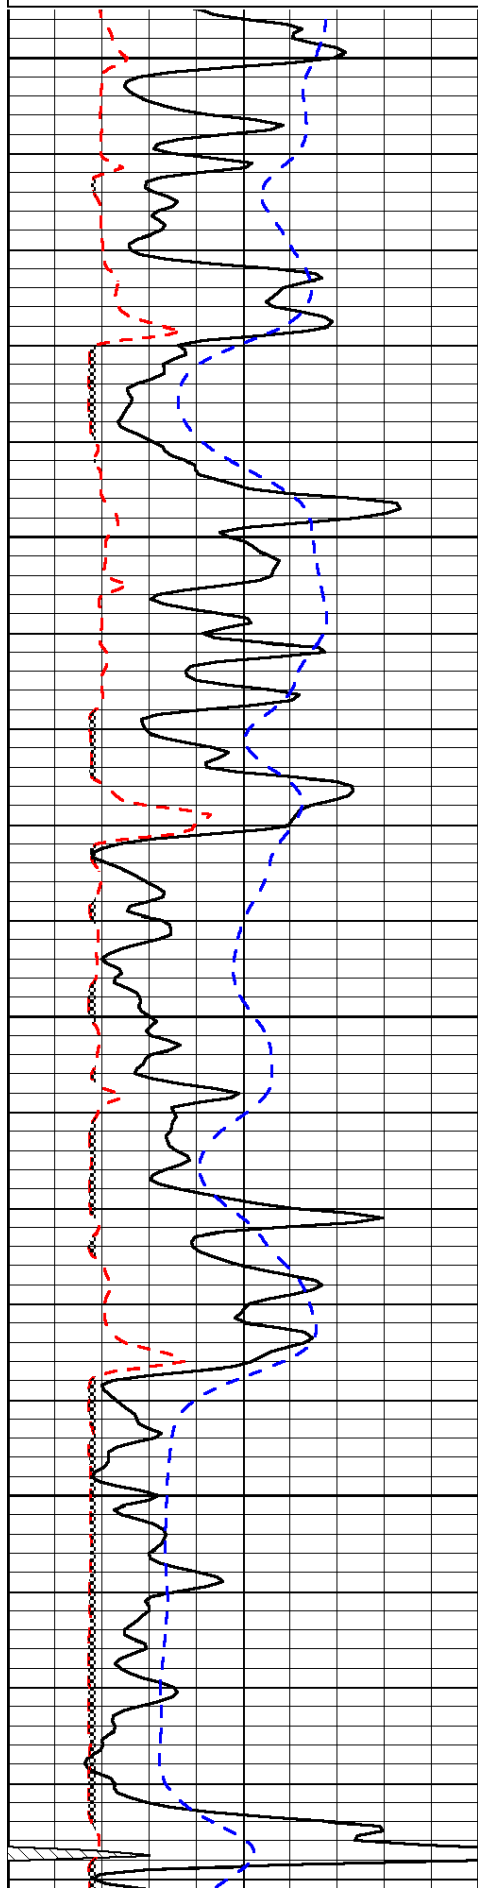


3700

3750

3800

3850

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

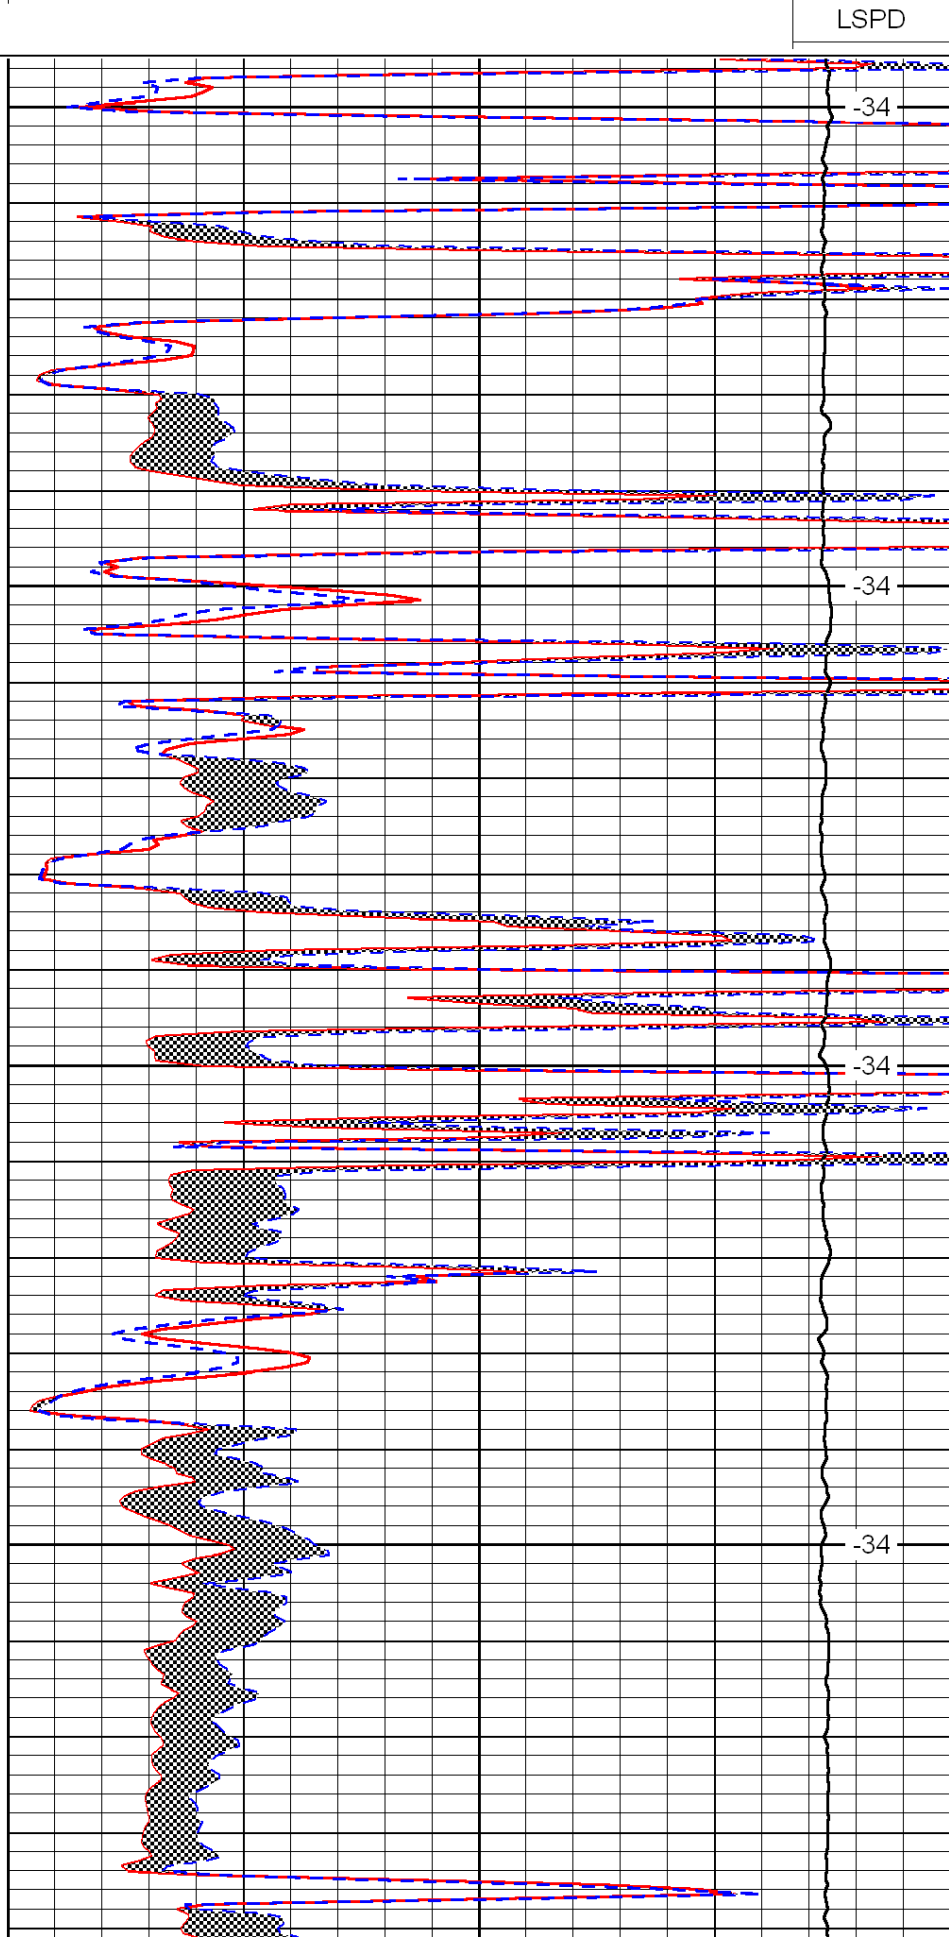


-34

-34

-34

-34

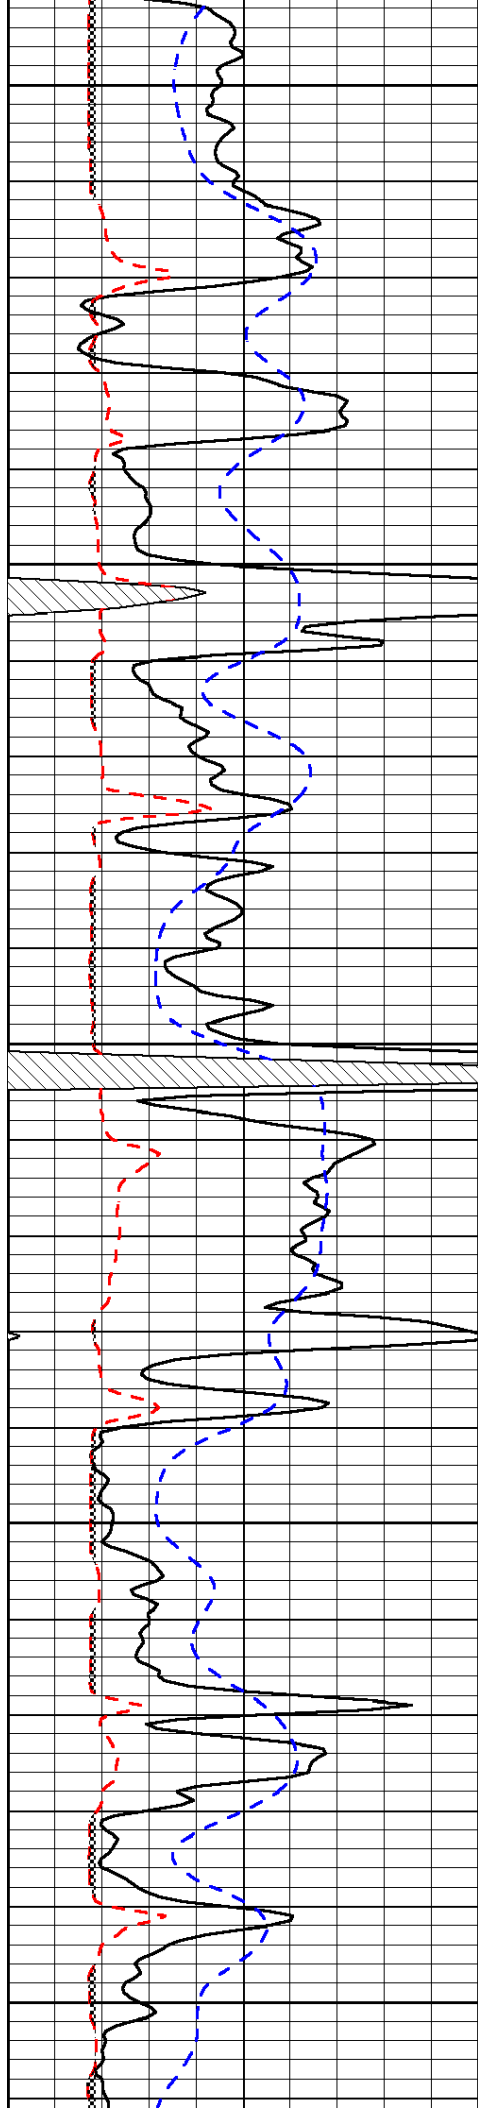


3900

3950

4000

4050

4100

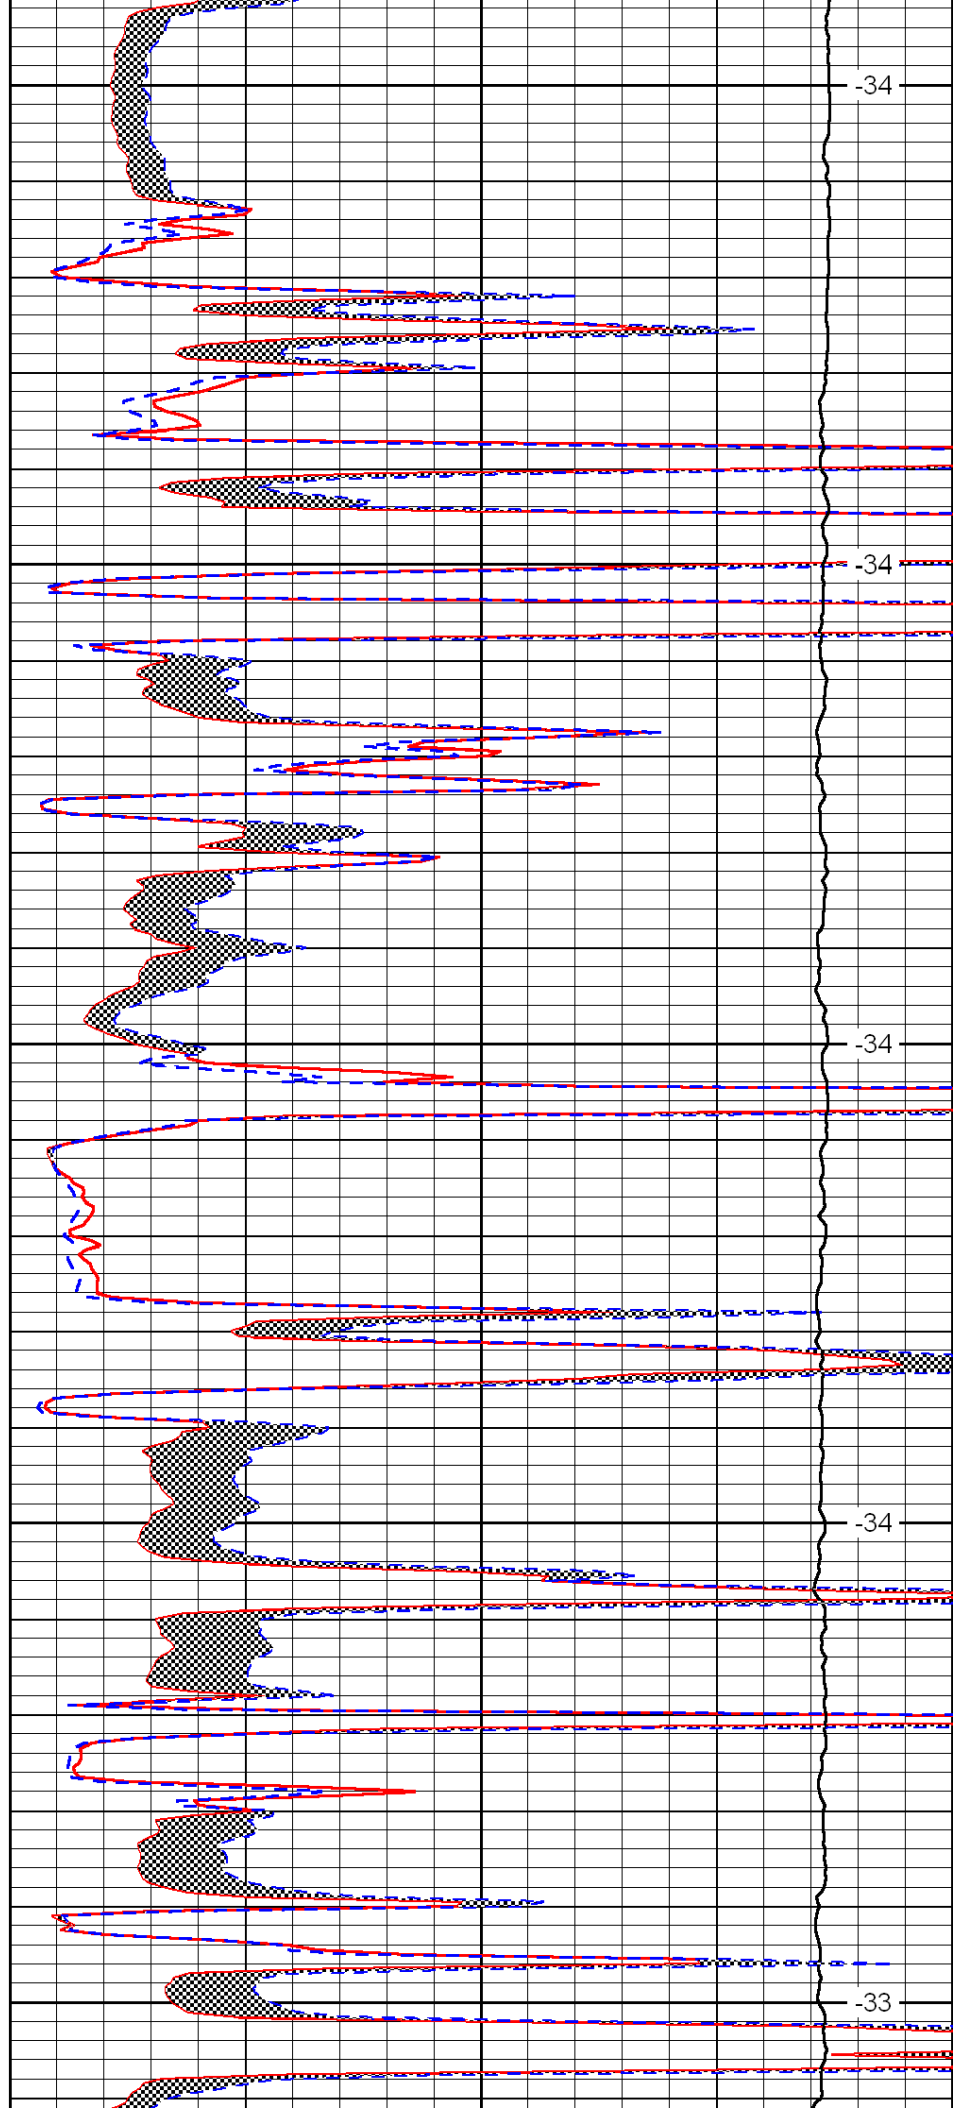


-34

-34

-34

-34

-33

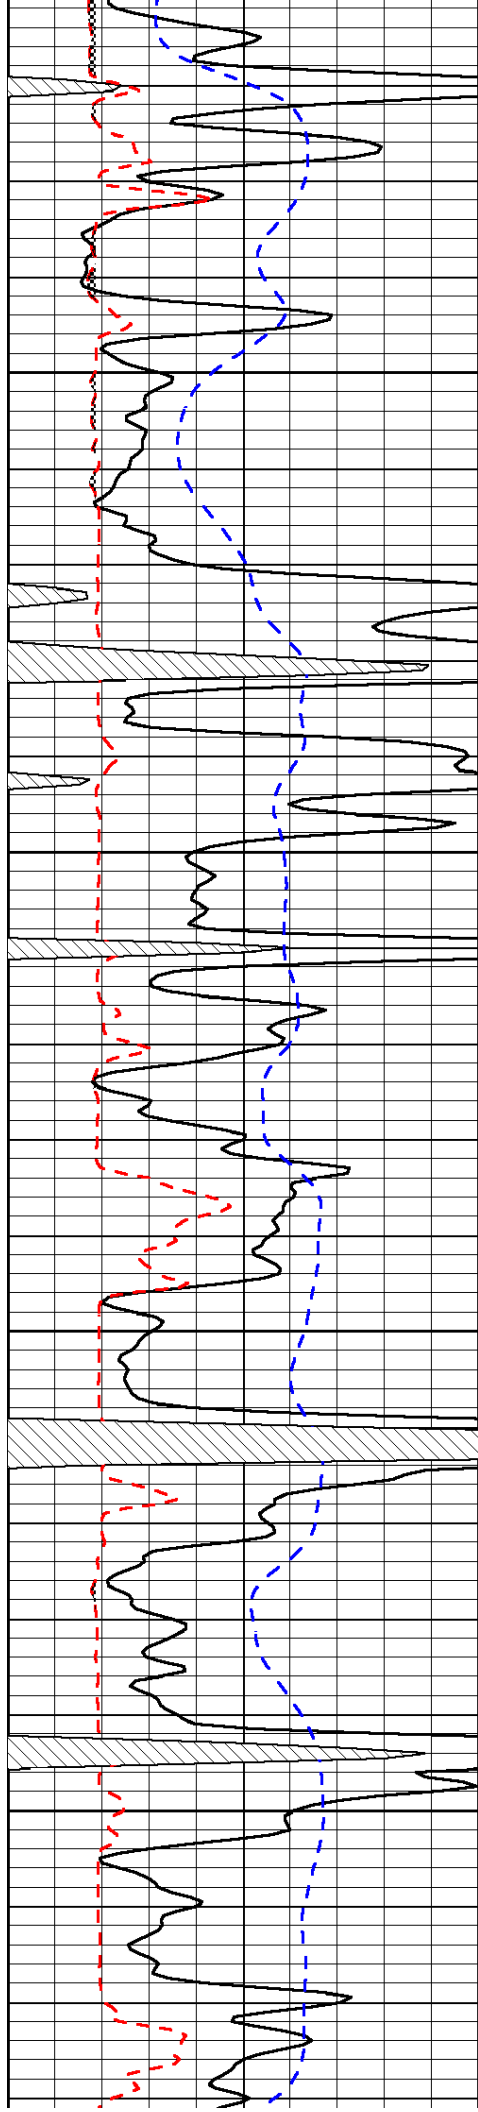



4150

4200

4250

4300

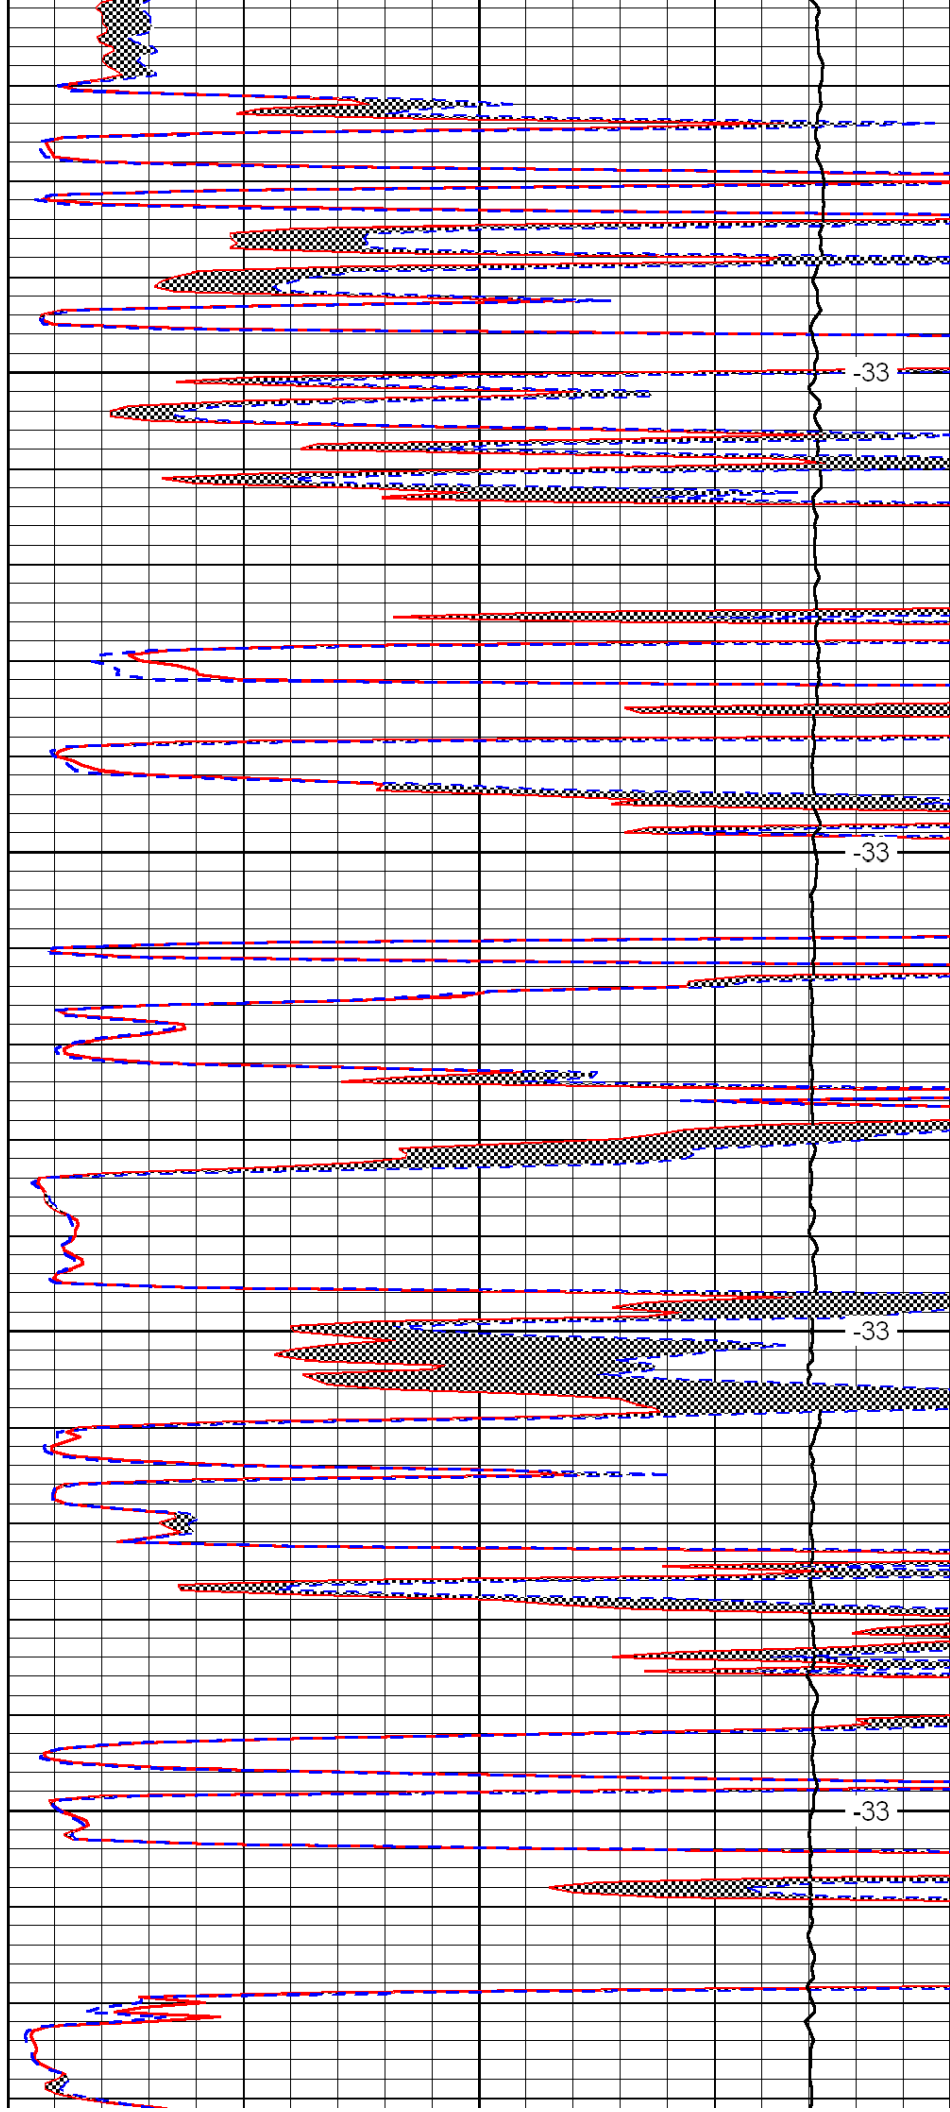

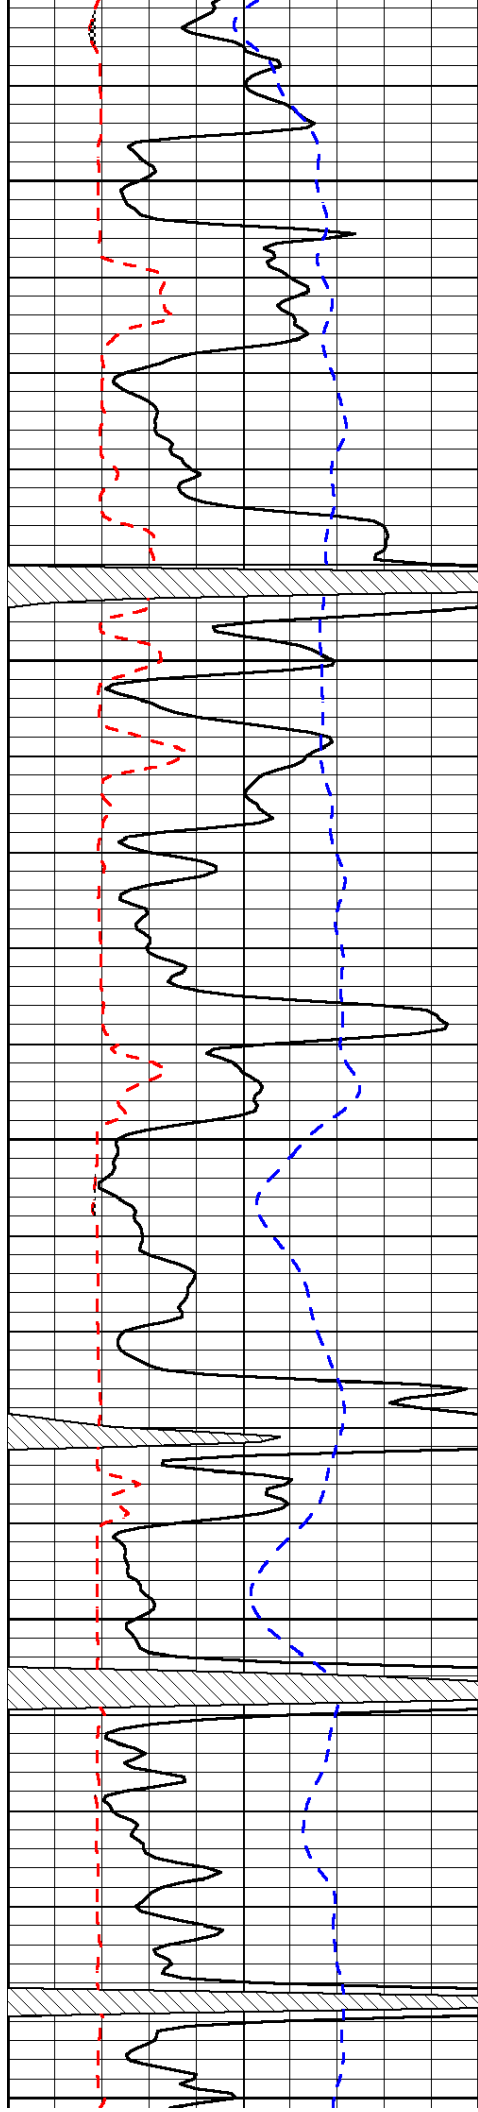


4350


4400

4450

4500

4550

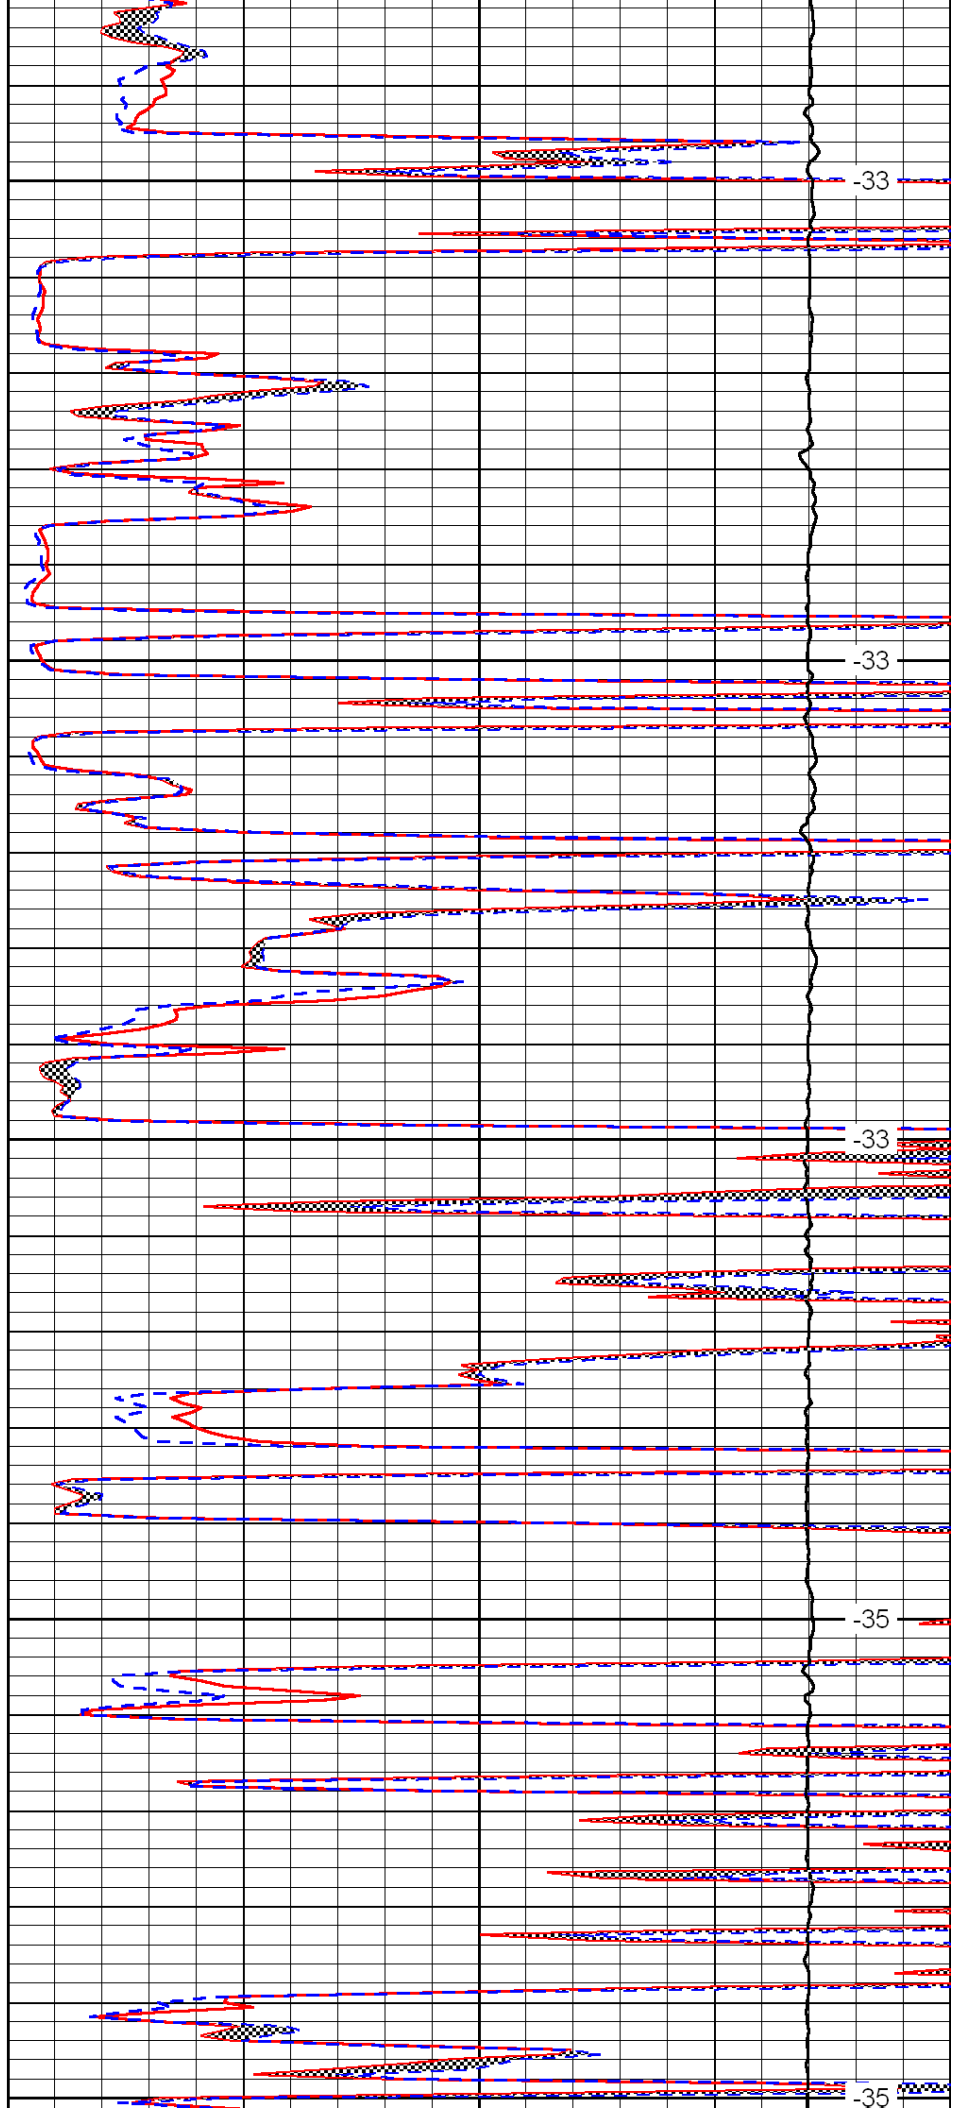


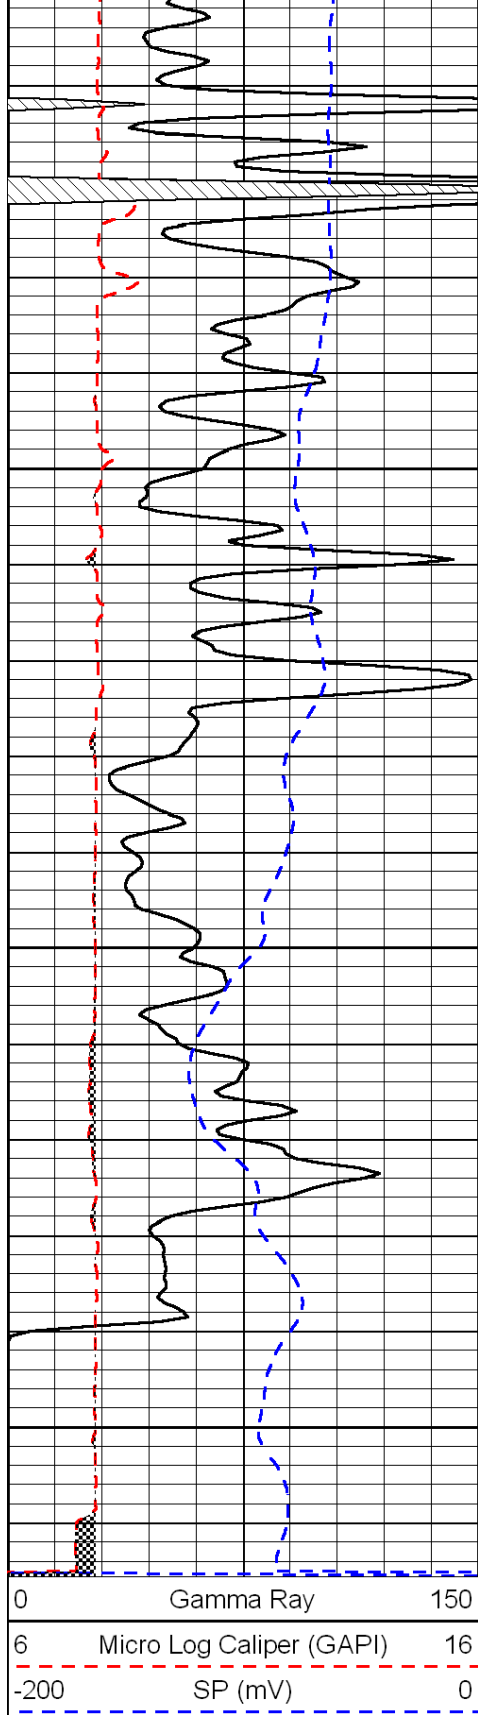

4600

4650

4700

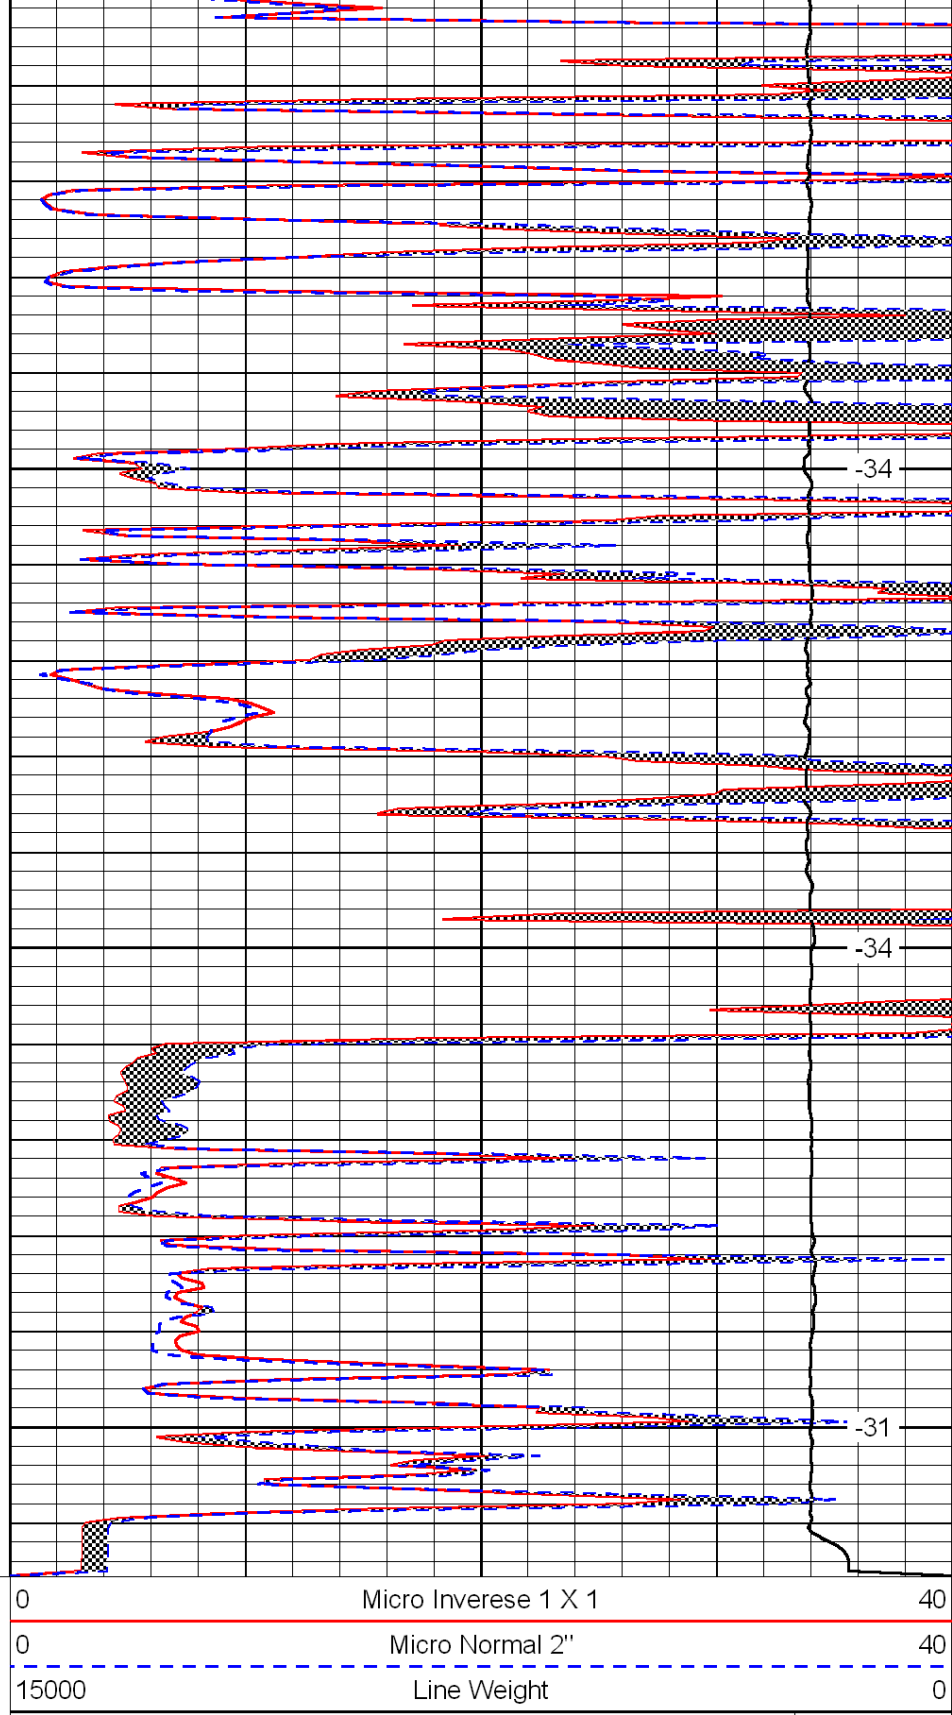

LSPD