



Radiation Guard
Log

DIGITAL LOG (785) 625-3858

API No.		Company Oil Company of America, Inc.	
15-051-26,178-00-00		Well Herl "A" No. 6	
Field Herl		County Ellis State Kansas	
Location NW NW SE 2,264' FSL & 2,264' FEL		Other Services None	
Sec: 28 Twp: 14S Rge: 17W		Elevation K.B. 1967 D.F. 1960 G.L. 1960	
Permanent Datum Ground Level		Elevation 1960	
Log Measured From Kelly Bushing		7 Ft. Above Perm. Datum	
Drilling Measured From Kelly Bushing			
Date	10/4/2011		
Run Number	One		
Depth Driller	3600		
Depth Logger	3605		
Bottom Logged Interval	3604		
Top Log Interval	1100		
Casing Driller	8.625 @ 1121		
Casing Logger	1119		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	4000		
Density / Viscosity	9.0 52		
pH / Fluid Loss	10.0 9.6		
Source of Sample	Flowline		
Rm @ Meas. Temp	.57 @ 79		
Rmf @ Meas. Temp	.43 @ 79		
Rmc @ Meas. Temp	.77 @ 79		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.40 @ 112		
Operating Rig Time	3 Hours		
Max Rec. Temp. F	112		
Equipment Number	10		
Location	Hays		
Recorded By	J. Long		
Witnessed By	Roger Moses	Darrell Herl	


<<< Fold Here >>>



All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Munjoy, 3 East, 5/8 South, West Into (Through Cattle Guard)

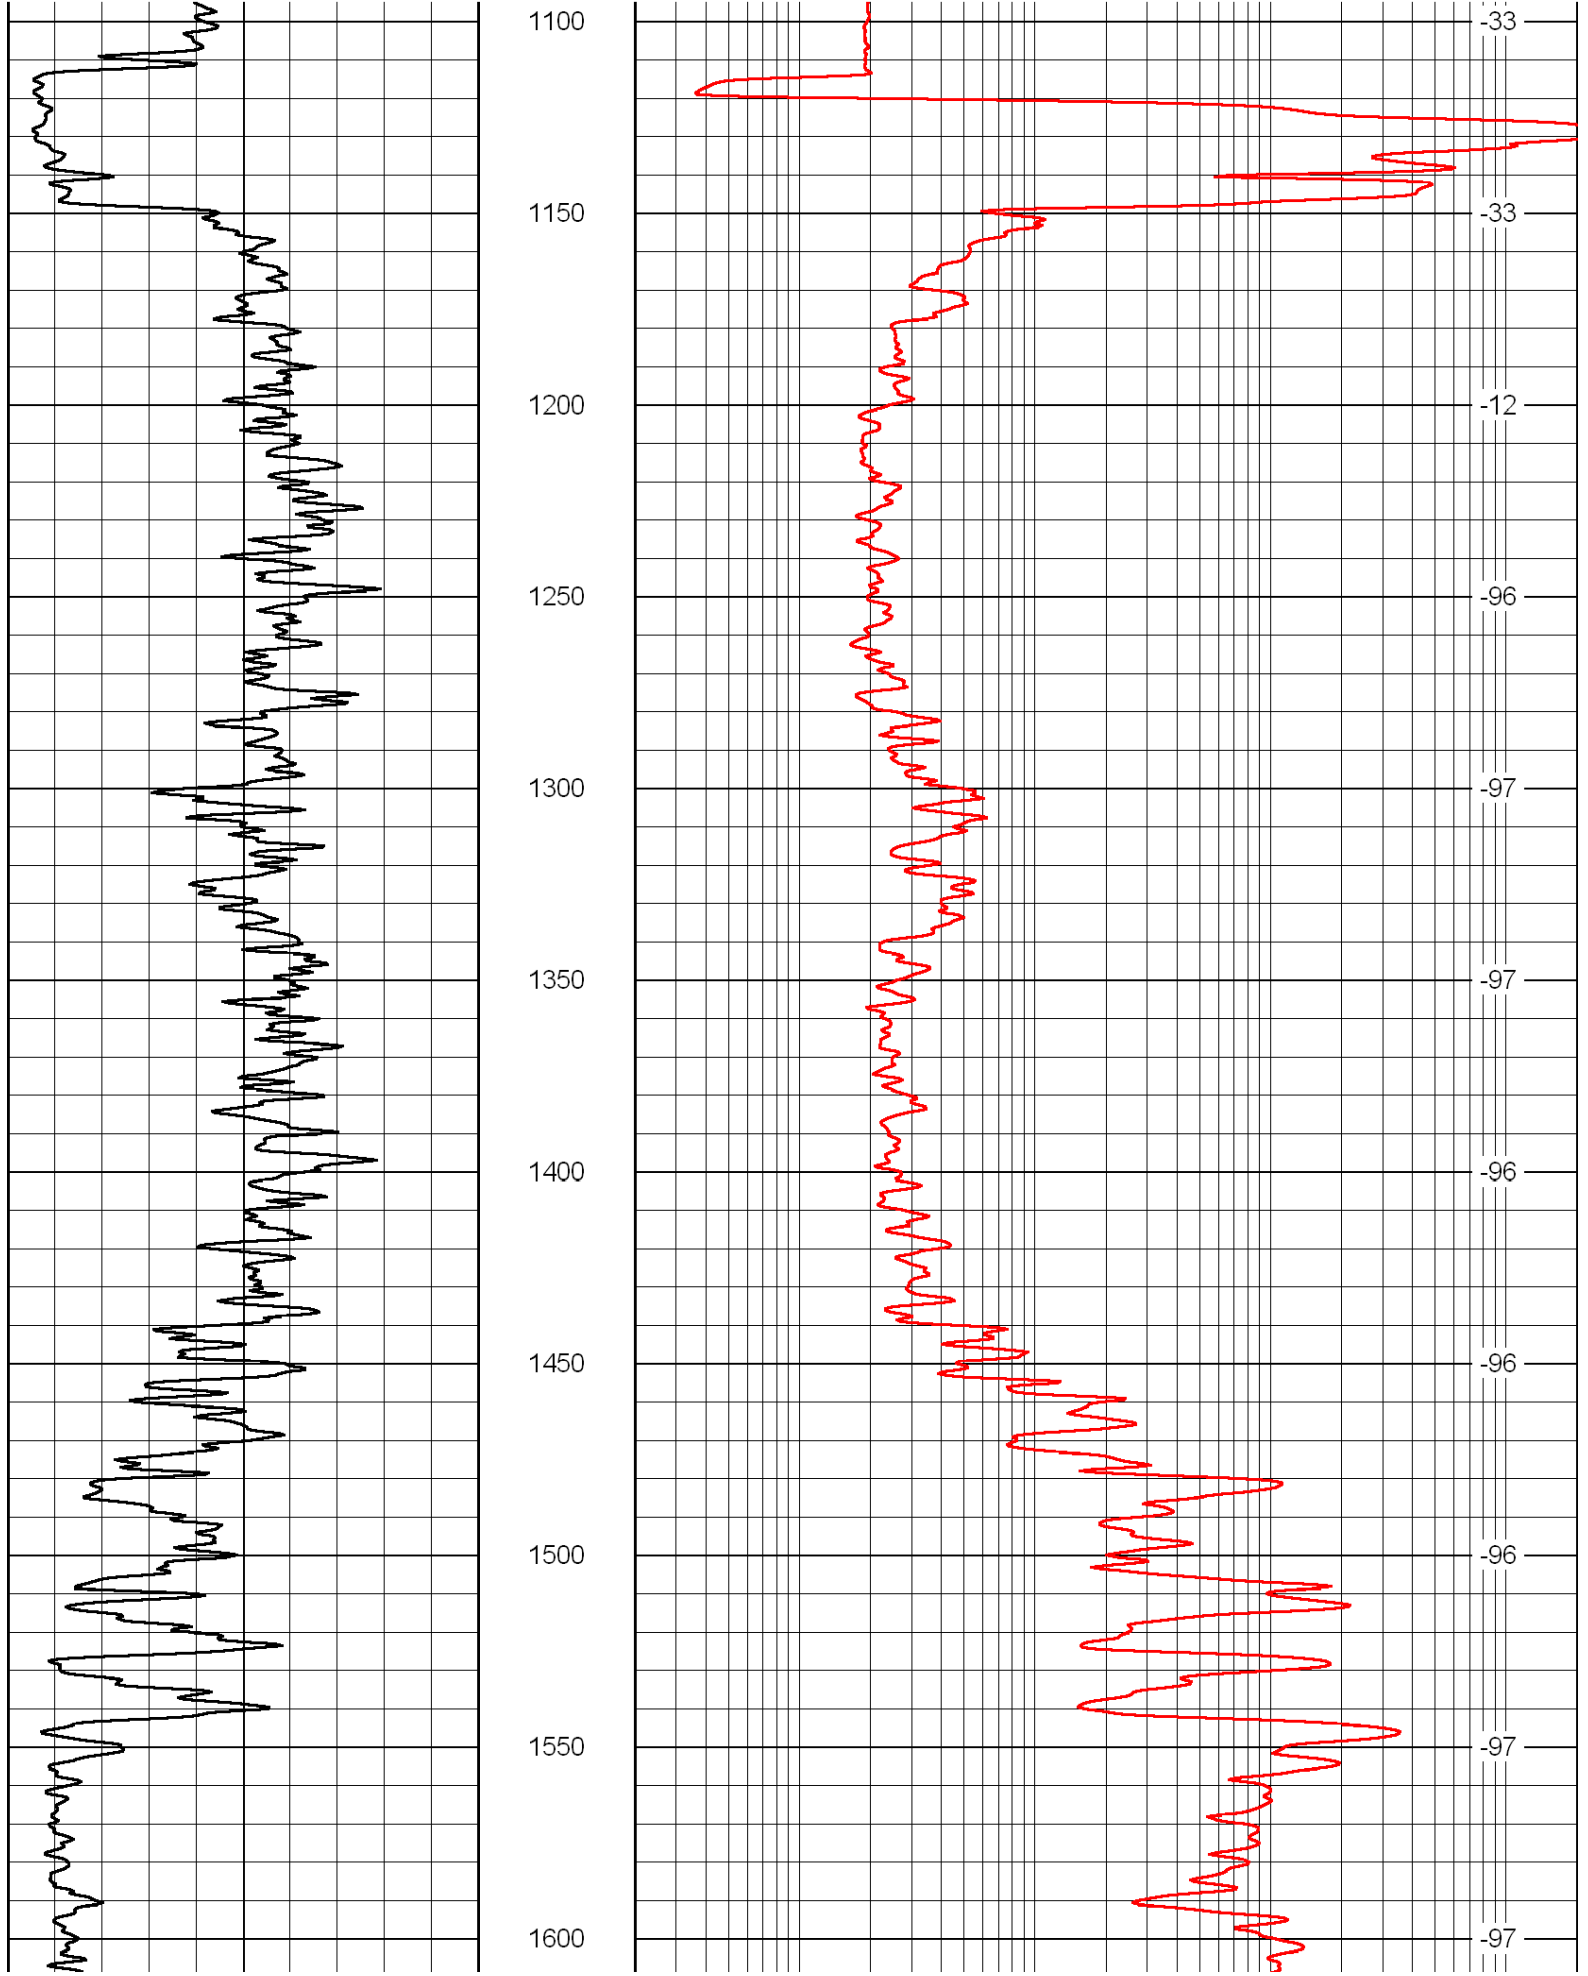

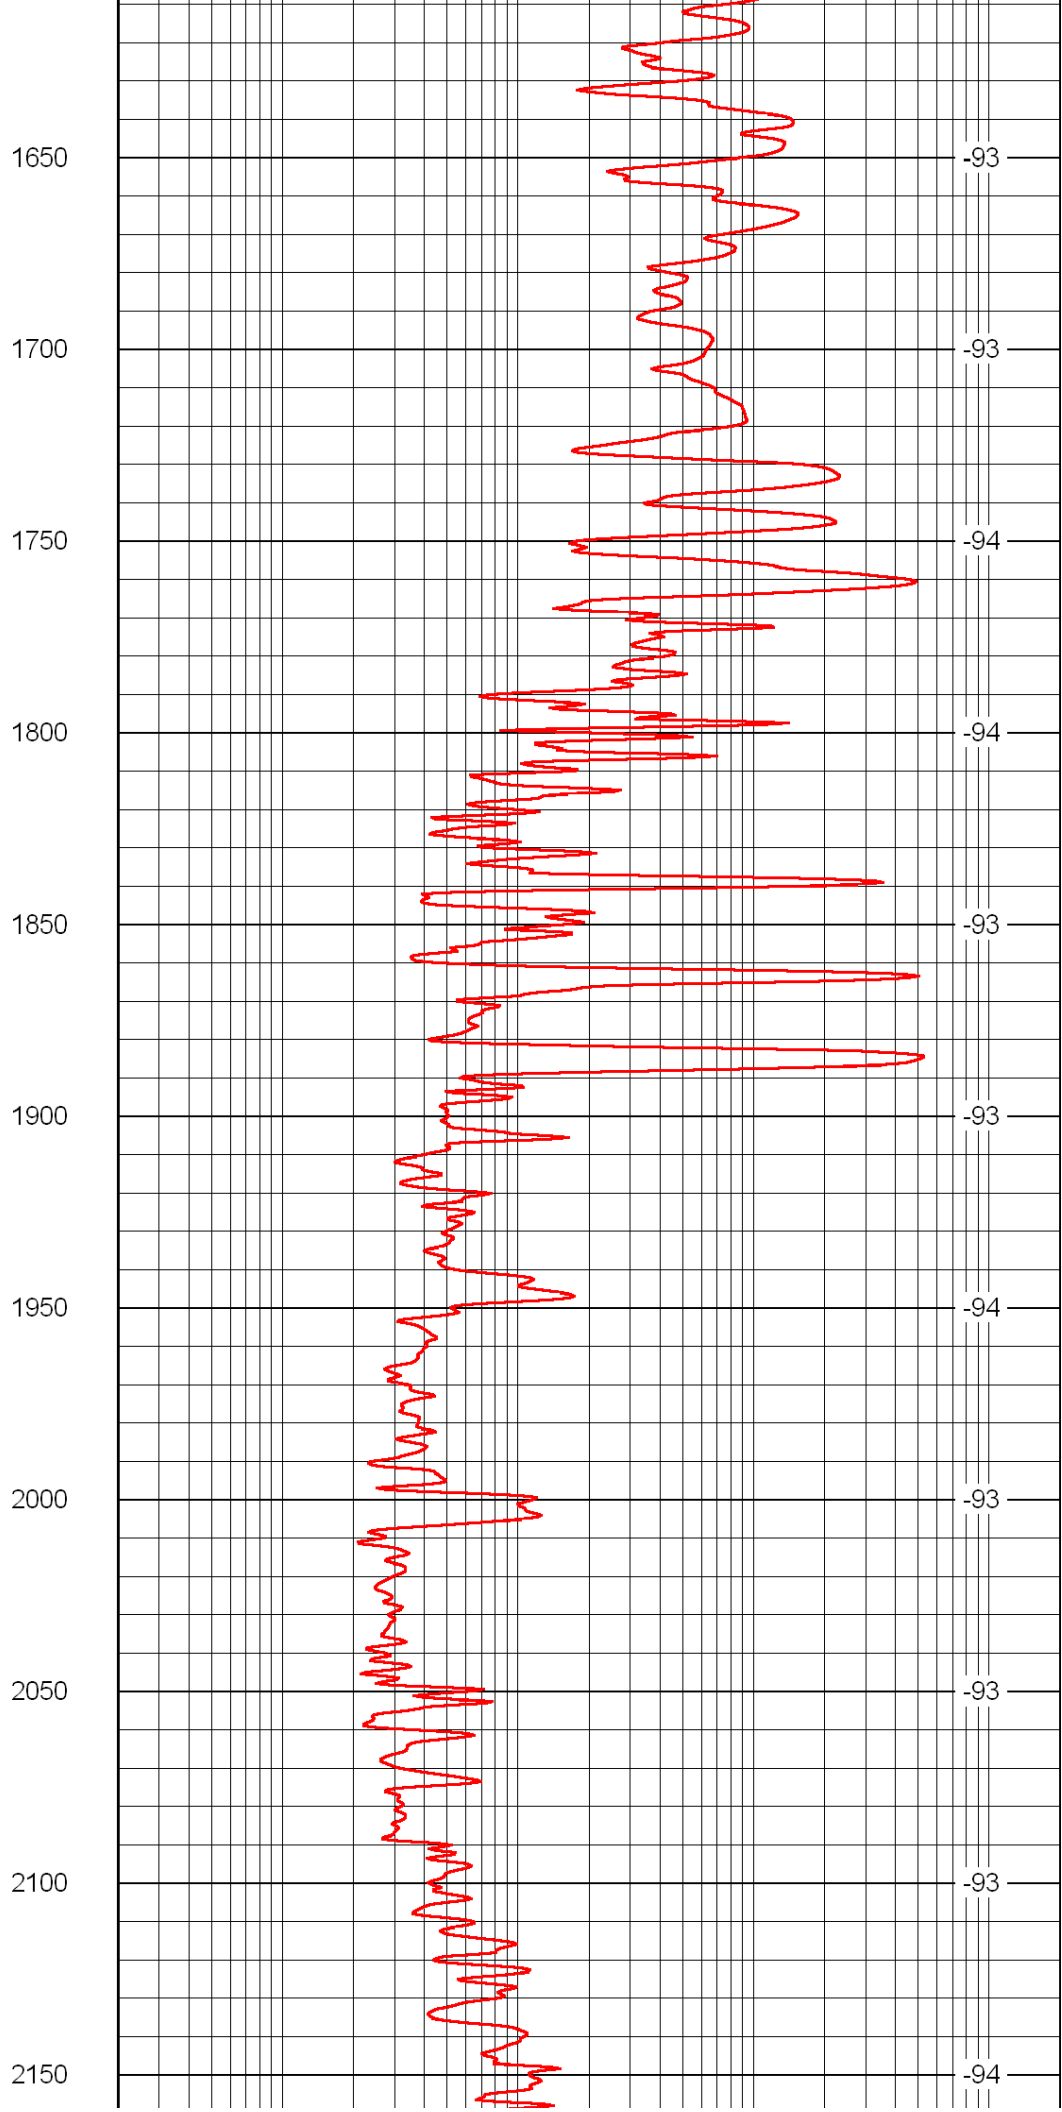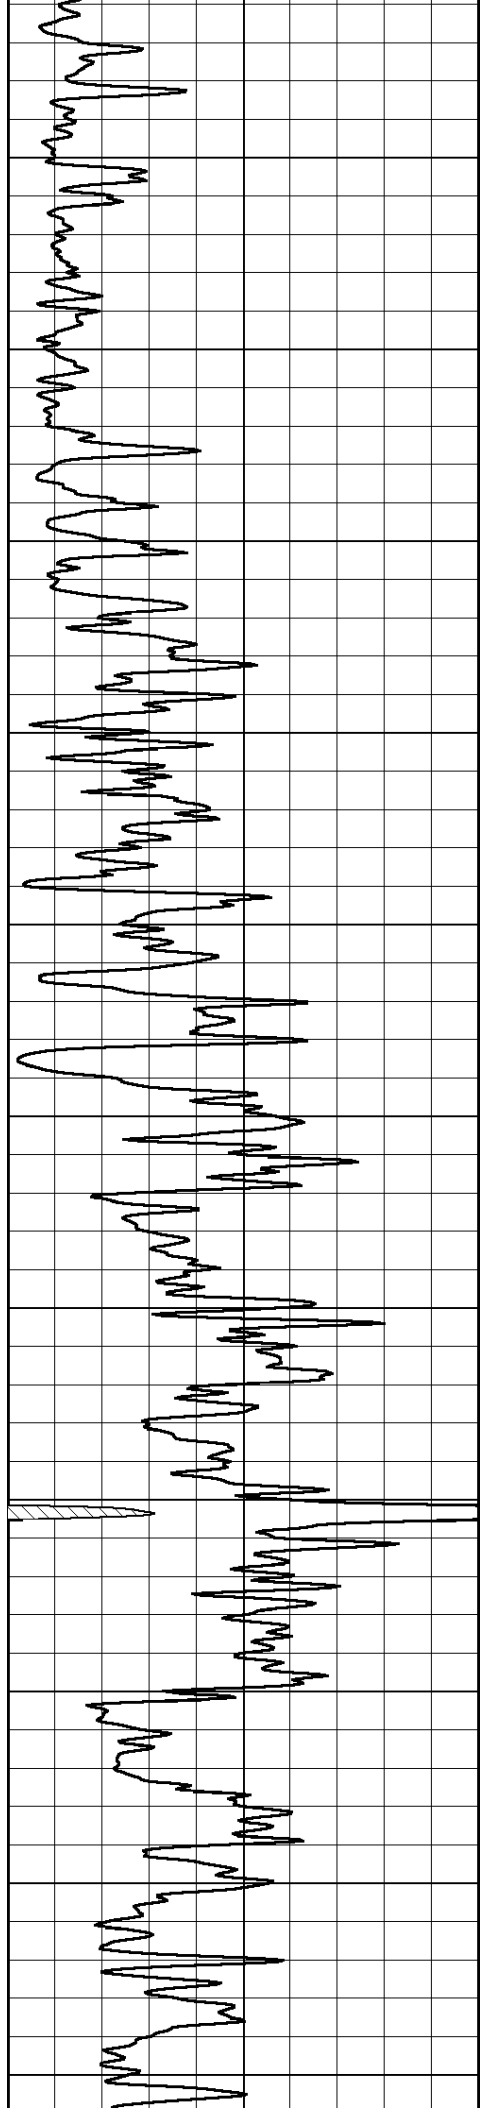

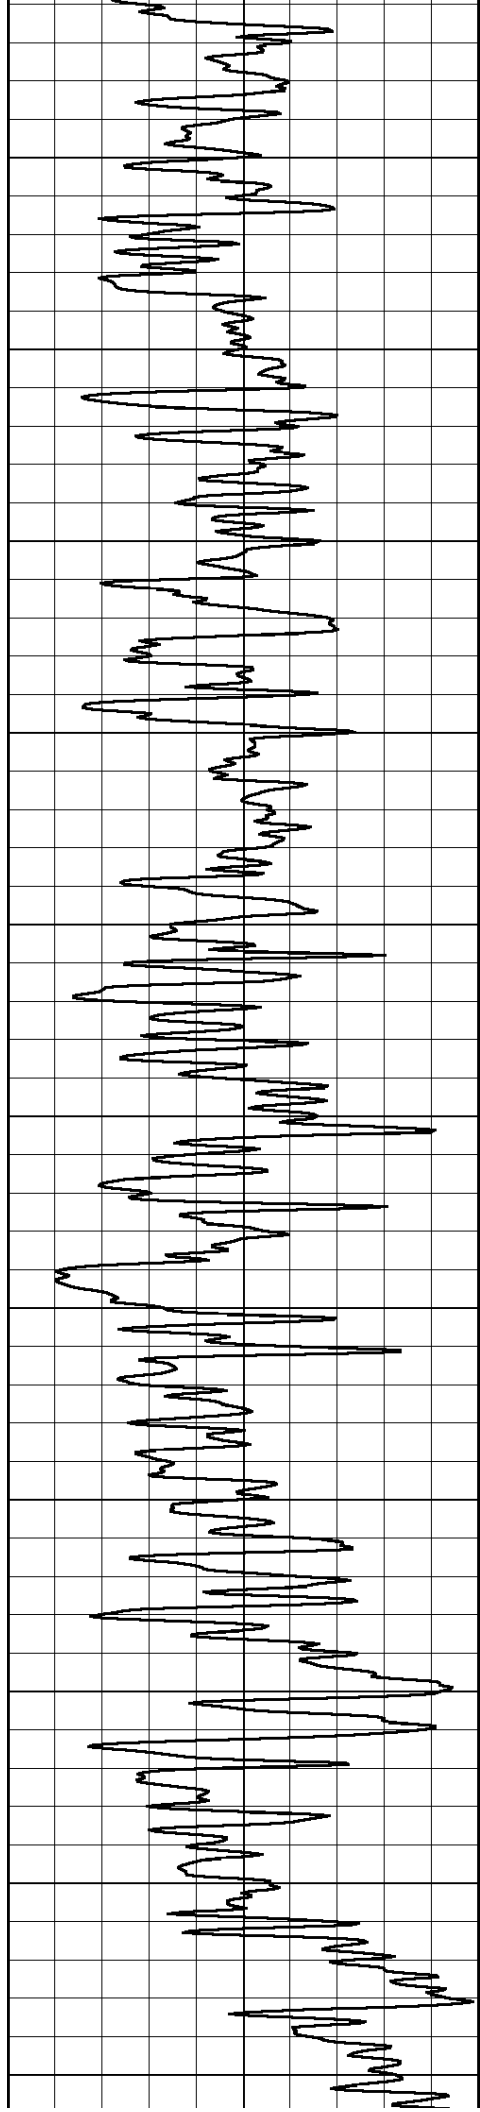

2200

2250

2300

2350

2400

2450


2500

2550

2600

2650

2700

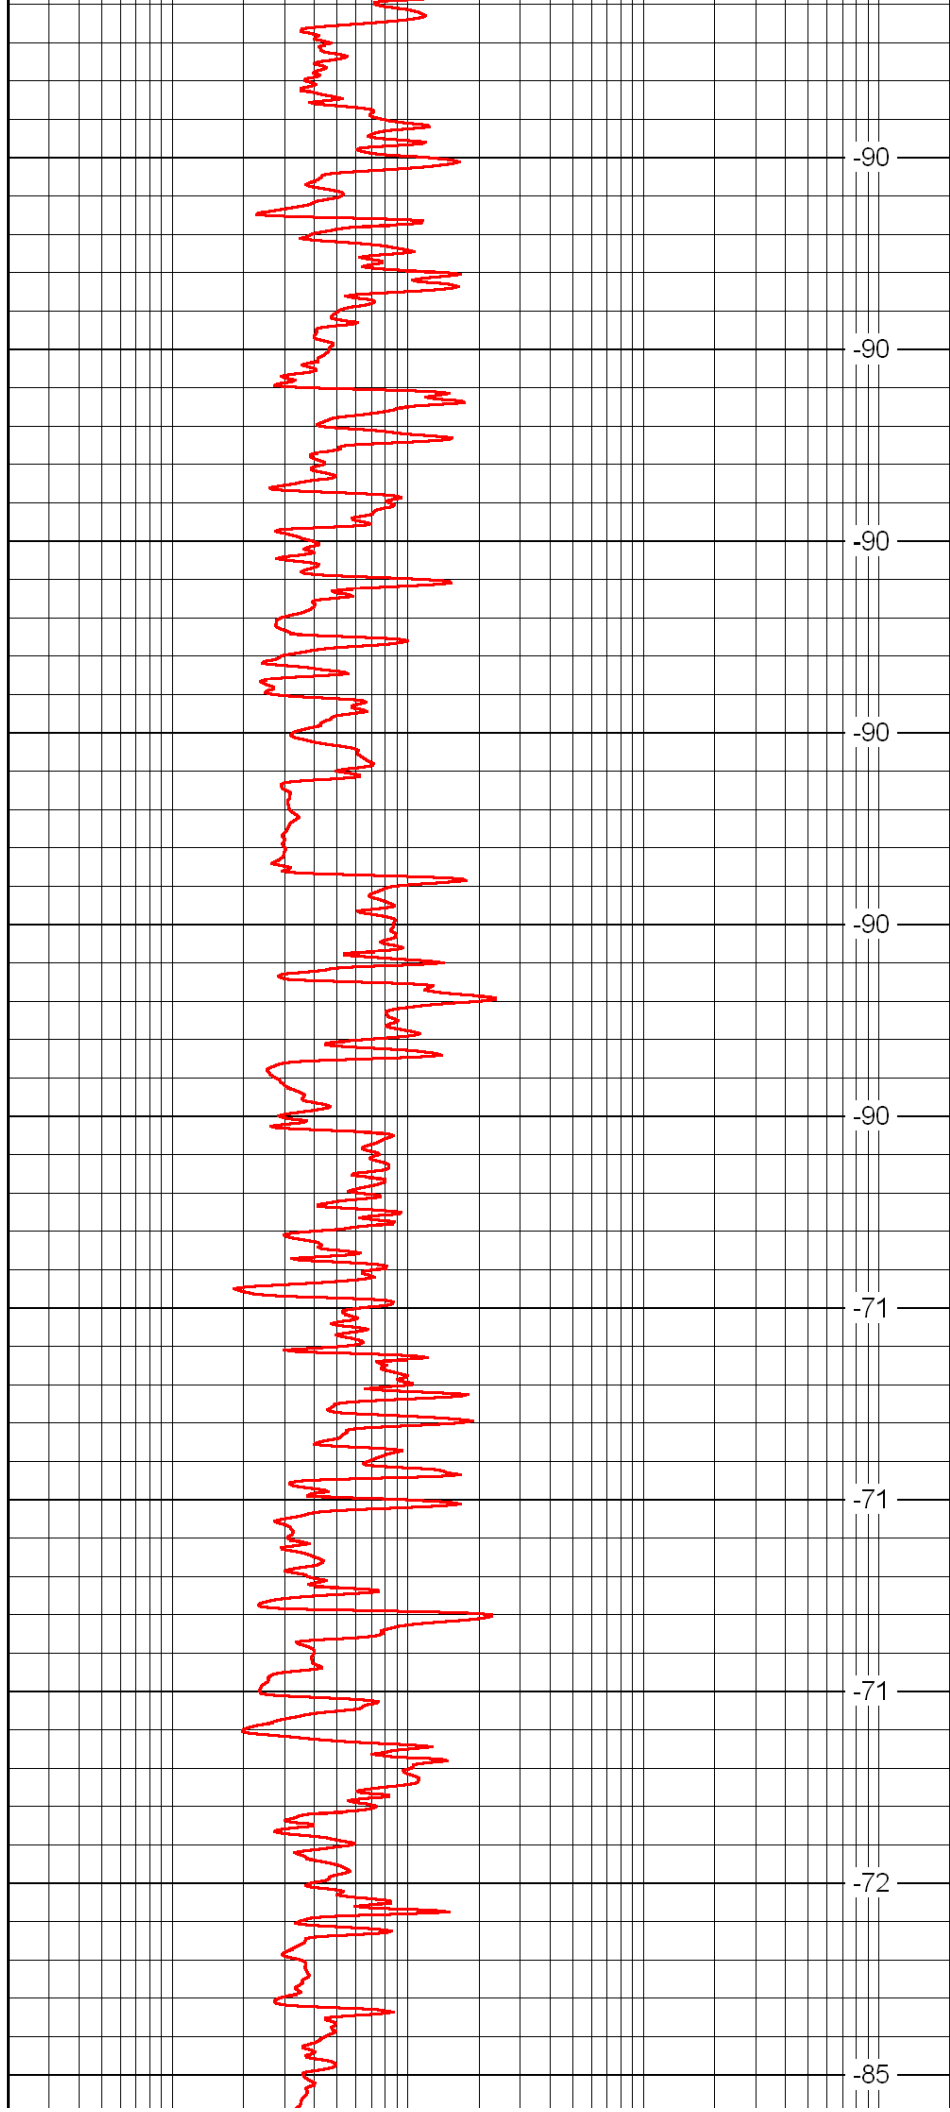

-90

-90

-90

-90

-90

-90


-71

-71

-71

-72

-85

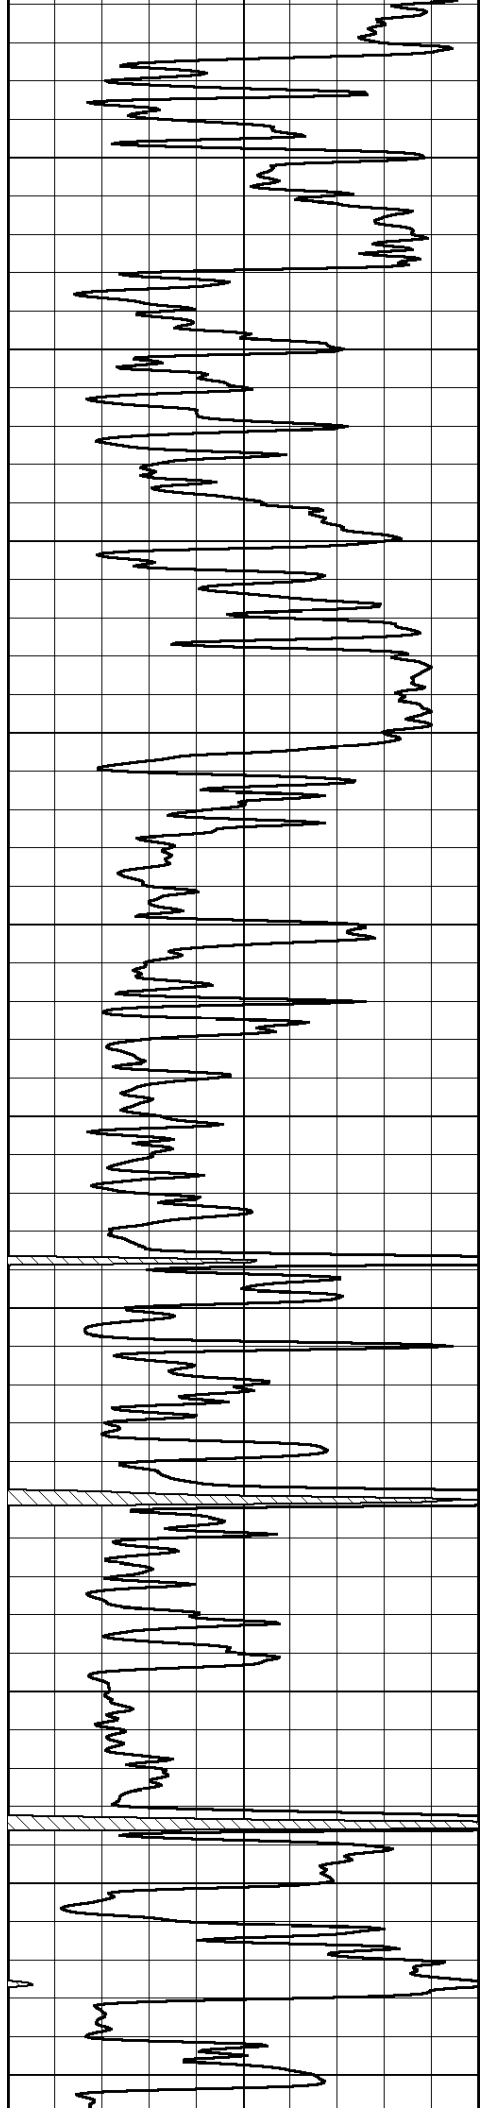

2750

2800

2850

2900

2950

3000


3050

3100

3150

3200

3250

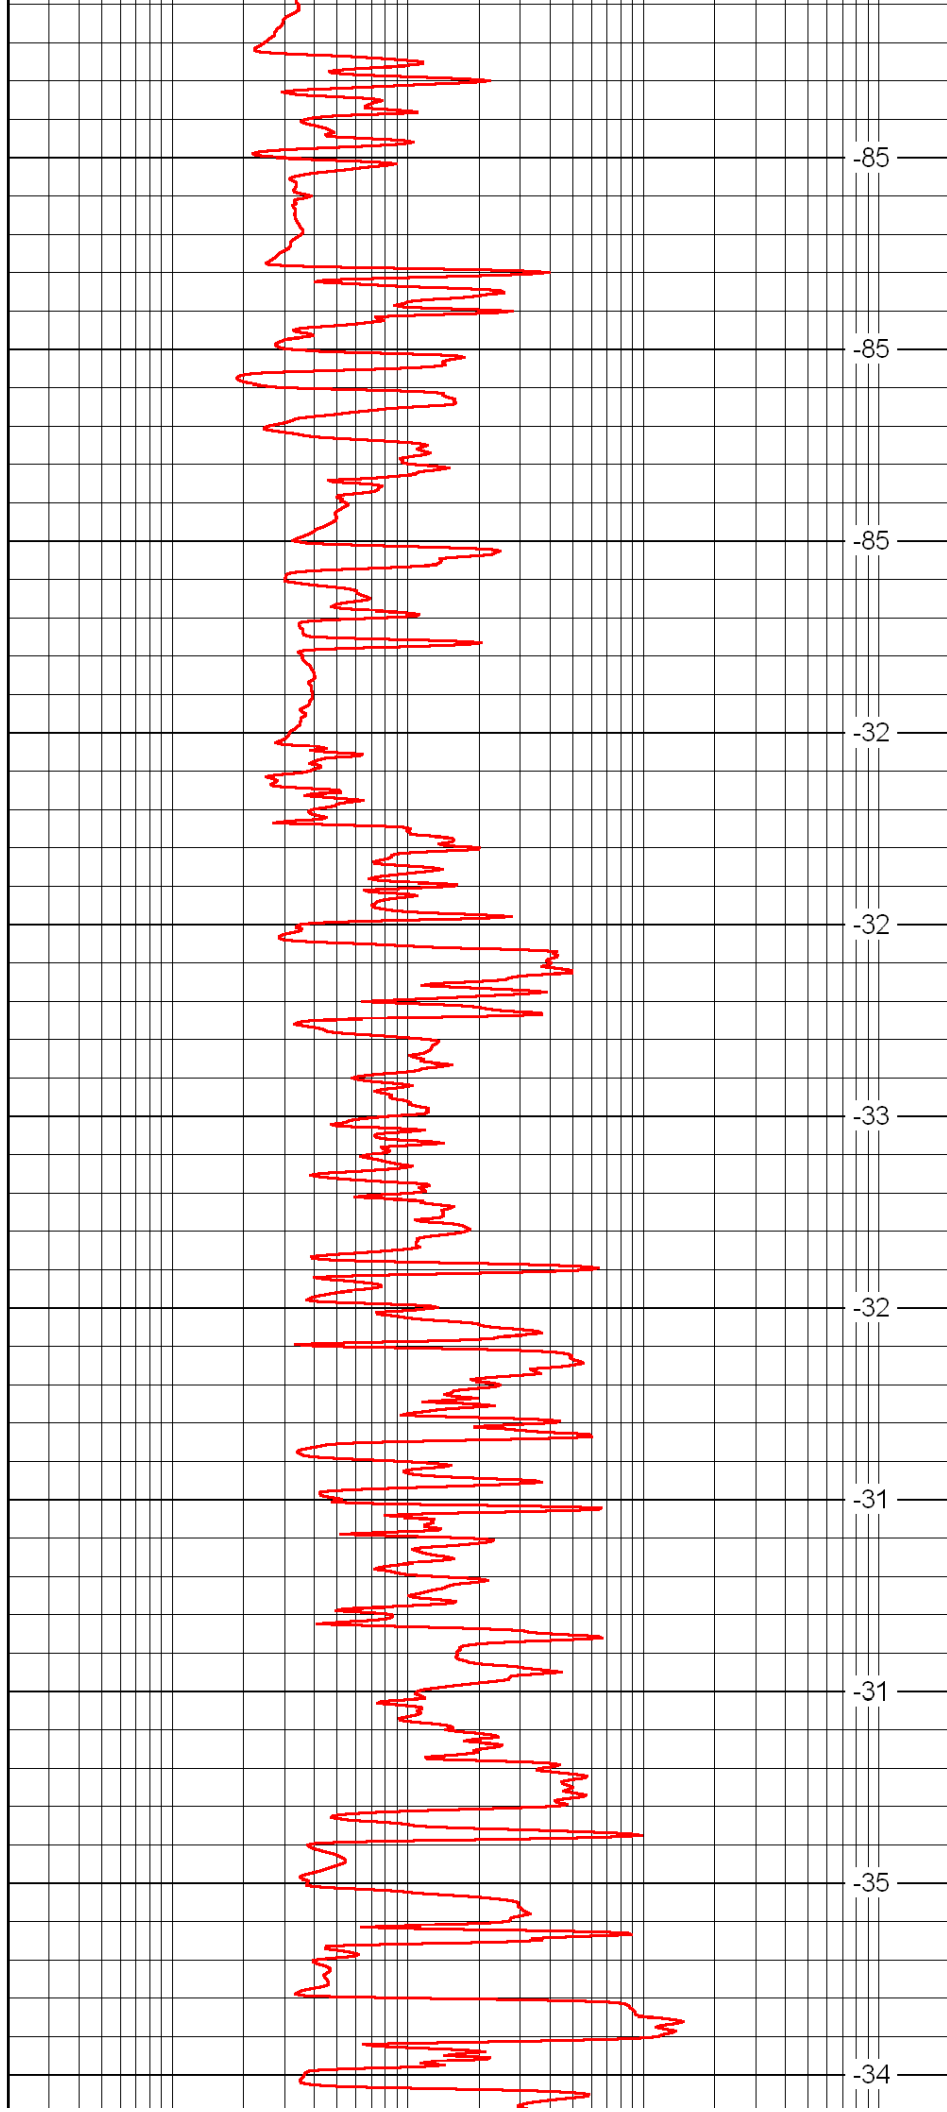

-85

-85

-85

-32

-32

-33


-32

-31


-31

-35

-34

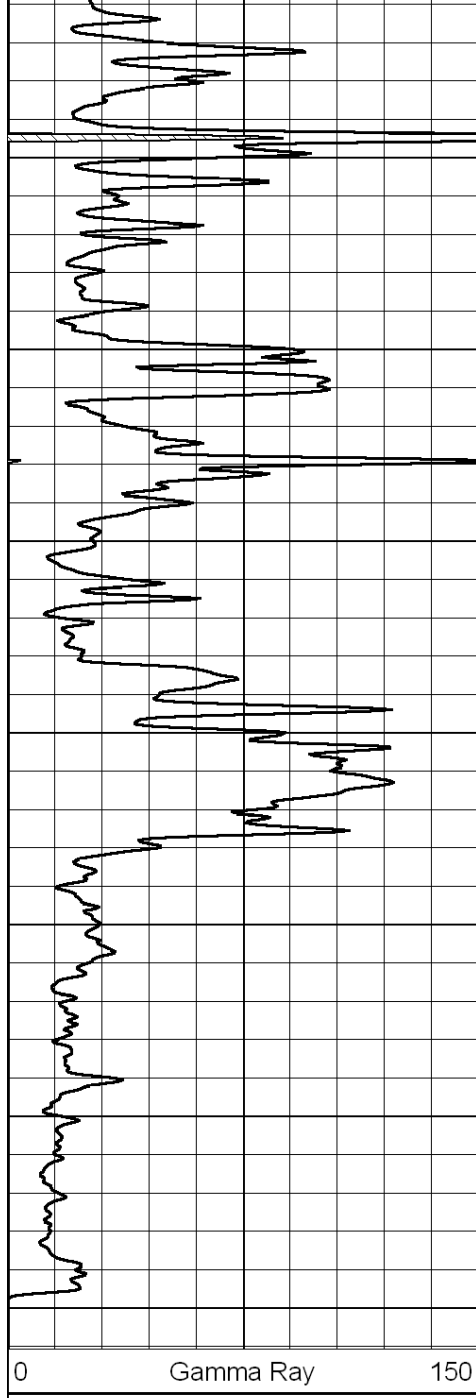






3300
3350
3400
3450
3500
3550
3600

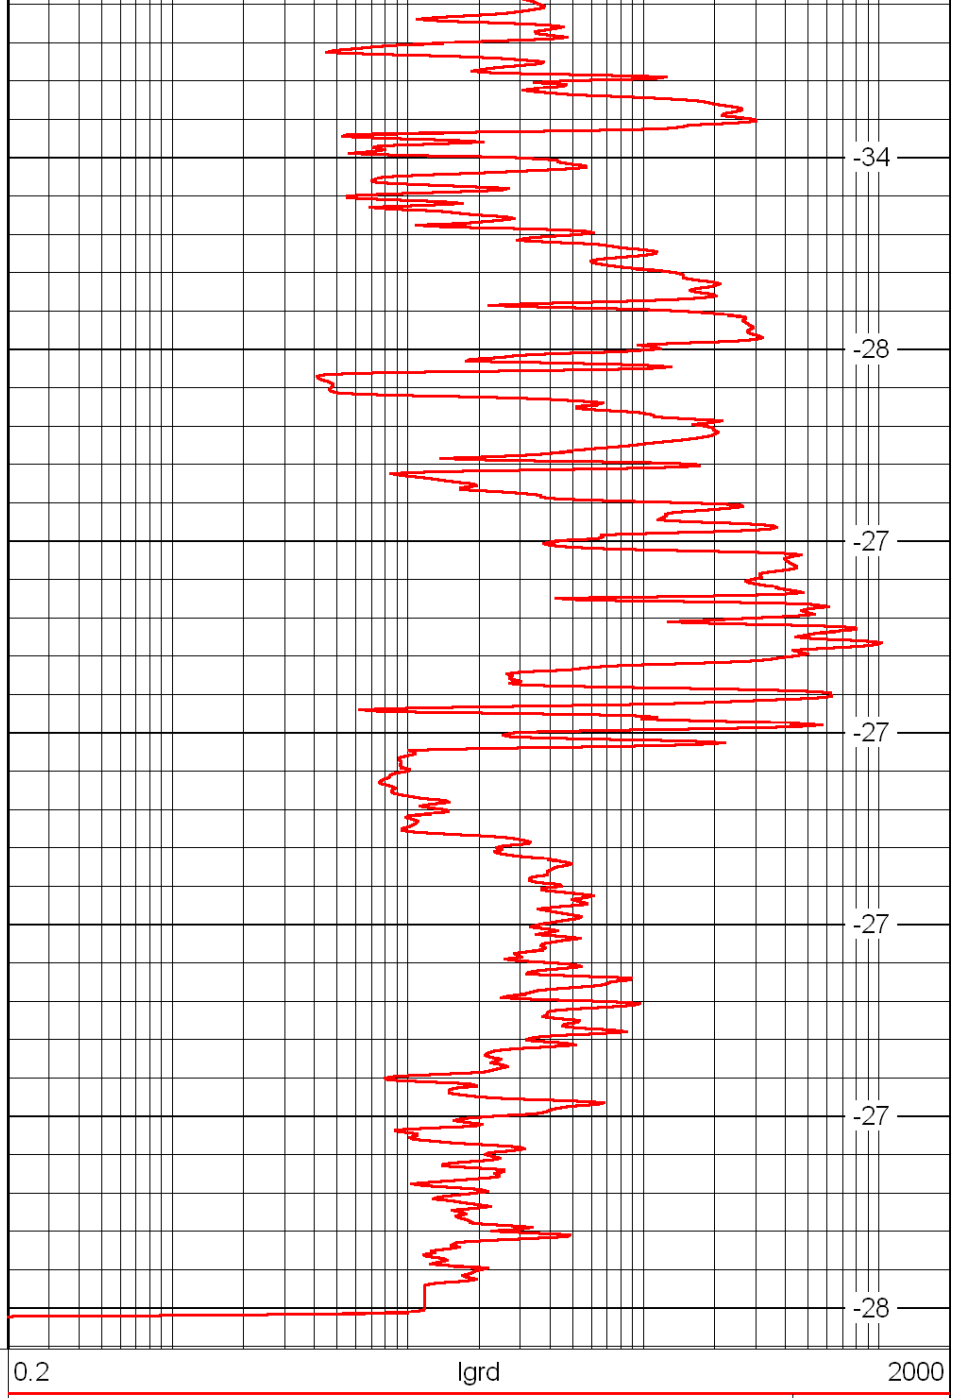


-34
-28
-27
-27
-27
-27
-28

LSPD


Database File: c:\warrior\data\oil co. of am._herl a no. 6\oilcompanyofamerica_herl_a_6hd.db
 Dataset Pathname: rag/ocoarag
 Presentation Format: rag
 Dataset Creation: Tue Oct 04 12:26:32 2011
 Charted by: Depth in Feet scaled 1:240

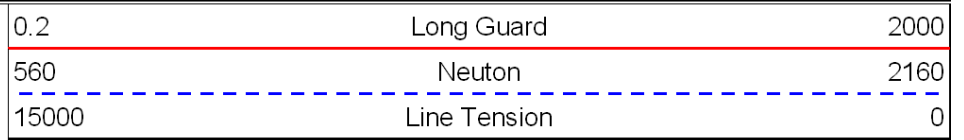


LSPD

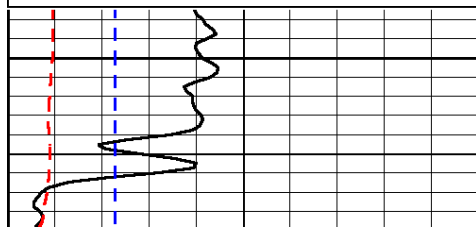

1100

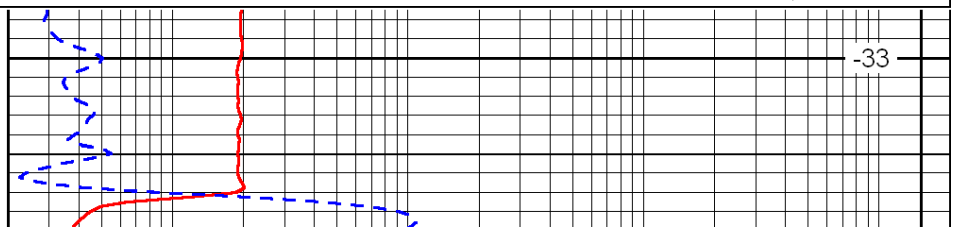

-33

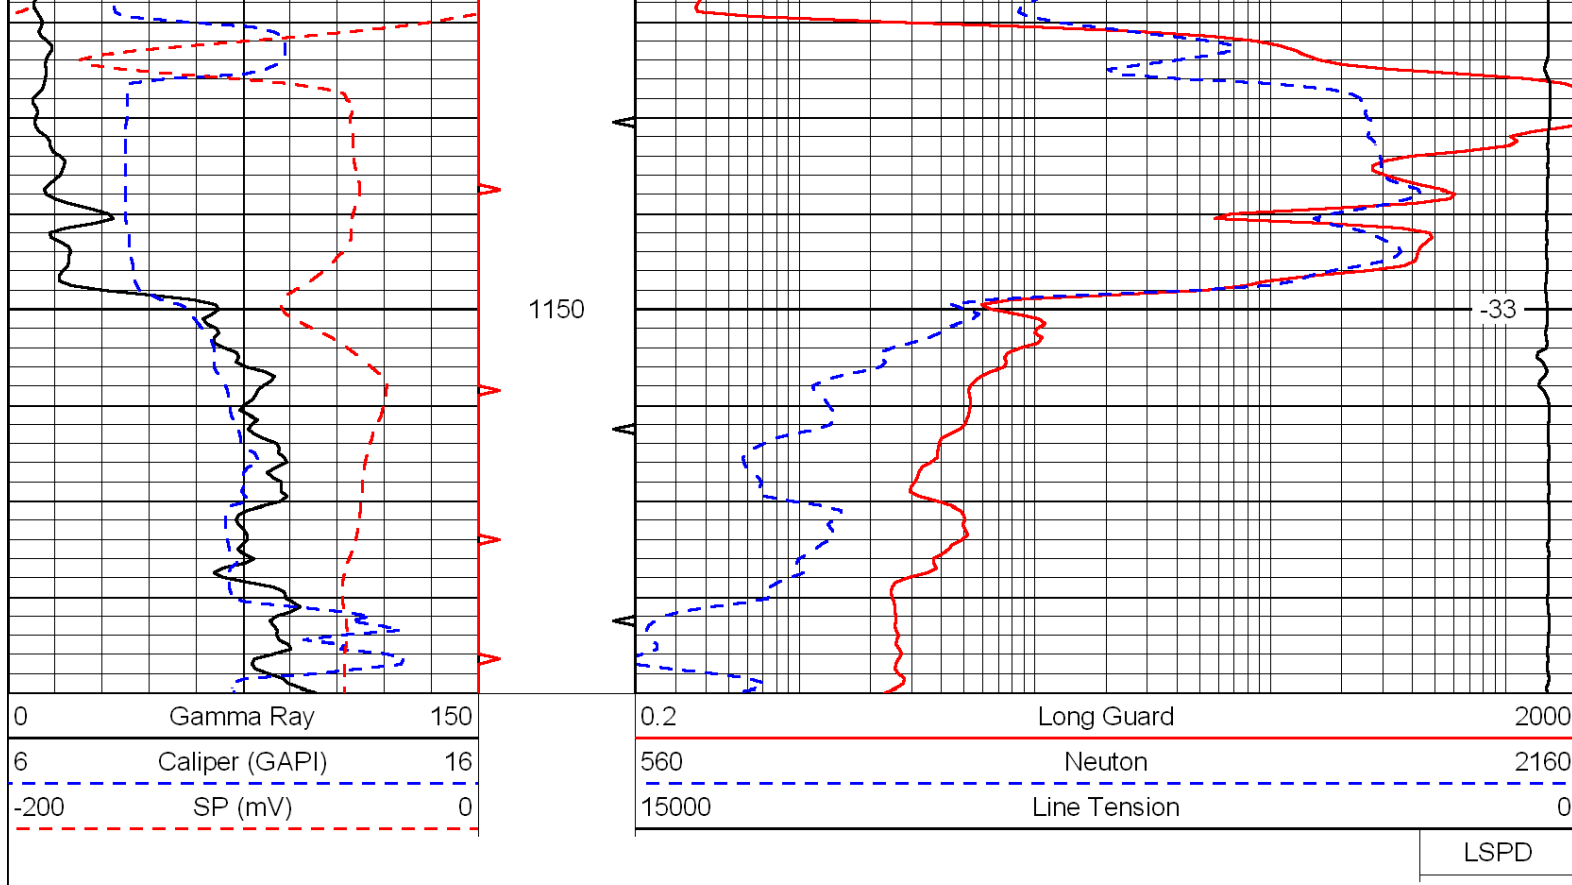

Database File: c:\warrior\data\oil co. of am._herl a no. 6\oilcompanyofamerica_herl_a_6hd.db
Dataset Pathname: rag/ocoarag
Presentation Format: rag
Dataset Creation: Tue Oct 04 12:26:32 2011
Charted by: Depth in Feet scaled 1:240

