

15-065-19024-00-00
00053-00-01

STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Graham County, Sec. 15 Twp. 6 Rge. 22W (X) (W)

Location as "NE/CNW/SW" or footage from lines SW SW NE

Lease Owner W. P. Simmons Oil Co.

Lease Name Rush Well No. 1

Office Address Alma, Nebraska

Character of Well (completed as Oil, Gas or Dry Hole) DRY HOLE

Date well completed 19

Application for plugging filed December 14, 19 62

Application for plugging approved December 14, 19 62


Plugging commenced 19

Plugging completed January 16, 19 63

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

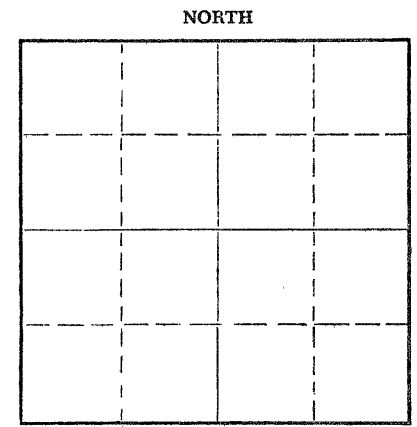

Locate well correctly on above Section Flat

Name of Conservation Agent who supervised plugging of this well W. L. Nichols

Producing formation Depth to top Bottom Total Depth of Well 3780' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

209' 8 5/8" Surface cement circulated. 4 1/2" - 3780' with 125 sacks cement
Top perforation-3563'. Sanded well back to 3550', set 4 sacks cement with
dump bailer. Initial shot @ 2700', circulated Oil. Final shot @ 1520'
pulled 4 1/2" to 600', circulated hole with heavy mud (25 sacks Gel),
displaced 20 sacks cement thru 4 1/2", heavy mud to 180', displaced 20 sacks
cement thru 4 1/2", heavy mud to 30', set plug and 10 sacks cement to bottom
of cellar. Cementing and mudding operations performed by Halliburton
Cementing Co.

RECEIVED
STATE CORPORATION COMMISSION

SEP 5 1963

9-5-63
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor R & D Casing Pulling Co.
Address Ellinwood, Kansas

STATE OF KANSAS, COUNTY OF Reno, ss.
W. P. Simmons (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. P. Simmons
5830 N. Broadway Wichita Kan
(Address)

SUBSCRIBED AND SWORN to before me this 3 day of September, 1963

My commission expires Nov. 16, 1965
Wilma A. Clark
Notary Public.

15-065-00053-00-01

We also need a well log on this well before
our file is complete. This well was a
old hole that was washed down
we do not have a well log on it.