

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas


WELL PLUGGING RECORD

15-065-30022-00-01

Graham County. Sec. 31 Twp. 6 Rge. 22 (X) (W)

Location as "NE/CNW%SW%" or footage from lines SW SW/4
Lease Owner E. H. Riggs
Lease Name La Certe #3 Well No. _____
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 3/18/68 _____ 19____
Plugging completed 3/22/68 _____ 19____
Reason for abandonment of well or producing formation depleted.

NORTH

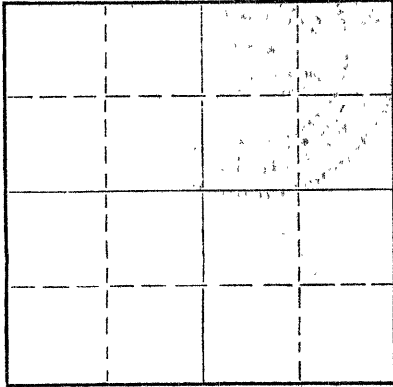

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Nichols
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3826 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				7"	223'	none
				4 1/2"	3824'	1435'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pulled rods and tubing. Checked hole, sanded back to 3725' and ran 3 sacks of cement. Broke and removed cellar slips. Rigged up on 4 1/2", worked pipe to 12", checked hole, shot pipe at 1808', 1616', 1426', worked pipe loose and pulled 4 1/2" casing. Had welder cut off swedge on surface. Used Knight pump and Moreland water truck to squeeze well. Pumped 14 sacks mud and 3 sacks hulls, 65 sacks of cement and 9 sacks mud, 15 sacks cement, 2 sacks mud, 10 sacks of cement. Moved off location.

PLUGGING COMPLETE.


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address Chase, Kansas

STATE OF Kansas COUNTY OF Rice, ss.
Noel J. Knight (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
Chase, Kansas (Address)

Subscribed and sworn to before me this 8th day of April, 1968



My commission expires February 15, 1971

Margaret Melcher
Notary Public.

Rec'd 04-09-68